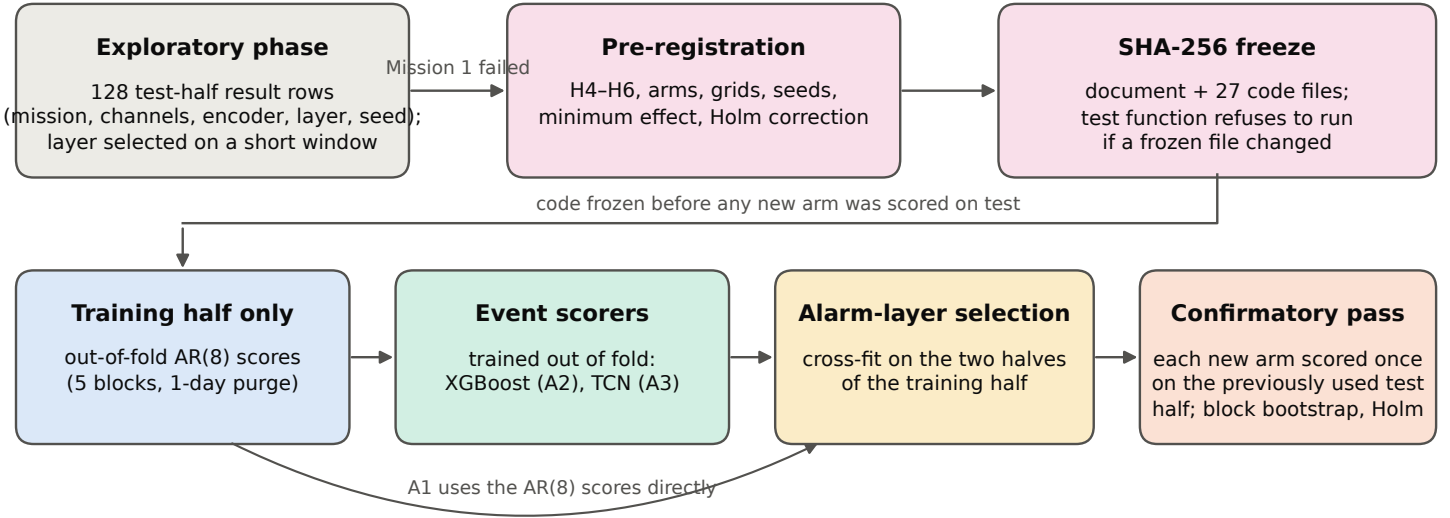
Exploratory phase
128 test-half result rows
(mission, channels, encoder, layer, seed);
layer selected on a short window
Mission 1 failed
Pre-registration
H4–H6, arms, grids, seeds,
minimum effect, Holm correction
SHA-256 freeze
document + 27 code files;
test function refuses to run
if a frozen file changed
code frozen before any new arm was scored on test
Training half only
out-of-fold AR(8) scores
(5 blocks, 1-day purge)
Event scorers
trained out of fold:
XGBoost (A2), TCN (A3)
Alarm-layer selection
cross-fit on the two halves
of the training half
Confirmatory pass
each new arm scored once
on the previously used test
half; block bootstrap, Holm
A1 uses the AR(8) scores directly