Case #3: We can access method level LV inside a LB either for reading or for modifying its value. If we assign a new value to a method level LV, that value is stored inside the same memory that is created at method level before LB as shown in above program for the variable 'p'.
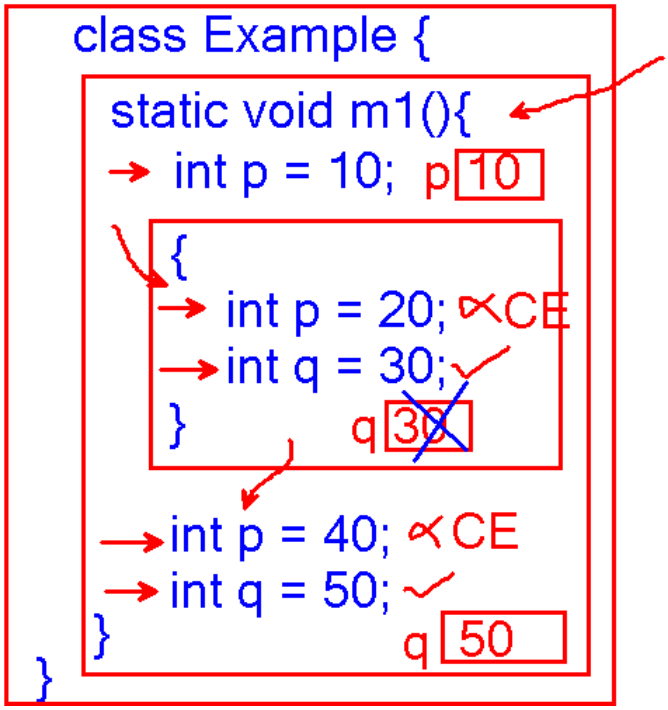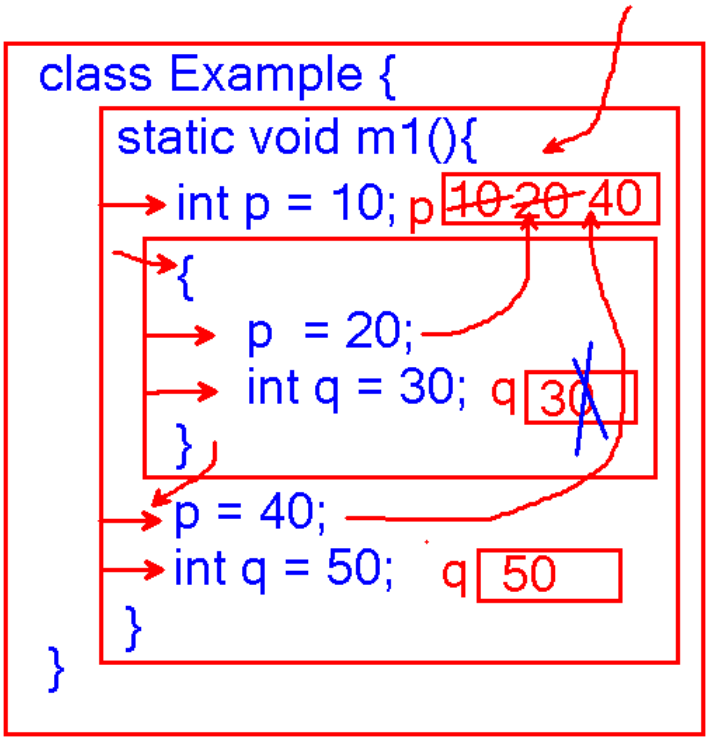
for example: