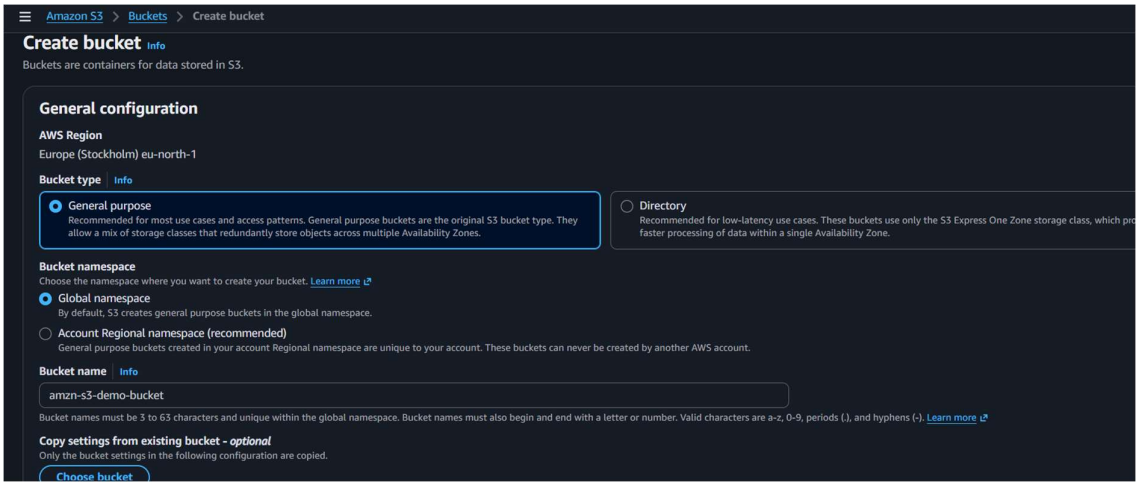
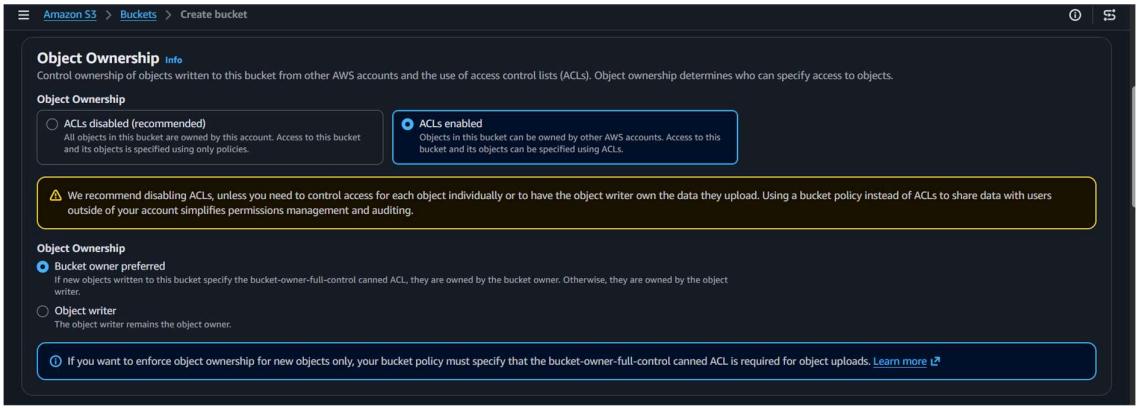
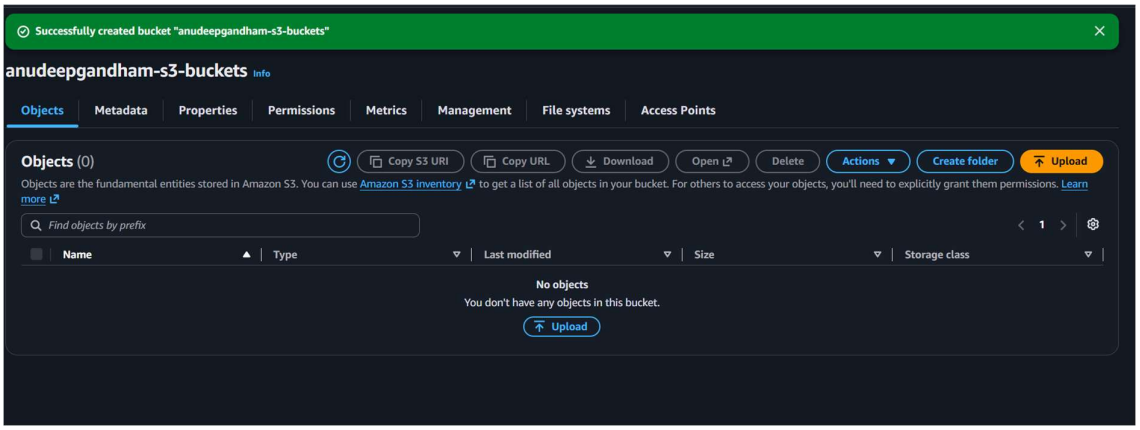
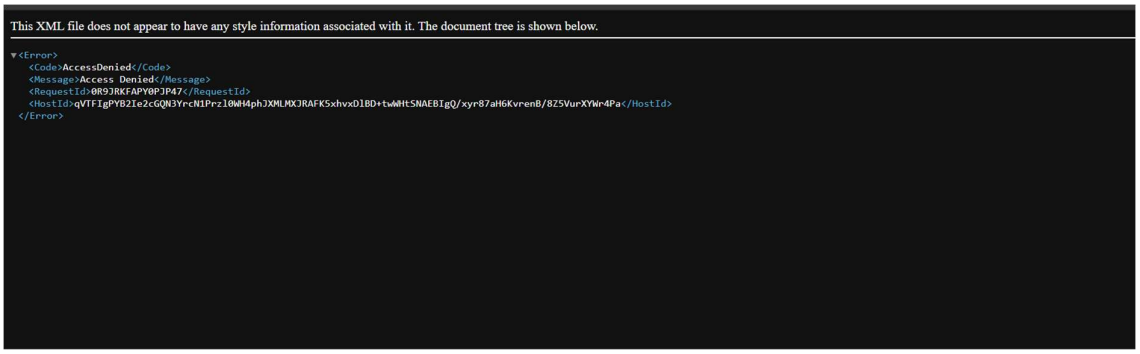
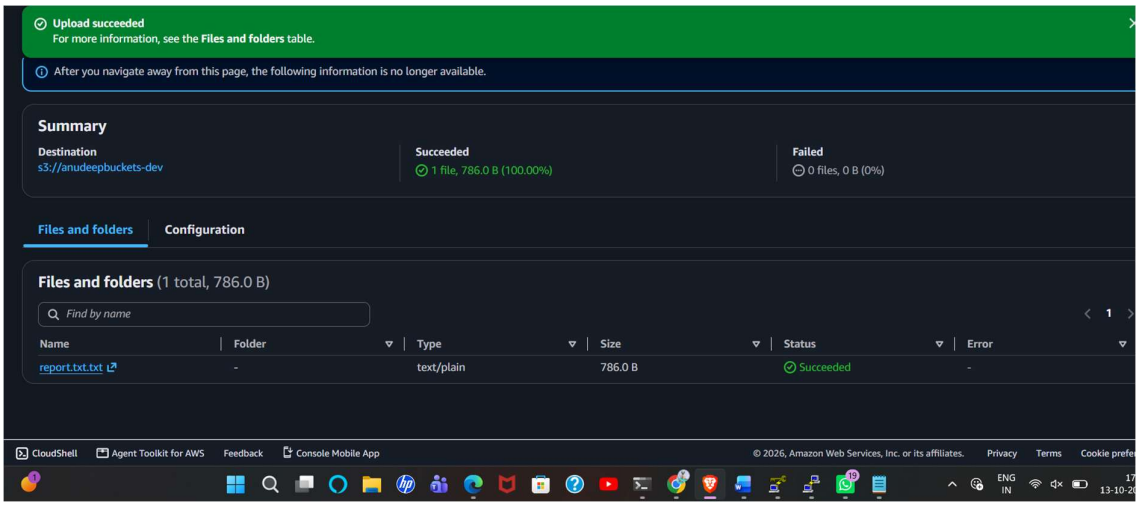

Amazon S3 > Buckets > Create bucket
Create bucket Info
Buckets are containers for data stored in S3.
General configuration
AWS Region
Europe (Stockholm) eu-north-1
Bucket type Info
General purpose
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
Directory
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which pro
faster processing of data within a single Availability Zone.
Bucket namespace
Choose the namespace where you want to create your bucket. Learn more
Global namespace
By default, S3 creates general purpose buckets in the global namespace.
Account Regional namespace (recommended)
General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.
Bucket name Info
amzn-s3-demo-bucket
Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). Learn more
Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.
Choose bucket

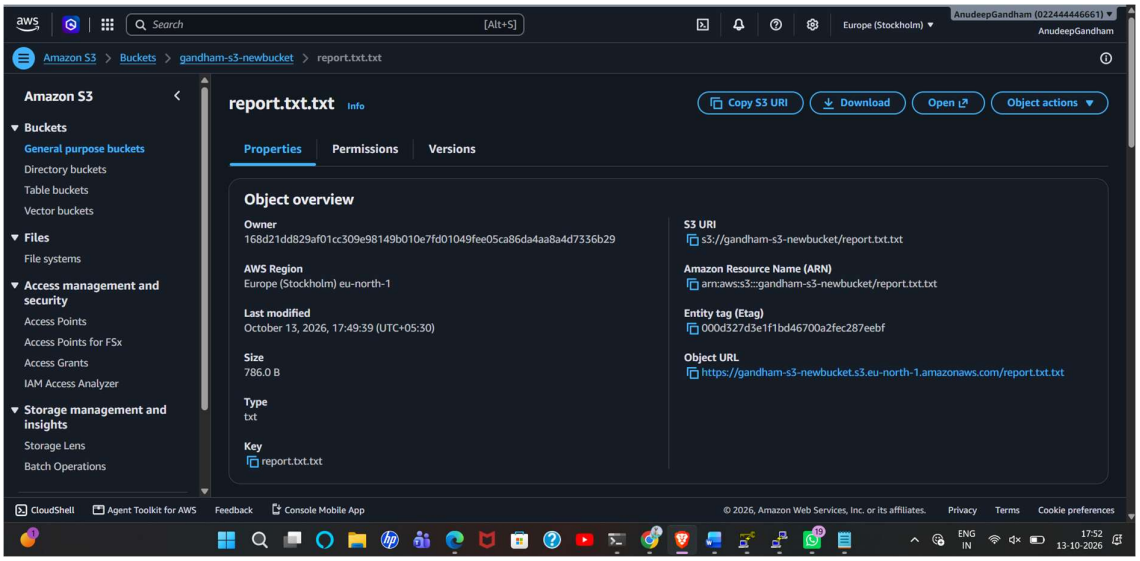

Amazon S3 > Buckets > Create bucket
Object Ownership Info
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.
Object Ownership
ACLs disabled (recommended)
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.
We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.
Object Ownership
Bucket owner preferred
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.
Object writer
The object writer remains the object owner.
If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. Learn more

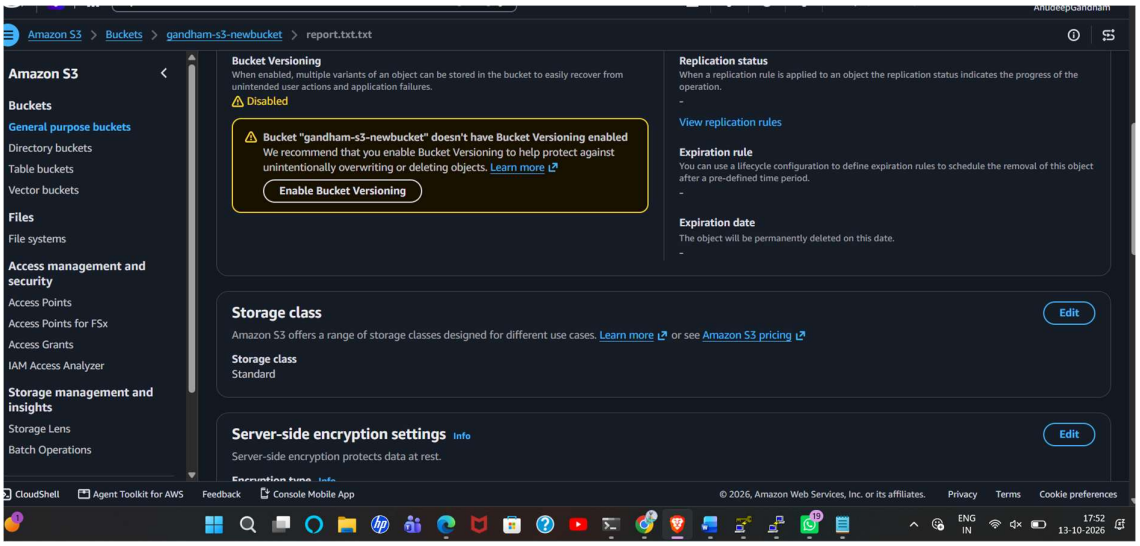

Successfully created bucket "anudeepgandham-s3-buckets"
anudeepgandham-s3-buckets Info
Objects
Metadata
Properties
Permissions
Metrics
Management
File systems
Access Points
Objects (0)
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder
Upload
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix
Name
Type
Last modified
Size
Storage class
No objects
You don't have any objects in this bucket.
Upload

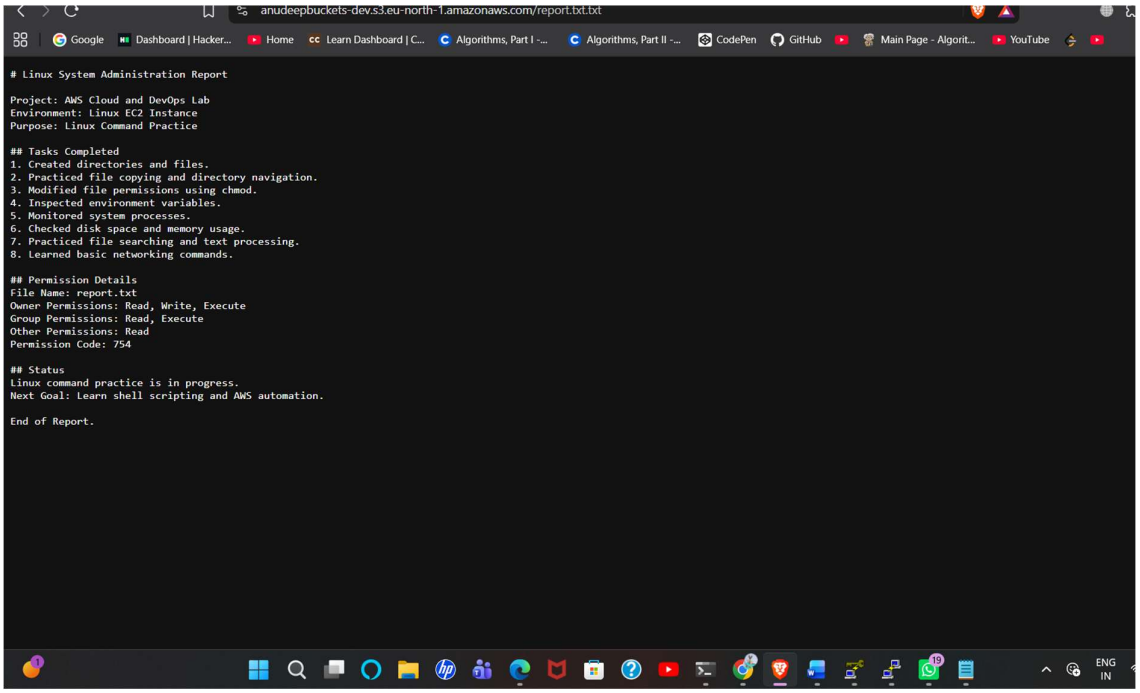


Public bucket creation






Amazon S3 > Buckets > gandham-s3-newbucket > report.txt.txt
Amazon S3
Buckets
General purpose buckets
Directory buckets
Table buckets
Vector buckets
Files
File systems
Access management and security
Access Points
Access Points for FSx
Access Grants
IAM Access Analyzer
Storage management and insights
Storage Lens
Batch Operations
Bucket Versioning
When enabled, multiple variants of an object can be stored in the bucket to easily recover from unintended user actions and application failures.
Disabled
Bucket "gandham-s3-newbucket" doesn't have Bucket Versioning enabled
We recommend that you enable Bucket Versioning to help protect against unintentionally overwriting or deleting objects. Learn more
Enable Bucket Versioning
Replication status
When a replication rule is applied to an object the replication status indicates the progress of the operation.
View replication rules
Expiration rule
You can use a lifecycle configuration to define expiration rules to schedule the removal of this object after a pre-defined time period.
Expiration date
The object will be permanently deleted on this date.
Storage class
Edit
Amazon S3 offers a range of storage classes designed for different use cases. Learn more or see Amazon S3 pricing
Storage class
Standard
Server-side encryption settings Info
Edit
Server-side encryption protects data at rest.
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
ENG
IN
17:52
13-10-2026


anudeepbuckets-dev.s3.eu-north-1.amazonaws.com/report.txt.txt
Google
Dashboard | Hacker...
Home
Learn Dashboard | C...
Algorithms, Part I -...
Algorithms, Part II -...
CodePen
GitHub
Main Page - Algorit...
YouTube
Linux System Administration Report
Project: AWS Cloud and DevOps Lab
Environment: Linux EC2 Instance
Purpose: Linux Command Practice
Tasks Completed
1. Created directories and files.
2. Practiced file copying and directory navigation.
3. Modified file permissions using chmod.
4. Inspected environment variables.
5. Monitored system processes.
6. Checked disk space and memory usage.
7. Practiced file searching and text processing.
8. Learned basic networking commands.
Permission Details
File Name: report.txt
Owner Permissions: Read, Write, Execute
Group Permissions: Read, Execute
Other Permissions: Read
Permission Code: 754
Status
Linux command practice is in progress.
Next Goal: Learn shell scripting and AWS automation.
End of Report.
ENG
IN