

1. **lsblk**

Displays block devices such as disks, partitions, and EBS volumes.

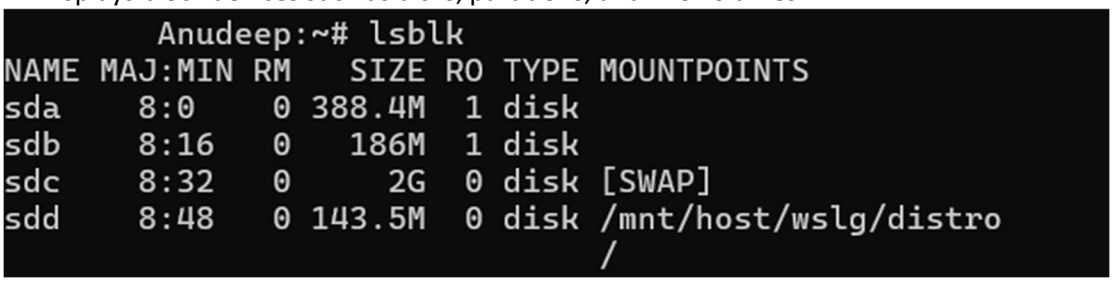

2. **du**

Checks how much disk space a directory occupies.

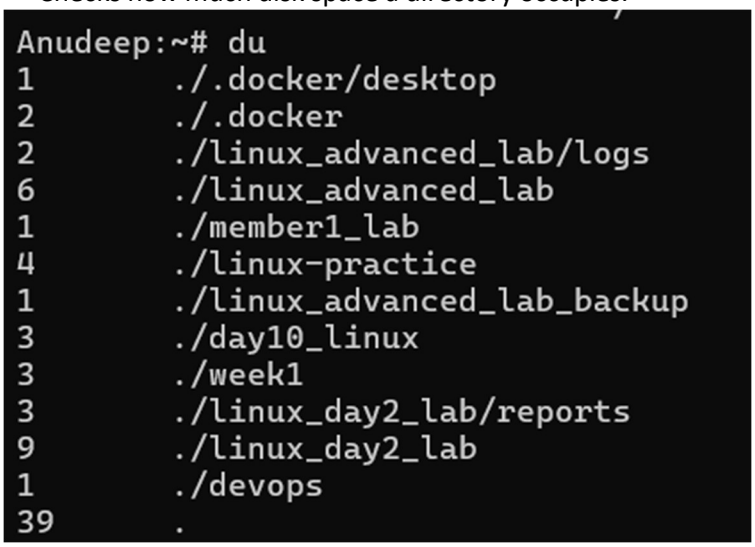

3. lsof

Lists open files and the processes using them.

```
Anudeep:~# lsof
1       /init   0       /dev/null
1       /init   1       /dev/null
1       /init   2       /dev/kmsg
1       /init   3       /dev/hvc1
1       /init   4       mnt:[4026532217]
1       /init   5       socket:[12297]
1       /init   7       socket:[12303]
1       /init   8       socket:[12304]
1       /init   100     socket:[1872]
5       /init   0       /dev/null
5       /init   1       /dev/null
5       /init   2       /dev/kmsg
5       /init   3       /dev/kmsg
5       /init   4       /dev/hvc1
5       /init   5       /
5       /init   6       socket:[12298]
5       /init   7       socket:[12299]
5       /init   8       anon_inode:[eventpoll]
8       /init   0       /dev/null
8       /init   1       /dev/null
8       /init   2       /dev/kmsg
8       /init   3       /dev/hvc1
8       /init   4       mnt:[4026532217]
8       /init   5       socket:[12297]
8       /init   6       socket:[12305]
8       /init   7       socket:[12303]
8       /init   8       socket:[12304]
8       /init   9       socket:[5011]
```

4. Basename

```
Anudeep:~# basename
BusyBox v1.36.1 (2024-05-21 13:38:37 UTC) multi-call binary.

Usage: basename FILE [SUFFIX] | -a FILE... | -s SUFFIX FILE...

Strip directory path and SUFFIX from FILE

        -a              All arguments are FILEs
        -s SUFFIX       Remove SUFFIX (implies -a)
```

5. dirname

```
Anudeep:~# dirname
BusyBox v1.36.1 (2024-05-21 13:38:37 UTC) multi-call binary.

Usage: dirname FILENAME

Strip non-directory suffix from FILENAME
```

6. find

Searches for files based on their names and other properties.

```
Anudeep:~# find
.
./.docker
./.docker/desktop
./linux_advanced_lab
./linux_advanced_lab/logs
./linux_advanced_lab/logs/application.log
./linux_advanced_lab/app.conf
./linux_advanced_lab/application.sh
./linux_advanced_lab/users.txt
./.ash_history
./member1_lab
./member1_lab/report.txt
./linux-practice
./linux-practice/tools.txt
./linux-practice/names.txt
./linux-practice/notes.txt
./linux_advanced_lab_backup
./day10_linux
./day10_linux/file2.txt
./day10_linux/file1.txt
./week1
./week1/example2
./week1/example1
./linux_day2_lab
./linux_day2_lab/deployment.env
./linux_day2_lab/services.txt
./linux_day2_lab/deployment_v2.env
./linux_day2_lab/server_metrics.txt
```

7. free

Shows RAM and swap memory usage.

```
Anudeep:~# free
               total        used        free      shared  buff/cache   available
Mem:         7962800      308036     7511708        2992      143056     7507552
Swap:        2097152           0     2097152
```

8. uptime

Displays how long the server has been running and its load averages.

```
Anudeep:~# uptime
 13:55:17 up 1 min,  0 users,  load average: 0.02, 0.00, 0.00
```

9. timeout

Runs a command for a limited duration and stops waiting after the specified time.

```
Anudeep:~# timeout
BusyBox v1.36.1 (2024-05-21 13:38:37 UTC) multi-call binary.

Usage: timeout [-s SIG] [-k KILL_SECS] SECS PROG ARGS

Run PROG. Send SIG to it if it is not gone in SECS seconds.
Default SIG: TERM.If it still exists in KILL_SECS seconds, send KILL.
```

10. namei

Shows each directory component along a file path and its permissions.

```
Anudeep:~# namei week4
f: week4
    week4 - No such file or directory
```