



# Mawlana Bhashani Science and Technology University

Santosh, Tangail-1902.

## Lab Report

### Department of Information and Communication Technology

**Report No:** 03

**Report Name:** TCP and router queues.

**Course Title:** Wireless and Mobile Communication.

**Course Code:** ICT-4201

| Submitted By  | Submitted To   |
|---|--|
| Name: <b>Md. Mohiuddin.</b><br>ID: <b>IT-16005</b><br>Session: 2015-16<br>4th Year 2nd Semester<br>Dept. of Information & Communication Technology,<br>MBSTU. | Nazrul Islam,<br>Assistant Professor<br>Dept. of Information & Communication<br>Technology, MBSTU. |

Submission Date: 11-09-2020

## Objective:

For TCP and router queues, we have to create a simple topology with two client node1, node 2 on the left side and node3 and node4 in the right side. We have to add drop tail queues of size QueueSize5 and QueueSize6 to Node5 and Node5 and Node6. Install a TCP socket instance on Node1 that will connect to Node3.

We have to Install a TCP socket instance on Node2 that will connect to Node3 and also Install a TCP socket instance on Node2 that will connect to Node4. Measure packet loss and cwnd size, and plot graphs throughput/time, cwnd/time and packet loss/time for each of the flows.

## Source Code:

```
// Network topology
//
//      192.168.1.0          192.168.2.0
// n1 ----- n2 ----- n3
// point-to-point (access link)      point-to-point (bottleneck link)
// 100 Mbps, 0.1 ms          bandwidth [10 Mbps], delay [5 ms]
// qdiscs PfifoFast with capacity      qdiscs queueDiscType in {PfifoFast, ARED,
CoDel, FqCoDel, PIE} [PfifoFast]
// of 1000 packets          with capacity of queueDiscSize packets [1000]
// net devices queues with size of 100 packets net devices queues with size of
net devices QueueSize packets [100]
```

```
// Two TCP flows are generated: one from n1 to n3 and the other from n3 to n1.
```

```
// Additionally, n1 pings n3, so that the RTT can be measured.
```

```
//
```

```
// The output will consist of a number of ping Rtt such as:
```

```
//
```

```
// /NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
```

```
// /NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
```

```
// /NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
```

```
// /NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
```

```
// /NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
```

```
// /NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
```

```
// /NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
```

```
#include "ns3/core-module.h"
```

```
#include "ns3/network-module.h"
```

```
#include "ns3/internet-module.h"
```

```
#include "ns3/point-to-point-module.h"
```

```
#include "ns3/applications-module.h"
```

```
#include "ns3/internet-apps-module.h"
```

```
#include "ns3/traffic-control-module.h"
```

```
#include "ns3/flow-monitor-module.h"
```

```
using namespace ns3;
```

```
NS_LOG_COMPONENT_DEFINE ("BenchmarkQueueDiscs");
```

```
void
```

```
LimitsTrace (Ptr<OutputStreamWrapper> stream, uint32_t oldVal, uint32_t  
newVal)
```

```
{
```

```
    *stream->GetStream () << Simulator::Now ().GetSeconds () << " " << newVal <<  
std::endl;
```

```
}
```

```
void
```

```
BytesInQueueTrace (Ptr<OutputStreamWrapper> stream, uint32_t oldVal,  
uint32_t newVal)
```

```
{
```

```
    *stream->GetStream () << Simulator::Now ().GetSeconds () << " " << newVal <<  
std::endl;
```

```
}
```

```
static void
```

```
GoodputSampling (std::string fileName, ApplicationContainer app,  
Ptr<OutputStreamWrapper> stream, float period)
```

```
{
```

```
    Simulator::Schedule (Seconds (period), &GoodputSampling, fileName, app,  
stream, period);
```

```
    double goodput;
```

```

uint64_t totalPackets = DynamicCast<PacketSink> (app.Get (0))->GetTotalRx ();
goodput = totalPackets * 8 / (Simulator::Now ().GetSeconds () * 1024); // Kbit/s

*stream->GetStream () << Simulator::Now ().GetSeconds () << " " << goodput <<
std::endl;
}

static void PingRtt (std::string context, Time rtt)
{
    std::cout << context << "=" << rtt.GetMilliSeconds () << " ms" << std::endl;
}

int main (int argc, char *argv[])
{
    std::string bandwidth = "10Mbps";
    std::string delay = "5ms";
    std::string queueDiscType = "PfifoFast";
    uint32_t queueDiscSize = 1000;
    uint32_t netdevicesQueueSize = 50;
    bool bql = false;

    std::string flowsDatarate = "20Mbps";
    uint32_t flowsPacketsSize = 1000;
    float startTime = 0.1f; // in s
    float simDuration = 60;

```

```
float samplingPeriod = 1;

CommandLine cmd;

cmd.AddValue ("bandwidth", "Bottleneck bandwidth", bandwidth);

cmd.AddValue ("delay", "Bottleneck delay", delay);

cmd.AddValue ("queueDiscType", "Bottleneck queue disc type in {PfifoFast,
ARED, CoDel, FqCoDel, PIE, prio}", queueDiscType);

cmd.AddValue ("queueDiscSize", "Bottleneck queue disc size in packets",
queueDiscSize);

cmd.AddValue ("netdevicesQueueSize", "Bottleneck netdevices queue size in
packets", netdevicesQueueSize);

cmd.AddValue ("bql", "Enable byte queue limits on bottleneck netdevices", bql);

cmd.AddValue ("flowsDatarate", "Upload and download flows datarate",
flowsDatarate);

cmd.AddValue ("flowsPacketsSize", "Upload and download flows packets sizes",
flowsPacketsSize);

cmd.AddValue ("startTime", "Simulation start time", startTime);

cmd.AddValue ("simDuration", "Simulation duration in seconds", simDuration);

cmd.AddValue ("samplingPeriod", "Goodput sampling period in seconds",
samplingPeriod);

cmd.Parse (argc, argv);

float stopTime = startTime + simDuration;

// Create nodes

NodeContainer n1, n2, n3;

n1.Create (1);
```

```
n2.Create (1);

n3.Create (1);

// Create and configure access link and bottleneck link

PointToPointHelper accessLink;

accessLink.SetDeviceAttribute ("DataRate", StringValue ("100Mbps"));

accessLink.SetChannelAttribute ("Delay", StringValue ("0.1ms"));


PointToPointHelper bottleneckLink;

bottleneckLink.SetDeviceAttribute ("DataRate", StringValue (bandwidth));

bottleneckLink.SetChannelAttribute ("Delay", StringValue (delay));

InternetStackHelper stack;

stack.InstallAll ();

// Access link traffic control configuration

TrafficControlHelper tchPfifoFastAccess;

tchPfifoFastAccess.SetRootQueueDisc ("ns3::PfifoFastQueueDisc", "MaxSize",
StringValue ("1000p"));

// Bottleneck link traffic control configuration

TrafficControlHelper tchBottleneck;

if (queueDiscType.compare ("PfifoFast") == 0)

{

    tchBottleneck.SetRootQueueDisc ("ns3::PfifoFastQueueDisc", "MaxSize",
        QueueSizeValue (QueueSize (QueueSizeUnit::PACKETS, queueDiscSize)));
}
```

```

}

else if (queueDiscType.compare ("ARED") == 0)
{
    tchBottleneck.SetRootQueueDisc ("ns3::RedQueueDisc");
    Config::SetDefault ("ns3::RedQueueDisc::ARED", BooleanValue (true));
    Config::SetDefault ("ns3::RedQueueDisc::MaxSize",
        QueueSizeValue (QueueSize (QueueSizeUnit::PACKETS, queueDiscSize)));
}

else if (queueDiscType.compare ("CoDel") == 0)
{
    tchBottleneck.SetRootQueueDisc ("ns3::CoDelQueueDisc");
    Config::SetDefault ("ns3::CoDelQueueDisc::MaxSize",
        QueueSizeValue (QueueSize (QueueSizeUnit::PACKETS,
queueDiscSize)));
}

else if (queueDiscType.compare ("FqCoDel") == 0)
{
    tchBottleneck.SetRootQueueDisc ("ns3::FqCoDelQueueDisc");
    Config::SetDefault ("ns3::FqCoDelQueueDisc::MaxSize",
        QueueSizeValue (QueueSize (QueueSizeUnit::PACKETS, queueDiscSize)));
}

else if (queueDiscType.compare ("PIE") == 0)

```



```

{
    tchBottleneck.SetRootQueueDisc ("ns3::PieQueueDisc");
    Config::SetDefault ("ns3::PieQueueDisc::MaxSize",
        QueueSizeValue (QueueSize (QueueSizeUnit::PACKETS, queueDiscSize)));
}

else if (queueDiscType.compare ("prio") == 0)
{
    uint16_t handle = tchBottleneck.SetRootQueueDisc ("ns3::PrioQueueDisc",
        "Priomap",
        StringValue ("0 1 0 1 0 1 0 1 0 1 0 1 0 1"));

    TrafficControlHelper::ClassIdList cid = tchBottleneck.AddQueueDiscClasses
        (handle, 2, "ns3::QueueDiscClass");

    tchBottleneck.AddChildQueueDisc (handle, cid[0], "ns3::FifoQueueDisc");
    tchBottleneck.AddChildQueueDisc (handle, cid[1], "ns3::RedQueueDisc");
}

else
{
    NS_ABORT_MSG ("--queueDiscType not valid");
}

if (bql)
{

```

```

    tchBottleneck.SetQueueLimits ("ns3::DynamicQueueLimits");
}

Config::SetDefault ("ns3::QueueBase::MaxSize", StringValue ("100p"));

NetDeviceContainer devicesAccessLink = accessLink.Install (n1.Get (0), n2.Get
(0));

tchPfifoFastAccess.Install (devicesAccessLink);

Ipv4AddressHelper address;

address.SetBase ("192.168.0.0", "255.255.255.0");

address.NewNetwork ();

Ipv4InterfaceContainer interfacesAccess = address.Assign (devicesAccessLink);

Config::SetDefault ("ns3::QueueBase::MaxSize", StringValue (std::to_string
(netdevicesQueueSize) + "p"));

NetDeviceContainer devicesBottleneckLink = bottleneckLink.Install (n2.Get (0),
n3.Get (0));

QueueDiscContainer qdiscs;

qdiscs = tchBottleneck.Install (devicesBottleneckLink);

address.NewNetwork ();

Ipv4InterfaceContainer interfacesBottleneck = address.Assign
(devicesBottleneckLink);

Ptr<NetDeviceQueueInterface> interface = devicesBottleneckLink.Get (0)-
>GetObject<NetDeviceQueueInterface> ();

Ptr<NetDeviceQueue> queueInterface = interface->GetTxQueue (0);

Ptr<DynamicQueueLimits> queueLimits = StaticCast<DynamicQueueLimits>
(queueInterface->GetQueueLimits ());

```

```

AsciiTraceHelper ascii;

if (bql)
{
    queueDiscType = queueDiscType + "-bql";

    Ptr<OutputStreamWrapper> streamLimits = ascii.CreateFileStream
(queueDiscType + "-limits.txt");

    queueLimits->TraceConnectWithoutContext ("Limit",MakeBoundCallback
(&LimitsTrace, streamLimits));
}

Ptr<Queue<Packet> > queue = StaticCast<PointToPointNetDevice>
(devicesBottleneckLink.Get (0))->GetQueue ();

Ptr<OutputStreamWrapper> streamBytesInQueue = ascii.CreateFileStream
(queueDiscType + "-bytesInQueue.txt");

queue->TraceConnectWithoutContext ("BytesInQueue",MakeBoundCallback
(&BytesInQueueTrace, streamBytesInQueue));

Ipv4InterfaceContainer n1Interface;

n1Interface.Add (interfacesAccess.Get (0));

Ipv4InterfaceContainer n3Interface;

n3Interface.Add (interfacesBottleneck.Get (1));

Ipv4GlobalRoutingHelper::PopulateRoutingTables ();

Config::SetDefault ("ns3::TcpSocket::SegmentSize", UIntegerValue
(flowsPacketsSize));

```

```

// Flows configuration

// Bidirectional TCP streams with ping like flent tcp_bidirectional test.

uint16_t port = 7;

ApplicationContainer uploadApp, downloadApp, sourceApps;

// Configure and install upload flow

Address addUp (InetSocketAddress (Ipv4Address::GetAny (), port));

PacketSinkHelper sinkHelperUp ("ns3::TcpSocketFactory", addUp);

sinkHelperUp.SetAttribute ("Protocol", TypeIdValue
(TcpSocketFactory::GetTypeId ()));

uploadApp.Add (sinkHelperUp.Install (n3));


InetSocketAddress socketAddressUp = InetSocketAddress
(n3Interface.GetAddress (0), port);

OnOffHelper onOffHelperUp ("ns3::TcpSocketFactory", Address ());

onOffHelperUp.SetAttribute ("Remote", AddressValue (socketAddressUp));

onOffHelperUp.SetAttribute ("OnTime", StringValue
("ns3::ConstantRandomVariable[Constant=1]"));

onOffHelperUp.SetAttribute ("OffTime", StringValue
("ns3::ConstantRandomVariable[Constant=0]"));

onOffHelperUp.SetAttribute ("PacketSize", UIntegerValue (flowsPacketsSize));

onOffHelperUp.SetAttribute ("DataRate", StringValue (flowsDatarate));

sourceApps.Add (onOffHelperUp.Install (n1));

```

```

port = 8;

// Configure and install download flow

Address addDown (InetSocketAddress (Ipv4Address::GetAny (), port));

PacketSinkHelper sinkHelperDown ("ns3::TcpSocketFactory", addDown);

sinkHelperDown.SetAttribute ("Protocol", TypedValue
(TcpSocketFactory::GetTypeId ()));

downloadApp.Add (sinkHelperDown.Install (n1));


InetSocketAddress socketAddressDown = InetSocketAddress
(n1Interface.GetAddress (0), port);

OnOffHelper onOffHelperDown ("ns3::TcpSocketFactory", Address ());

onOffHelperDown.SetAttribute ("Remote", AddressValue (socketAddressDown));

onOffHelperDown.SetAttribute ("OnTime", StringValue
("ns3::ConstantRandomVariable[Constant=1]"));

onOffHelperDown.SetAttribute ("OffTime", StringValue
("ns3::ConstantRandomVariable[Constant=0]"));

onOffHelperDown.SetAttribute ("PacketSize", UIntegerValue (flowsPacketsSize));

onOffHelperDown.SetAttribute ("DataRate", StringValue (flowsDatarate));

sourceApps.Add (onOffHelperDown.Install (n3));


// Configure and install ping

V4PingHelper ping = V4PingHelper (n3Interface.GetAddress (0));

ping.Install (n1);

```

```

Config::Connect ("/NodeList/*/ApplicationList/*/Sns3::V4Ping/Rtt",
MakeCallback (&PingRtt));

uploadApp.Start (Seconds (0));

uploadApp.Stop (Seconds (stopTime));

downloadApp.Start (Seconds (0));

downloadApp.Stop (Seconds (stopTime));


sourceApps.Start (Seconds (0 + 0.1));

sourceApps.Stop (Seconds (stopTime - 0.1));

Ptr<OutputStreamWrapper> uploadGoodputStream = ascii.CreateFileStream
(queueDiscType + "-upGoodput.txt");

Simulator::Schedule (Seconds (samplingPeriod), &GoodputSampling,
queueDiscType + "-upGoodput.txt", uploadApp,

uploadGoodputStream, samplingPeriod);

Ptr<OutputStreamWrapper> downloadGoodputStream = ascii.CreateFileStream
(queueDiscType + "-downGoodput.txt");

Simulator::Schedule (Seconds (samplingPeriod), &GoodputSampling,
queueDiscType + "-downGoodput.txt", downloadApp,

downloadGoodputStream, samplingPeriod);


// Flow monitor

Ptr<FlowMonitor> flowMonitor;

```

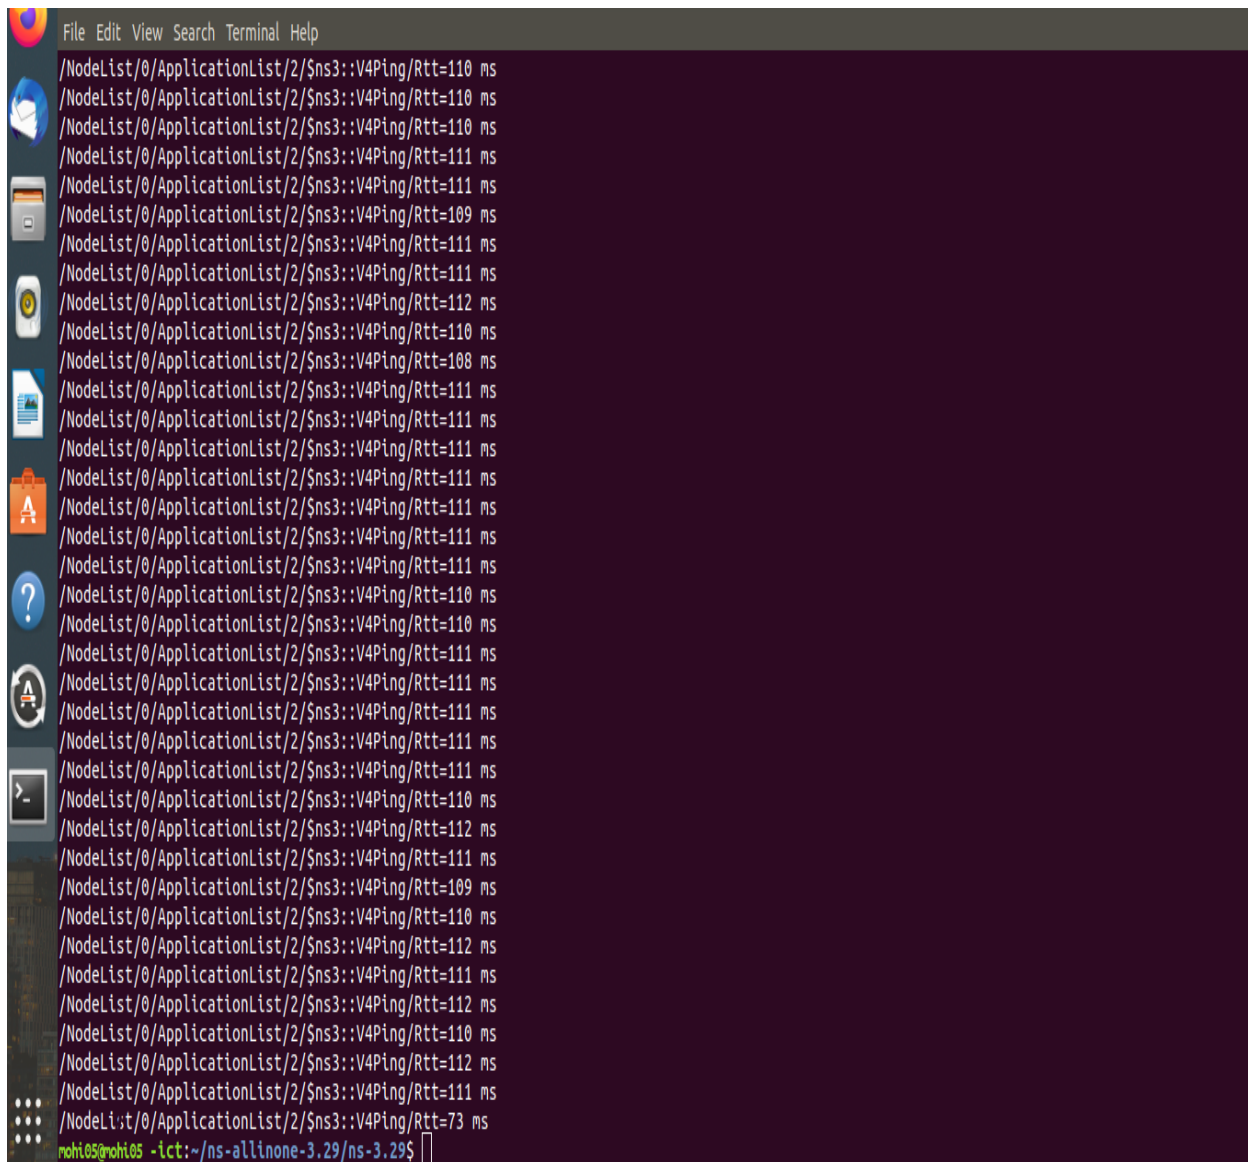
```
FlowMonitorHelper flowHelper;  
flowMonitor = flowHelper.InstallAll();  
  
Simulator::Stop (Seconds (stopTime));  
  
Simulator::Run ();  
  
flowMonitor->SerializeToXmlFile(queueDiscType + "-flowMonitor.xml", true,  
true);  
  
Simulator::Destroy ();  
  
return 0;  
}
```

**Output:**



```
mohi05@mohi05 -ict:~$ cd ns-allinone-3.29
mohi05@mohi05 -ict:~/ns-allinone-3.29$ cd ..
mohi05@mohi05 -ict:~$ cd ns-allinone-3.29/ns-3.29
mohi05@mohi05 -ict:~/ns-allinone-3.29/ns-3.29$ ./waf --run scratch/queue-discs-benchmark
Waf: Entering directory '/home/mohi05/ns-allinone-3.29/ns-3.29/build'
Waf: Leaving directory '/home/mohi05/ns-allinone-3.29/ns-3.29/build'
Build commands will be stored in build/compile_commands.json
'build' finished successfully (12.394s)

/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=10 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=109 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=109 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=109 ms
```

A terminal window with a dark background and a sidebar on the left containing various application icons. The terminal displays a list of ping results for different nodes. Each line shows a path, a ping command, and the round-trip time (Rtt) in milliseconds. The paths are mostly /NodeList/0/ApplicationList/2/\$ns3::V4Ping. The Rtt values vary slightly, mostly between 109 and 112 ms. The last line shows a different path: /NodeList/0/ApplicationList/2/\$ns3::V4Ping/Rtt=73 ms. The prompt at the bottom is nohi05@nohi05 -lct:~/ns-allinone-3.29/ns-3.29\$.

```
File Edit View Search Terminal Help
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=109 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=108 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=109 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=110 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=112 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=111 ms
/NodeList/0/ApplicationList/2/$ns3::V4Ping/Rtt=73 ms
nohi05@nohi05 -lct:~/ns-allinone-3.29/ns-3.29$
```

**Conclusion:**

The specific characteristics of TCP and Router queues include the manner in which they avoid routing loops, the manner in which they select preferred routes, using information. This has the added benefit of preventing issues with TCP and router queues loops. TCP and router is related to connecting the network packages simultaneously.

