

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

Case Study 2 - Web-based Solution

Background

You are developing a web-based solution that students and teachers can use to collaborate on written assignments. Teachers can also use the solution to detect potential plagiarism, and they can manage assignments and data by using locally accessible network shares.

Business Requirements

The solution consists of three parts: a website where students work on assignments and where teachers view and grade assignments, the plagiarism detection service, and a connector service to manage data by using a network share. The system availability agreement states that operating hours are weekdays between midnight on Sunday and midnight on Friday.

Plagiarism Service

The plagiarism detection portion of the solution compares a new work against a repository of existing works. The initial dataset contains a large database of existing works. Teachers upload additional works. In addition, the service itself searches for other works and adds those works to the repository.

Technical Requirements

Website

The website for the solution must run on an Azure web role.

Plagiarism Service

The plagiarism detection service runs on an Azure worker role. The computation uses a random number generator. Certain values can result in an infinite loop, so if a particular work item takes longer than one hour to process, other instances of the service must be able to process the work item. The Azure worker role must fully utilize all available CPU cores. Computation results are cached in local storage resources to reduce computation time.

Repository of Existing Works

The plagiarism detection service works by comparing student submissions against a repository of existing works by using a custom matching algorithm. The master copies of the works are stored in Azure blob storage. A daily process synchronizes files between blob storage and a file share on a virtual machine (VM). As part of this synchronization, the Existing WorkRepository object adds the files to Azure Cache to improve the display performance of the website. If a student's submission is overdue, the Late property is set to the number of days that the work is overdue. Work files can be downloaded by using the Work action of the TeacherController object

Network Connector

Clients can interact with files that are stored on the VM by using a network share. The network permissions are configured in a startup task in the plagiarism detection service.

Service Monitoring

The CPU of the system on which the plagiarism detection service runs usually limits the plagiarism detection service. However, certain combinations of input can cause memory issues,

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

which results in decreased performance. The average time for a given computation is 45 seconds. Unexpected results during computations might cause a memory dump. Memory dump files are stored in the Windows temporary folder on the VM that hosts the worker role.

Security

Only valid users of the solution must be able to view content that users submit. Privacy regulations require that all content that users submit must be retained only in Azure Storage. All documents that students upload must be signed by using a certificate named DocCert that is installed in both the worker role and the web role.

Solution Development

You use Microsoft Visual Studio 2013 and the Azure emulator to develop and test both the compute component and the storage component. New versions of the solution must undergo testing by using production data.

Scaling

During non-operating hours, the plagiarism detection service should not use more than 40 CPU cores. During operating hours, the plagiarism detection service should automatically scale when 500 work items are waiting to be processed. To facilitate maintenance of the system, no plagiarism detection work should occur during non-operating hours. All ASP.NET MVC actions must support files that are up to 2 GB in size.

Biographical Information

Biographical information about students and teachers is stored in a Microsoft Azure SQL database. All services run in the US West region. The plagiarism detection service runs on Extra Large instances.

Solution Structure

Relevant portions of the solution files are shown in the following code segments. Line numbers in the code segments are included for reference only and include a two-character prefix that denotes the specific file to which the line belongs.

Diagnostics.wadcfg

```
DG01 <?xml version="1.0" encoding="utf-8" ?>
DG02 <DiagnosticMonitorConfiguration
DG03   xmlns="http://schemas.microsoft.com/ServiceHosting/2010/10/DiagnosticsConfiguration"
DG04   configurationChangePollInterval="PT1M"
DG05   overallQuotaInMB="4096">
DG06   <PerformanceCounters bufferQuotaInMB="0" scheduledTransferPeriod="PT30M">
DG07     <PerformanceCounterConfiguration counterSpecifier="\System\Context Switches/
sec" sampleRate="PT30S" />
DG08   </PerformanceCounters>
DG09 </DiagnosticMonitorConfiguration>
```

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

ExistingWorkRepository.cs

```
EW01 public static class ExistingWorkRepository
EW02 {
EW03     public static void PopulateCache(string subject, string workId)
EW04     {
EW05         var account = Storage.Account();
EW06         var container = account.CreateCloudBlobClient().GetContainerReference("work" + subject);
EW07         var body = container.GetBlockBlobReference(workId).DownloadText();
EW08         var cache = new DataCacheFactory().GetCache(subject);
EW09         cache.Add(workId, body);
EW10     }
EW11 }
```

PlagiarismCalculation.ps1

```
PC01 public class PlagiarismCalculation
PC02 {
PC03     public double Compute(Work essay)
PC04     {
PC05         var score = default(double);
PC06         var account = Storage.Account();
PC07         var cloudTableClient = account.CreateCloudTableClient();
PC08         var cloudBlobClient = account.CreateCloudBlobClient();
PC09         var existingWorks = cloudTableClient.GetTableReference("library").CreateQuery<Work>();
PC10         var container = cloudBlobClient.GetContainerReference("work" + subject);
PC11         foreach (var work in existingWorks.Execute())
PC12         {
PC13             work.Body = container.GetBlockBlobReference(work.PartitionKey).DownloadText();
PC14             score = GetMaxScore(essay, work, score);
PC15         }
PC16         return score;
PC17     }
PC18
PC19     private double GetMaxScore(Work work, Work previousWork, double previous)
PC20     {
PC21         var rootPath = RoleEnvironment.GetLocalResource("ComputeResults").RootPath;
PC22         ...
PC23         return score;
PC24     }
PC25 }
```

SetupNetworkAccess.ps1

```
SN01 $acl = New-AzureAclConfig
SN02 Set-AzureAclConfig -AddRule -ACL $acl -Order 400 -Action permit `
    -RemoteSubnet "192.168.5.1/24" -Description "Access for Northwood"
SN03 Set-AzureAclConfig -AddRule -ACL $acl -Order 200 -Action permit `
    -RemoteSubnet "10.181.11.1/16" -Description "Access for Contoso, Ltd"
SN04 Get-AzureVM -ServiceName "FileService" -Name "FS" | `
    Add-AzureEndpoint -Name "Files" -Protocol tcp -Localport 445 `
    -PublicPort 445 -ACL $acl | Update-AzureVM
```

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

TeacherController.cs

```
TC01 public class TeacherController : Controller
TC02 {
TC03     public ActionResult Work(string workId, string subject)
TC04     {
TC05     }
TC06 }
TC07 public ActionResult Upload(string workId, string subject)
TC08 {
TC09 }
TC10 }
TC11 private static bool CheckDay(DateTime dt)
TC12 {
TC13     if ((dt.DayOfWeek == DayOfWeek.Saturday) || (dt.DayOfWeek == DayOfWeek.Sunday))
TC14         return true;
TC15     return false;
TC16 }
TC17 private static CloudQueueMessage BuildMessage(params string[] args)
TC18 {
TC19     return new CloudQueueMessage(string.Join("/", args));
TC20 }
TC21 }
```

Work.cs

```
WK01 public class Work : TableEntity
WK02 {
WK03     public string Body { get; set; }
WK04     public string Author { get; set; }
WK05     public bool IsReference { get; set; }
WK06     public int Late { get; set; }
WK07     [IgnoreProperty]
WK08     public string Subject
WK09     {
WK10         get { return RowKey; }
WK11         set { RowKey = value; }
WK12     }
WK13     [IgnoreProperty]
WK14     public string WorkId
WK15     {
WK16         get { return PartitionKey; }
WK17         set { PartitionKey = value; }
WK18     }
WK19 }
```

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

WorkerRole.cs

```
WR01 public class WorkerRole : RoleEntryPoint
WR02 {
WR03     public override void Run()
WR04     {
WR05         var account = Storage.Account();
WR06         var queue = account.CreateCloudQueueClient().GetQueueReference("checkwork");
WR07         var service = new PlagiarismCalculation();
WR08         foreach (var queueMessage in GetWork(queue))
WR09         {
WR10             var parts = queueMessage.AsString.Split(new[] { "/" }, StringSplitOptions.None);
WR11             service.Compute(parts[0], parts[1]);
WR12         }
WR13     }
WR14     private IEnumerable<CloudQueueMessage> GetWork(CloudQueue queue)
WR15     {
WR16     }
WR17 }
WR18 }
```

1) Drag and Drop Question.

You need to configure storage for the solution. What should you do? To answer, drag the appropriate XML segments to the correct locations. Each XML segment may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

Markup Segments	Answer Area
<div>LocalStorage</div>	< [] >
<div>ComputeResults</div>	< []
<div>Content</div>	name=" [] "
<div>ignoreRoleInstanceState</div>	[] = "true"
<div>cleanOnRoleRecycle</div>	Status = "true"
<div>TemporaryData</div>	sizeInMB = "123"
<div>LocalResources</div>	/>
	< [] />

Answer:

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

Markup Segments

LocalStorage

ComputeResults

Content

ignoreRoleInstanceStatus

cleanOnRoleRecycle

TemporaryData

LocalResources

Answer Area

< LocalResources >

< LocalStorage

name=" ComputeResults "

cleanOnRoleRecycle ="true"

Status ="true"

sizeInMB="123"

/>

< LocalResources />

- 2) You are deploying the web-based solution in the West Europe region. You need to copy the repository of existing works that the plagiarism detection service uses. You must achieve this goal by using the least amount of time. What should you do?
- a) Copy the files from the source file share to a local hard disk.
Ship the hard disk to the West Europe data center by using the Azure Import/Export service.
 - b) Create an Azure virtual network to connect to the West Europe region.
Then use Robocopy to copy the files from the current region to the West Europe region.
 - c) Provide access to the blobs by using the Microsoft Azure Content Delivery Network (CDN).
Modify the plagiarism detection service so that the files from the repository are loaded from the CDN.
 - d) Use the Asynchronous Blob Copy API to copy the blobs from the source storage account to a storage account in the West Europe region.

Answer: D

- 3) You need to find all existing works about World History that are overdue and are stored in the repository. How should you complete the relevant code? To answer, select the appropriate option or options in the answer area.

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

```
var root = Storage.Account().TableStorageUri;  
var query = root + "library()?filter=" +  
" " +  
"Late%20gt%200  
Late%20lt%200  
Late%20ne%20true  
Late%20eq%20true  
"%20and%20 " +  
"RowKey  
WorkID  
Subject  
PartitionKey  
%20eq%20'World History'";
```

Answer:

```
var root = Storage.Account().TableStorageUri;  
var query = root + "library()?filter=" +  
" " +  
"Late%20gt%200  
Late%20lt%200  
Late%20ne%20true  
Late%20eq%20true  
"%20and%20 " +  
"RowKey  
WorkID  
Subject  
PartitionKey  
%20eq%20'World History'";
```

4) Drag and Drop Question

You need to insert code at line WR16 to implement the GetWork method. How should you complete the relevant code? To answer, drag the appropriate code segment to the correct location. Each code segment may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

Code Segments

numOfMessages:4

numOfMessages:8

GetMessages

PeekMessages

visibilityTimeout:

operationContext:

Answer Area

```
while (true)
{
    var messages = queue.
    (
        ,
        TimeSpan.FromHours(1));
    foreach (var message in messages)
        yield return message;
}
```

Answer:

Code Segments

numOfMessages:4

numOfMessages:8

GetMessages

PeekMessages

visibilityTimeout:

operationContext:

Answer Area

```
while (true)
{
    var messages = queue. GetMessages
    (
        numOfMessages:8 , visibilityTimeout:
        TimeSpan.FromHours(1));
    foreach (var message in messages)
        yield return message;
}
```

[Note: Your worker role is using Extra Large VM (mentioned in case study: in Biographical Information), To utilize all Cores you need to fetch 8 messages at once]

- 5) The Compute method in the PlagiarismCalculation class takes a significant amount of time to load existing works from blob storage. To improve performance, the service must load existing works from the cache. You need to modify the Compute method in the class PlagiarismCalculation. How should you modify the method? To answer, select the appropriate option or options in the answer area.

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

```
var existingWorks =  
  
cloudTableClient.GetTableReference("library").CreateQuery<Work>();  
  
var cache = new DataCache(essay.Author);  
var cache = new DataCache(essay.Subject);  
var cache = new DataCacheItemKey(essay.Author, "body");  
var cache = new DataCacheItemKey(essay.Subject, "body");  
  
foreach (var work in existingWorks.Execute())  
{  
  
work.Body = cache.Get(work.Body).ToString();  
work.Body = cache.Get(work.RowKey).ToString();  
work.Body = cache.Get(work.Author).ToString();  
work.Body = cache.Get(work.PartitionKey).ToString();  
  
score = compute(essay, work, score);  
}
```

Answer:

```
var existingWorks =  
  
cloudTableClient.GetTableReference("library").CreateQuery<Work>();  
  
var cache = new DataCache(essay.Author);  
var cache = new DataCache(essay.Subject);  
var cache = new DataCacheItemKey(essay.Author, "body");  
var cache = new DataCacheItemKey(essay.Subject, "body");  
  
foreach (var work in existingWorks.Execute())  
{  
  
work.Body = cache.Get(work.Body).ToString();  
work.Body = cache.Get(work.RowKey).ToString();  
work.Body = cache.Get(work.Author).ToString();  
work.Body = cache.Get(work.PartitionKey).ToString();  
  
score = compute(essay, work, score);  
}
```

- 6) You update the portion of the website that contains biographical information about students. You need to provide data for testing the updates to the website. Which approach should you use?
- A. Use SQL Server data synchronization.
 - B. Use the Active Geo-Replication feature of Azure SQL Database.

Talk to Expert


Sonu Sathyadas – <http://sonusathyadas.in>

- C. Use SQL Replication.
- D. Use the Geo-Replication feature of Azure Storage.

Answer: A

[Note: Assuming SQL Server data synchronization is Azure Sql Data Sync which is still in preview. Cannot use Active Geo-replication because If it is read only copy, than you cannot update the rows. "You ****update**** the portion of the website that contains biographical information about students."

- 7) You need to configure scaling for the plagiarism detection service. What should you do? To answer, select the appropriate values in the dialog box in the answer area.

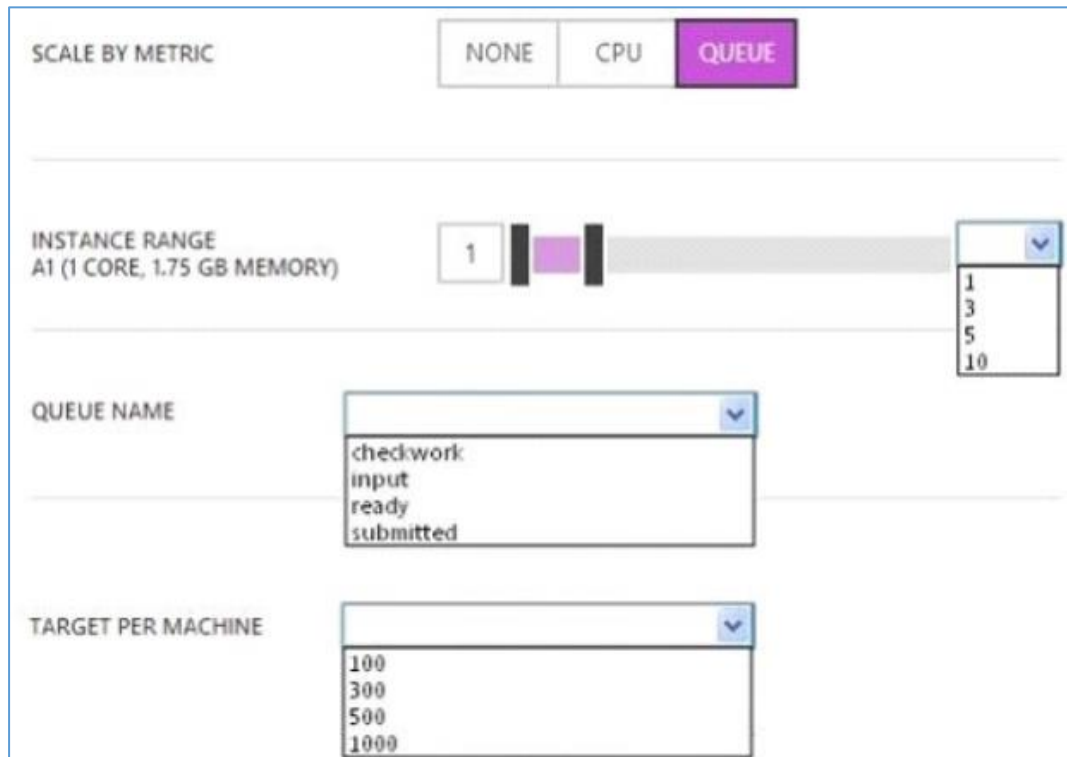

The image shows a screenshot of the Azure Autoscale configuration dialog box. The 'SCALE BY METRIC' section has three buttons: 'NONE', 'CPU', and 'QUEUE', with 'QUEUE' selected. The 'INSTANCE RANGE' section shows a slider set to 1, with a dropdown menu open showing options 1, 3, 5, and 10. The 'QUEUE NAME' section has a dropdown menu with options 'checkwork', 'input', 'ready', and 'submitted'. The 'TARGET PER MACHINE' section has a dropdown menu with options 100, 300, 500, and 1000.

SCALE BY METRIC
NONE
CPU
QUEUE

INSTANCE RANGE
1
3
5
10

QUEUE NAME
checkwork
input
ready
submitted

TARGET PER MACHINE
100
300
500
1000

Answer:

Sonu Sathyadas – <http://sonusathyadas.in>

[illegible]

- 8) You need to implement the Work action on the TeacherController object. How should you complete the relevant code? To answer, select the appropriate options in the answer area.

```
var disposition = string.Format("attachment; filename=\"{0}\"", workId);
var account = Storage.Account();
var cloudBlobClient = account.CreateCloudBlobClient();
var server = cloudBlobClient.StorageUri;
var blobName = new Uri(string.Format("{0}/{1}/{2}", server,
```

```
"work" + subject  
workId  
disposition  
blobname
```

```

"work" + subject
workId
disposition
blobname
));

```

```
var blob = cloudBlobClient.GetBlobReferenceFromServer(blobName);
var contentLength = blob.Properties.Length.ToString();
Response.Buffer = false;
Response.AddHeader("Content-Disposition", disposition);
Response.AddHeader("Content-Length", contentLength);
Response.ContentType = "application/octet-stream";
Response.Flush();
```

```
blob.DownloadToStream(  
    Response.OutputStream  
    Request.InputStream  
    blob.OpenRead()  
);
```

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

Answer:

```
var disposition = string.Format("attachment; filename=\"{0}\"", workId);
var account = Storage.Account();
var cloudBlobClient = account.CreateCloudBlobClient();
var server = cloudBlobClient.StorageUri;
var blobName = new Uri(string.Format("{0}/{1}/{2}", server,
```

workId, disposition, blobName);

workId
disposition
blobName

workId
disposition
blobName

```
var blob = cloudBlobClient.GetBlobReferenceFromServer(blobName);
var contentLength = blob.Properties.Length.ToString();
Response.Buffer = false;
Response.AddHeader("Content-Disposition", disposition);
Response.AddHeader("Content-Length", contentLength);
Response.ContentType = "application/octet-stream";
Response.Flush();
```

```
blob.DownloadToStream(Response.OutputStream);
```

- 9) Contoso, Ltd. reports that hackers have compromised a computer on its network. You need to prevent access to the site from all Contoso, Ltd. computers. How should you complete the relevant Windows PowerShell script? To answer, drag the appropriate Windows PowerShell segment to the correct location. Each Windows PowerShell segment may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

PowerShell Segments	Answer Area
100	\$acl = New-AzureAclConfig
300	Set-AzureAclConfig -AddRule -ACL \$acl -Action Deny -
500	-Description "Security Fix" -Order
192.168.5.1/24	-RemoteSubnet " " -
10.181.11.1/16	Get-AzureVM -ServiceName "FileService" -Name "FS" -
192.181.5.1/8	Set-AzureEndpoint -Name "Files" -Protocol tcp -
	-Localport 445 -PublicPort 445 -ACL \$acl Update-AzureVM

Answer:

Talk to Expert

Sonu Sathyadas – <http://sonusathyadas.in>

PowerShell Segments	Answer Area
<input type="text" value="100"/>	<code>\$acl = New-AzureAclConfig</code>
<input type="text" value="300"/>	<code>Set-AzureAclConfig -AddRule -ACL \$acl -Action Deny `</code>
<input type="text" value="500"/>	<code>-Description "Security Fix" -Order <input type="text" value="100"/></code>
<input type="text" value="192.168.5.1/24"/>	<code>-RemoteSubnet " <input type="text" value="10.181.11.1/16"/> "</code>
<input type="text" value="10.181.11.1/16"/>	<code>Get-AzureVM -ServiceName "FileService" -Name "FS" `</code>
<input type="text" value="192.181.5.1/8"/>	<code>Set-AzureEndpoint -Name "Files" -Protocol tcp `</code>
	<code>-Localport 445 -PublicPort 445 -ACL \$acl Update-AzureVM</code>

10)