

1) Created the Storage Account (input output container) , Data Factory .

The image shows two screenshots from the Azure portal. The top screenshot is the 'Containers' view for a storage account named 'Imspracstoragemod3'. It displays a table of containers: 'logs', 'input', and 'output'. The bottom screenshot is the 'Data factory' view for 'Imspracfactorymod3', showing options to 'Ingest', 'Orchestrate', 'Transform data', and 'Configure SSIS'.

Containers View:

Storage account: **Imspracstoragemod3** | Containers

Search:

Actions: + Add container, Upload, Refresh, Delete, Change access level, Restore containers, Edit columns

Search containers by prefix: Only show active containers

Showing all 3 items

☐	Name	Last modified	Anonymous access level	Lease state	Storage connector
☐	logs	4/20/2026, 10:18:07 AM	Private	Available	-
☐	input	4/20/2026, 10:18:29 AM	Private	Available	-
☐	output	4/20/2026, 10:18:35 AM	Private	Available	-

Data factory View:

Data factory: **Imspracfactorymod3**

Buttons: New, Set up code repository

Actions:

- Ingest:** Copy data at scale once or on a schedule.
- Orchestrate:** Code-free data pipelines.
- Transform data:** Transform your data using data flows.
- Configure SSIS:** Manage & run your SSIS packages in the cloud.

2) Create linked service and datasets:

The image shows the 'Linked services' page in Azure Data Factory. It lists a single linked service named 'blobDataset' of type 'Azure Blob Storage'. A notification at the top right states 'Successfully created blobDataset (Linked service)'.

General

Connector upgrade advisor

Factory settings

Connections

Linked services

Integration runtimes

Microsoft Purview

ADF in Microsoft Fabric

Linked service defines the connection information to a data store or compute. [Learn more](#)

+ New

Filter by name: Annotations: **Any**

Showing 1 - 1 of 1 items

Name ↑↓	Type ↑↓	Related ↑↓	Annotations ↑↓
blobDataset	Azure Blob Storage	0	

Successfully created blobDataset (Linked service).

Set properties

Name

inputDataset

Linked service *

blobDataset

File path

input

/

Directory

/

sales_dataset.csv



First row as header



Import schema

☒ From connection/store ☐ From sample file ☐ None

Set properties

Name

outputDataset

Linked service *

blobDataset

File path

output

/

Directory

/

File name



First row as header



Import schema

☒ From connection/store ☐ From sample file ☐ None

- 3) Sink Dataset has dynamic filename parameter and added it in copy activity sink:

Pipeline expression builder



Add dynamic content below using any combination of [expressions](#), [functions](#) and [system variables](#).

```
@dataset().fileName
```

[Clear contents](#)


Parameters

Functions

Search



fileName



General	Source	Sink	Mapping	Settings	User properties				
Sink dataset			outputDataset Learn more						
Dataset properties									
<table border="1"><thead><tr><th>Name</th><th>Value</th></tr></thead><tbody><tr><td>fileName</td><td>@variables('fileName')</td></tr></tbody></table>			Name	Value	fileName	@variables('fileName')			
Name	Value								
fileName	@variables('fileName')								
Copy behavior			Select...						
Max concurrent connections									
Block size (MB)									
Metadata			New						
Quote all text			☒						

- 4) Pipeline based variables for the set activity and their expression :

+ New

🗑 Delete

☐	Name	Type	Default value
☐	region	Array	Value
☐	upperRegion	String	Value
☐	fileName	String	Value
☐	checkRegion	String	Value
☐	dateDiff	Integer	Value
☐	year	String	Value
☐	fileLength	Integer	Value
☐	log	String	Value

log:

```
@concat(
  'FileName=', variables('fileName'),
  ', DayDiff=', string(variables('dateDiff')),
  ', Year=', variables('year'),
  ', Length=', string(variables('fileLength'))
)
```

fileName:

```
@concat(
  'SalesReport-',
  toUpper(replace(item().Region, ' ', '_')),
  '-',
  formatDateTime(utcNow(), 'yyyyMMdd'),
  '-',
  formatDateTime(utcNow(), 'HHmmss'),
  '.csv'
)
```

dateDiff

```
@div(sub(ticks(utcNow()), ticks(formatDateTime(item().Date))),  
      864000000000)
```

upperRegion

Add dynamic content below using any cell

```
@toUpper(item().Region)
```


checkregion:

```
@concat(  
  toUpper(item().Region),  
  '-',  
  if(  
    equals(toUpper(item().Region), 'US'),  
    'Domestic',  
    'International'  
  )  
)
```

fileLength

```
@length(variables('fileName'))
```

5) Set Variable Activity Flow:

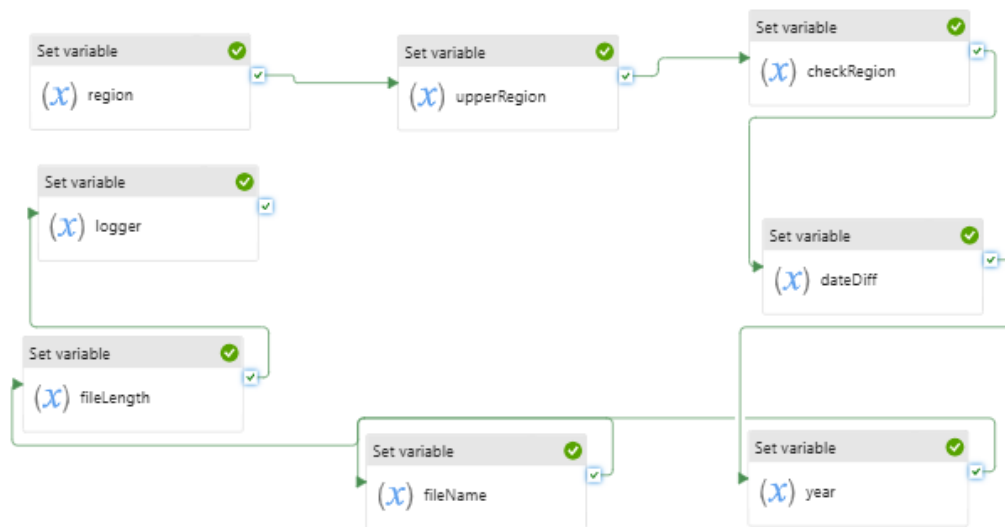


6) Data Flow Activity:



Group by: region


Aggregates :max(Date)

7) Overall Pipeline(data flow + lookup + foreach (set variables)):

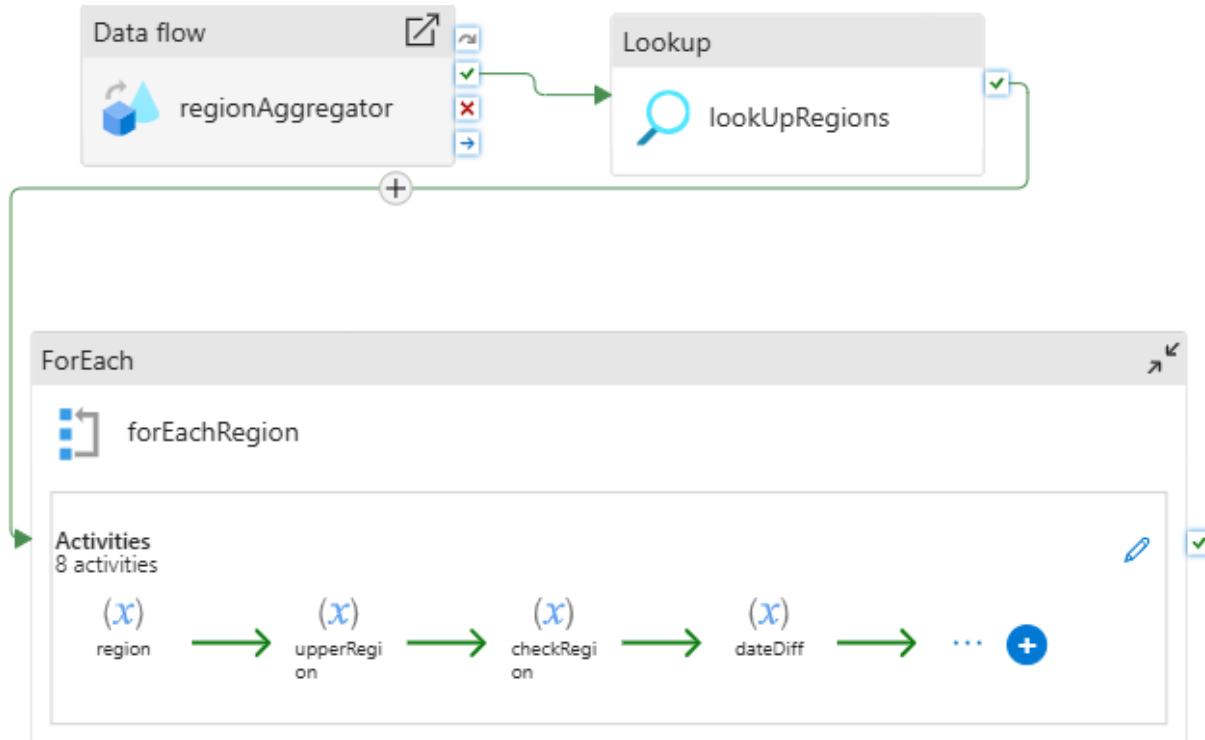

8)Required Output Logs:

Output



Copy to clipboard

```
{
  "name": "log",
  "value": "FileName=SalesReport-ASIA-20260420-115654.csv,
DayDiff=481, Year=2024, Length=36"
}
```