

SPTS 200mm GEM/SECSII Manual

(with Cimetrix-based SECS Module)

Table of Contents

1	REVISION HISTORY	7
2	GENERAL INFORMATION	8
2.1	Introduction	8
2.2	Supported Software Revisions.....	8
3	GEM Compliance Statement.....	9
4	Communications	10
4.1	Objective.....	10
4.2	Communications State Model	10
4.2.1	Communications State Diagram	10
4.2.2	State Transition Table	11
4.2.3	Communications State Definitions	11
4.3	Associated Variables	13
4.4	Protocol Parameters	13
5	Control	14
5.1	Objective.....	14
5.2	State Model	14
5.2.1	Control State Diagram	15
5.2.2	Control State Transition Table.....	16
5.2.3	Control State Definitions	16
5.3	Associated Variables	18
6	On-line Identification	19
6.1	Objective.....	19
6.2	Description	19
6.3	Associated Variables	19
7	Event Notification	20
7.1	Objective.....	20
7.2	Event Collection.....	20
7.3	Associated Variables	20
8	Alarm Management.....	26
8.1	Objective.....	26
8.2	Alarm-related Variables	26
8.3	Alarm ID's.....	27
9	Spooling	28
9.1	Objective.....	28
9.2	Description - Enabling Spooling.....	28
9.3	Spooling State Diagram	28
9.3.1	Spooling State Definitions	28
9.3.2	Spooling State Transition Table.....	30
9.3.3	Related Status Variables, Constants and Events	31
9.3.4	Related Equipment Constants	32
9.3.5	Related Collection Events.....	32
10	Error Messages	33

10.1	Objective	33
10.2	Description.....	33
11	<i>Dynamic Event Report Configuration</i>	34
11.1	Objective	34
11.2	Report Configuration	34
11.3	Associated Variables.....	34
12	<i>Variable Data Collection</i>	35
12.1	Objective	35
12.2	Variable Data	35
12.3	GEM Specific Equipment Constants	35
12.3.1	Objective.....	35
12.3.2	Capabilities	35
12.4	GEM Specific Status Variables	36
12.5	GEM Specific Discrete Data Variables.....	37
12.6	General Equipment Specific Equipment Constants	39
12.6.1	Objective.....	39
12.6.2	Capabilities	39
12.7	Module Equipment Specific Equipment Constants.....	41
	<i>See Section 0,</i>	41
12.8	General Equipment Specific Status Variables	43
12.9	Module Equipment Specific Status Variables.....	46
12.10	Equipment Specific Discrete Data Variables	47
13	<i>Limits Monitoring</i>	48
13.1.1	General Description	48
13.1.2	Limits Monitoring State Diagram.....	49
13.1.3	Limits Monitoring State Definitions Table.....	49
13.1.4	Limit Monitoring State Transition Table.....	49
14	<i>Trace Data Collection</i>	51
14.1	Objective	51
14.2	Trace Data Collection	51
15	<i>Remote Control</i>	52
15.1	Objective.....	52
15.2	Automatic Equipment Processing Commands.....	52
15.3	Process Module Processing Commands.....	57
15.4	Process Module Mode Command.....	60
15.5	Remote-to-Local / Local-to-Remote Command	60
15.6	Acknowledgement Commands	60
15.7	Lamp Tower Commands.....	61
16	<i>Process Program Management</i>	62
16.1	Objective	62
16.2	Description.....	62
16.2.1	Individual Recipe Upload/Download.....	62

16.2.2	Custom message (S7F65/66) for Reporting Child Recipes	63
16.3	Restrictions	63
17	Terminal Services	64
17.1	Objective	64
17.2	Description	64
18	Clock	65
18.1	Objective	65
18.2	Description	65
19	Appendix A - Message Summary Tables	66
19.1	Control State Dependency	66
19.2	Host Initiated	66
19.3	Equipment Initiated	66
19.4	Notes	67
19.5	Data Item Definition Table	67
20	Appendix B - Streams and Functions	74
20.1	Stream 1: Equipment Status	74
20.1.1	S1, F1 Are You There Request (H↔E)	74
20.1.2	S1, F2 On-line Data (H←E)	74
20.1.3	S1, F2 On-line Data (H→E)	74
20.1.4	S1, F3 Selected Equipment Status Request (H→E)	74
20.1.5	S1, F4 Selected Equipment Status Data (H←E)	74
20.1.6	S1, F11 Status Variable Namelist Request (H→E)	74
20.1.7	S1, F12 Status Variable Namelist Reply (H←E)	74
20.1.8	S1, F13 Establish Communications Request (H→E)	75
20.1.9	S1, F14 Establish Communications Request Acknowledge (H→E)	75
20.1.10	S1, F13 Establish Communications Request (H←E)	75
20.1.11	S1, F14 Establish Communications Request Acknowledge (H←E)	75
20.1.12	S1, F15 Off-line Control State Request (H→E)	75
20.1.13	S1, F16 Off-line Control State Acknowledge (H←E)	75
20.1.14	S1, F17 On-line Control State Request (H→E)	75
20.1.15	S1, F18 On-line Control State Acknowledge (H←E)	75
20.2	Stream 2: Equipment Control and Diagnostics	75
20.2.1	S2, F13 Equipment Constant Request (H→E)	75
20.2.2	S2, F14 Equipment Constant Data (H←E)	75
20.2.3	S2, F15 New Equipment Constant Send (H→E)	76
20.2.4	S2, F16 New Equipment Constant Acknowledge (H←E)	76
20.2.5	S2, F17 Date and Time Request (H↔E)	76
20.2.6	S2, F18 Date and Time Data (H↔E)	76
20.2.7	S2, F23 Trace Initialize Send (H→E)	76
20.2.8	S2, F24 Trace Initialize Acknowledge (H←E)	76
20.2.9	S2, F25 Loop-back Diagnostic Request (H↔E)	76
20.2.10	S2, F26 Loop-back Diagnostic Data (H↔E)	76
20.2.11	S2, F29 Equipment Constant Namelist Request (H→E)	76
20.2.12	S2, F30 Equipment Constant Namelist (H←E)	77
20.2.13	S2, F31 Date and Time Set Request (H→E)	77
20.2.14	S2, F32 Date and Time Set Acknowledge (H←E)	77
20.2.15	S2, F33 Define Report (H→E)	77
20.2.16	S2, F34 Define Report Acknowledge (H←E)	77
20.2.17	S2, F35 Link Event Report (H→E)	77
20.2.18	S2, F36 Link Event Report Acknowledge (H←E)	78
20.2.19	S2, F37 Enable/Disable Event Report (H→E)	78
20.2.20	S2, F38 Enable/Disable Event Report Acknowledge (H←E)	78

20.2.21	S2, F39 Multi-Block Inquire (H→E).....	78
20.2.22	S2, F40 Multi-Block Grant (H←E)	78
20.2.23	S2, F41 Host Command Send (H→E)	78
20.2.24	S2, F42 Host Command Acknowledge (H←E)	78
20.2.25	S2, F43 Reset Spooling Streams and Functions (H→E).....	79
20.2.26	S2, F44 Reset Spooling Acknowledge (H←E).....	79
20.2.27	S2, F45 Define Variable Limit Attributes (H→E)	79
20.2.28	S2, F46 Variable Limit Attribute Acknowledge (H←E)	80
20.2.29	S2, F47 Variable Limit Attribute Request (H→E)	80
20.2.30	S2, F48 Variable Limit Attribute Send (H←E)	81
20.3	Stream 5: Exception Reporting	81
20.3.1	S5, F1 Alarm Report Send (H←E).....	81
20.3.2	S5, F2 Alarm Report Acknowledge (H→E).....	81
20.3.3	S5, F3 Enable/Disable Alarm Send (H→E).....	81
20.3.4	S5, F4 Enable/Disable Alarm Acknowledge (H←E).....	82
20.3.5	S5, F5 List Alarms Request (H→E)	82
20.3.6	S5, F6 List Alarms Data (H→E).....	82
20.4	Stream 6: Data Collection	82
20.4.1	S6, F1 Trace Data Send (H←E).....	82
20.4.2	S6, F2 Trace Data Acknowledge (H→E)	82
20.4.3	S6, F3 Discrete Variable Data Send (H←E).....	82
20.4.4	S6, F12 Discrete Variable Data Acknowledge (H→E).....	83
20.4.5	S6, F5 Multi-Block Data Send Inquire (H←E)	83
20.4.6	S6, F6 Multi-Block Grant (H→E)	83
20.4.7	S6, F11 Event Report Send (H←E)	83
20.4.8	S6, F12 Event Report Acknowledge (H→E).....	83
20.4.9	S6, F15 Event Report Request (H→E)	83
20.4.10	S6, F16 Event Report Data (H←E).....	84
20.4.11	S6, F19 Individual Report Request (H→E)	84
20.4.12	S6, F20 Individual Report Data (H←E)	84
20.4.13	S6, F23 Request Spooled Data (H→E).....	84
20.4.14	S6, F24 Request Spooled Data Acknowledgement Send (H←E).....	84
20.5	Stream 7: Process Program Management	84
20.5.1	S7, F1 Process Program Load Inquire (H↔E)	84
20.5.2	S7, F2 Process Program Load Grant (H↔E).....	84
20.5.3	S7, F3 Process Program Send (H↔E).....	84
20.5.4	S7, F4 Process Program Acknowledge (H↔E).....	85
20.5.5	S7, F5 Process Program Request (H↔E)	85
20.5.6	S7, F6 Process Program Data (H↔E)	85
20.5.7	S7, F17 Delete Process Program Send (H→E).....	85
20.5.8	S7, F18 Delete Process Program Acknowledge (H←E).....	85
20.5.9	S7, F19 Current EPPD Request (H→E)	85
20.5.10	S7, F20 Current EPPD Data (H←E).....	85
20.6	Stream 9: System Errors.....	85
20.6.1	S9, F1 Unrecognized Device ID (H←E)	85
20.6.2	S9, F3 Unrecognized Stream Type (H←E)	85
20.6.3	S9, F5 Unrecognized Function Type (H←E)	85
20.6.4	S9, F7 Illegal Data (H←E)	85
20.6.5	S9, F9 Transaction Timer Timeout (H←E)	86
20.6.6	S9, F11 Data Too Long (H←E).....	86
20.6.7	S9, F13 Conversation Timeout (H←E)	86
20.7	Stream 10: Terminal Services.....	86
20.7.1	S10, F1 Terminal Request (H←E).....	86
20.7.2	S10, F2 Terminal Request Acknowledge (H→E).....	86
20.7.3	S10, F3 Terminal Display (Single) (H→E)	86
20.7.4	S10, F4 Terminal Display (Single) Acknowledge (H←E)	86
20.7.5	S10, F5 Terminal Display, Multi-Block (H→E).....	86
20.7.6	S10, F6 Terminal Display, Multi-Block Acknowledge (H←E)	86

20.7.7	S10, F7 Multi-Block Not Allowed (H←E).....	86
21	Appendix C - General Equipment Specific Equipment Constants.....	87
22	Appendix D - Module Equipment Specific Equipment Constants	96
22.1.2	Forefill PM.....	97
22.1.3	Sputter Deposition PM.....	99
22.1.4	HSE PM.....	103
22.1.5	Heat PM.....	106
22.1.7	GTM/Level 1 Brooks MX Transport.....	107
22.1.8	C2L Transport.....	110
22.1.9	GTM/Level 1 Brooks Coolstation:-	112
22.1.10	GTM/Level 1 Brooks MX Cassette:-	113
22.1.11	EtchModule: -	114
22.1.12	Deposition RevB PM.....	124
22.1.13	SoftEtch RevB PM.....	131
22.1.14	Heat RevB PM.....	135
22.1.15	Delta APM PM.....	137
22.1.16	C3M (Bridge) PM.....	148
22.1.17	Primaxx Monarch25PM.....	155
22.1.18	Pro CVE PM.....	159
23	Appendix E - Module Equipment Specific Status Variables	171
23.1.1	Forcefill PM:-	172
23.1.2	Sputter Deposition PM: -	173
23.1.3	HSE PM: -.....	175
23.1.4	Heat PM: -.....	177
23.1.5	GTM/Level 1 Brooks MX Transport:-.....	178
23.1.6	C2L Transport.....	182
23.1.7	GTM/Level 1 Brooks Coolstation:-	184
23.1.8	GTM/Level 1 Brooks MX Cassette:-	185
23.1.9	EtchModule: -	186
23.1.10	Deposition RevB PM:-.....	193
23.1.11	SoftEtch RevB PM:-	197
23.1.12	Heat RevB PM:-.....	201
23.1.13	Delta APM PM	202
23.1.14	C3M (Bridge) PM.....	207
23.1.15	Primaxx Monarch 25 PM.....	210
23.1.16	Pro CVE PM.....	212
24	Appendix F – Status Variable Value Definitions.....	213
24.1	Station Type	213
24.2	Robot Position	213
24.3	Robot Station Number.....	214
24.4	Wafer Status.....	214
24.5	Station States.....	220
24.6	Wafer Tracking Status Variable	221
24.7	Energy Consumption Data.....	222
25	Appendix G – Wafer Statistical Data	223
25.1	Statistical Data Collected from Datalogging Database.....	223
25.2	Statistical Data as Separate DVIDs.....	224
25.2.1	DeltaAPM Statistical Data DVIDs	225
25.3	Etch PM Generated Summary Data	228

1 REVISION HISTORY

Date	Manual Version	Tool's Software Release	Description
February 2008	Rev A	R9.9.5	Derived from 1255790-A
September 2008	Rev B	R9.9.5SP2	Addition on TF SVIDs Rev A SDep module
October 2008	Rev C	R9.9.5SP3	Corrections to Etch SVIDs.
December 2008	Rev D	R9.9.5SP4	Addition of Pyrometer Temperature SVID for Rev B Heat module
July 2009	Rev E	R10.1.0	Updated for new software release
June 2011	11.0	R11.0.0	Update for new software release. Company name changed to SPTS. New method of tracking manual revisions Removed Forcefill, Planar, FTM, Damascene PMs
November 2012	12.0	R12.4.2	Updated for new release, added missing features
June 2013	12.1	R12.6.0	Added c2L transport
December 2014	14.0	R14.0.1	Added Primaxx Monarch 25
October 2017		R17.9	Added ProCVE IDs

2 GENERAL INFORMATION

2.1 Introduction

This document details the design and implementation of a SEMI Equipment Communications Standard (SECS) interface that conforms to the Generic Model for communications and control of SEMI equipment (GEM).

The SEMI Equipment Communications Standard (SECS) defines an interface suitable for the exchange of messages between computers in a semiconductor factory.

This implementation is built upon three layers of standards:

- SEMI E37
- SEMI E5
- SEMI E30

SEMI E37 (HSMS) defines a communication interface suitable for the exchange of messages between computers in a semiconductor factory using a TCP/IP environment. TCP/IP stream support is used to provide reliable two-way simultaneous transmissions of streams of contiguous bytes. This implementation supports TCP/IP running on Ethernet.

SEMI E5 (SECS-II) defines the details necessary for the interpretation of messages exchanged between a Host and equipment. It is the intent of this standard to define sufficient detail to enable Host software to be built with only minimal knowledge of the opposite side of the communications link.

SEMI E30 (GEM) defines the behaviour of semiconductor equipment as viewed through the communications link. It defines which SECS-II messages should be used, in what situations and the resultant activity.

2.2 Supported Software Revisions

This GEM/SECS II Interface described in this manual requires the equipment software to be at Release 9.9.5 or higher with the Cimetrix-based SECS Module installed.

3 GEM Compliance Statement

FUNDAMENTAL GEM REQUIREMENTS	IMPLEMENTED	GEM COMPLIANT
State Models	Yes	Yes
Equipment Processing States	Yes	
Host Initiated S1, F13/F14 Scenario	Yes	
Event Notification	Yes	
On-Line Identification	Yes	
Error Messages	Yes	
Documentation	Yes	
Control (Operator Initiated)	Yes	
ADDITIONAL CAPABILITIES	IMPLEMENTED	GEM COMPLIANT
Establish Communications	Yes	Yes
Dynamic Event Report Configuration	Yes	Yes
Variable Data Collection	Yes	Yes
Trace Data Collection	Yes	Yes
Status Data Collection	Yes	Yes
Alarm Management	Yes	Yes
Remote Control	Yes	Yes
Equipment Constants	Yes	Yes
Process Program Management	Yes	Yes
Material Movement	Yes	Yes
Equipment Terminal Services	Yes	Yes
Clock	Yes	Yes
Limits Monitoring	Yes	Yes
Spooling	Yes	Yes
Control (Host-Initiated)	Yes	Yes

Table 1: Compliance Statement

4 Communications

4.1 Objective

Orderly transitions of communication link between normal communications and non-communicating states.

4.2 Communications State Model

The Communications State Model defines the behaviour of the equipment in relation to the existence or absence of a communications link with the Host.

The State Diagram shown in Figure 1 below details the Communications Finite State Model that the SPTS fxP Equipment maintains, and Table 2 shows the corresponding Communications Transition Table. Section 4.2.3 describes each state of the model.

4.2.1 Communications State Diagram

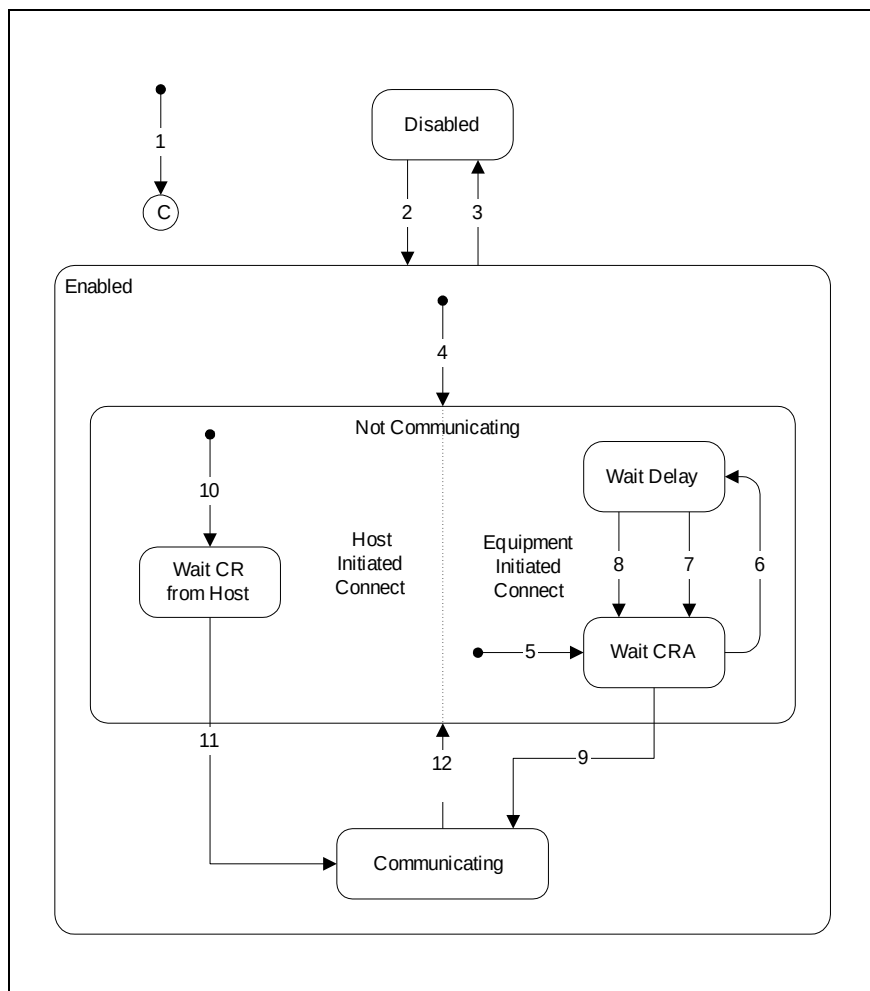


Figure 1: Communications State Diagram

4.2.2 State Transition Table

#	Current State	Trigger	New state	Action	Comment
1	(Entry to COMMUNICATIONS)	System initialisation	System Default	None	System default may be DISABLED or ENABLED
2	DISABLED	Operator switches from DISABLED to ENABLED	ENABLED	None	SECS-II communications enabled
3	ENABLED	Operator switches from ENABLED to DISABLED	DISABLED	None	SECS-II communications are prohibited
4	(Entry to ENABLED)	Any entry to ENABLED state	NOT COMMUNICATING	None	Enter to ENABLED from system initialisation or through operator switch
5	(Entry to EQUIPMENT-INITIATED CONNECT)	(Any entry to NOT COMMUNICATING)	WAIT CRA	Initialise communications. Set CommDelay timer expired. Send S1F13	Begin attempt to establish communications
6	WAIT CRA	Connection transaction failure	WAIT DELAY	Initialise CommDelay timer	Wait for timer to expire
7	WAIT DELAY	CommDelay timer expired	WAIT CRA	Send S1F13	Wait for S1F14. May receive S1F13 from Host
8	WAIT DELAY	Received a message other than S1F13	WAIT CRA	Discard message. No reply. Set CommDelay timer expired. Send S1F13	Indicate opportunity to establish communications
9	WAIT CRA	Receive expected S1F14 with COMMACK=0	COMMUNICATING	None	Communications established
10	(Entry to HOST-INITIATED CONNECT)	(Any entry to NOT COMMUNICATING)	WAIT CR FROM HOST	None	Wait for S1F13 from Host
11	WAIT CR FROM HOST	Received S1F13	COMMUNICATING	Send S1F14 with COMMACK=0	Host establishes communications
12	COMMUNICATING	Communication failure	NOT COMMUNICATING	Dequeue all messages queued to send	Dequeued messages may be placed in spool buffer

Table 2: Communications Transition Table

4.2.3 Communications State Definitions

The SPTS fxP equipment CTC User Interface will display the current Communication State:

- DISABLED
- ENABLED/NOT COMMUNICATING
- ENABLED/COMMUNICATING

The possible communication states are as follows:

4.2.3.1 DISABLED

The SECS link with the Host is non-existent. The SPTS fxP equipment will not send any messages to the Host and will not respond to any messages from the Host.

4.2.3.2 ENABLED

The ENABLED state assumes that lower level protocols such as SECS-I or HSMS are fully functional and for the Equipment to be in communication with the Host.

When communications are enabled, either by operator selection or system initialisation, the sub-state of NOT COMMUNICATING will be active until the

formal establishment of communications, and then COMMUNICATING will be active.

4.2.3.3 COMMUNICATING

In this state, communications between Host and the SPTS fxP equipment are operating normally. All messages from the Host may be received.

The equipment will send a 'heartbeat' message (S1F1) periodically to test if the link is still operating. The equipment constant HEARTBEAT defines the period between these messages. If the constant is zero, no heartbeat messages will be sent.

If a communications failure occurs, the equipment will return to the NOT COMMUNICATING State.

4.2.3.4 NOT COMMUNICATING

In this state, the SECS link to the Host is enabled at the SPTS fxP equipment, and the equipment is attempting to determine if the link is active. The equipment periodically sends S1F13 (Establish Communications Request).

If the connection is not successful for any reason, the equipment will periodically attempt to establish communications. The time between attempts is controlled by the equipment constant ESTABLISHCOMMUNICATIONSTIMEOUT.

Once the Host has responded with S1F14, the Communication State will change to COMMUNICATING.

In the event that the Host and the equipment attempt to establish communications at the same time, the following two 'AND' sub-states of the NOT COMMUNICATING State clarify the behaviour of the equipment.

- EQUIPMENT-INITIATED CONNECT
- HOST-INITIATED CONNECT

If the equipment constant ESTABLISHCOMMUNICATIONSTIMEOUT is set to zero, the equipment will never initiate a Connect Request and will expect the Host to initiate.

4.2.3.5 NOT COMMUNICATING/EQUIPMENT-INITIATED CONNECT

On entry to the NOT COMMUNICATING State, the SPTS fxP equipment will immediately attempt to send an S1F13.

A transition to WAIT CRA occurs.

4.2.3.6 NOT COMMUNICATING/EQUIPMENT-INITIATED CONNECT/WAIT CRA

The SPTS fxP equipment waits for the Host to acknowledge the S1F13 that has been sent.

4.2.3.7 NOT COMMUNICATING/EQUIPMENT-INITIATED CONNECT/WAIT DELAY

The connection attempt is unsuccessful; the SPTS fxP equipment will wait for the period of time determined by the equipment constant ESTABLISHCOMMUNICATIONSTIMEOUT before retrying the S1F13.

4.2.3.8 NOT COMMUNICATING/HOST-INITIATED CONNECT

On entry to NOT COMMUNICATING State, the SPTS fxP equipment will immediately enter the WAIT CR FROM HOST State and begins to wait for an S1F13 from the Host.

4.2.3.9 NOT COMMUNICATING/HOST-INITIATED CONNECT/WAIT CR FROM HOST

The SPTS fxP equipment is waiting for an S1F13 from the Host.

If an S1F13 is received, the SPTS fxP equipment will attempt to send an S1F14 with COMMACK=0.

4.3 Associated Variables

The following Equipment Constants are relevant to the operation of the SPTS fxP equipment Communications State Model.

- DefaultCommState - default entry state at initialisation
- EstablishCommunicationsTimeout - delay before retrying S1F13
- HeartBeat- time between S1F1 messages

4.4 Protocol Parameters

Parameter Name	Value Range	Resolution	Typical Value	Description
T3 Reply Time-out	1-120	1 Second	30	Reply time-out. Specifies maximum amount of time an entity expecting a reply message will wait for that reply.
T5 Connect Separation Time-out	1-120	1 Second	5	Connection Separation Time-out. Specifies the amount of time that must elapse between successive attempts to connect to a given remote entity.
T6 Control Transaction Time-out	1-120	1 Second	10	Control transaction Time-out. Specifies the time for which a control transaction may remain open before it is considered a communications failure.
T7 NOT SELECTED Time-out	1-120	1 Second	5	Time that a TCP/IP connection can remain in the NOT SELECTED state, i.e. no HSMS activity, before it is considered a communications failure.
T8 Network Intercharacter Time-out	1-120	1 Second	6	Maximum time between successive bytes of a single HSMS message that may expire before it is considered a communications failure.
Connect Mode	Active/ Passive		Passive	Connect Mode. Specifies the logic this local entity will use during HSMS connection establishment.

Table 3: Protocol Parameters

5 Control

5.1 Objective

The orderly cooperation between the Host system and the SPTS fxP equipment operator in controlling the equipment.

5.2 State Model

The CONTROL model provides the Host with three basic levels of control:

- OFF-LINE
- LOCAL
- REMOTE

For the lowest level, OFF-LINE, no Host control is allowed and very limited information is available. The middle level, LOCAL, offers limited control to the Host but full access to information. The highest level, REMOTE, gives the Host the fullest extent of control over the SPTS fxP equipment.

The state diagram shown in Control State Diagram

POWER UP


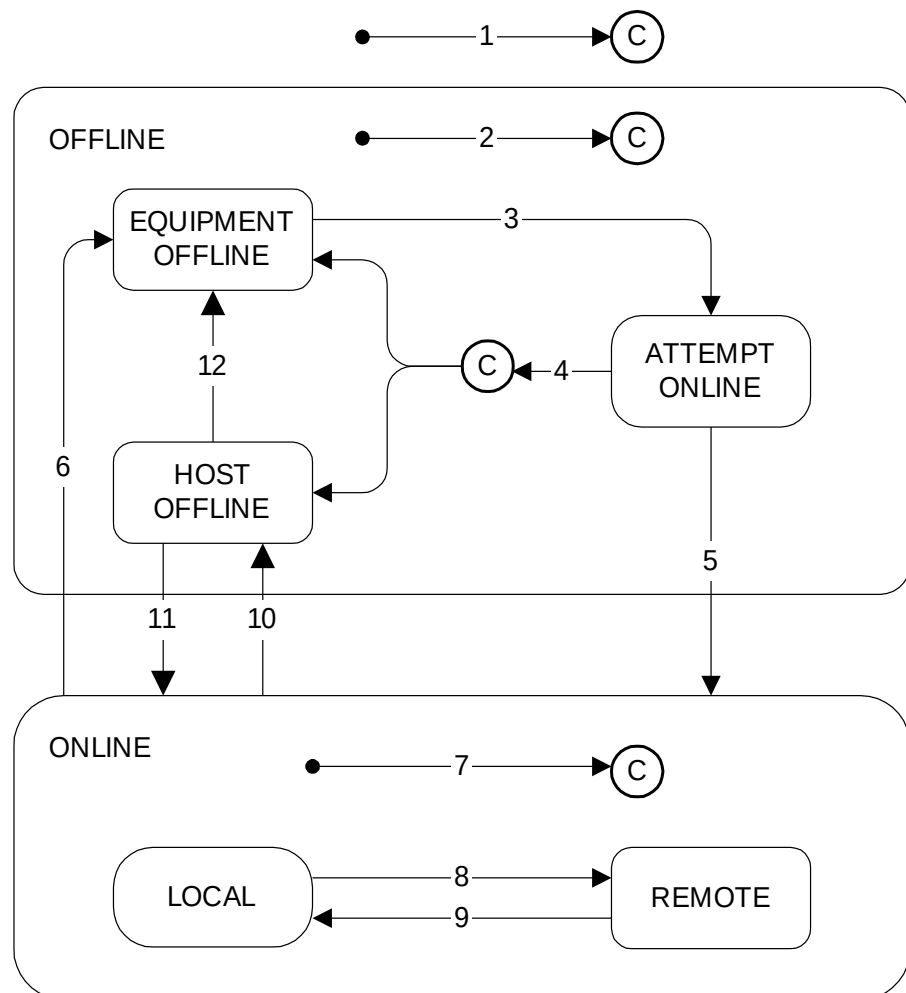


Figure 2 below shows the relationship between these and the other sub-states. Table 4 shows the corresponding State Transition table.

5.2.1 Control State Diagram

Figure 2: Control State Diagram

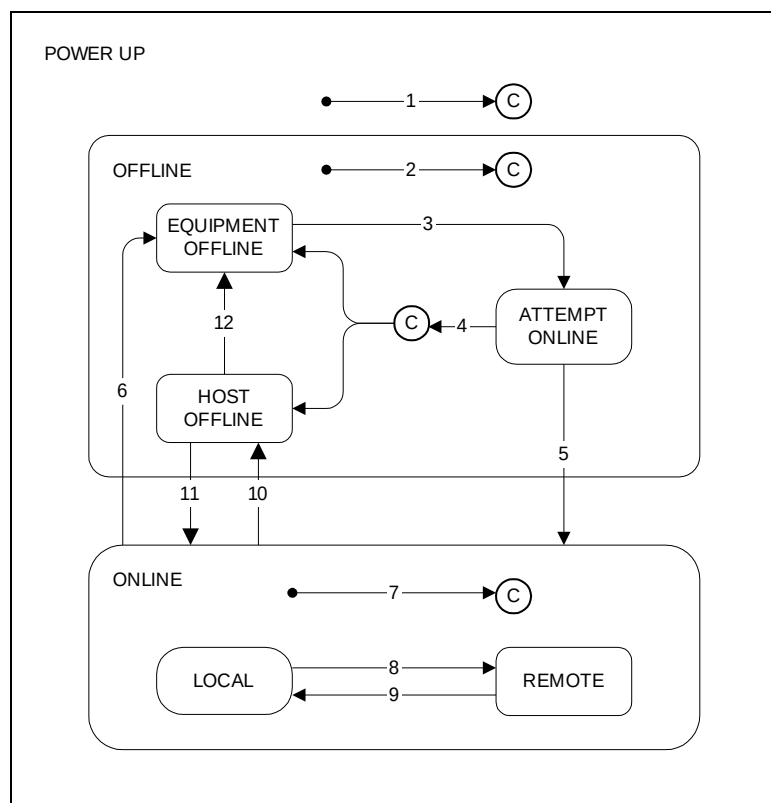

5.2.2 Control State Transition Table

#	Current State	Trigger	New state	Action	Comments
1	(Undefined)	Entry into CONTROL (system initialization)	CONTROL (Sub-state configurable)	None	Options are ON-LINE or OFF-LINE
2	(Undefined)	Entry into OFF-LINE state	OFF-LINE (Sub-state configurable)	None	Options are EQUIPMENT OFF-LINE, ATTEMPT ON-LINE OR HOST OFF-LINE
3	EQUIPMENT OFF-LINE	Operator actuates ON-LINE switch	ATTEMPT ON-LINE	None	S1F1 sent
4	ATTEMPT ON-LINE	S1F0	New state configurable	None	Options are EQUIPMENT OFF-LINE or HOST OFF-LINE
5	ATTEMPT ON-LINE	Equipment receives expected S1F2	ON-LINE	None	Host is notified of transition to ON-LINE at transition 7
6	ON-LINE	Operator actuates OFF-LINE switch	EQUIPMENT OFF-LINE	None	“Equipment OFF-LINE” event. (Reply discarded)
7	(Undefined)	Entry to ON-LINE state	ON-LINE (Sub-state conditional on REMOTE/LOCAL switch setting)	None	“Control state LOCAL” or “Control state REMOTE” event
8	LOCAL	Operator actuates REMOTE switch	REMOTE	None	“Control state REMOTE” event
9	REMOTE	Operator actuates LOCAL switch	LOCAL	None	“Control state LOCAL” event
10	ON-LINE	Equipment accepts S1F15 from Host	HOST OFF-LINE	None	“Equipment OFF-LINE” event
11	HOST OFF-LINE	Equipment accepts S1F17	ON-LINE	None	Host is notified of transition to ON-LINE at transition 7
12	HOST OFF-LINE	Operator actuates OFF-LINE switch	EQUIPMENT OFF-LINE	None	“Equipment OFF-LINE” event

Table 4: Control State Transition Table

5.2.3 Control State Definitions

5.2.3.1 OFF-LINE

In this state, the SECS link is severely restricted. All SPTS fxP equipment controls are actioned by the operator.

The equipment will only send and respond to messages that are required for CONNECT and ON-LINE, S1F13 and S1F17.

The equipment will refuse primary messages from the Host by responding with a SxF0.

The OFF-LINE State has three sub-states:

- EQUIPMENT OFF-LINE
- ATTEMPT ON-LINE
- HOST OFF-LINE

5.2.3.2 OFF-LINE/EQUIPMENT OFF-LINE

In this Offline sub-state, only the SPTS fxP equipment can switch to Online (through the operator interface). The OFF-LINE State is maintained until the operator requests ON-LINE. Transition to OFF-LINE/ATTEMPT ON-LINE occurs.

If an S1F13 (Connect Request) is received from the Host, the SPTS fxP equipment will respond with S1F14 (Connect Acknowledge).

If an S1F17 (On-line Request) is received from the Host, the equipment will respond with S1F18 (On-line Acknowledge) with a non-zero acknowledge code rejecting the request.

5.2.3.3 OFF-LINE/ATTEMPT ON-LINE

While this state is active, the SPTS fxP equipment is attempting to go ON-LINE at the request of the operator.

The equipment will send an S1F1 (Are you there) to the Host.

If an S1F13 (Connect Request) is received from the Host, the equipment will respond with S1F14 (Connect Acknowledge).

If an S1F17 (On-line Request) is received from the Host, the equipment will respond with S1F18 (On-line Acknowledge).

If an S1F2 (On-line Data) is received from the Host, a transition to ON-LINE occurs. The equipment constant ONLINESUBSTATE defines the sub-state, either LOCAL or REMOTE. The appropriate Control event, ControlStateLOCAL or ControlStateREMOTE is signalled.

5.2.3.4 OFF-LINE/HOST OFF-LINE

From this Offline sub-state, only the Host can switch the SPTS fxP equipment Online.

If the Host sends an S1F17 (Request On-line), the equipment will respond with S1F18 (On-line Acknowledge) with ONLACK=0 and a transition to ON-LINE will occur. The equipment constant ONLINESUBSTATE defines the sub-state, either LOCAL or REMOTE. The appropriate Control event, ControlStateLOCAL or ControlStateREMOTE is signalled.

If the operator selects Off-line, a transition to OFF-LINE/EQUIPMENT OFF-LINE occurs, and an EquipmentOFFLINE event is signalled.

If an S1F13 (Connect Request), the equipment will respond with S1F14 (Connect Acknowledge).

5.2.3.5 ON-LINE

In this state, the SECS link works with few restrictions.

The SPTS fxP equipment may send S1F1 (Are you there) and S1F13 (Connect Request) according to the configuration, see section Establishing Connection.

The equipment will not send any SxF0 messages.

If an S1F13 (Connect Request) is received from the Host, the equipment will respond with S1F14 (Connect Acknowledge).

If an S1F15 (Request Off-line) is received from the Host, the equipment will respond with S1F16 (Off-line Acknowledge) and a transition to OFF-LINE/HOST OFF-LINE will occur.

If an S1F17 (Request On-line) is received from the Host, the equipment will respond with an S1F18 (On-line Acknowledge) with ONLACK=2 (Equipment already on-line).

The ON-LINE State has two sub-states:

- LOCAL
- REMOTE

5.2.3.6 **ON-LINE/LOCAL**

In this state, the SECS link is operating normally.

The operator has full control of the machine.

The Host will not allow the use of the S2F41 (Remote Command).

If the operator selects Remote, a transition to ON-LINE/REMOTE occurs and a ControlStateREMOTE event is signalled.

If the operator selects Off-line, a transition to OFF-LINE/EQUIPMENT OFF-LINE occurs and an EquipmentOFFLINE event is signalled.

If the Host sends S1F15 (Request Off-line), the SPTS fxP equipment will respond with S1F16 (Off-line Acknowledge) with OFLACK=0, a transition to OFF-LINE/HOST OFF-LINE occurs and an EquipmentOFFLINE event is signalled.

5.2.3.7 **ON-LINE/REMOTE**

In this state, the SECS link is operating normally.

The SPTS fxP equipment operator and the Host share control of the machine based upon a set of Remote Control equipment constants. See the section on Remote Control for further details.

If the operator selects Local, a transition to ON-LINE/LOCAL occurs and a ControlStateLOCAL event is signalled.

If the operator selects Off-line, a transition to OFF-LINE/EQUIPMENT OFF-LINE occurs and an EquipmentOFFLINE event is signalled.

If the Host sends S1F15 (Request Off-line), the equipment will respond with S1F16 (Off-line Acknowledge) with OFLACK=0, a transition to OFF-LINE/HOST OFF-LINE occurs and an EquipmentOFFLINE event is signalled.

5.3 **Associated Variables**

The following variables are relevant to Control State:

Equipment Constants:

- DefCtrlOfflineState
- DefaultCtrlState

Status Variables:

- ControlState
- PreviousControlState

The current Control State will be displayed on the Status Line of the SPTS fxP equipment CTC User Interface.

6 On-line Identification

6.1 Objective

To provide on-line identification of the SPTS fxP equipment to the Host system.

6.2 Description

The equipment will respond to an S1F1 'Are You There' Request with an S1F2 message that provides the Equipment Model Type and Equipment Software Revision Code.

The Equipment Model is the fixed string "fxP" for a 200mm tool.

The Equipment Software Revision Code is a string of the form:

wxy{Pz}

Where w is the major revision number and x and y are the minor revision numbers.
For Patched releases there will also be a Pz part where z is the patch number

The revision code relates to the software issue of the equipment's CTC. This will normally change when any part of the system software is changed, including that installed in the Process Modules.

6.3 Associated Variables

The following variables are relevant to On-line identification:

Status Variables

- MDLN
- SOFTREV

7 Event Notification

7.1 Objective

To provide an orderly and flexible method of notifying the Host when a significant event occurs within the SPTS fxP equipment.

7.2 Event Collection

The equipment provides a comprehensive set of Collection Events.

The equipment fully supports the S6F11/F12 transaction for event reporting. The appropriate Inquire/Grant (S6F5/F6) is supported for those reports that are multi-block.

The reporting of an event may be disabled on a per event basis by the Host system. See the section on Dynamic Event Report Configuration for more detail.

The Host may request an Event Report at any time by sending an S6F15 message.

Table 5 details the Collection Events available for the equipment.

7.3 Associated Variables

The following Equipment Constants are relevant to the operation of the SPTS fxP equipment Event Data Collection mechanism.

- WBitS6 - S6 messages with or without W-bit set

The following Status Variables are relevant to the operation of the equipment Event Data Collection mechanism.

- LastCEID - id of the last collection event that occurred
- EventsEnabled - list of events enabled

The following table lists the events that are available from the SPTS fxP equipment.

CEID	Keyword	Description	Valid DVs for Reports
3	MaterialReceived	Material has arrived at a port on the equipment	6102
4	MaterialRemoved	Material has been removed from a port on the equipment	6102
6	OperatorCommandIssued	Machine operator issued a control command	6102, 16
7	PPChange	A process program (recipe) has been created changed or deleted	3, 4
8	EquipmentOffline	Control state is about to change to Off-line	
9	ControlStateLocal	Control state has changed to Local (from Remote or Off-line)	
10	ControlStateRemote	Control state has changed to Remote (from Local or Off-line)	
15	MessageRecognition	Operator confirmation of Terminal Services Message	
16	SpoolTransmitFailure	Spool Transmit failure has occurred	
17	SpoolingActivated	Spooling State Machine has entered the ACTIVE state.	
18	SpoolingDeactivated	Spooling State Machine has entered the DE-ACTIVE state.	
19	HostECChange	The Host changed an equipment constant	
20	HostPPChange	The Host changed a Process Program	
24	ECChange	An equipment constant value was changed locally by the operator.	7, 2052, 2053
100	ProcessStateChange1	Process State Changed for VCE A	
101	ProcessStateChange2	Process State Changed for VCE B	
120	ProcessingStatePausing1	VCE A has gone to Pausing	
121	ProcessingStatePausing2	VCE B has gone to Pausing	
130	ProcessingStatePaused1	VCE A has gone to Paused	
131	ProcessingStatePaused2	VCE B has gone to Paused	
140	ProcessingStateResumed1	VCE A has Resumed	
141	ProcessingStateResumed2	VCE B has Resumed	
151	IdleSelectingStateChange1	Process State has changed from Idle to Selecting on VCE A	
152	SelectingIdleStateChange1	Process State has changed from Selecting to Idle on VCE A	
153	SelectingSelectedStateChange1	Process State has changed from Selecting to Selected on VCE A	
154	SelectedSelectingStateChange1	Process State has changed from Selected to Selecting on VCE A	
155	SelectedStartingStateChange1	Process State has changed from Selected to Starting on VCE A	
156	StartingSelectedChange1	Process State has changed from Starting to Selected on VCE A	
157	StartingRunningStateChange1	Process State has changed from Starting to Running on VCE A	
158	RunningSelectedStateChange1	Process State has changed from Running to Selected on VCE A	
159	RunningStoppingStateChange1	Process State has changed from Running to Stopping on VCE A	
160	StoppingAbandoningStateChange1	Process State has changed from Stopping to Abandoning on VCE A	
161	StoppingRestartingStateChange1	Process State has changed from Stopping to Restarting on VCE A	
162	RestartingStoppingStateChange1	Process State has changed from Restarting to Stopping on VCE A	
163	StoppingStoppedStateChange1	Process State has changed from Stopping to Stopped on VCE A	
164	StoppedRestartingStateChange1	Process State has changed from Stopped to Restarting on VCE A	
165	RestartingRunningStateChange1	Process State has changed from Restarting to Running on VCE A	
166	RunningAbandoningStateChange1	Process State has changed from Running to Abandoning on VCE A	
167	StoppedAbandoningStateChange1	Process State has changed from Stopped to Abandoning on VCE A	
168	AbandoningStoppedStateChange1	Process State has changed from Abandoning to Stopped on VCE A	
169	SelectedIdleStateChange1	Process State has changed from Selected to Idle on VCE A	
170	StartingIdleStateChange1	Process State has changed from Starting to Idle on VCE A	
171	RunningIdleStateChange1	Process State has changed from Running to Idle on VCE A	
172	StoppingIdleStateChange1	Process State has changed from Stopping to Idle on VCE A	
173	RestartingIdleStateChange1	Process State has changed from Restarting to Idle on VCE A	
174	StoppedIdleStateChange1	Process State has changed from Stopped to Idle on VCE A	
175	AbandoningIdleStateChange1	Process State has changed from Abandoning to Idle on VCE A	
176	RunningStoppedStateChange1	Process State has changed from Running to Stopped on VCE A	
181	IdleSelectingStateChange2	Process State has changed from Idle to Selecting on VCE B	
182	SelectingIdleStateChange2	Process State has changed from Selecting to Idle on VCE B	
183	SelectingSelectedStateChange2	Process State has changed from Selecting to Selected on VCE B	
184	SelectedSelectingStateChange2	Process State has changed from Selected to Selecting on VCE B	
185	SelectedStartingStateChange2	Process State has changed from Selected to Starting on VCE B	
186	StartingSelectedStateChange2	Process State has changed from Starting to Selected on VCE B	
187	StartingRunningStateChange2	Process State has changed from Starting to Running on VCE B	
188	RunningSelectedStateChange2	Process State has changed from Running to Selected on VCE B	
189	RunningStoppingStateChange2	Process State has changed from Running to Stopping on VCE B	
190	StoppingAbandoningStateChange2	Process State has changed from Stopping to Abandoning on VCE B	
191	StoppingRestartingStateChange2	Process State has changed from Stopping to Restarting on VCE B	

CEID	Keyword	Description	Valid DVs for Reports
192	RestartingStoppingStateChange2	Process State has changed from Restarting to Stopping on VCE B	
193	StoppingStoppedStateChange2	Process State has changed from Stopping to Stopped on VCE B	
194	StoppedRestartingStateChange2	Process State has changed from Stopped to Restarting on VCE B	
195	RestartingRunningStateChange2	Process State has changed from Restarting to Running on VCE B	
196	RunningAbandoningStateChange2	Process State has changed from Running to Abandoning on VCE B	
197	StoppedAbandoningStateChange2	Process State has changed from Stopped to Abandoning on VCE B	
198	AbandoningStoppedStateChange2	Process State has changed from Abandoning to Stopped on VCE B	
199	SelectedIdleStateChange2	Process State has changed from Selected to Idle on VCE B	
200	StartingIdleStateChange2	Process State has changed from Starting to Idle on VCE B	
201	RunningIdleStateChange2	Process State has changed from Running to Idle on VCE B	
202	StoppingIdleStateChange2	Process State has changed from Stopping to Idle on VCE B	
203	RestartingIdleStateChange2	Process State has changed from Restarting to Idle on VCE B	
204	StoppedIdleStateChange2	Process State has changed from Stopped to Idle on VCE B	
205	AbandoningIdleStateChange2	Process State has changed from Abandoning to Idle on VCE B	
206	RunningStoppedStateChange2	Process State has changed from Running to Stopped on VCE B	
330	MBCStart1	A lot has started processing from VCE A – this will be sent when the process state changes from SELECTED to STARTING	
331	MBCStart2	A lot has started processing from VCE B – this will be sent when the process state changes from SELECTED to STARTING	
336	MBCComplete1	A lot has completed processing in VCE A – this will be sent when the process state changes from RUNNING to SELECTED	
337	MBCComplete2	A lot has completed processing in VCE B – this will be sent when the process state changes from RUNNING to SELECTED	
342	MBStart1	A wafer has started processing from VCE A	
343	MBStart2	A wafer has started processing from VCE B	
348	MBComplete1	A wafer has completed processing in VCE A	
349	MBComplete2	A wafer has completed processing in VCE B	
354	OpSelect1	The operator has pressed the SELECT button for VCE A	
355	OpSelect2	The operator has pressed the SELECT button for VCE B	
360	OpStart1	The operator has pressed the START button for VCE A	
361	OpStart2	The operator has pressed the START button for VCE B	
366	OpStop1	The operator has pressed the STOP button for VCE A	
367	OpStop2	The operator has pressed the STOP button for VCE B	
372	OpPause1	The operator has pressed the PAUSE button for VCE A	
373	OpPause2	The operator has pressed the PAUSE button for VCE B	
378	OpResume1	The operator has pressed the RESUME button for VCE A	
379	OpResume2	The operator has pressed the RESUME button for VCE B	
384	OpCancel1	The operator has pressed the CANCEL button for VCE A	
385	OpCancel2	The operator has pressed the CANCEL button for VCE B	
390	OpAbandon1	The operator has pressed the ABANDON button for VCE A	
391	OpAbandon2	The operator has pressed the ABANDON button for VCE B	
400	TransportStateChange	Transport has changed state	
401	VCEAStateChange	VCE A has changed state	
402	PM1StateChange	PM1 has changed state	
403	PM2StateChange	PM2 has changed state	
404	PM3StateChange	PM3 has changed state	
405	PM4StateChange	PM4 has changed state	
406	PM5StateChange	PM5 has changed state	
407	PM6StateChange	PM6 has changed state	
408	VCEBStateChange	VCE B has changed state	
410	CoolerStateChange	Cool station has changed state	
422	PM1RecipeStart	PM1 Recipe started	5111, 5113, 5114, 5115, 5116, 5117, 5118
423	PM2RecipeStart	PM2 Recipe started	5111, 5113, 5114, 5115, 5116, 5117, 5118
424	PM3RecipeStart	PM3 Recipe started	5111, 5113, 5114, 5115, 5116, 5117, 5118
425	PM4RecipeStart	PM4 Recipe started	5111, 5113, 5114, 5115, 5116, 5117, 5118
426	PM5RecipeStart	PM5 Recipe started	5111, 5113, 5114, 5115, 5116, 5117, 5118
427	PM6RecipeStart	PM6 Recipe started	5111, 5113, 5114, 5115, 5116, 5117, 5118

CEID	Keyword	Description	Valid DVs for Reports
430	CoolerRecipeStart	Cool station Recipe started	5111, 5113, 5114, 5115, 5116, 5117, 5118
442	PM1RecipeEnd	PM1 Recipe ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
443	PM2RecipeEnd	PM2 Recipe ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
444	PM3RecipeEnd	PM3 Recipe ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
445	PM4RecipeEnd	PM4 Recipe ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
446	PM5RecipeEnd	PM5 Recipe ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
447	PM6RecipeEnd	PM6 Recipe ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
450	CoolerRecipeEnd	Cool station Recipe ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
462	PM1RecipeStepStart	PM1 Recipe step started	5111, 5113, 5114, 5115, 5116, 5117, 5118
463	PM2RecipeStepStart	PM2 Recipe step started	5111, 5113, 5114, 5115, 5116, 5117, 5118
464	PM3RecipeStepStart	PM3 Recipe step started	5111, 5113, 5114, 5115, 5116, 5117, 5118
465	PM4RecipeStepStart	PM4 Recipe step started	5111, 5113, 5114, 5115, 5116, 5117, 5118
466	PM5RecipeStepStart	PM5 Recipe step started	5111, 5113, 5114, 5115, 5116, 5117, 5118
467	PM6RecipeStepStart	PM6 Recipe step started	5111, 5113, 5114, 5115, 5116, 5117, 5118
470	CoolerRecipeStepStart	Cool station Recipe step started	5111, 5113, 5114, 5115, 5116, 5117, 5118
482	PM1RecipeStepEnd	PM1 Recipe step ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
483	PM2RecipeStepEnd	PM2 Recipe step ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
484	PM3RecipeStepEnd	PM3 Recipe step ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
485	PM4RecipeStepEnd	PM4 Recipe step ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
486	PM5RecipeStepEnd	PM5 Recipe step ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
487	PM6RecipeStepEnd	PM6 Recipe step ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
490	CoolerRecipeStepEnd	Cool station Recipe step ended	5111, 5113, 5114, 5115, 5116, 5117, 5118
500	VacArmAWaferStatusChange	Wafer Status change for Vacuum Arm A.	
501	VacArmBWaferStatusChange	Wafer Status change for Vacuum Arm B.	
502	VCEAWaferStatusChange	Wafer Status change for VCE A	
503	PM1WaferStatusChange	Wafer Status change for PM1	
504	PM2WaferStatusChange	Wafer Status change for PM2	
505	PM3WaferStatusChange	Wafer Status change for PM3	
506	PM4WaferStatusChange	Wafer Status change for PM4	
507	PM5WaferStatusChange	Wafer Status change for PM5	
508	PM6WaferStatusChange	Wafer Status change for PM6	
509	VCEBWaferStatusChange	Wafer Status change for VCE B	
510	AlignerWaferStatusChange	Wafer Status change for Vacuum Aligner (Brooks MX)	
514	InCoolerWaferStatusChange	Wafer Status change for InCooler (Brooks MX)	
515	BufferWaferStatusChange	Wafer Status change for Buffer	
520	ReadyForProcessA	The lot in VCE A is ready to start processing. This will be sent when the process state changes from SELECTING to SELECTED	
521	ReadyForProcessB	The lot in VCE B is ready to start processing. This will be sent when the process state changes from SELECTING to SELECTED	
610	TransportModeChange	Change of mode for the Transport	
611	VCEAModeChange	Change of mode for VCE A	
612	PM1ModeChange	Change of mode for PM1	

CEID	Keyword	Description	Valid DVs for Reports
613	PM2ModeChange	Change of mode for PM2	
614	PM3ModeChange	Change of mode for PM3	
615	PM4ModeChange	Change of mode for PM4	
616	PM5ModeChange	Change of mode for PM5	
617	PM6ModeChange	Change of mode for PM6	
618	VCEBModeChange	Change of mode for VCE B	
620	CoolerModeChange	Change of mode for Cool station	
701	DoorOpen1	Door for VCE A open	
702	DoorOpen2	Door for VCE B open	
711	DoorClosed1	Door for VCE A closed	
712	DoorClosed2	Door for VCE B closed	
721	SMIFPodPresent1	SMIF Pod for VCE A is present (LPI2200)	
722	SMIFPodPresent2	SMIF Pod for VCE B is present (LPI2200)	
731	SMIFPodAbsent1	SMIF Pod for VCE A is absent (LPI2200)	
732	SMIFPodAbsent2	SMIF Pod for VCE B is absent (LPI2200)	
741	SMIFPodClamped1	SMIF Pod for VCE A is clamped (LPI2200)	
742	SMIFPodClamped2	SMIF Pod for VCE B is clamped (LPI2200)	
751	SMIFPodUnClamped1	SMIF Pod for VCE A is unclamped (LPI2200)	
752	SMIFPodUnClamped2	SMIF Pod for VCE B is unclamped (LPI2200)	
761	SMIFPodHomed1	SMIF Pod for VCE A is homed (LPI2200)	
762	SMIFPodHomed2	SMIF Pod for VCE B is homed (LPI2200)	
771	VCEAMaterialPresent	Material is Present on VCE A	
772	VCEBMaterialPresent	Material is Present on VCE B	
781	VCEAMaterialAbsent	Material is Absent on VCE A	
782	VCEBMaterialAbsent	Material is Absent on VCE B	
791	VCEALoadComplete	Load Completed on VCE A	
792	VCEBLoadComplete	Load Completed on VCE B	
801	VCEAUnloadComplete	Unload Completed on VCE A	
802	VCEBUnloadComplete	Unload Completed on VCE B	
810	WaferStatisticalDataAvailable	Statistical data for last step of wafer process is available	6102, 6503, 5101, 5102, 5100, 5117, 5114
850	SlotMapRead	Slot Map Read	5112, 6102
851	CassetteStarted	Processing has started for a cassette	5110, 6102, 5114
852	CassetteComplete	Processing has completed successfully for a cassette	5110, 6102, 5114
853	PMWaferIn	A wafer has arrived in a process module	5111, 5113, 5118
854	PMWaferOut	A wafer has been removed from a process module	5111, 5113, 5118
855	ProcessingStarted	Processing has started in a process module	5111, 5113, 5114, 5115, 5116, 5117, 5118
856	ProcessingFinished	Processing has finished in a process module	5111, 5113, 5114, 5115, 5116, 5117, 5118
857	RecipeStepStart	A new recipe step has started in a process module	5111, 5113, 5114, 5115, 5116, 5117, 5118
858	RecipeStepEnd	A new recipe step has finished in a process module	5111, 5113, 5114, 5115, 5116, 5117, 5118
859	WaferStarted	A wafer has started processing	5111, 5114, 5118, 6102
860	WaferComplete	A wafer has completed processing	5111, 5114, 5118, 6102
861	Lamp1StatusChanged	Status of Lamp 1 has changed	
862	Lamp2StatusChanged	Status of Lamp 2 has changed	
863	Lamp3StatusChanged	Status of Lamp 3 has changed	
864	Lamp4StatusChanged	Status of Lamp 4 has changed	
865	BuzzerStatusChanged	Status of Buzzer has changed	
870	DatabaseAutoSwapPending	Database is full and auto-swap is enabled and pending	
871	DatabaseAutoSwapComplete	Database auto-swap has completed	
880	PM1WaferIn	A wafer has arrived in PM1	5111, 5113, 5118
881	PM2WaferIn	A wafer has arrived in PM2	5111, 5113, 5118
882	PM3WaferIn	A wafer has arrived in PM3	5111, 5113, 5118
883	PM4WaferIn	A wafer has arrived in PM4	5111, 5113, 5118
884	PM5WaferIn	A wafer has arrived in PM5	5111, 5113, 5118
885	PM6WaferIn	A wafer has arrived in PM6	5111, 5113, 5118
886	PM1WaferOut	A wafer has been removed from PM1	5111, 5113, 5118
887	PM2WaferOut	A wafer has been removed from PM2	5111, 5113, 5118
888	PM3WaferOut	A wafer has been removed from PM3	5111, 5113, 5118
889	PM4WaferOut	A wafer has been removed from PM4	5111, 5113, 5118

CEID	Keyword	Description	Valid DVs for Reports
890	PM5WaferOut	A wafer has been removed from PM5	5111, 5113, 5118
891	PM6WaferOut	A wafer has been removed from PM6	5111, 5113, 5118
900	PM1RFOn	RF has been turned on in PM1	
901	PM2RFOn	RF has been turned on in PM2	
902	PM3RFOn	RF has been turned on in PM3	
903	PM4RFOn	RF has been turned on in PM4	
904	PM5RFOn	RF has been turned on in PM5	
905	PM6RFOn	RF has been turned on in PM6	
906	PM1RFOff	RF has been turned off in PM1	
907	PM2RFOff	RF has been turned off in PM2	
908	PM3RFOff	RF has been turned off in PM3	
909	PM4RFOff	RF has been turned off in PM4	
910	PM5RFOff	RF has been turned off in PM5	
911	PM6RFOff	RF has been turned off in PM6	

Table 5: Collection Events

8 Alarm Management

8.1 Objective

This allows the Equipment to report alarm information to the Host in an orderly manner.

The Equipment supports the S5F1/F2 message that notifies the Host when an alarm is set and cleared.

The Equipment also supports the enabling and disabling of alarms through the S5F3/F4 message.

The Equipment also supports the Host requesting a listing of alarms (S5F5/F6) and a listing of enabled alarms (S5F7/F8).

There will be a collection event sent whenever an alarm changes state. The ID of the collection event will be related to the Alarm ID.

Details of Alarm IDs are given in section 8.3.

8.2 Alarm-related Variables

The following alarm-related status variables are supported: -

- AlarmID -This status variable holds the Alarm ID of the most recent alarm.
- AlarmsEnabled -This status variable holds a list of Alarm IDs for all alarms currently enabled.
- AlarmsSet - This status variable holds a list of Alarm IDs for all alarms which are in the alarm state 'ON'.
- AlarmState -_This status variable holds the On/Off state of the most recent alarm.
- ASer -_This status variable holds an alarm serial number which is incremented each time there is an alarm state change.

The following alarm-related equipment constant is supported :-

- WBitS5 - This equipment constant determines whether the W-bit is set to '1' or '0' when an alarm message is sent.

8.3 Alarm ID's

In order to uniquely identify an alarm, Alarm Ids generated by the tool will be dependent on the station that originates the alarm (e.g. Process Module or CTC) and the station type

Alarm ID = (Station Number * 10,000,000) +
(Station Type * 100,000) +
ID offset.

ON CEID = (Station Number * 10,000,000) +
(Station Type * 100,000) +
10000 +
ID offset.

OFF CEID = (Station Number * 10,000,000) +
(Station Type * 100,000) +
1,000,000,000 + 10,000
ID offset.

Station Number :-

- 0 = Transport
- 1 = VCE A
- 2 = Process Module 1
- 3 = Process Module 2
- 4 = Process Module 3
- 5 = Process Module 4
- 6 = Process Module 5
- 7 = Process Module 6
- 8 = VCE B
- 10 = Cool Station

Station Type :-

- 3 = Forcefill PM
- 4 = Sputter Deposition PM
- 7 = HSE PM
- 9 = Heat PM
- 20 = Level 0/1 Brooks MX Transport
- 21 = Level 0/1 Brooks Coolstation
- 22 = Level 0/1 Brooks MX Cassette
- 23 = Level 0/1 Brooks Inliner
- 24 = Etch PM
- 25 = Deposition RevB PM
- 26 = SoftEtch RevB PM
- 27 = Heat RevB PM
- 34 = Delta APM PM
- 58 = Pro CVE PM

9 Spooling


9.1 Objective

Spooling provides a method for retaining equipment message data that might otherwise be lost due to communication failure. The motive for producing this functionality is to retain valuable data used to track material and to improve product quality. The spooling capability fills a gap in the SEMI E5 standard. In the past, without a spooling capability, the equipment has typically discarded messages that could not be delivered, or turned messaging off altogether. It is intended that the host initiate the spool unload process immediately following the reestablishment of communications.

9.2 Description - Enabling Spooling

The equipment provides the host with the ability to enable and disable Spooling for any message (except Stream 1 messages, i.e. S1, F1 and S1, F13) via the S2, F43/F44 transaction. Spooling may be enabled for an entire Stream, for individual messages within a stream, or for any combination of the two. Streams and Functions not referenced in this message are not spooled. Spooling can be totally disabled by sending an S2, F43 with a zero length list for the first item (see S2, F43 definition).

9.3 Spooling State Diagram

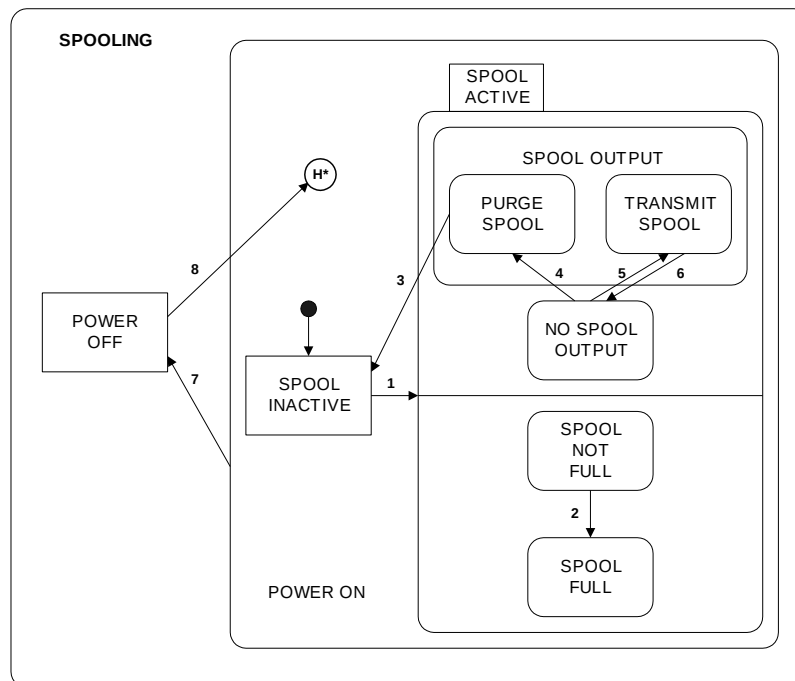

9.3.1 Spooling State Definitions

9.3.1.1 POWER OFF

The equipment has lost power for any reason (e.g. power failure, power switch set to off, etc.).

9.3.1.2 POWER ON

The equipment is powered up.

9.3.1.3 SPOOL INACTIVE

This is the normal operating mode. No spooling occurs. The spool area is empty. Primary SECS-II messages are transmitted normally.

9.3.1.4 SPOOL ACTIVE

All primary SECS-II messages ready for sending and for which spooling is enabled (see S2, F43) are directed to the spool area. All other primary messages, except Stream 1, are discarded. The equipment attempts to send any generated secondary messages, yet discards them if the attempt to send fails.

Once communications are established, the host must initiate the spool unload sequence to restore full functionality (see below). Since the equipment will deliver secondary messages, the host may inquire for information or send commands as needed.

The SPOOL ACTIVE State has two substates, SPOOL LOAD and SPOOL UNLOAD. This means that they operate independently, though sharing data and some state change stimuli.

9.3.1.5 SPOOL LOAD

The SPOOL LOAD component enters messages into the spool area. It is divided into two substates: SPOOL NOT FULL and SPOOL FULL. SPOOL NOT FULL is the default entry substate of the parent state SPOOL LOAD.

9.3.1.6 SPOOL NOT FULL

As primary SECS-II messages are directed to the spool area, the equipment "writes" the SECS-II message to the end of the spool. Spooling status variables are incremented each time a message is placed in the spool area.

9.3.1.7 SPOOL FULL

In this state, all of the allocated spooling area is filled. The following options are equipment constant controlled. The first message to be dealt with is that which could not be fit into the spool prior to transition from SPOOL NOT FULL (see transition table below).

If the "overwrite spool" equipment constant is true, then the equipment deletes as many of the "oldest" records (e.g. SECS-II messages) contained in the spool area necessary to make space for the new message and then adds the message. The "total spool count" status variable is incremented whenever a message is submitted to the spool area. The "actual spool count" status variable is manipulated to keep an accurate count of the number of messages contained in the spool area. For example, if it is necessary to delete three messages in the spool area to spool one message, the "actual spool count" SV would have three subtracted and then one added to the total.

If the "overwrite spool" equipment constant is false, then the subsequent primary messages are discarded. When such a message is discarded, the "total spool count" SV is still incremented.

9.3.1.8 SPOOL UNLOAD

The SPOOL UNLOAD component of SPOOLACTIVE deals with movement of messages out of the spool. It has an active substate (SPOOL OUTPUT) and a passive substate (NO SPOOL OUTPUT). NO SPOOL OUTPUT is the default entry substate since the equipment is NOT COMMUNICATING at the time spooling is initiated. When communications between equipment and host are restored, there is an opportunity for the host to recover spooled messages. No action is taken until the host initiates the spool output process via the S6, F23 (Request Spooled Data). The host has the option to either receive the spooled messages (see substate TRANSMIT SPOOL) or discard all messages in the spool (see substate PURGE SPOOL).

9.3.1.9 NO SPOOL OUTPUT

In this state, no messages are removed from the spool.

9.3.1.10 SPOOL OUTPUT

The SPOOL OUTPUT State encompasses the removal of messages from the spool. Its substates are TRANSMIT SPOOL and PURGE SPOOL.

9.3.1.11 TRANSMIT SPOOL

The host elects to receive all messages contained in the spool area. The equipment is expected to keep track of the oldest record (i.e. message) within the spool area. When communications are re-established with the host and transmission of the spool area is started, the oldest record is the first record transmitted then the next oldest record, etc. There is no prioritization of messages to be sent from the spool.

As each spooled message is successfully transmitted to the host, it is removed from the spool area upon successful completion of the transaction. The "actual spool count" SV decrements as each message is removed from the spool. The equipment transmits messages only from the spool area until all spooled messages have been completely transmitted to the host.

Flow control of the spool transmit process is achieved in two ways. First, only one open transaction on the equipment is allowed during spool unload. Thus, if a message requires a reply, the equipment waits for that reply before transmitting the next spooled message. Messages that require no reply are transmitted sequentially as rapidly as the message transfer mechanism will allow.

The second flow control method is to allow the host to limit the maximum number of messages sent from the spool in response to the S6, F23 request. The "maximum spool transmit" equipment may be set by the host to achieve this behaviour. If set to five, for example, the equipment will send the first five messages from the spool and then transition to the NO SPOOL OUTPUT State, awaiting the next S6, F23 request. There is no event report generated when the "maximum spool transmit" value is reached. The host is responsible for determining this situation by one of the following:

counting the messages received

timing out waiting for the next message

inquiring to the equipment for the current value of the "actual spool count" SV

some combination of the above

If the "maximum spool transmit" equipment constant is set to zero, the spool is transmitted completely in response to S6, F23.

Normal spooling continues during the spool transmit process. If the SPOOL LOAD component transitions to SPOOL FULL, it does not have any effect on the SPOOL UNLOAD component. Once full, the spool cannot make the transition back to SPOOL NOT FULL except via the SPOOL INACTIVE State. Space made available due to the spool unload process is not used in this case.

When a multi-block message is to be transmitted from the spool, any required inquire/grant transaction is initiated. If the host's response denies permission to send the multi-block message, the equipment discards that message and continues with the transmit process. This sequence counts as one message in the "maximum spool transmit" EC count.

SPOOL LOAD and SPOOL UNLOAD may interact when the spool is full and "overwrite spool" EC is True. During the spool transmit process, spooled messages are removed while new primary messages are written to the spool. These new messages are overwriting the oldest messages available, unless the process of unloading has made sufficient spool space available. There is a possibility that unloading and overwriting processes may compete for control of the same message area. The loss of continuity may be "disorienting" to the host program receiving the messages. It is expected that the unloading process will be fast relative to the generation of new messages, so this occurrence will be rare.

Should a communication failure occur during the spool transmit process, spooling continues as before the transmit process began. However, the spool unload sequence terminates (i.e. transition to NO SPOOL OUTPUT will occur--see transition table below).

9.3.1.12 PURGE SPOOL

The equipment discards all messages in the spool and, when the spool is empty, "actual spool count" SV becomes zero.

9.3.2 Spooling State Transition Table

#	Current State	Trigger	New State	Action	Comment
1	SPOOL INACTIVE	Communication failure detected	SPOOL ACTIVE	Status variables "actual spool count" and "total spool count" are initialized to zero. Any open transactions with the host are aborted. Status variable "spool start time" is set to current time. Alert the operator that spooling is active.	The default state in each OR substate is entered. Unsent messages remain in the queue until handled within the SPOOL ACTIVE state. The "spooling activated" collection event has occurred.
2	SPOOL NOT FULL	Message generated which will not fit into spool area.	SPOOL FULL	Status variable "spool full time" is set to current time. Alert the operator that the spool is full.	The message that would not fit into the spooling area is dealt with after the transition. No collection event is generated.

#	Current State	Trigger	New State	Action	Comment
3	SPOOL OUTPUT	Spool area emptied.	SPOOL INACTIVE	Spooling process disabled. Alert the operator that spooling has been terminated.	The "spooling deactivated" collection event has occurred. Transition from the OR substate SPOOL LOAD component occurs.
4	NO SPOOL OUTPUT	S7, F23 received w/RSDC=1	PURGE SPOOL	No action	Initiates purging process. No collection event is generated since this is based on host request.
5	NO SPOOL OUTPUT	S6, F23 received/RSCD=0	TRANSMIT SPOOL	No action	Initiates message transmission from spool. No collection event is generated since this is based on host request.
6	TRANSMIT SPOOL	Comm. failure or "maximum spool transmit" EC value reached.	NO SPOOL OUTPUT	Spool transmission process suspended	If communications failure, the "spool transmit failure" collection event has occurred. No collection event is generated for "maximum spool transmit" EC value reached.
7	POWER ON	Equipment power source discontinued.	POWER OFF	No action	Spooling context has been maintained in non-volatile storage prior to this transition.
8	POWER OFF	Equipment power source restored.	POWER ON	Spooling context restored from non-volatile memory.	If spooling were active prior to power down, it continues. If the TRANSMIT SPOOL was active at power down, then transition #6 is expected to follow since communications state is initially NOT COMMUNICATING.

9.3.3 Related Status Variables, Constants and Events

SpoolCountActual – Number of messages actually stored in the spool area. Multi-block inquire/grant messages are not included in this count.

SpoolCountTotal – Number of messages actually stored in the spool area. Multi-block inquire/grant messages are not included in this count.

SpoolFullTime – Number of messages actually stored in the spool area. Multi-block inquire/grant messages are not included in this count.

SpoolStartTime – Number of messages actually stored in the spool area. Multi-block inquire/grant messages are not included in this count.

SpoolState - The current state of the GEM spooling state machine.

9.3.4 Related Equipment Constants

MaxSpoolMessages – Maximum number of messages that can be put into the spool area until it is considered full as part of the Spooling State Machine. Multi-block inquire/grant messages are not included in this count.

MaxSpoolTransmit – Maximum number of messages that the machine will transmit from the spool area in response to an S6F23 (transmit spooled messages) request as part of the Spooling State Machine.

OverwriteSpool – Determine whether to overwrite data in the spool area or to discard further messages when the spool area is full as part of the Spooling State Machine.

SpoolEnabled - Enable or disable the Spooling State Machine.

9.3.5 Related Collection Events

SpoolTransmitFailure – Spool Transmit failure has occurred.

SpoolingActivated – Spooling State Machine has entered the ACTIVE state.

SpoolingDeactivated – Spooling State Machine has entered the DE-ACTIVE state.

10 Error Messages

10.1 Objective

To provide the Host with consistent reports describing the reason for a particular message or communication fault as detected by the SPTS fxP equipment.

10.2 Description

A communication fault occurs when the fxP equipment does not receive an expected message, or when either a transaction timer or conversation timer expires.

A message fault occurs when the fxP equipment receives a message that it cannot process because of a defect within the message.

The fxP equipment *supports* all Stream 9 messages. It will send the appropriate message containing either <MHEAD> or <SHEAD> as required whenever a communication or message fault is detected.

11 Dynamic Event Report Configuration

11.1 Objective

To provide a mechanism for the dynamic customization of event reports by the Host system in order to inhibit unwanted messages, and provide a sufficient level of detail for the desired Collection Events.

11.2 Report Configuration

The SPTS fxP equipment is supplied with a set of default reports that reside on the hard disk. These are linked to the defined collection events. These defaults may be changed by the Host using messages S2F33 to S2F40:

- S2F33 to define the Event Reports
- S2F35 to link reports to Collection Events
- S2F37 to enable or disable Event Reports

The ability to configure the event reporting capability is supported only via the Host interface, the operator console does not support this.

All report definitions, report-to-event links, and the enable/disable status of event reports are retained in non-volatile storage.

11.3 Associated Variables

The following Status Variables are relevant to the operation of the SPTS fxP equipment Event Data Collection mechanism.

- LastCEID - id of the last collection event that occurred
- EventsEnabled - list of events enabled

12 Variable Data Collection

12.1 Objective

To provide the Host system with a mechanism to query for required equipment data variables.

12.2 Variable Data

The SPTS fxP equipment will respond to a Host request for variable data using the S6F19/F20 messages. The data will be returned in a report that has either been defined by the Host, see section on Dynamic Event Report Configuration, or by using one of the supplied defaults.

The distinction between Status Variables and Data Variables is only made when building an S1F4 reply to a Selected Equipment Status Request message (S1F3) that requires “all SVIDs”. For this special case, the reply contains Status Variables only, Data variables and Equipment Constants are excluded.

Note that Discrete Data Values (DVVALs) are only guaranteed to be valid when a specific Collection Event occurs.

When requesting lists of variable data, certain variables will be reported that are documented here. This is because they are not supported yet.

12.3 GEM Specific Equipment Constants

12.3.1 Objective

To provide Host access to selected constant settings relevant to the operation of the SECSII link and the SPTS fxP equipment as a whole.

12.3.2 Capabilities

The SPTS fxP equipment will allow the Host to read one or more of the Equipment Constants as defined in this Section using S2F13. The Host will be able to set GEM Equipment Constants using S2F15.

The Host may request basic information, such as name, maximum and minimum values, etc. of one or more of the equipment constants as defined in this Section using S2F29.

ID	Name	Description	Values	Forma	Units
6	EstablishCommunicationTime out	Determines how often the SPTS fxP equipment attempts to establish communication with the Host	10 (default) 0-1800	U2	s
8	DefaultCommState	Determines whether the initial communications state is Enabled or Disabled when the tool is initialised	0 = Disabled 256 = Enabled	U4	None
9	DefaultControlState	Determines the initial control state when the tool is initialised	1 = Eq Offline 2 = Attempt Online 3 = Host Offline 4 = Online/Local 5 = Online/Remote	U1	None
10	HeartBeat	Determines how the SPTS fxP equipment will send the S1F1 message	30 (default) 0-1800	U2	s
11	DefaultCtrlOfflineState	Determines the default offline control state	1 = Eq Offline 3 = Host Offline	U1	None
18	WBitS10	Determines whether the SPTS fxP equipment will send stream 10 messages with or without the W-bit set	1 = W-bit set 0 = W-bit not set	Bool	None
19	WBitS5	Determines whether the SPTS fxP equipment will send stream 5 messages with or without the W-bit set	1 = W-bit set 0 = W-bit not set	Bool	None
20	WBitS6	Determines whether the SPTS fxP equipment will send stream 6 messages with or without the W-bit set	1 = W-bit set 0 = W-bit not set	Bool	None

ID	Name	Description	Values	Forma	Units
67	TimeFormat	Determines which time format to use where applicable	0 = 12 byte format 1 = 16 byte format	U4	None
4004	MaxSpoolMessages	Maximum number of messages that can be put into the spool area until it is considered full as part of the Spooling State Machine. Multi-block inquire/grant messages are not included in this count.	0 - 4294967295	U4	None
4005	MaxSpoolTransmit	Maximum number of messages that the machine will transmit from the spool area in response to an S6F23 (transmit spooled messages) request as part of the Spooling State Machine. If 0 there is no limit. Multi-block inquire/grant messages are not included in this count.	0 - 4294967295	U4	None
4009	OverwriteSpool	Determine whether to overwrite data in the spool area or to discard further messages when the spool area is full as part of the Spooling State Machine.	1 = overwrite 0 = discard	Bo	None
4010	SpoolEnabled	Enable or disable the Spooling State Machine	1 = enabled 0 = disabled	Bo	None
4022	EventReportMsg	Message sent on Event Trigger 67075 – S6F3, 67083 – S6F11, 67085 – S6F13	0 – 67083	U4	None
4028	LimitFreq	Determines how frequently the limits are checked as part of the Limits Monitoring capability.	1 - 120	U2	Secs

Table 6: GEM Equipment Constants

12.4 GEM Specific Status Variables

A Status Variable provides meaningful data that can be sampled at any time. It is set by the SPTS fxP equipment and may be only read by the Host system. Status Variables are updated continuously.

The Host requests a report of selected variables with an S1F3 message. The Host may also request the description of any or all Status variables by sending a Status Variable Namelist Request message (S1F11). The SPTS fxP equipment will respond with an S1F12 message providing the name and units of the requested variables.

ID	Name	Description	Values	Format	Units
22	AlarmID	Specifies the ALID of the most recent alarm	Any valid ALID	U4	None
23	AlarmsEnabled	A List of ALIDs for all alarms that are currently enabled	List of ALIDs	List of U4s	None
24	AlarmsSet	A List of ALIDs for all alarms whose Alarm State is 'ON'	List of ALIDs	List of U4s	None
25	AlarmState	On/Off state of most recent alarm	On or Off	U1	None
26	Aser	Alarm serial number of most recent alarm. A sequential number is assigned each time an alarm is set.	Incrementing number	U4	None
27	Clock	string containing the Host's view of the time and date on the SPTS fxP Equipment	yyyymmddhhmmsscc	A[16]	cs
28	ControlState	holds the current Control State	1=Offline 2=Attempt Online 3=Host Offline 4=Local 5=Remote	U1	None
29	DataID	type of data being sent in particular messages		U4	None
30	EventsEnabled	Holds a list of events that are enabled for reporting. The variable is updated when the Host enables or disables events using the S2F37/38 messages		L	None

ID	Name	Description	Values	Format	Units
31	CommState	Holds the current communication state	0 =Disabled 260=Communicating 273 = Enabled/Not Communicating	U4	None
32	MDLN	4 character ASCII string identifying the Equipment.	'P300' or 'fxP'	A[6]	None
34	LastCEID	used to provide the Host with the value of the last event that occurred		U4	None
36	PreviousControlState	the previous Control State	Same as ControlState	U1	None
39	SOFTREV	used to hold an ASCII string identifying the software revision of the SPTS fxP equipment of the form X.Y	e.g. '5.0'	A[6]	None
40	Time	String containing the Host's view of the time and date on the SPTS fxP Equipment. The format is dependent upon TIMEFORMAT equipment constant	yyyymmddhhmmsscc or yyymmddhhmmss	A[16] or A[12]	
2016	SpoolCountActual	Number of messages actually stored in the spool area. Multi-block inquire/grant messages are not included in this count.		U4	None
2017	SpoolCountTotal	Total number of messages put into spool area from the time spooling was activated. Multi-block inquire/grant messages are not included in this count.		U4	None
2018	SpoolFullTime	Time when the spool area becomes full in the format YYYYMMDDhhmmsscc where Y = year M = month D = day h = hour m = minute s = second c = centisecond.		A	None
2019	SpoolStartTime	Time when spool was last activated in the format YYYYMMDDhhmmsscc where Y = year M = month D = day h = hour m = minute s = second c = centisecond.		A	None

Table 7: GEM Status Variables

12.5 GEM Specific Discrete Data Variables

ID	Name	Description	Format	min	max	unit
1	EventLimit	Limit ID of limit that has been exceeded. This may be linked to any variable's Limit Monitoring collection event.	L			
2	LimitVariable	VID of variable associated with the last limit. This may be linked to any variable's Limit Monitoring collection event.	U4			
3	PPChangeName	Name of the process program (recipe) changed by the local operator. This may be linked to CE PPChange.	A			
4	PPChangeStatus	Type of change made to a process program (recipe) by the local operator. Possible values include 1 (created), 2 (edited), and 3 (deleted). This may be linked to CE PPChange.	U1			
5	TransitionType	Direction of a Limit Monitoring zone transition. This may be linked to any variable's Limit Monitoring collection event. Possible values include 1 (lower to upper) and 0 (upper to lower zone).	Bi			
7	ECID	ECID changed by the machine operator.	U4			

ID	Name	Description	Format	min	max	unit
15	LastPPRequested	Name of the process program (recipe) requested by the equipment.	A			
16	OperatorCommand	Command issued by the machine operator.	A			
22	AlarmID	ALID of the most recent alarm to change state. This may be linked to any alarm's SET or CLEAR collection event.	U4			
29	DataID	Value of SEMI E5 DATAID item.	U4			
34	LastCEID	The last triggered CE.	U4			
48	HostECHostID	ID of the host that changed the EC value. This may be linked to CE HostECChange.	U4			
49	HostECID	ECID changed by another host. This may be linked to CE HostECChange.	U4			
2052	ECChangeName	The EC that changed	A			
2053	ECChangeValue	The value of EC that changed	Any			
5100	WaferStatisticalDataDV	Min, Max, Avg values for last wafer process. This may be linked to CE WaferStatisticalDataAvailable	L			
5101	WaferRecipeDV	Wafer recipe for last wafer process. This may be linked to CE WaferStatisticalDataAvailable	A			
5102	ModuleRecipeDV	Module recipe for last wafer process. This may be linked to CE WaferStatisticalDataAvailable	A			
5110	CassetteID	Cassette ID	A			
5111	WaferID	Wafer ID	A			
5112	CassetteSlotMap	Cassette Slot Map	L			
5113	StationID	Station Number	U1			
5114	LotID	Lot ID	A			
5115	RecipeID	Recipe Name	A			
5116	StepID	Recipe Step Number	U1			
5117	StepName	Recipe Step Name	A			
5118	WaferNo	Wafer Number	A			
6102	PortID	Cassette Port ID	U1			

12.6 General Equipment Specific Equipment Constants

12.6.1 Objective

To provide Host access to selected constant settings relevant to the operation of the SECSII link and the SPTS fxP equipment as a whole.

12.6.2 Capabilities

The SPTS fxP equipment will allow the Host to get and set the Equipment Constants as defined in this Section using S2F13.

There is also a list of general equipment specific equipment constants that are not intended for modification in Appendix C - General Equipment Specific Equipment Constants.

The Host may request basic information, such as name, maximum and minimum values, etc. of one or more of the equipment constants as defined in this Section using S2F29.

ID	Name	Values	Format	Units
1001	AllowRemoteSelect	0 = disallow 1 = allow	Bo	None
1002	AllowRemoteStart	0 = disallow 1 = allow	Bo	None
1003	AllowRemoteStop	0 = disallow 1 = allow	Bo	None
1004	AllowRemotePause	0 = disallow 1 = allow	Bo	None
1005	AllowRemoteResume	0 = disallow 1 = allow	Bo	None
1006	AllowRemoteAbandon	0 = disallow 1 = allow	Bo	None
1007	AllowRemoteCancel	0 = disallow 1 = allow	Bo	None
1008	EqpName		A	None
1010	AllModuleAlarmLevels	1 = Generate Alarm IDs for all module fault severities	Bo	None
1011	AllSCAlarmLevels	1 = Generate Alarm IDs for all station controller fault severities	Bo	None
1012	UseZeroBasedCassettePortID	If false (default) then portIDs start at 1 otherwise start at 0	Bo	None
1013	UseZeroBasedCassettePortID	If false (default) then portIDs start at 1 otherwise start at 0	Bo	None
1014	ModuleWarningAlarms	1 = Generate Alarm IDs for module warning fault severities	Bo	None
1015	ModuleAttentionAlarms	1 = Generate Alarm IDs for module attention fault severities	Bo	None
5037	NotifyWaferStatisticalData	0 = no statistical data 1 = generate statistical data	Bo	None
5039	GenerateStatisticalDVIDs	0 = No PM Stats DVIDs 1 = Create PM Stats DVIDs	Bo	None

ID	Name	Values	Format	Units
5040	MedianAndStdDeviationRequired (NB: This can only be used in conjunction with ECID 5039)	0 = Min, Max and Avg stats only 1 = Median and Std Deviation also available	Bo	None
1000186	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_HSMS_SE TTINGS_1st_Host_Connection_Device_ID	0 - 32767	I4	None
1000187	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_HSMS_SE TTINGS_1st_Host_Connection_Port_Number	1-65535	I4	None
1000188	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_HSMS_SE TTINGS_1st_Host_Connection_T3_Timeout	1000-120000	I4	ms
1000189	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_HSMS_SE TTINGS_1st_Host_Connection_T5_Timeout	1000-240000	I4	ms
1000190	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_HSMS_SE TTINGS_1st_Host_Connection_T6_Timeout	1000-240000	I4	ms
1000191	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_HSMS_SE TTINGS_1st_Host_Connection_T7_Timeout	1000-240000	I4	ms
1000192	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_HSMS_SE TTINGS_1st_Host_Connection_T8_Timeout	1000-120000	I4	ms
1000193	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_HSMS_SE TTINGS_1st_Host_Connection_Link_Test_Idle_Time	0-240000	I4	ms
1000347	Machine_Config_LAMP_TOWER_Lamp_4_Equipment_Controlled	0 = Host Controlled 1 = Equipment Controlled	Bo	None
1000348	Machine_Config_LAMP_TOWER_Lamp_3_Equipment_Controlled	0 = Host Controlled 1 = Equipment Controlled	Bo	None
1000349	Machine_Config_LAMP_TOWER_Lamp_2_Equipment_Controlled	0 = Host Controlled 1 = Equipment Controlled	Bo	None
1000350	Machine_Config_LAMP_TOWER_Lamp_1_Equipment_Controlled	0 = Host Controlled 1 = Equipment Controlled	Bo	None
1000351	Machine_Config_LAMP_TOWER_Alarm_Equipment_Controlled	0 = Host Controlled 1 = Equipment Controlled	Bo	None
1000352	Machine_Config_SECS_II_CIMETRIX_SECS_II_Report_Cassette_ID	0 = No use of Cassette ID 1 = Use and display CassetteID	Bo	None
1000358	Machine_Config_SECS_II_CIMETRIX_SECS_II_Individual_Recipe_Upload/Do wnload_Control	0=Disable Individual Control 1=PM1 2=PM2 3=PM3 4=PM4 5=PM5 6=PM6 7=Coolstation 8=Conditioning 9=Wafer Recipe 10=Cassette Recipe	I4	None
1000359	Machine_Config_SECS_II_CIMETRIX_SECS_II_Individual_Recipe_Upload/Do wnload_Type	0=Process 1=Service	I4	None
1000395	Machine_Config_SECS_II_CIMETRIX_SECS_II_Use_GWIDs	0 = Use standard Cimetrix SECSII IDs 1 = Use SECSII IDs valid for GW package	Bo	None
1000401	Machine_Config_LAMP_TOWER_EQUIPMENT_CONTROL_Lamp_4_Equipm ent_Override		Bo	
1000402	Machine_Config_LAMP_TOWER_EQUIPMENT_CONTROL_Lamp_3_Equipm ent_Override		Bo	

ID	Name	Values	Format	Units
1000403	Machine_Config_LAMP_TOWER_EQUIPMENT_CONTROL_Lamp_2_Equipm ent_Override		Bo	
1000404	Machine_Config_LAMP_TOWER_EQUIPMENT_CONTROL_Lamp_1_Equipm ent_Override		Bo	
1000405	Machine_Config_LAMP_TOWER_EQUIPMENT_CONTROL_Alarm_Equipmen t_Override		Bo	
1000490	Machine_Config_SECS_II_CIMETRIX_SECS_II_HSMS_SETTINGS_2nd_Host _Connection_Device_ID	0 - 32767	I4	None
1000491	Machine_Config_SECS_II_CIMETRIX_SECS_II_HSMS_SETTINGS_2nd_Host _Connection_Port_Number	1-65535	I4	None
1000492	Machine_Config_SECS_II_CIMETRIX_SECS_II_HSMS_SETTINGS_2nd_Host _Connection_T3_Timeout	1000-120000	I4	ms
1000493	Machine_Config_SECS_II_CIMETRIX_SECS_II_HSMS_SETTINGS_2nd_Host _Connection_T5_Timeout	1000-240000	I4	ms
1000494	Machine_Config_SECS_II_CIMETRIX_SECS_II_HSMS_SETTINGS_2nd_Host _Connection_T6_Timeout	1000-240000	I4	ms
1000495	Machine_Config_SECS_II_CIMETRIX_SECS_II_HSMS_SETTINGS_2nd_Host _Connection_T7_Timeout	1000-240000	I4	ms
1000496	Machine_Config_SECS_II_CIMETRIX_SECS_II_HSMS_SETTINGS_2nd_Host _Connection_T8_Timeout	1000-120000	I4	ms
1000497	Machine_Config_SECS_II_CIMETRIX_SECS_II_HSMS_SETTINGS_2nd_Host _Connection_Link_Test_Idle_Time	0-240000	I4	Ms
1000498	Machine_Config_SECS_II_CIMETRIX_SECS_II_HSMS_SETTINGS_2nd_Host _Connection_Connection_Type	0 = Active 1 = Passive	I4	None
1000499	Machine_Config_SECS_II_CIMETRIX_SECS_II_HSMS_SETTINGS_2nd_Host _Connection_IP_Address		A	None
1000500	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_Communica tion_Protocol		I4	
1000501	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_SECS- I_SETTINGS_Device_ID		I4	
1000502	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_SECS- I_SETTINGS_COM_Port		I4	
1000503	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_SECS- I_SETTINGS_Baud_Rate		I4	
1000504	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_SECS- I_SETTINGS_T1_Timeout		I4	ms
1000505	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_SECS- I_SETTINGS_T2_Timeout		I4	ms
1000506	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_SECS- I_SETTINGS_T3_Timeout		I4	ms
1000507	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_SECS- I_SETTINGS_T4_Timeout		I4	ms
1000508	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_SECS- I_SETTINGS_Max_Send_Retries		I4	

Table 8: General Equipment Constants

12.7 Module Equipment Specific Equipment Constants

See Section 0,

12.8 General Equipment Specific Status Variables

ID	Name	Description	Values	Format	Units
1100	ArmAWaferStatus	Indicates Wafer status on Transport Arm A	See Section 24.4	U2	None
1101	ArmBWaferStatus	Indicates Wafer status on Transport Arm B	As Above	U2	None
1102	VCEAWaferStatus	Indicates Wafer status in VCE A	As Above	U2[25]	None
1103	PM1WaferStatus	Indicates Wafer status of PM1	As Above	U2[4]	None
1104	PM2WaferStatus	Indicates Wafer status of PM2	As Above	U2[4]	None
1105	PM3WaferStatus	Indicates Wafer status of PM3	As Above	U2[4]	None
1106	PM4WaferStatus	Indicates Wafer status of PM4	As Above	U2[4]	None
1107	PM5WaferStatus	Indicates Wafer status of PM5	As Above	U2[4]	None
1108	PM6WaferStatus	Indicates Wafer status of PM6	As Above	U2[4]	None
1109	VCEBWaferStatus	Indicates Wafer status in VCE B	As Above	U2[25]	None
1110	AlignerWaferStatus	Indicates Wafer status in the Aligner	As Above	U2	None
1114	InCoolerWaferStatus	Indicates Wafer status in the InCooler	As Above	U2	None
1115	BufferWaferStatus	Indicates Wafer status in the Buffer	As Above	U2	None
1201	VCEAWaferTrackingW01	Wafer Tracking status for wafer from VCE A slot 1	See section 24.6	A[20]	None
1202	VCEAWaferTrackingW02	Wafer Tracking status for wafer from VCE A slot 2	See section 24.6	A[20]	None
1203	VCEAWaferTrackingW03	Wafer Tracking status for wafer from VCE A slot 3	See section 24.6	A[20]	None
1204	VCEAWaferTrackingW04	Wafer Tracking status for wafer from VCE A slot 4	See section 24.6	A[20]	None
1205	VCEAWaferTrackingW05	Wafer Tracking status for wafer from VCE A slot 5	See section 24.6	A[20]	None
1206	VCEAWaferTrackingW06	Wafer Tracking status for wafer from VCE A slot 6	See section 24.6	A[20]	None
1207	VCEAWaferTrackingW07	Wafer Tracking status for wafer from VCE A slot 7	See section 24.6	A[20]	None
1208	VCEAWaferTrackingW08	Wafer Tracking status for wafer from VCE A slot 8	See section 24.6	A[20]	None
1209	VCEAWaferTrackingW09	Wafer Tracking status for wafer from VCE A slot 9	See section 24.6	A[20]	None
1210	VCEAWaferTrackingW10	Wafer Tracking status for wafer from VCE A slot 10	See section 24.6	A[20]	None
1211	VCEAWaferTrackingW11	Wafer Tracking status for wafer from VCE A slot 11	See section 24.6	A[20]	None
1212	VCEAWaferTrackingW12	Wafer Tracking status for wafer from VCE A slot 12	See section 24.6	A[20]	None
1213	VCEAWaferTrackingW13	Wafer Tracking status for wafer from VCE A slot 13	See section 24.6	A[20]	None
1214	VCEAWaferTrackingW14	Wafer Tracking status for wafer from VCE A slot 14	See section 24.6	A[20]	None
1215	VCEAWaferTrackingW15	Wafer Tracking status for wafer from VCE A slot 15	See section 24.6	A[20]	None
1216	VCEAWaferTrackingW16	Wafer Tracking status for wafer from VCE A slot 16	See section 24.6	A[20]	None
1217	VCEAWaferTrackingW17	Wafer Tracking status for wafer from VCE A slot 17	See section 24.6	A[20]	None
1218	VCEAWaferTrackingW18	Wafer Tracking status for wafer from VCE A slot 18	See section 24.6	A[20]	None
1219	VCEAWaferTrackingW19	Wafer Tracking status for wafer from VCE A slot 19	See section 24.6	A[20]	None
1220	VCEAWaferTrackingW20	Wafer Tracking status for wafer from VCE A slot 20	See section 24.6	A[20]	None
1221	VCEAWaferTrackingW21	Wafer Tracking status for wafer from VCE A slot 21	See section 24.6	A[20]	None
1222	VCEAWaferTrackingW22	Wafer Tracking status for wafer from VCE A slot 22	See section 24.6	A[20]	None
1223	VCEAWaferTrackingW23	Wafer Tracking status for wafer from VCE A slot 23	See section 24.6	A[20]	None
1224	VCEAWaferTrackingW24	Wafer Tracking status for wafer from VCE A slot 24	See section 24.6	A[20]	None

ID	Name	Description	Values	Format	Units
1225	VCEAWaferTrackingW25	Wafer Tracking status for wafer from VCE A slot 25	See section 24.6	A[20]	None
1251	VCEBWaferTrackingW01	Wafer Tracking status for wafer from VCE B slot 1	See section 24.6	A[20]	None
1252	VCEBWaferTrackingW02	Wafer Tracking status for wafer from VCE B slot 2	See section 24.6	A[20]	None
1253	VCEBWaferTrackingW03	Wafer Tracking status for wafer from VCE B slot 3	See section 24.6	A[20]	None
1254	VCEBWaferTrackingW04	Wafer Tracking status for wafer from VCE B slot 4	See section 24.6	A[20]	None
1255	VCEBWaferTrackingW05	Wafer Tracking status for wafer from VCE B slot 5	See section 24.6	A[20]	None
1256	VCEBWaferTrackingW06	Wafer Tracking status for wafer from VCE B slot 6	See section 24.6	A[20]	None
1257	VCEBWaferTrackingW07	Wafer Tracking status for wafer from VCE B slot 7	See section 24.6	A[20]	None
1258	VCEBWaferTrackingW08	Wafer Tracking status for wafer from VCE B slot 8	See section 24.6	A[20]	None
1259	VCEBWaferTrackingW09	Wafer Tracking status for wafer from VCE B slot 9	See section 24.6	A[20]	None
1260	VCEBWaferTrackingW10	Wafer Tracking status for wafer from VCE B slot 10	See section 24.6	A[20]	None
1261	VCEBWaferTrackingW11	Wafer Tracking status for wafer from VCE B slot 11	See section 24.6	A[20]	None
1262	VCEBWaferTrackingW12	Wafer Tracking status for wafer from VCE B slot 12	See section 24.6	A[20]	None
1263	VCEBWaferTrackingW13	Wafer Tracking status for wafer from VCE B slot 13	See section 24.6	A[20]	None
1264	VCEBWaferTrackingW14	Wafer Tracking status for wafer from VCE B slot 14	See section 24.6	A[20]	None
1265	VCEBWaferTrackingW15	Wafer Tracking status for wafer from VCE B slot 15	See section 24.6	A[20]	None
1266	VCEBWaferTrackingW16	Wafer Tracking status for wafer from VCE B slot 16	See section 24.6	A[20]	None
1267	VCEBWaferTrackingW17	Wafer Tracking status for wafer from VCE B slot 17	See section 24.6	A[20]	None
1268	VCEBWaferTrackingW18	Wafer Tracking status for wafer from VCE B slot 18	See section 24.6	A[20]	None
1269	VCEBWaferTrackingW19	Wafer Tracking status for wafer from VCE B slot 19	See section 24.6	A[20]	None
1270	VCEBWaferTrackingW20	Wafer Tracking status for wafer from VCE B slot 20	See section 24.6	A[20]	None
1271	VCEBWaferTrackingW21	Wafer Tracking status for wafer from VCE B slot 21	See section 24.6	A[20]	None
1272	VCEBWaferTrackingW22	Wafer Tracking status for wafer from VCE B slot 22	See section 24.6	A[20]	None
1273	VCEBWaferTrackingW23	Wafer Tracking status for wafer from VCE B slot 23	See section 24.6	A[20]	None
1274	VCEBWaferTrackingW24	Wafer Tracking status for wafer from VCE B slot 24	See section 24.6	A[20]	None
1275	VCEBWaferTrackingW25	Wafer Tracking status for wafer from VCE B slot 25	See section 24.6	A[20]	None
1500	TransportMode	The current mode of the Transport	1 = Manual 2 = Automatic	U2	None
1501	VCEAMode	The current mode of VCE A	As Above	U2	None
1502	PM1Mode	The current mode of PM1	As Above	U2	None
1503	PM2Mode	The current mode of PM2	As Above	U2	None
1504	PM3Mode	The current mode of PM3	As Above	U2	None
1505	PM4Mode	The current mode of PM4	As Above	U2	None
1506	PM5Mode	The current mode of PM5	As Above	U2	None
1507	PM6Mode	The current mode of PM6	As Above	U2	None
1508	VCEBMode	The current mode of VCE B	As Above	U2	None
1510	CoolerMode	The current mode of the Incooler	As Above	U2	None
1550	Transport State	The current state of the Transport	See Section 24.5	U2	None

ID	Name	Description	Values	Format	Units
1551	VCEAState	The current state of VCE A	See Section 24.5	U2	None
1552	PM1State	The current state of PM1	See Section 24.5	U2	None
1553	PM2State	The current state of PM2	See Section 24.5	U2	None
1554	PM3State	The current state of PM3	See Section 24.5	U2	None
1555	PM4State	The current state of PM4	See Section 24.5	U2	None
1556	PM5State	The current state of PM5	See Section 24.5	U2	None
1557	PM6State	The current state of PM6	See Section 24.5	U2	None
1558	VCEBState	The current state of VCE B	See Section 24.5	U2	None
1560	CoolerState	The current state of the Cool station	See Section 24.5	U2	None
1572	PM1ModuleRecipe	String containing the current module recipe selected for PM1		A[20]	None
1573	PM2ModuleRecipe	String containing the current module recipe selected for PM2		A[20]	None
1574	PM3ModuleRecipe	String containing the current module recipe selected for PM3		A[20]	None
1575	PM4ModuleRecipe	String containing the current module recipe selected for PM4		A[20]	None
1576	PM5ModuleRecipe	String containing the current module recipe selected for PM5		A[20]	None
1577	PM6ModuleRecipe	String containing the current module recipe selected for PM6		A[20]	None
1601	VCEAProcessState	Current Process State of VCE A	0 = Idle 1 = Selecting 2 = Selected 3 = Starting 4 = Running 5 = Stopping 6 = Stopped 7 = Abandoning 8 = Restarting	U2	None
1602	VCEBProcessState	Current Process State of VCE B	As above	U2	None
1611	VCEAPreviousProcessState	Previous Process State of VCE A	As Current Process State	U2	None
1612	VCEBPreviousProcessState	Previous Process State of VCE B	As Current Process State	U2	None
1621	VCEAProcessPauseState	Current Process Pause State of VCE A	0 = Not Paused 1 = Pausing 2 = Paused	U2	None
1622	VCEBProcessPauseState	Current Process Pause State of VCE B	As above	U2	None
1631	VCEACassetteRecipe	String containing the current cassette recipe selected for VCE A		A[20]	None
1632	VCEBCassetteRecipe	String containing the current cassette recipe selected for VCE B		A[20]	None
1641	VCEALotid	String containing the current Lotid for VCE A		A[16]	None
1642	VCEBLotid	String containing the current Lotid for VCE B		A[16]	None
1651	VCEACyclingEnabled	Indicates whether the currently selected Cassette recipe has cycling enabled	False = Cycling disabled True = Cycling Enabled	Bo	None
1652	VCEBCyclingEnabled	Indicates whether the currently selected Cassette recipe has cycling enabled	False = Cycling disabled True = Cycling Enabled	Bo	None
1661	VCEADataloggingConnected	Indicates whether the datalogging system is currently running	False = Datalogging not Connected True = Datalogging Connected	Bo	None
1662	VCEBDataloggingConnected	Indicates whether the datalogging system is currently running	False = Datalogging not Connected True = Datalogging Connected	Bo	None

ID	Name	Description	Values	Format	Units
1700	MchTotalWaferCount	Total Wafer Count for the Machine		U4	None
1701	PM1TotalWaferCount	Total Wafer Count for PM1		U4	None
1702	PM2TotalWaferCount	Total Wafer Count for PM2		U4	None
1703	PM3TotalWaferCount	Total Wafer Count for PM3		U4	None
1704	PM4TotalWaferCount	Total Wafer Count for PM4		U4	None
1705	PM5TotalWaferCount	Total Wafer Count for PM5		U4	None
1706	PM6TotalWaferCount	Total Wafer Count for PM6		U4	None
1720	MchRunningWaferCount	Running Wafer Count for the Machine		U4	None
1721	PM1RunningWaferCount	Running Wafer Count for PM1		U4	None
1722	PM2RunningWaferCount	Running Wafer Count for PM2		U4	None
1723	PM3RunningWaferCount	Running Wafer Count for PM3		U4	None
1724	PM4RunningWaferCount	Running Wafer Count for PM4		U4	None
1725	PM5RunningWaferCount	Running Wafer Count for PM5		U4	None
1726	PM6RunningWaferCount	Running Wafer Count for PM6		U4	None
2039	NVSPath	Non-volatile storage directory.		A	None
2040	RecipeHandling	Recipe handling type		U4	None
2041	RecipeType	Recipe handling type		U4	None
2042	RecipePath	Recipe storage directory		A	None
2048	RecipeExtension	Recipe file extension		A	None
2055	ResyncNVS	Resync EVENTSENABLED (= 1) or do not resync (= 0)		U1	None
5103	EnergyConsumption		See section 24.7	L	None
5200	LampTowerLamp1Status	Lamp Tower Lamp 1 Status	1 = On 2 = Off 3 = Intermittent	U2	None
5201	LampTowerLamp2Status	Lamp Tower Lamp 2 Status	1 = On 2 = Off 3 = Intermittent	U2	None
5202	LampTowerLamp3Status	Lamp Tower Lamp 3 Status	1 = On 2 = Off 3 = Intermittent	U2	None
5203	LampTowerLamp4Status	Lamp Tower Lamp 4 Status	1 = On 2 = Off 3 = Intermittent	U2	None
5204	LampTowerAlarmStatus	Lamp Tower Alarm Status	1 = On 2 = Off 3 = Intermittent	U2	None
5205	PrevLamp1Status	Previous Lamp Tower Lamp 1 Status	As Above	U2	None
5206	PrevLamp2Status	Previous Lamp Tower Lamp 2 Status	As Above	U2	None
5207	PrevLamp3Status	Previous Lamp Tower Lamp 3 Status	As Above	U2	None
5208	PrevLamp4Status	Previous Lamp Tower Lamp 4 Status	As Above	U2	None
5209	PrevAlarmStatus	Previous Lamp Tower Alarm Status	As Above	U2	None
5300	CassetteWaferMapA	CassetteWaferMapA		L	None
5301	CassetteWaferMapB	CassetteWaferMapB		L	None
5302	CassetteLotMapA	CassetteLotMapA		L	None
5303	CassetteLotMapB	CassetteLotMapB		L	None
5310	EquipmentReady	Equipment is ready to start communicating	True = Ready False = Not Ready	Bo	None

Table 9: General Status Variables

12.9 Module Equipment Specific Status Variables

See Appendix E - Module Equipment Specific Status Variables

12.10 Equipment Specific Discrete Data Variables

ID	Name	Collection Events for which DV is valid	Format
5100	WaferStatisticalDataDV	810	L (See Section 25.1)
5101	WaferRecipeDV	810	A
5102	ModuleRecipeDV	810	A
5110	CassetteID	810, 851, 852	A
5111	WaferID	422, 423, 424, 425, 426, 427, 430, 442, 443, 444, 445, 446, 447, 450, 462, 463, 464, 465, 466, 467, 470, 482, 483, 484, 485, 486, 487, 490, 810, 853, 854, 855, 856, 857, 858, 859, 860	A
5112	CassetteSlotMap	850	L
5113	StationID	422, 423, 424, 425, 426, 427, 430, 442, 443, 444, 445, 446, 447, 450, 462, 463, 464, 465, 466, 467, 470, 482, 483, 484, 485, 486, 487, 490, 810, 853, 854, 855, 856, 857, 858	U1
5114	LotID	422, 423, 424, 425, 426, 427, 430, 442, 443, 444, 445, 446, 447, 450, 462, 463, 464, 465, 466, 467, 470, 482, 483, 484, 485, 486, 487, 490, 855, 856, 857, 858, 859, 860	A
5115	RecipeID	422, 423, 424, 425, 426, 427, 430, 442, 443, 444, 445, 446, 447, 450, 462, 463, 464, 465, 466, 467, 470, 482, 483, 484, 485, 486, 487, 490, 855, 856, 857, 858	A
5116	StepID	422, 423, 424, 425, 426, 427, 430, 442, 443, 444, 445, 446, 447, 450, 462, 463, 464, 465, 466, 467, 470, 482, 483, 484, 485, 486, 487, 490, 810, 855, 856, 857, 858	U1
5117	StepName	422, 423, 424, 425, 426, 427, 430, 442, 443, 444, 445, 446, 447, 450, 462, 463, 464, 465, 466, 467, 470, 482, 483, 484, 485, 486, 487, 490, 855, 856, 857, 858	A
5118	WaferNo	422, 423, 424, 425, 426, 427, 430, 442, 443, 444, 445, 446, 447, 450, 462, 463, 464, 465, 466, 467, 470, 482, 483, 484, 485, 486, 487, 490, 853, 854, 855, 856, 857, 858, 859, 860	A
6102	PortID	3, 4, 810, 850, 851, 852, 859, 860	U1


13 Limits Monitoring

13.1.1 General Description

The Limits Monitoring State Model allows the equipment to monitor certain status and data variable values. It allows the host to define limit boundaries. The equipment notifies the host using a collection event whenever configured variables transition across limit boundaries.

The limits monitoring capability provides the host a means of monitoring equipment conditions by a flexible, efficient and asynchronous method which is consistent across equipment. It eliminates the need for frequent status variable polling. This capability also allows the host to implement changes in the monitoring range as needed. This capability has application to both production operation and diagnostic/testing scenarios and it has applicability to statistical process control.

Limits monitoring may be configured for each available variable according to this diagram.

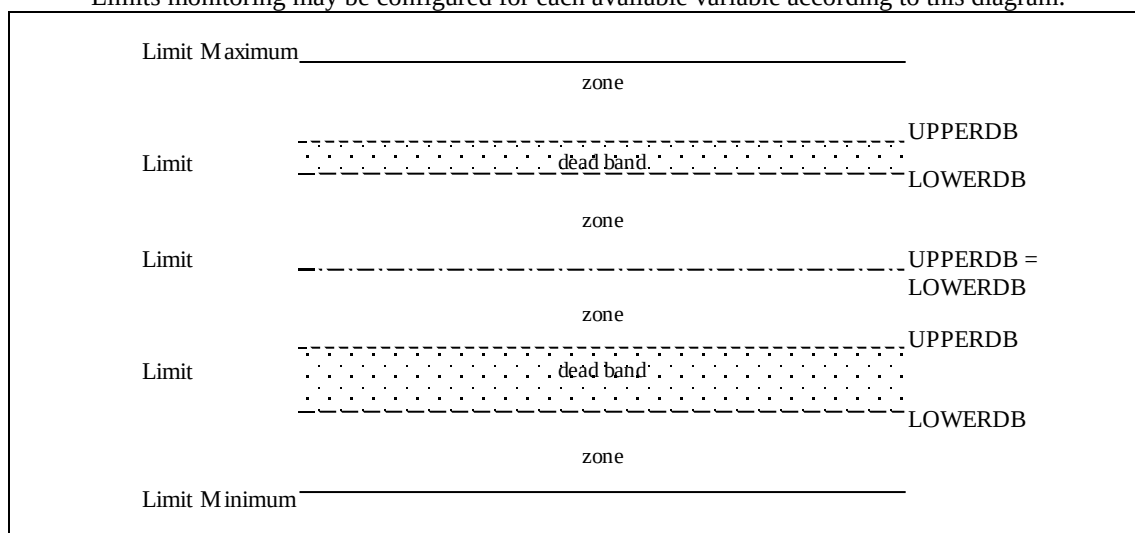

Notice that each limit has an upper dead-band and lower dead-band value. The region between the two is called the dead-band. If the upper and lower dead-band values are equal, then there is no dead-band. The regions above and below the limit are called zones. A zone transition occurs when the value crosses above the upper dead-band or below the lower dead-band. The host may define as many limits as desired.

UPPERDB and LOWERDB values are restricted by the following formula:

$$\text{Limit Maximum} \geq \text{UPPERDB} \geq \text{LOWERDB} \geq \text{Limit Minimum}$$

A limit divides the possible range of variable values into two parts, the upper zone and the lower zone. At any time, the monitored variable is considered to be in one and only one of these zones. However, as Figure 4.2.2 in the SEMI E30 manual shows, these two zones have an area of overlap. This is called the dead-band.


The dead-band is a critical element of Limits Monitoring. Its purpose is to prevent a phenomenon known as chattering -- the repeated changing of zones due to small, rapid fluctuations in variable value while near the zone boundary. In practice, the value of a variable must reach the opposite boundary of the dead-band before a zone transition can occur. Thus, if a variable's value reaches the UPPERDB and transitions into the upper zone, it will not return to the lower zone until it falls back to the LOWERDB. The difference between UPPERDB and LOWERDB should always be greater than the typical amplitude of those fluctuations deemed insignificant. In some cases, the width of the dead-band may set to zero (i.e., $\text{UPPERDB} = \text{LOWERDB}$). At first glance, this would seem to make indeterminate the current zone when an integer value sits on the limit. This is not the case, however, when movement of the value is considered. To illustrate, an example is given, assuming that $\text{UPPERDB} = \text{LOWERDB} = 100$.

Transition from one zone into another generates a collection event, as might be reported via S6, F11. The host has the option of receiving notification by enabling event reporting for the event. For each variable that has monitoring capability, one CEID is reserved to indicate zone transitions for that variable.

The sampling frequency is an important aspect of Limits Monitoring. If the value changes frequently compared to sampling frequency, it is possible for some zone transitions to be missed or for multiple zone transitions to

occur between readings. Since it is possible for zone transitions to occur “simultaneously” and for limit boundaries to be identical, the "event limit" data variable allows a list of multiple zone transitions of a variable to be reported with a single collection event.

13.1.2 Limits Monitoring State Diagram

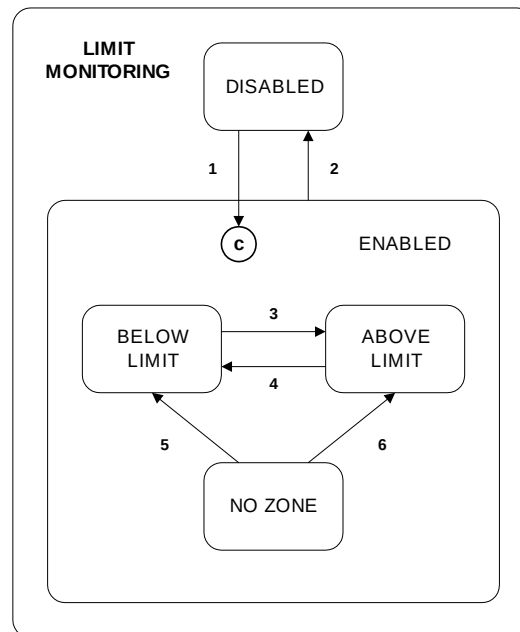

13.1.3 Limits Monitoring State Definitions Table

13.1.3.1 ABOVE LIMIT

A variable is considered to be above a limit when its value increases to equal or exceed the upper boundary of the dead-band, UPPERDB. The significance attached to this state is a function of the host's usage.

13.1.3.2 BELOW LIMIT

A variable is considered to be below a limit when its value decreases to equal or fall below the lower boundary of the dead-band, LOWERDB. The significance attached to this state is a function of the host's usage.

13.1.3.3 NO ZONE

In some circumstances, it is possible for the variable value to be in neither the upper zone nor the lower zone. This may occur upon definition of a new limit or upon equipment startup when the value of the variable lies in the dead-band. In this case, the active state of the limit is considered NO ZONE. The limit remains in this state until the variable value reaches either boundary of the dead-band.

13.1.4 Limit Monitoring State Transition Table

#	Current State	Trigger	New State	Action	Comment
1	DISABLED	Limit attributed defined with S2, F45.	ENABLED	None	The substate of ENABLED is determined by the current value of the monitored variable.
2	ENABLED	Limit attributes set to undefined with S2, F45.	DISABLED	None	None
3	BELOW LIMIT	Variable increased to be $\geq$ UPPERDB.	ABOVE LIMIT	None	Zone Transition
4	ABOVE LIMIT	Variable decreases to be $\leq$ LOWERDB.	BELOW LIMIT	None	Zone Transition
5	NO ZONE	Variable decreases to be $\leq$ LOWERDB.	BELOW LIMIT	None	Zone Transition
6	NO ZONE	Variable increases to be $\geq$ UPPERDB.	ABOVE LIMIT	None	Zone Transition

The following variables are used in Limits Monitoring :-

Equipment Constant :-

- LimitFreq

Data Variables :-

- EventLimit
- LimitVariable
- TransitionType

All variables listed in the section Module Equipment Specific variables are available for limits monitoring.

14 Trace Data Collection

14.1 Objective

To provide the Host system with the means to sample data on a regular basis

14.2 Trace Data Collection

The Host using S2F23 messages defines trace reports. This will be removed from the SPTS fxP equipment when the report has been sent to the Host.

The value of the required variables is read at the specified time, however, the transmission of the S6F1 message may occur sometime later depending upon message traffic.

Sixteen separate simultaneous Trace operations are allowed, but each must have a unique Trace ID (TRID).

15 Remote Control

15.1 Objective

To provide the Host system with the means to control the SPTS fxP equipment remotely.

The Equipment can only be controlled when the Control State is On-line Remote.

15.2 Automatic Equipment Processing Commands

The Process State Model of the Machine can be mapped independently onto both cassettes. Therefore two state machines exist, one for VCE A and one for VCE B.

The cassette remote commands available to the user are as follows (they are all in upper case):

RCMD	CPNAME	CPVAL FORMAT	CPVAL
“SELECT” or “PP_SELECT”	“VCE” “LOTID” “RECIPE”	A[1] A[16] A[20]	VCE (‘A’ or ‘B’) Lot ID String Cassette Recipe Name String
“START”	“VCE” “LOTID”	A[1] A[16]	VCE (‘A’ or ‘B’) Lot ID String
“STOP”	“VCE”	A[1]	VCE (‘A’ or ‘B’)
“CANCEL”	“VCE”	A[1]	VCE (‘A’ or ‘B’)
“ABORT”	“VCE”	A[1]	VCE (‘A’ or ‘B’) (Note:- has the same effect as CANCEL)
“ABANDON”	“VCE”	A[1]	VCE (‘A’ or ‘B’)
“PAUSE”	“VCE”	A[1]	VCE (‘A’ or ‘B’)
“RESUME”	“VCE”	A[1]	VCE (‘A’ or ‘B’)
“LOAD”	“VCE”	A[1]	VCE (‘A’ or ‘B’)
“UNLOAD”	“VCE”	A[1]	VCE (‘A’ or ‘B’)
“CLAMP”	“VCE”	A[1]	VCE (‘A’ or ‘B’)
“UNCLAMP”	“VCE”	A[1]	VCE (‘A’ or ‘B’)
“SCANSLOTMAP”	“VCE” “CASSETTEID”	A[1] A[16]	VCE(‘A’ or ‘B’) Cassette ID String
“SPSELECT”	“VCE” “LOTID” “SLOTxBASERECIPE” “NEWRECIPE” Note: x is slot number 1 to 25.	A[1] A[16] A[20] A[20]	VCE (‘A’ or ‘B’) Lot ID String Cassette Recipe Name String (Slot based) Cassette Recipe Name String (Slot based) Note: There may be between 1 and 25 pairs of the “SLOTxBASERECIPE”, CPNAME and CPVAL in the command. On receipt of this command a slot based cassette recipe with the name in the CPVAL for “NEWRECIPE” will be created using the wafer recipes and conditioning recipes defined in the slot based cassette recipes named in the CPVAL for the “SLOTxBASERECIPE” for each slot defined by x in the CPNAME. The “SLOTxBASERECIPE” must exist on the equipment and be a slot based recipe with only slot 1 defined.

Table 10: Remote Commands

To use the SCANSLOTMAP remote command, ECID 1000352


(Machine_Config_SECS_II_CIMETRIX_SECS_II_Report_Cassette_ID) must be set to true.

Also, if this equipment constant is set to true then the PP_SELECT command has the following format:-

RCMD	CPNAME	CPVAL FORMAT	CPVAL
“PP_SELECT”	“VCE” “CASSETTEID” “RECIPE”	A[1] A[16] A[20]	VCE (‘A’ or ‘B’) Cassette ID String Cassette Recipe Name String

The Process State Diagram applicable to each cassette is as follows: -

Process State Diagram

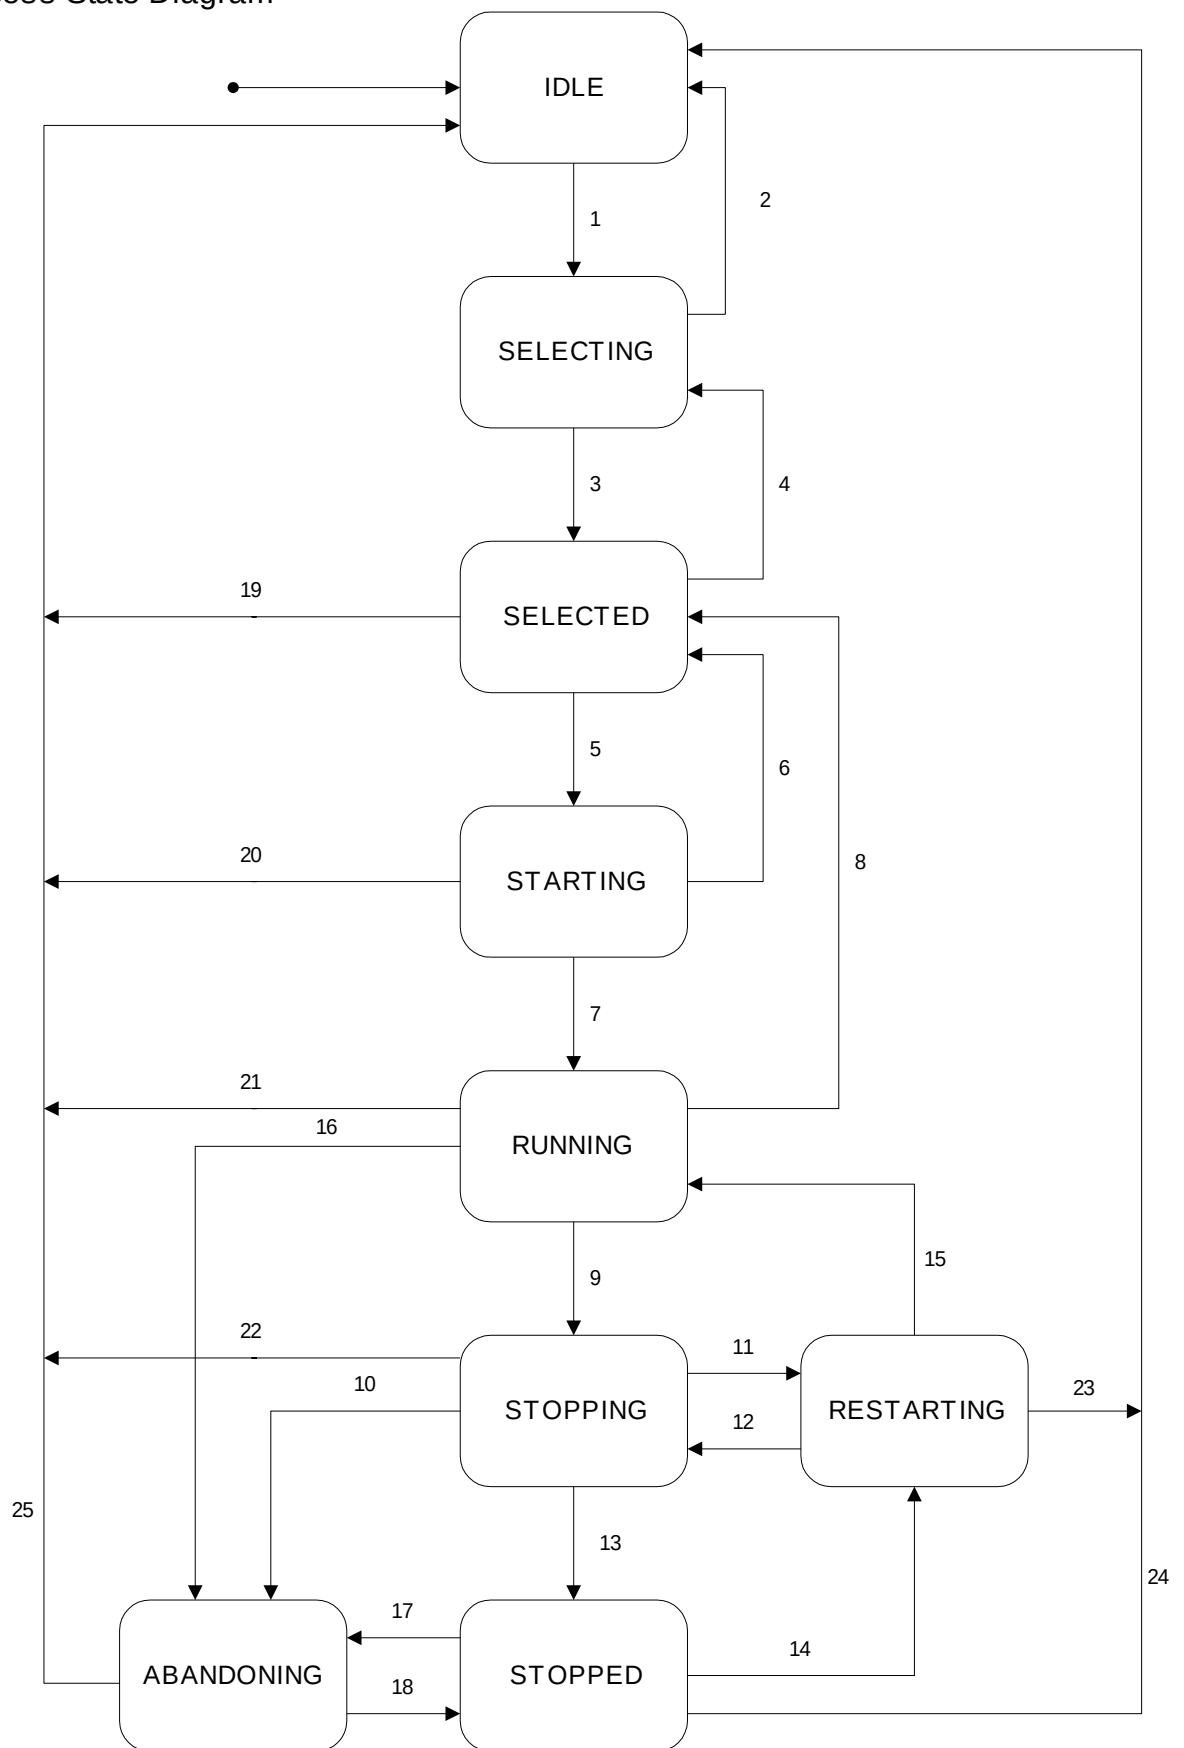

The state transition table for this state diagram is as follows: -

#	Current State	Trigger	New State	Action
1	IDLE	A SELECT command is received from the Host or operator	SELECTING	The recipe chosen is verified and validated. Also the appropriate modules are checked to ensure that they are in the correct mode and state
2	SELECTING	The recipe chosen fails verification or validation or the appropriate modules are not in the correct mode or state	IDLE	None
3	SELECTING	The recipe chosen passes verification and validation and the appropriate modules are in the correct mode and state	SELECTED	The recipe is copied into the execution area
4	SELECTED	A SELECT command is received from the Host or operator	SELECTING	The recipe chosen is verified and validated. Also the appropriate modules are checked to ensure that they are in the correct mode and state
5	SELECTED	A START command is received from the Host or operator	STARTING	The appropriate modules are checked to ensure that they are in the correct mode and state. If they are, they are sent to READY with the appropriate module recipe. Also, if the VCE is currently Ejected, it is Loaded
6	STARTING	One or more modules are not in the correct mode or state, or when the VCE is mapped the wafers present are incompatible with the recipe.	SELECTED	If modules have been sent to READY, they are sent back to IDLE
7	STARTING	All appropriate modules have reached their 'pre-process' state (PMs - READY, VCE - Loaded, Transport - IDLE) and all ACHIEVED-READY conditioning processes have been run	RUNNING	Wafers are handled into the system and processes are run as defined by the recipe
8	RUNNING	All wafers defined in the recipe have been successfully processed and returned to the VCE and the relevant modules have been sent back to IDLE, and if Auto-Eject has been selected, the VCE is Ejected	SELECTED	None
9	RUNNING	A STOP command is received from the Host or operator or a module generates an Abort Fault	STOPPING	Wafers are processed according to the recipe until they cannot proceed.
10	STOPPING	An ABANDON (all) command is received from the Host or operator	ABANDONING	All wafers in the system are flagged as requiring to be abandoned and transferred directly to the Incooler (if fitted) when available
11	STOPPING	A START command is received from the Host or operator	RESTARTING	Process Modules not in the Ready state are sent to Ready, the VCE is loaded if it has Aborted and the Transport is sent to Idle if it has Aborted
12	RESTARTING	A module generates an Abort fault	STOPPING	Wafers are processed according to the recipe until they cannot proceed.
13	STOPPING	Wafers in the system can no longer proceed (either because they have fully completed their processing or they are stuck behind an Aborted module)	STOPPED	None
14	STOPPED	A START command is received from the Host or operator	RESTARTING	Process Modules not in the Ready state are sent to Ready, the VCE is loaded if it has Aborted and the Transport is sent to Idle if it has Aborted

#	Current State	Trigger	New State	Action
15	RESTARTING	All appropriate modules have reached their 'pre-process' state (PMs - READY, VCE - Loaded, Transport - IDLE) and all ACHIEVED-READY conditioning processes have been run	RUNNING	Wafers now continue to proceed through the system and processes are run as defined by the recipe
16	RUNNING	An ABANDON (all) command is received from the Host or operator	ABANDONING	All wafers in the system are flagged as requiring to be abandoned and transferred directly to the Incooler (if fitted) when available
17	STOPPED	An ABANDON (all) command is received from the Host or operator	ABANDONING	All wafers in the system are flagged as requiring to be abandoned and transferred directly to the Incooler (if fitted) when available
18	ABANDONING	Wafers in the system can no longer proceed (either because they have fully Abandoned or they are stuck behind an Aborted module)	STOPPED	None
19	SELECTED	A CANCEL command is received from the Host or operator	IDLE	The recipe is de-selected
20	STARTING	A CANCEL command is received from the Host or operator	IDLE	All Process modules are sent to Idle if at Ready and the recipe is de-selected
21	RUNNING	A CANCEL command is received from the Host or operator	IDLE	All Process modules are sent to Idle if at Ready and the recipe is de-selected
22	STOPPING	A CANCEL command is received from the Host or operator	IDLE	All Process modules are sent to Idle if at Ready and the recipe is de-selected
23	RESTARTING	A CANCEL command is received from the Host or operator	IDLE	All Process modules are sent to Idle if at Ready and the recipe is de-selected
24	STOPPED	A CANCEL command is received from the Host or operator	IDLE	All Process modules are sent to Idle if at Ready and the recipe is de-selected
25	ABANDONING	A CANCEL command is received from the Host or operator	IDLE	All Process modules are sent to Idle if at Ready and the recipe is de-selected

Table 11: Process State Transition Table

In addition to this state model, the PAUSE and RESUME commands can be used to temporarily suspend and resume processing. The PAUSE command is available in any state apart from IDLE, SELECTED and SELECTING if the Process Pause State is 'Not Paused'. When the PAUSE command is issued, processing continues until all modules have completed their current action. The Process Pause State then becomes 'Paused'.

The RESUME command is available when the Process Pause State is 'Paused'.

Commands available to the Host whilst in the REMOTE Control State are configurable by equipment constants. If the command is available to the Host, it is made unavailable to the local operator and vice versa.

Also, modules not involved in automatic processing whilst in the REMOTE Control State are available to be used by a local operator.

Note that, where necessary, remote commands will be interpreted as 'request action to be initiated' rather than 'do action'. The SPTS fxP equipment will then respond via S2, F42 with HCACK = 4 meaning that the command 'is going to be performed'.

15.3 Process Module Processing Commands


There is also a Process State Model for each Process Module. Each has its own state machine.

The Process Module remote commands available to the user are as follows (they are all in upper case): -

RCMD	CPNAME	CPVAL FORMAT	CPVAL
"IDLE"	"PM" "RECIPE"	A[1..2] A[20]	'1' to '6' Module Recipe Name String
"READY"	"PM" "RECIPE"	A[1..2] A[20]	'1' to '6' Module Recipe Name String
"PROCESS"	"PM" "RECIPE"	A[1..2] A[20]	'1' to '6' Module Recipe Name String
"SERVICE"	"PM" "RECIPE"	A[1..2] A[20]	'1' to '6' Module Recipe Name String
"ABORTPM"	"PM"	A[1..2]	'1' to '6'
"HOLD"	"PM"	A[1..2]	'1' to '6'
"RESTORE"	"PM"	A[1..2]	'1' to '6'

Table 12: Process Module Remote Commands

The state model for Process Modules is as follows: -

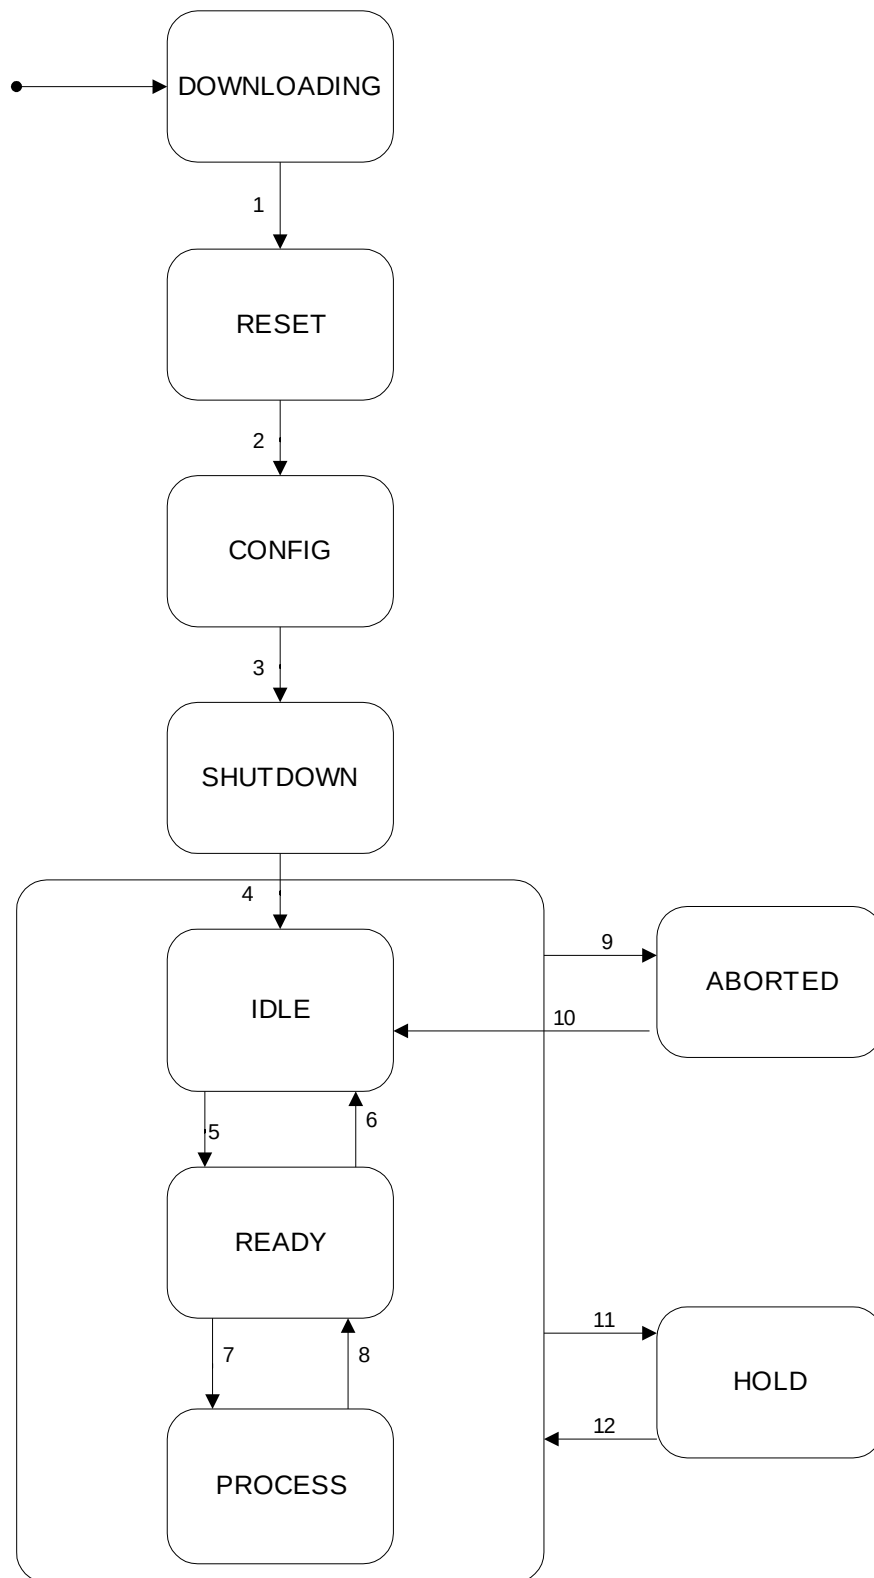

In order to simplify the model, the transitory states (e.g. ACTION IDLE) are not in the diagram but these are explained in the State Transition Table.

The initial state entered by the module is different depending on whether the Process Module (PM) runs on a 200 series-based rack or a PC104 PC.

For a 200 series-based PM, the initial state is DOWNLOADING which is entered when the PM code is downloaded from the CTC to the module.

For a PC104 PM, the initial state is RESET which is entered when the PM code starts running.

The state transition diagram for the Process Module State Diagram is as follows: -

#	Current State	Trigger	New State	Action
1	DOWNLOADING	The PM completes downloading from the CTC	RESET	None
2	RESET	The module receives a valid configuration message from the CTC	CONFIG	None
3	CONFIG	The module receives a valid parameter message from the CTC	SHUTDOWN	None
4	SHUTDOWN	The module receives an Idle state control command from the CTC	IDLE	The module actions the IDLE sequence which typically involves getting to the right temperature and pressure. (during this sequence the module state is 'Going to Idle')
5	IDLE	The module receives a READY state control command from the CTC	READY	The module actions the IDLE to READY sequence which gets the module Ready to Process. This typically means turning on sensitive devices that can't be left on for long periods of time (during this sequence the module state is 'Going to Ready')
6	READY	The module receives an Idle state control command from the CTC	IDLE	The module actions the READY to IDLE sequence. This typically means turning off sensitive devices that can't be left on for long periods of time (during this sequence the module state is 'Going to Idle')
7	READY	The module receives an PROCESS state control command from the CTC	PROCESS	The module actions the PROCESS sequence.
8	PROCESS	The module completes the process sequence	READY	None
9	IDLE / READY / PROCESS	The module receives an Abort command from the CTC or an alarm with Abort priority occurs. (Note this can also happen in the transitory states)	ABORTED	The module actions the Abort sequence which puts the module into a safe state (during this sequence the module state is 'Going to Abort')
10	ABORTED	The module receives an Idle state control command from the CTC	IDLE	The module actions the IDLE sequence which typically involves getting to the right temperature and pressure. (during this sequence the module state is 'Going to Idle')
11	IDLE / READY / PROCESS	The module receives a Hold command from the CTC or an alarm with Hold priority occurs. (Note this can also happen in the transitory states)	HOLD	The module actions the Hold sequence which turns off any sensitive devices (during this sequence the module state is 'Going to Hold')
12	HOLD	The module receives a Restore command from the CTC.	IDLE / READY / PROCESS	The module turns on any sensitive devices that were turned off when going to Hold. The module then returns to the state it was in before going to Hold

Table 13: Process Module State Transition Table

It is also possible for the module to receive the Ready and Process commands from the Aborted, Shutdown and Idle states, in which case the module goes through the appropriate transitory states.

15.4 Process Module Mode Command

As well as having a state, a Process Module also has a mode. The module is in one of two modes: -

- Automatic – in this mode, the module is available for Automatic Processing of wafers and not available for Manual Commands.
- Manual – in this mode, the module is available for Manual Commands and not available for Automatic Processing of wafers.

A Remote command is available to allow a Process Module to change mode.

The structure of the command is as follows: -

RCMD	CPNAME	CPVAL FORMAT	CPVAL
"MODE"	"PM" "MODE"	A[1..2] A[1..9]	'1' to '6' 'MANUAL' or 'AUTOMATIC'

The mode command will be rejected (HCACK = 2) if the Process Module is already in that mode.

An event will be sent when a Process Module changes mode (see collection events table for details).

15.5 Remote-to-Local / Local-to-Remote Command

A Remote command is available to allow the host to switch the control mode, whilst Online-Communicating, from local to remote or vice-versa.

The structure of the command is as follows: -

RCMD	CPNAME	CPVAL FORMAT	CPVAL
"LOCAL"	N/A	N/A	N/A
"REMOTE"	N/A	N/A	N/A

An event will be sent when the control state changes (see collection events table for details).

15.6 Acknowledgement Commands

Remote commands are available to allow the host to acknowledge the following :-

- Acknowledge all current alarms – the alarms will then be cleared (including the lamp tower).
- Acknowledge that operator attention is required – this will clear operator attention is required.

- Acknowledge alarms and operator attention required.

The structure of the command is as follows: -

RCMD	CPNAME	CPVAL FORMAT	CPVAL
"ACKFAULTS"	N/A	N/A	N/A
"ACKOPERATOR"	N/A	N/A	N/A
"ACKALL"	N/A	N/A	N/A

15.7 Lamp Tower Commands

Remote commands are available for giving the host control of the operation of the lamp tower. Each individual lamp and the buzzer can be controlled separately by use of the following message:-

RCMD	CPNAME	CPVAL FORMAT	CPVAL
"LAMPTOWER"	"LAMPID" "LAMPACTION"	A[1] A[1]	Lamp ('1', '2', '3' or '4') or Alarm ('5') '1' = on, '2' = off, '3' - intermittent

Availability of this message for individual lamps is governed by the value of the equipment constants 1000347 – 1000350. See Section 12.6 for further details of these equipment constants.

16 Process Program Management

16.1 Objective

To provide a mechanism where the Host and SPTS fxP equipment can transfer process programs and share the management of them in an orderly manner.

16.2 Description

The SPTS fxP equipment provides a full set of functions for Process Program Management. This allows Cassette/Wafer Recipes (and the dependent Wafer Recipes, Module Recipes and Conditioning Recipes) to be transferred as unformatted process program to and from the Host.

There is an Equipment Constant which defines whether Wafer Recipes or Cassette Recipes are Uploaded/Downloaded. For 200mm tools this EC should be set to Cassette Recipes.

The messages supported are as follows:-

Operation	Unformatted
Host-initiated Download	S7F3/S7F4
Host-initiated Upload	S7F5/S7F6
Host-initiated Delete	S7F17/S7F18
Host-initiated Directory request	S7F19/S7F20
Equipment-initiated Upload	S7F3/S7F4
Equipment-initiated Download	S7F5/S7F6

16.2.1 Individual Recipe Upload/Download

Individual recipes can be uploaded or downloaded instead of complete recipe structures. This is controlled by equipment constant ECID 1000358. The possible values for this, and their meanings, are listed below.

The default value is to disable the use of this new feature and behave as before.

When being used, this feature will affect the functionality of S7F3, S7F5, S7F17, S7F19 to act on the selected type of recipe only, i.e. no sub-recipe will be included in the operations.

Possible values for ECID 1000358:

0 = Disable the use of individual recipe control

1 = PM1 Module Recipe

2 = PM2 Module Recipe

3 = PM3 Module Recipe

4 = PM4 Module Recipe

5 = PM5 Module Recipe

6 = PM6 Module Recipe

7 = Coolstation Recipe

8 = Conditioning Recipe

9 = Wafer Recipe

10 = Cassette Recipe

In addition to this, ECID 1000359 can be used to specify whether process or service type recipes for a module are used.

0 = Process Recipe

1 = Service Recipe

16.2.2 Custom message (S7F65/66) for Reporting Child Recipes

A custom message is supported to allow child recipes of cassette, wafer or conditioning recipes to be requested by the host.

The type of recipe is controlled by the settings of ECIDs 1000358, 1000359 and 1000194.

The format of the messages are as follows:-

S7 F65

< A RecipeName>

Success

S7 F66

L,2

1. <Bo True>

2. L,n

1. L,2

1. <A RecipeType>

2. <A RecipeName>

The RecipeType string will be WaferRecipe, ConditioningRecipe or the name of the module if a module recipe.

Failure

L,2

1. <Bo False>

2. L,n

1. L,2

1. <U4 ErrorCode>

2. <A ErrorText>

16.3 Restrictions

Only unformatted process programs are supported, there is no support for formatted process programs.

Recipes downloaded from the Host will automatically overwrite recipes held locally on the Equipment.

Host-initiated delete will only delete the relevant Wafer or Cassette Recipe and will not delete the various sub-recipes.

17 Terminal Services

17.1 Objective

Terminal Services allows simple text communication between the Host and Equipment Operator.

17.2 Description

Terminal Services allows text strings to be sent between the Host and Equipment. There is an indicator on the CTC to allow the operator to see that a new Terminal message has arrived and has not been recognized.

Terminal Services are implemented as specified in the GEM standard :-

- Any new Terminal message sent by the Host overwrites an 'unrecognised' message at the CTC.
- The SPTS fxP equipment allows a message of up to 160 characters to be sent or received.
- The SPTS fxP equipment provides an easy mechanism for reading a message sent by the Host.
- The SPTS fxP equipment provides an indicator to notify an operator when an unrecognized message is present
- The SPTS fxP equipment provides an easy mechanism for message recognition.
- The SPTS fxP equipment provides a method for entering an alpha-numeric text message.
- The SPTS fxP equipment interprets a Host message with zero-length TEXT data item as replacing any previous unrecognized message but does not consider it as an unrecognized message. This provides a method of clearing an unrecognized message and turning off the unrecognized indicator.

The messages supported are as follows:-

Operation	
Host-initiated Terminal Message	S10F3/S10F4
Equipment-initiated Terminal Message	S10F1/S10F2

The SPTS fxP equipment provides a collection event when a message is recognized by the operator.

18 Clock

18.1 Objective

To provide an orderly synchronization of Equipment to Host Date and Time.

18.2 Description

The SPTS fxP equipment fully supports the Clock capability including the use of the equipment constant TIMEFORMAT in order to be Year 2000 compliant.

The following features are supported: -

- Host-initiated Date/Time Set (S2F31/S2F32)
- Host-initiated Date/Time Request (S2F17/S2F18)
- Equipment-initiated Date/Time Request (S2F17/S2F18)

When the SPTS fxP equipment receives a new Date/Time from the Host via an S2F31 or S2F18, it modifies the equipment's clock hardware.

19 Appendix A - Message Summary Tables

19.1 Control State Dependency

The equipment's Control State Model determines the availability of most SECS-II message communication. If the host sends an unavailable SECS-II message while the equipment is off-line, then the equipment will respond with a respective Sx, F0 message.

Control State	Description
On-line L, R	On-line local or remote
Any	Any control state
Off-line	Off-line equipment, host or on-line Attempt. It may be accepted while on-line, but has no meaning.
On-line R	On-line remote

19.2 Host Initiated

This section lists primary, host initiated SECS-II messages supported by the equipment.

Primary	Reply	Notes	Control State	Primary Description
S1, F1	S2, F2		On-line L, R	Are you there request
S1, F3	S1, F4		On-line L, R	Selected equipment status request
S1, F11	S1, F12		On-line L, R	Status variable name-list request
S1, F13	S1, F14		Any	Establish communication request
S1, F15	S1, F16		On-line L, R	Request off-line
S1, F17	S1, F18		Off-line	Request on-line
S2, F13	S2, F14		On-line L, R	Equipment constant request
S2, F15	S2, F16		On-line L, R	New equipment constant send
S2, F17	S2, F18		On-line L, R	Date and time request
S2, F23	S2, F24		On-line L, R	Trace initialise send
S2, F25	S2, F26	A	On-line L, R	Loop-back diagnostic request
S2, F29	S2, F30		On-line L, R	Equipment constant name-list request
S2, F31	S2, F32		On-line L, R	Date and time send
S2, F33	S2, F34		On-line L, R	Define report
S2, F35	S2, F36		On-line L, R	Link event report
S2, F37	S2, F38		On-line L, R	Enable/disable event report
S2, F39	S2, F40		On-line L, R	Multi-block inquire
S2, F41	S2, F42		On-line R	Host command send
S2, F43	S2, F44		On-line L, R	Reset spooling request
S2, F45	S2, F46		On-line L, R	Define variable limit attributes
S2, F47	S2, F48		On-line L, R	Variable limit attribute request
S5, F3	S5, F4		On-line L, R	Enable/disable alarm send
S5, F5	S5, F6		On-line L, R	List alarms request
S5, F7	S5, F8		On-line L, R	List enabled alarm request
S6, F15	S6, F16		On-line L, R	Event report request
S6, F19	S6, F20		On-line L, R	Individual report request
S6, F23	S6, F24		On-line L, R	Request spooled data
S7, F1	S7, F2		On-line L, R	Process program load inquire
S7, F3	S7, F4		On-line L, R	Process program send
S7, F5	S7, F6		On-line L, R	Process program request
S7, F17	S7, F18		On-line L, R	Delete process program send
S7, F19	S7, F20		On-line L, R	Current EPPD request
S9, F1	none			Unrecognised device ID
S9, F3	none			Unrecognised stream type
S9, F5	none			Unrecognised function type
S9, F7	none			Illegal data
S9, F9	none			Transaction timer timeout
S9, F11	none			Data too long
S9, F13	none			Conversation timeout
S10, F3	S10, F4		On-line L, R	Terminal display, single
S10, F5	S10, F6		On-line L, R	Terminal display, multi-block

19.3 Equipment Initiated

This section lists primary, equipment initiated SECS-II messages supported by the equipment.

Primary	Reply	Notes	Primary Description
Sx, F0	none		Host primary reject since control state is off-line
S1, F1	S2, F2		Are you there request
S1, F13	S1, F14		Establish communication request
S2, F17	S2, F18		Date and time request
S5, F1	S5, F2	W5	Alarm report send
S6, F1	S6, F2	W6	Trace data send
S6, F3	S6, F5	W6	Discrete variable data send
S6, F5	S6, F6		Multi-block data send inquire
S6, F11	S6, F12	W6	Event report send
S7, F1	S7, F2		Process program load inquire
S7, F3	S7, F4		Process program send
S7, F5	S7, F6		Process program request
S9, F1	none		Unrecognized device ID
S9, F3	none		Unrecognized stream type
S9, F5	none		Unrecognized function type
S9, F7	none		Illegal data
S9, F9	none		Transaction timer timeout
S9, F11	none		Data too long
S9, F13	none		Conversation timeout
S10, F1	S10, F2	W10	Terminal request
S10, F7	none		Multi-block not allowed
S14, F21	S14, F22		Generic Service Completion Information

19.4 Notes

These notes describe special conditions about the message.

Key	Description
A	A supported SECS-II message that does not conflict with the GEM standard. The "A" abbreviates <u>A</u> ddition to GEM.
W5	Equipment constant WBitS5 determines whether or not the equipment expects the host to reply.
W6	Equipment constant WBitS6 determines whether or not the equipment expects the host to reply.
W10	Equipment constant WBitS10 determines whether or not the equipment expects the host to reply.

19.5 Data Item Definition Table

Variable	Description	Values
ABS	Any binary string	
ACKA	Indicates success of a request	TRUE is success else FALSE
ACKC6	Acknowledge code	0 = Accepted > 0 = Error, not accepted 1-63 Reserved
ACKC7	Acknowledge code	0 = Accepted 1 = Permission not granted 2 = Length error 3 = Matrix overflow 4 = PPID not found 5 = Mode unsupported 6-63 Reserved
ACKC10	Acknowledge code	0 = Accepted for display 1 = Message will not be displayed 2 = Terminal not available 3-63 Reserved
ALCD	Alarm code byte	bit 8 = 1 Alarm set bit 8 = 0 Alarm clear bit 7-1 Alarm category, not used
ALED	Alarm enable/disable code	bit 8 = 1 Enable alarm

		bit 8 = 0 Disable alarm
ALID	Alarm identification	
ALTX	Alarm text limited to 40 characters	
ATTRDATA	Contains a specific attribute value for a specific object	
ATTRID	Identifier for an attribute	
ATTRRELN	The relationship that a specified qualifying value has to the value of an attribute of an object instance (the value of interest)	
CAACK	Carrier Action Acknowledge Code	0 = Acknowledge 1 = Invalid Command 2 = Cannot perform now 3 = Invalid data or argument 4 = Acknowledge, request will be performed with completion signalled later by an event 5 = Rejected. Invalid state. 6 = Command performed with errors.
CARRIERACTION	Specifies the action requested for a carrier	
CARRIERID	The identifier of a carrier	
CARRIERSPEC	The object specifier for a carrier. Conforms to OBJSPEC.	
CATTRDATA	The value of a carrier attribute.	
CATTRID	The name of a carrier attribute.	
CEED	Collection event enable/disable code	FALSE = Disable TRUE = Enable
CEID	Collected event ID	
COMMACK	Establish communications acknowledge code	0 = Accepted 1 = Denied 2-63 Reserved
CPACK	Command parameter acknowledge code	1 = Parameter Name (CPNAME does not exist 2 = Illegal value specified for CPVAL 3 = Illegal format specified by CPVAL >3 Other equipment-specific error 4-63 Reserved
CPNAME	Command parameter name	
CPVAL	Command parameter value	
DATAID	Data ID	
DATALLENGTH	Total bytes to be sent	
DRACK	Define report acknowledge code	0 = Accept 1 = Denied, insufficient space 2 = Denied, invalid format 3 = Denied, at least one RPTID already defined 4 = Denied, at least VID does not exist. >4 Other errors 5-63 Reserved
DSPER	Data sample period	hhmmss, 6 bytes
EAC	Equipment acknowledge code	0 = Acknowledge 1 = Denied, At least one constant does not exist. 2 = Denied, busy 3 = Denied, at least one constant out of range. >3 Other equipment-specific error 4-63 Reserved
ECDEF	Equipment constant default value	
ECID	Equipment constant ID	
ECMAX	Equipment constant maximum value	
ECMIN	Equipment constant minimum	

	value	
ECNAME	Equipment constant name	
ECV	Equipment constant value	
EDID	Expected data identification	Possible responses: MEXP EDID EDID S07F03 <PPID> A[16]
ERACK	Enable/disable event report	0 = Accepted 1 = Denied >1 Other errors 2-63 Reserved
ERRORCODE	Code identifying an error.	0 = No Error 1 = Unknown object in Object Specifier 2 = Unknown target object type 3 = Unknown object instance 4 = Unknown attribute name 5 = Read-only attribute – access denied 6 = Unknown object type 7 = Invalid attribute value 8 = Syntax error 9 = Verification error 10 = Validation Error 11 = Object identifier in use 12 = Parameters improperly specified 13 = Insufficient parameters specified 14 = Unsupported option requested 15 = Busy 16 = Not available for processing 17 = Command not valid for current state 18 = No material altered 19 = Material partially processed 20 = All material processed 21 = Recipe specification related error 22 = Failed during processing 23 = Failed while not processing 24 = Failed due to lack of material 25 = Job aborted 26 = Job stopped 27 = Job cancelled 28 = Cannot change selected recipe 29 = Unknown event 30 = Duplicate report ID 31 = Unknown data report 32 = Data report not linked 33 = Unknown trace report 34 = Duplicate trace ID 35 = Too many data reports 36 = Sample period out of range 37 = Group size too large 38 = Recovery action currently invalid 39 = Busy with another recovery 40 = No active recovery action 41 = Exception recovery failed 42 = Exception recovery aborted 43 = Invalid table element 44 = Unknown table element 45 = Cannot delete predefined 46 = Invalid token 47 = Invalid parameter
ERRTEXT	Text string describing error noted in corresponding ERRORCODE.	
FCNID	Function identification	
GRANT	Grant code	0 = Permission granted 1 = Busy, try again 2 = No space available 3 = Duplicate DATAID >3 Equipment specific error code 4-63 Reserved

GRANT6	Permission to send	0 = Permission granted 1 = Busy, try again 2 = Not interested >2 Other errors 3-63 Reserved
HCACK	Host command parameter acknowledge code	0 = Acknowledge 1 = Command does not exist 2 = Cannot perform now 3 = At least one parameter is invalid 4 = Acknowledge, command will be performed with completion signalled later 5 = Rejected, already in the desired condition 6 = No such object exists 7-63 Reserved
LENGTH	Length of the service program or process program in bytes	
LIMITACK	Acknowledgment code for variable limit attribute set	1 = LIMITID does not exist 2 = UPPERDB > LIMITMAX 3 = LOWERDB < LIMITMIN 4 = UPPERDB < LOWERDB 5 = Illegal format specified for UPPERDB or LOWERDB 6 = ASCII value cannot be translated to numeric 7 = Duplicate limit definition for this variable >7 Other equipment-specific error 8-63 Reserved
LIMITID	The identifier of a specific limit in the set of limits (as defined by UPPERDB and LOWERDB) for a variable to which the corresponding limit attributes refer	
LIMITMAX	The maximum allowed value for the limit values of a specific variable. The equipment manufacturer should specify this value, which would typically coincide with the maximum value of the variable being monitored. The format must match that of the referenced variable.	
LIMITMIN	The minimum allowed value for the limit values of a specific variable. The equipment manufacturer should specify this value, which would typically coincide with the minimum value of the variable being monitored. The format must match that of the referenced variable.	
LINKID	Used to link a completion message with a request that an operation be performed	
LOWERDB	A variable limit attribute, which defines the lower boundary of the dead-band of a limit. The value applies to a single limit (*LIMITID) for a specified VID. Thus, UPPERDB and LOWERDB as a pair define a limit.	
LRACK	Link report acknowledge code	0 = Accepted 1 = Denied, Insufficient space 2 = Denied, Invalid format 3 = Denied, At least one CEID link

		4 = already defined Denied, At least one CEID does not exist 5 = Denied, At least one RPTID does not exist >5 Other errors 6-63 Reserved
LVACK	Variable limit definition, acknowledge code. Defines the error with limit attributes for the reference VID.	1 = Variable does not exist 2 = Variable has no limits capability 3 = Variable repeated in message 4 = Limit value error as described in LIMITACK 5-63 Reserved
MDLN	Equipment Model Type, 6 bytes max	
MEXP	Message expected	SXX, FYY X = stream Y = function
MF	Material Format	1 = Quantities in wafers 2 = Quantities in cassette 13 = Quantities in carriers 14 = Quantities in substrates
MHEAD	SECS message block header associated with message block in error	
MID	Material Id	
OFLACK	Acknowledge code for OFF-LINE request	0 = OFF-LINE Acknowledge 1-63 Reserved
ONLACK	Acknowledge code for ON-LINE	0 = ON-LINE Accepted 1 = ON-LINE Not Allowed 2 = Equipment Already ON-LINE 3-63 Reserved
OBJACK	Acknowledge code	0 = Successful completion of requested data 1 = Error
OBJCMD	Specifies an action to be performed by an object	0 = Reserved 1 = Attach to requestor 2 = Detach from requestor 3 = Reattach to requestor 4 = Set attributes
OBJID	Identifier for an object	
OBJSPEC	A text string that has an internal format and that is to be used to point to a specific object instance	
OBJTOKEN	Token used for authorisation	
OBJTYPE	Identifier for a group or class of objects.	
OPID	Operation ID. A unique integer generated by the requester of an operation, used where multiple	
PARAMNAME	The name of a parameter in a request	
PARAMVAL	The value of the parameter named in PARAMNAME.	
PORTACTION	The action to be performed on a port.	
PPBODY	Process program body	
PPGNT	Process program grant status	0 = OK 1 = Already have 2 = No space 3 = Invalid PPID 4 = Busy, try later 5 = Will not accept >5 Other error 6-63 Reserved
PPID	Process program ID	

PRCMDNAME	Commands sent to a process job	“START”, “STOP”, “PAUSE”, “RESUME”, “ABORT”, “CANCEL”
PRJOBID	Text string which uniquely identifies a process job	
PRJOBSPACE	The number of process jobs that can be created	
PRMTRLORDER	Defines the order by which material in the process jobs material list will be processed.	1 = ARRIVAL 2 = OPTIMISE 3 = LIST
PRPROCESSSTART	Indicates that the process resource start processing immediately when ready.	
PRRECIPEMETHOD	Indicates the recipe specification type	1 = Recipe only 2 = Recipe with variable tuning
PRSTATE	Enumerated value	
PTN	Material port number	
RCPSPEC	Recipe specifier	
REPGSZ	Reporting group size	
RPTID	Report ID	
RSDA	Request spool data acknowledge	0 = OK 1 = Denied, busy, try later 2 = Denied, spooled data does not exist 3-63 Reserved
RSDC	Request spool data code	0 = Transmit spooled messages 1 = Purge spooled messages 2-63 Reserved
RSPACK	Reset spooling acknowledge	0 = Acknowledge, spooling setup accepted 1 = Spooling setup rejected 2-63 Reserved
SHEAD	Stored header related to the transaction timer	
SLOTID	Used to reference material by slot in a carrier	
SMPLN	Sample number	
SOFTREV	Software revision code 6 bytes maximum	
SPNAME	Service parameter name defined in specific standard	
SPVAL	Service parameter value, corresponding to SPNAME.	
STIME	Sample time	same as TME
STRID	Stream identification	
SV	Status variable value	
SVCACK	Service acceptance acknowledge code	0 = Acknowledge, service has been performed 1 = Service does not exist 2 = Cannot perform now 3 = At least one parameter is invalid 4 = Acknowledge, service will be performed with completion notified later with parameters for response
SVCNAME	Service name provided on specified object asking by the host	
SVID	Status variable ID	
SVNAME	Status variable name	
TEXT	A single line of characters.	
TIAACK	Equipment acknowledgment code	0 = Everything correct 1 = Too many SVID 2 = No more traces allowed 3 = Invalid period >3 Equipment-specific error 4-63 Reserved
TIACK	Time acknowledge code	0 = OK 1 = Error, not done 2-63 Reserved

TID	Terminal number	
TIME	Time of day	If 12 bytes the format is YYMMDDhhmmss YY = year 00 to 99 MM = month 01 to 12 DD = day 01 to 31 hh = hour 00 to 23 mm = minute 00 to 59 ss = second 00 to 59 If 16 bytes the format is YYYYMMDDhhmmsscc YYYY = year 0000 to 9999 MM = month 01 to 12 DD = day 01 to 31 hh = hour 00 to 23 mm = minute 00 to 59 ss = second 00 to 59 cc = centisecond 00 to 99
TOTSMP	Total samples to be made	
TRID	Trace request ID	
UNITS	Units Identifier	
UPPERDB	A variable limit attribute that defines the upper boundary of the dead-band of a limit. The value applies to a single limit (LIMITID) for a specified VID. Thus, UPPERDB and LOWERDB as a pair define a limit.	
V	Variable data	
VID	Variable ID	
VLAACK	Variable Limit Attribute Acknowledge Code	0 = Acknowledge, command will be performed. 1 = Limit attribute definition error 2 = Cannot perform now >2 Equipment-specific error 3-63 Reserved

n . A, Bi, Bo, F4, F8, I1, I2, I4, U1, U2, U4

20 Appendix B - Streams and Functions

The sections below describe the subset of SECS-II message streams and their included functions that are supported by the interface. It can be seen that the odd numbered functions within each stream are requests and the subsequent, even numbered functions are the corresponding response.

Symbol	Description
H↔E	Host to equipment or equipment to host
H←E	Equipment to host only
H→E	Host to equipment only

20.1 Stream 1: Equipment Status

20.1.1 S1, F1 Are You There Request (H↔E)

Establishes that the SECS-II link is operational and that the host and machine are on-line. The machine responds with its model number and software revision. The host responds with a null list. The machine periodically sends this message as a ``heartbeat'' for the SECS-II communications link.

Header only

20.1.2 S1, F2 On-line Data (H←E)

L, 2

1. <A MDLN>
2. <A SOFTREV>

20.1.3 S1, F2 On-line Data (H→E)

L, 0

20.1.4 S1, F3 Selected Equipment Status Request (H→E)

A request from the host system to the machine, to identify the value of certain status variables in a predefined order.

L, n

1. <U4 SVID>
- ...
- n. <U4 SVID>

A zero-length list or item means report all SVID.

20.1.5 S1, F4 Selected Equipment Status Data (H←E)

L, n

1. <* SV>
- n. <* SV>

n. A, Bi, Bo, F4, F8, L, I1, I2, I4, U1, U2, U4

A zero-length U1 for SV means that the SVID does not exist.

20.1.6 S1, F11 Status Variable Namelist Request (H→E)

A request from the host to the machine to report the name and units of certain status variables, in the order requested.

L, n

1. <U4 SVID>
- ...
- n. <U4 SVID>

A zero-length means report all SVID.

20.1.7 S1, F12 Status Variable Namelist Reply (H←E)

L, n

1. L, 3
 1. <U4 SVID>
 2. <A SVNAME>
 3. <A UNITS>
- ...
- n. L, 3

1. <U4 *SVID*>
2. <A *SVNAME*>
3. <A *UNITS*>

20.1.8 S1, F13 Establish Communications Request (H→E)

Initiate an attempt to establish a SECS-II communications link at a logical level on power-up or after a break in the link. It is the first message sent after either of the above conditions.

L, 0

20.1.9 S1, F14 Establish Communications Request Acknowledge (H→E)

L, 2

1. <Bi *COMMACK*>
2. L, 0

20.1.10 S1, F13 Establish Communications Request (H←E)

Initiate an attempt to establish a SECS-II communications link at a logical level on power-up or after a break in the link. It is the first message sent after either of the above conditions. If no response is received from the host, the machine will periodically send a S1F13 message until a S1F14 with the correct COMMACK is received.

L, 2

1. <A *MDLN*>
2. <A *SOFTREV*>

20.1.11 S1, F14 Establish Communications Request Acknowledge (H←E)

L, 2

1. <Bi *COMMACK*>
2. L, 2
 1. <A *MDLN*>
 2. <A *SOFTREV*>

20.1.12 S1, F15 Off-line Control State Request (H→E)

A request from the host that the machine change control state to off-line.

Header only

20.1.13 S1, F16 Off-line Control State Acknowledge (H←E)

<Bi *OFLACK*>

20.1.14 S1, F17 On-line Control State Request (H→E)

A request from the host that the machine enters the On-line State in its control model.

Header only

20.1.15 S1, F18 On-line Control State Acknowledge (H←E)

<Bi *ONLACK*>

20.2 Stream 2: Equipment Control and Diagnostics**20.2.1 S2, F13 Equipment Constant Request (H→E)**

A request from the host to report the value of certain equipment constants in a predefined order.

L, n

1. <U4 *ECID*>
- ...
- n. <U4 *ECID*>

A zero-length list or item means report all ECID.

20.2.2 S2, F14 Equipment Constant Data (H←E)

L, n

1. <* *ECV*>
- ...
- n. <* *ECV*>

n. A, Bi, Bo, F4, F8, I1, I2, I4, U1, U2, U4

A zero-length U1 ECV means that ECID does not exist.

20.2.3 S2, F15 New Equipment Constant Send (H→E)

Host updates the values of specified EC. If the host returns a non-zero EAC the machine cannot alter the value of any ECID specified in the S2F15 body.

```
L, n
  1. L, 2
    <U4 ECID>
    <* ECV>
  ...
  n. L, 2
    <U4 ECID>
    <* ECV>
```

n. A, Bi, Bo, F4, F8, I1, I2, I4, U1, U2, U4

20.2.4 S2, F16 New Equipment Constant Acknowledge (H←E)

```
<Bi EAC>
```

20.2.5 S2, F17 Date and Time Request (H↔E)

The host and machine synchronize time-stamps.

Header Only

20.2.6 S2, F18 Date and Time Data (H↔E)

```
<A TIME>
```

A zero-length item means no time exists.

20.2.7 S2, F23 Trace Initialize Send (H→E)

The host requests a time driven trace of specified status variables. If TOTSMF is zero, the machine will cancel an existing trace with the given TRID.

```
L, 5
  1. <U4 TRID>
  2. <A DSEPER>
  3. <U4 TOTSMF>
  4. <U4 REPGSZ>
  5. L, n
    1. <U4 SVID>
    ...
    n. <U4 SVID>
```

20.2.8 S2, F24 Trace Initialize Acknowledge (H←E)

```
<Bi TIAACK>
```

20.2.9 S2, F25 Loop-back Diagnostic Request (H↔E)

The host sends an arbitrary binary string to test the operation of the logical link.

```
<* ABS>
n. Any structure is valid.
```

20.2.10 S2, F26 Loop-back Diagnostic Data (H↔E)

```
<* ABS>
n. The same structure is returned.
```

20.2.11 S2, F29 Equipment Constant Namelist Request (H→E)

A request from the host to the machine to identify certain equipment constants. A null list (n = 0) is interpreted as send information on all ECID.

```
L, n
  1. <U4 ECID>
  ...
  n. <U4 ECID>
```

A zero-length list means send all information for all ECID.

20.2.12 S2, F30 Equipment Constant Namelist (H←E)

L, n

1. L, 6
 1. <U4 ECID>
 2. <A ECNAME>
 3. <* ECMIN>
 3. <* ECMAX>
 3. <* ECDEF>
 3. <A UNITS>

...

- n. L, 6
 1. <U4 ECID>
 2. <A ECNAME>
 3. <* ECMIN>
 3. <* ECMAX>
 3. <* ECDEF>
 3. <A UNITS>

n. A, Bi, Bo, F4, F8, L, I1, I2, I4, U1, U2, U4

20.2.13 S2, F31 Date and Time Set Request (H→E)

The host instructs the equipment to set its time base to the specified value.

<A TIME>

20.2.14 S2, F32 Date and Time Set Acknowledge (H←E)

<Bi TIACK>

20.2.15 S2, F33 Define Report (H→E)

A request from the host for the machine to define a group of event reports. One or more Report IDs is specified, each containing a list of variable IDs to be included in the report.

L, 2

1. <U4 DATAID>
2. L, a
 1. L, 2
 1. <U4 RPTID>
 2. L, b
 1. <U4 VID>
 - ...
 - b. <U4 VID>
- ...
- a. L, 2
 1. <U4 RPTID>
 2. L, c
 1. <U4 VID>
 - ...
 - c. <U4 VID>

A zero-length list following DATAID deletes all report definitions and associated links. See S2, F35.

A zero-length list following RPTID deletes report type RPTID. All CEID links to this RPTID are also deleted.

20.2.16 S2, F34 Define Report Acknowledge (H←E)

<Bi DRACK>

20.2.17 S2, F35 Link Event Report (H→E)

The host links Report IDs (RPTID) to Collection event IDs (CEID). These linked event reports default to "disabled" upon linking. That is, the occurrence of an event would not cause the report to be sent until enabled. See S2, F37 for enabling events.

L, 2

1. <U4 DATAID>
2. L, a
 1. L, 2
 1. <U4 CEID>

```

2. L, b
   1. <RPTID>
   ...
   b. <RPTID>
...
a. L, 2
   1. <CEID>
   2. L, c
       1. <RPTID>
       ...
       c. <RPTID>

```

A zero-length list following CEID deletes all report links to that event.

20.2.18 S2, F36 Link Event Report Acknowledge (H←E)

<Bi LRACK>

20.2.19 S2, F37 Enable/Disable Event Report (H→E)

Host requests to enable or disable reporting for a list of Collection events (CEID).

```

L, 2
  1. <Bo CEED>
  2. L, n
      1. <U4 CEID>
      ...
      n. <U4 CEID>

```

A zero-length list means all CEID.

20.2.20 S2, F38 Enable/Disable Event Report Acknowledge (H←E)

<Bi ERACK>

20.2.21 S2, F39 Multi-Block Inquire (H→E)

The host initiates this transaction preceding a multi-block S2, F33 or S2, F35.

```

L, 2
  1. <DATAID>
  2. <DATALENGTH>

```

20.2.22 S2, F40 Multi-Block Grant (H←E)

<Bi GRANT>

20.2.23 S2, F41 Host Command Send (H→E)

The host sends a command to the machine for execution with the relevant parameters.

```

L, 2
  1. <A RCMD>
  2. L, n
      1. L, 2
          1. <A CPNAME>
          2. <A CPVAL>
      ...
      n. L, 2
          1. <A CPNAME>
          2. <A CPVAL>

```

20.2.24 S2, F42 Host Command Acknowledge (H←E)

```

L, 2
  1. <HACK>
  2. L, n
      1. L, 2
          1. <A CPNAME>
          2. <Bi CPACK>
      ...
      n. L, 2
          1. <Bi CPNAME>
          2. <A CPACK>

```

If there are no invalid parameters, then a list of zero length will be sent for item 2.

20.2.25 S2, F43 Reset Spooling Streams and Functions (H→E)

The host selects specific streams and functions to be spooled whenever spooling is active.

```
L, m
  1. L, 2
    1. <U1 STRID>
    2. L, n
      1. <U1 FCNID>
      ...
      n. <U1 FCNID>
  ...
  m. L, 2
    1. <U1 STRID>
    2. L, n
      1. <U1 FCNID>
      ...
      n. <U1 FCNID>
```

- A zero-length list, m = 0, turns off spooling for all streams and functions.
- A zero-length list, n = 0, turns on spooling for all functions for the associated stream
- Turning off spooling for all functions for a specific stream is achieved by omitting reference to the stream from this message.
- Spooling for Stream 1 is not allowed.
- All other primary messages for a stream are allowed.
- A defined list of functions for a stream in this message will replace any previously selected functions.

20.2.26 S2, F44 Reset Spooling Acknowledge (H←E)

```
L, 2
  1. <Bi RSACK>
  2. L, m
    1. L, 3
      1. <U1 STRID>
      2. <Bi STRACK>
      3. L, n
        1. <U1 FCNID>
        ...
        n. <U1 FCNID>
    ...
    m. L, 3
      1. <U1 STRID>
      2. <Bi STRACK>
      3. L, n
        1. <U1 FCNID>
        ...
        n. <U1 FCNID>
```

If RSACK = 0, then a zero-length list, m = 0, is given. This indicates no streams or functions are in error.

A zero-length list, n = 0, indicates no functions in error for specified streams.

20.2.27 S2, F45 Define Variable Limit Attributes (H→E)

```
L, 2
  1. <U4 DATAID>
  2. L, m
    1. L, 2
      1. <U4 VID>
      2. L, n
        1. L, 2
          1. <Bi LIMITID>
          2. L, p = {0,2}
            1. <* UPPERDB>
            2. <* LOWERDB>
```

```

...
n. L, 2
  1. <Bi LIMITID>
  2. L, p = {0,2}
    1. <* UPPERDB>
    2. <* LOWERDB>
...
m. L, 2
  1. L, 2
    1. <U4 VID>
    2. L, n
      1. L, 2
        1. <Bi LIMITID>
        2. L, p = {0,2}
          1. <* UPPERDB>
          2. <* LOWERDB>
...
n. L, 2
  1. <Bi LIMITID>
  2. L, p = {0,2}
    1. <* UPPERDB>
    2. <* LOWERDB>

```

n. A, Bi, Bo, F4, F8, I1, I2, I4, U1, U2, U4

A zero length list, m=0, sets all limit values for all monitored VID to "undefined".

A zero length list, n=0, sets all limit values for that VID to "undefined".

A zero length list, p=0, sets that limit to "undefined".

20.2.28 S2, F46 Variable Limit Attribute Acknowledge (H←E)

Acknowledge definition of variable limit attributes or report error. If DVLA is not accepted due to one or more invalid parameters (e.g., LIMITACK=3), then a list of invalid parameters is returned containing the variable limit attribute and reason for rejection. If an error condition is detected, the entire message is rejected, i.e., partial changes are not allowed.

```

L, 2
  1. <Bi VLACK>
  2. L, m
    1. L, 3
      1. <U4 VID>
      2. <Bi LVACK>
      3. L, n = {0,2}
        1. <Bi LIMITID>
        2. <Bi LIMITACK>
...
m. L, 3
  1. <U4 VID>
  2. <Bi LVACK>
  3. L, n = {0,2}
    1. <Bi LIMITID>
    2. <Bi LIMITACK>

```

A zero-length list, m = 0, indicates no invalid variable limit attributes.

A zero-length list, n = 0, indicates no invalid limit values for that VID.

20.2.29 S2, F47 Variable Limit Attribute Request (H→E)

Host requests the current variable limit attribute definitions. This message allows the host to query the equipment for the current limit-attribute definitions.

```

L, m
  1. <U4 VID>
...
m. <U4 VID>

```

A zero-length list, m = 0, requests a list of all VID values that can have variable limit attributes.

20.2.30 S2, F48 Variable Limit Attribute Send (H←E)

```

L, m
  1. L, 2
    1. <U4 VID>
    2. L, p = {0,4}
      1. <A UNITS>
      2. <* LIMITMIN>
      3. <* LIMITMAX>
      4. L, n
        1. L, 3
          1. <Bi LIMITID>
          2. <* UPPERDB>
          3. <* LOWERDB>
        ...
        n. L, 3
          1. <Bi LIMITID>
          2. <* UPPERDB>
          3. <* LOWERDB>
      ...
    m. L, 2
      1. <U4 VID>
      2. L, p = {0,4}
        1. <A UNITS>
        2. <* LIMITMIN>
        3. <* LIMITMAX>
        4. L, n
          1. L, 3
            1. <Bi LIMITID>
            2. <* UPPERDB>
            3. <* LOWERDB>
          ...
          n. L, 3
            1. <Bi LIMITID>
            2. <* UPPERDB>
            3. <* LOWERDB>

```

n. A, Bi, Bo, F4, F8, I1, I2, I4, U1, U2, U4

A zero-length list, p = 0, indicates that limits are not supported for the VID.

A zero-length list, n = 0, means no limits are currently defined for the specified variable.

20.3 Stream 5: Exception Reporting**20.3.1 S5, F1 Alarm Report Send (H←E)**

This message reports a change in a defined alarm. Thus, both setting and clearing an alarm will have distinct alarms.

```

L, 3
  1. <Bi ALCD>
  2. <U4 ALID>
  3. <A ALTX>

```

20.3.2 S5, F2 Alarm Report Acknowledge (H→E)

```
<Bi ACKC5>
```

20.3.3 S5, F3 Enable/Disable Alarm Send (H→E)

This message enables or disables an alarm from being reported to the host. Some alarms (safety related) are not controllable in this way.

```

L, 2
  1. <Bi ALED>

```

2. <U4 ALID>

A zero-length item for ALID means all alarms.

20.3.4 S5, F4 Enable/Disable Alarm Acknowledge (H←E)

<Bi ACKC5>

20.3.5 S5, F5 List Alarms Request (H→E)

The host requests the machine to send information on currently defined alarms.

L, n

1. <U4 ALID>

...

n. <U4 ALID>

A zero-length item means send all possible alarms regardless of the state of ALED.

20.3.6 S5, F6 List Alarms Data (H→E)

L, m

1. L, 3

1. <Bi ALCD>

2. <U4 ALID>

3. <A ALTX>

...

m. L, 3

1. <Bi ALCD>

2. <U4 ALID>

3. <A ALTX>

If m = 0, no response can be made. A zero-length item returned for ALCD or ALTX means that value does not exist.

20.4 Stream 6: Data Collection**20.4.1 S6, F1 Trace Data Send (H←E)**

Trace Samples configured with S2, F23 messages are sent to the host in these messages.

L, 4

1. <U4 TRID>

2. <U4 SMPLN>

3. <A STIME>

4. L, n

1. <* SV>

...

n. <* SV>

n. A, Bi, Bo, F4, F8, L, I1, I2, I4, U1, U2, U4

A zero-length STIME means no value is given and that the time is to be derived from SMPLN along with knowledge of the request.

20.4.2 S6, F2 Trace Data Acknowledge (H→E)

<Bi ACKC6>

20.4.3 S6, F3 Discrete Variable Data Send (H←E)

The machine sends a defined, event linked and enabled group of reports to the host on a linked event. This is a message that possibly requires a preceding S6, F5/F6 multi-block enquire/grant transaction.

L, 3

1. <U4 DATAID>

2. <U4 CEID>

3. L, a

1. L, 2

1. <U4 DSID>

2. L, b

1. L, 2

1. <A DVNAME>

2. <* DVVAL>

```

...
1. L, 2
   1. <A DVNAME>
   2. <* DVVAL>
...
a. L, 2
   1. <U4 DSID>
     1. L, 2
       1. <A DVNAME>
       2. <* DVVAL>
...
1. L, 2
   1. <A DVNAME>
   2. <* DVVAL>
n. A, Bi, Bo, F4, F8, L, I1, I2, I4, U1, U2, U4

```

If there are no reports linked to the event a "null" report is assumed. A zero-length list for # of reports means there are no reports linked to the given CEID.

20.4.4 S6, F12 Discrete Variable Data Acknowledge (H→E)

<Bi ACKC6>

20.4.5 S6, F5 Multi-Block Data Send Inquire (H←E)

The machine initiates this transaction preceding a multi-block S6 report.

```

L, 2
  1. <U4 DATAID>
  2. <U4 DATALENGTH>

```

20.4.6 S6, F6 Multi-Block Grant (H→E)

<Bi GRANT6>

20.4.7 S6, F11 Event Report Send (H←E)

The machine sends a defined, event linked and enabled group of reports to the host on a linked event. This is a message that possibly requires a preceding S6, F5/F6 multi-block enquire/grant transaction.

```

L, 3
  1. <U4 DATAID>
  2. <U4 CEID>
  3. L, a
     1. L, 2
        1. <U4 RPTID>
        2. L, b
           1. <*V>
           ...
           b. <*V>
     ...
     a. L, 2
        1. <U4 RPTID>
        2. L, c
           1. <*V>
           ...
           c. <*V>

```

o. A, Bi, Bo, F4, F8, L, I1, I2, I4, U1, U2, U4

If there are no reports linked to the event a "null" report is assumed. A zero-length list for # of reports means there are no reports linked to the given CEID.

20.4.8 S6, F12 Event Report Acknowledge (H→E)

<Bi ACKC6>

20.4.9 S6, F15 Event Report Request (H→E)

The machine sends a report according to a request from the host specifying a CEID.

<U4 CEID>

20.4.10 S6, F16 Event Report Data (H←E)

Equipment sends reports linked to given CEID to host.

```

L, 3
  1. <U4 DATAID>
  2. <U4 CEID>
  3. L, a
      1. L, 2
          1. <U4 RPTID>
          2. L, b
              1. <* V>
              ...
              b. <* V>
          ...
      a. L, 2
          1. <U4 RPTID>
          2. L, c
              1. <* V>
              ...
              c. <* V>
n. A, Bi, Bo, F4, F8, L, I1, I2, I4, U1, U2, U4

```

A zero-length item means there are no reports linked to the given CEID.

20.4.11 S6, F19 Individual Report Request (H→E)

The host requests a defined report and in reply, the machine sends the variable data defined for that RPTID. A null variable list means that RPTID is undefined.

<U4 RTPID>

20.4.12 S6, F20 Individual Report Data (H←E)

Equipment sends variable data defined for the given RPTID to the host.

```

L, n
  1. <* V>
  ...
  n. <* V>
n. A, Bi, Bo, F4, F8, L, I1, I2, I4, U1, U2, U4

```

A zero-length list means RPTID is not defined.

20.4.13 S6, F23 Request Spooled Data (H→E)

Host requests transmission or deletion of messages currently spooled by the equipment.

<U1 RSDC>

20.4.14 S6, F24 Request Spooled Data Acknowledgement Send (H←E)

<Bi RSDA>

20.5 Stream 7: Process Program Management**20.5.1 S7, F1 Process Program Load Inquire (H↔E)**

This message is used to initiate the transfer of a process program.

```

L, 2
  1. <A PPID>
  2. <U4 LENGTH>

```

20.5.2 S7, F2 Process Program Load Grant (H↔E)

<Bi PPGNT>

20.5.3 S7, F3 Process Program Send (H↔E)

The purpose of this message is to send the process program.

L, 2

1. <A PPID>
2. <A PPBODY>

20.5.4 S7, F4 Process Program Acknowledge (H↔E)

<Bi ACKC7>

20.5.5 S7, F5 Process Program Request (H↔E)

This message is used to request the transfer of a process program.

<A PPID>

20.5.6 S7, F6 Process Program Data (H↔E)

This message is used to request the transfer of a process program.

L, 2

1. <A PPID>
2. <A PPBODY>

A zero-length list means request denied.

20.5.7 S7, F17 Delete Process Program Send (H→E)

This message is used by the host to request the deletion of a process program.

L, n

1. <A PPID>
- ...
- n. <A PPID>

20.5.8 S7, F18 Delete Process Program Acknowledge (H←E)

<Bi ACKC7>

20.5.9 S7, F19 Current EPPD Request (H→E)

This message is used by the host to request the name of the process program directory (EPPD) in use.

Header only

20.5.10 S7, F20 Current EPPD Data (H←E)

L, n

1. <PPID>
- ...
- n. <PPID>

20.6 Stream 9: System Errors

20.6.1 S9, F1 Unrecognized Device ID (H←E)

Device ID specified in block header is not defined in the machine.

<Bi MHEAD>

20.6.2 S9, F3 Unrecognized Stream Type (H←E)

Machine does not recognize the stream type in the message block header.

<Bi MHEAD>

20.6.3 S9, F5 Unrecognized Function Type (H←E)

Machine does not recognize the function type in the message block header.

<Bi MHEAD>

20.6.4 S9, F7 Illegal Data (H←E)

This error signifies that the stream and function were correctly interpreted but the associated data was not.

<Bi MHEAD>

20.6.5 S9, F9 Transaction Timer Timeout (H←E)

This error specifies that a transaction / receive timer has timed out and the transaction aborted. The host system should respond to this message in a suitable manner to keep the system operational.

<Bi SHEAD>

20.6.6 S9, F11 Data Too Long (H←E)

The machine has been sent more data than it can handle.

<Bi MHEAD>

20.6.7 S9, F13 Conversation Timeout (H←E)

Machine informs host that data was expected, but none was received within time period given.

L, 2

1. <A MEXP>
2. <A EDID>

20.7 Stream 10: Terminal Services**20.7.1 S10, F1 Terminal Request (H←E)**

A terminal text message to the host.

L, 2

1. <Bi TID>
2. <A TEXT>

20.7.2 S10, F2 Terminal Request Acknowledge (H→E)

<Bi ACKC10>

20.7.3 S10, F3 Terminal Display (Single) (H→E)

The host requests a text message be displayed on the machine.

L, 2

1. <Bi TID>
2. <A TEXT>

20.7.4 S10, F4 Terminal Display (Single) Acknowledge (H←E)

<Bi ACKC10>

20.7.5 S10, F5 Terminal Display, Multi-Block (H→E)

The host requests a multi-block text message be displayed on the machine.

L, 2

1. <Bi TID>
2. L, n
 1. <A TEXT>
 - ...
 - n. <A TEXT>

20.7.6 S10, F6 Terminal Display, Multi-Block Acknowledge (H←E)

<Bi ACKC10>

20.7.7 S10, F7 Multi-Block Not Allowed (H←E)

21 Appendix C - General Equipment Specific Equipment Constants

NB: The equipment constants in this section are not intended to be modified by the host.

ID	Name	Values	Format	Units
1000001 - 1000017	Machine_Config_STATIONS_Station_x_Type (where x is station number 0 to 16)	See Section 24.1	I4	None
1000019	Machine_Config_MISC_Machine_Name		A	None
1000020	Machine_Config_MISC_Run_Machine_at_Atmosphere	1 = ATM, 0 = Vac	Bo	None
1000021	Machine_Config_MISC_Machine_Pumping_Configuration		I4	None
1000022	Machine_Config_MISC_Lot_ID_Entry	0 = no LotId Entry 1 = Local Lotid Entry 2 = Remote Lotid Entry	I4	None
1000023	Machine_Config_DATALOGGING_Datalogging_Enabled	0 = Disabled 1 = Enabled	Bo	None
1000024	Machine_Config_LAMP_TOWER_Lamp_Tower_Fitted	0 = Not fitted 1 = Fitted	Bo	None
1000025	Machine_Config_MISC_Waypoint_Interface_Fitted	0 = Not fitted 1 = Fitted	Bo	None
1000026	Machine_Config_SECS_II_GW_SECS_II_SECS_II_Enabled	0 = Not fitted 1 = Fitted	Bo	None
1000027	Machine_Config_KEYBOARD_Machine_Keyboard_Mapping		I4	None
1000028-1000044	Machine_Config_KEYBOARD_Station_x_Keyboard_Mapping		I4	None
1000045	Machine_Config_PARALLEL_GROUPS_GROUP_1_Parallel_Group_1_Name		A	None
1000046-1000051	Machine_Config_PARALLEL_GROUPS_GROUP_1_xxx_Module_in_Group_1 (where xxx is 1 st to 6 th)		A	None
1000052	Machine_Config_PARALLEL_GROUPS_GROUP_2_Parallel_Group_2_Name		A	None
1000053-1000058	Machine_Config_PARALLEL_GROUPS_GROUP_2_xxx_Module_in_Group_2 (where xxx is 1 st to 6 th)		A	None
1000059	Machine_Config_PARALLEL_GROUPS_GROUP_3_Parallel_Group_3_Name		A	None
1000060-1000065	Machine_Config_PARALLEL_GROUPS_GROUP_3_xxx_Module_in_Group_3 (where xxx is 1 st to 6 th)		A	None
1000066	Machine_Config_PARALLEL_GROUPS_GROUP_4_Parallel_Group_4_Name		A	None
1000067-1000072	Machine_Config_PARALLEL_GROUPS_GROUP_4_xxx_Module_in_Group_4 (where xxx is 1 st to 6 th)		A	None
1000073	Machine_Config_PARALLEL_GROUPS_GROUP_5_Parallel_Group_5_Name		A	None
1000074-1000079	Machine_Config_PARALLEL_GROUPS_GROUP_5_xxx_Module_in_Group_5 (where xxx is 1 st to 6 th)		A	None
1000080	Machine_Config_SCHEDULER_EVENT_DRIVEN_Immediate_Use_of_Module_Recipe_on_Save	0 = Don't use 1 = use	Bo	None
1000082	Machine_Config_MISC_Controllable_Shared_Module_Roughing_Pump	0 = Not configured 1 = Configured	Bo	None
1000083	Machine_Config_SCHEDULER_Always_Cool_Wafers	0 = Not configured 1 = Configured	Bo	None
1000084	Machine_Config_STATIONS_Station_17_Type	See Section 24.1	I4	None
1000085	Machine_Config_STATIONS_Station_18_Type	See Section 24.1	I4	None
1000086	Machine_Config_STATIONS_Station_19_Type	See Section 24.1	I4	None
1000087	Machine_Config_KEYBOARD_Station_17_Keyboard_Mapping		I4	None
1000090	Machine_Config_SECS_II_GW_SECS_II_SECS_II_Terminal_Services	0 = Not configured 1 = Configured	Bo	None
1000091	Machine_Config_SECS_II_GW_SECS_II_SECS_II_Recipe_Management	0 = Not configured 1 = Configured	Bo	None

ID	Name	Values	Format	Units
1000092	Machine_Config_SCHEDULER_EVENT_DRIVEN_Stricter_Revisit_Path_Checking_Enabled	0 = Not configured 1 = Configured	Bo	None
1000093	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Unacknowledged_Hold_or_Abort_Alarm		I4	None
1000094	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Unacknowledged_Warning_Alarm		I4	None
1000095	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_One_or_more_Active_Cassette_Recipes		I4	None
1000096	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Unacknowledged_Operator_Attention_Required		I4	None
1000097	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_One_or_more_Inactive_Cassette_Recipes		I4	None
1000098	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_DC_Target_On		I4	None
1000099	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_RF_supply_On		I4	None
1000100	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_No_Active_Cassette_Recipes		I4	None
1000101	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_System_in_Manual		I4	None
1000102	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Unacknowledged_Attention_Alarm		I4	None
1000109	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Unacknowledged_Hold_or_Abort_Alarm_in_Automatic		I4	None
1000110	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Acknowledged_Hold_or_Abort_Alarm_in_Automatic		I4	None
1000111	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Scheduler_Error_Stopping/Stopped		I4	None
1000135	Machine_Config_SECS_II_CIMETRIX_SECS_II_SECS_II_Enabled	0 = Not configured 1 = Configured	Bo	None
1000136	Machine_Config_SECS_II_CIMETRIX_SECS_II_SECS_II_Terminal_Services	0 = Not configured 1 = Configured	Bo	None
1000137	Machine_Config_SECS_II_CIMETRIX_SECS_II_SECS_II_Recipe_Management	0 = Not configured 1 = Configured	Bo	None
1000138	Machine_Config_SECS_II_CIMETRIX_SECS_II_E87	0 = Not configured 1 = Configured	Bo	None
1000139	Machine_Config_SECS_II_CIMETRIX_SECS_II_E90	0 = Not configured 1 = Configured	Bo	None
1000140	Machine_Config_SECS_II_CIMETRIX_SECS_II_E40/E94	0 = Not configured 1 = Configured	Bo	None
1000144	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_Max_Scara_Hold_Time	0 - 3600	I4	Secs
1000145	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_Max_Pre-Vent_Hold_Time	0 - 3600	I4	Secs
1000146	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_Max_Post-Vent_Hold_Time	0 - 3600	I4	Secs
1000147	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_Max_Pre-Pump_Hold_Time	0 - 3600	I4	Secs
1000148	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_Max_Post-Pump_Hold_Time	0 - 3600	I4	Secs
1000149	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_Load_Lock_Vent_Time	0 - 3600	F4	Secs
1000150	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_Load_Lock_Pump_Time	0 - 3600	F4	Secs
1000151	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_VCE/LPM_Load_Time	0 - 3600	F4	Secs
1000152	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_Align_Time	0 - 3600	F4	Secs
1000153	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_VCE/LPM_Unload_Time	0 - 3600	F4	Secs
1000154	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_SCARA_LPM_Pick_Time	0 - 3600	F4	Secs
1000155	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_SCARA_Load_Lock_Place_Time	0 - 3600	F4	Secs

ID	Name	Values	Format	Units
1000156	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_SCAR_A_Load_Lock_Pick_Time	0 - 3600	F4	Secs
1000157	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_SCAR_A_LPM_Place_Time	0 - 3600	F4	Secs
1000158	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_Vacuuum_Arm_Load_Lock_Pick_Time	0 - 3600	F4	Secs
1000159	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_Vacuuum_Arm_PM_Place_Time	0 - 3600	F4	Secs
1000160	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_Vacuuum_Arm_PM_Pick_Time	0 - 3600	F4	Secs
1000161	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_Vacuuum_Arm_Load_Lock_Place_Time	0 - 3600	F4	Secs
1000162	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_PM_READY_to_IDLE_Time	0 - 3600	F4	Secs
1000163	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_PM_IDLE_to_READY_Time	0 - 3600	F4	Secs
1000164	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_AH_to_IDLE_Time	0 - 3600	F4	Secs
1000165	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_TMC_to_IDLE_TIME	0 - 3600	F4	Secs
1000166	Machine_Config_SCHEDULER_EVENT_DRIVEN_Abort_Modules_on_Recipe_Selection	0 = Not configured 1 = Configured	Bo	
1000167	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM1_HOLD_TIMES_PM1_Max_Vacuum_Arm_Hold_Time	0 - 3600	I4	Secs
1000168	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM2_HOLD_TIMES_PM2_Max_Vacuum_Arm_Hold_Time	0 - 3600	I4	Secs
1000169	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM3_HOLD_TIMES_PM3_Max_Vacuum_Arm_Hold_Time	0 - 3600	I4	Secs
1000170	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM4_HOLD_TIMES_PM4_Max_Vacuum_Arm_Hold_Time	0 - 3600	I4	Secs
1000171	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM5_HOLD_TIMES_PM5_Max_Vacuum_Arm_Hold_Time	0 - 3600	I4	Secs
1000172	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM6_HOLD_TIMES_PM6_Max_Vacuum_Arm_Hold_Time	0 - 3600	I4	Secs
1000173	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM1_HOLD_TIMES_PM1_Max_Pre-Process_Hold_Time	0 - 3600	I4	Secs
1000174	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM2_HOLD_TIMES_PM2_Max_Pre-Process_Hold_Time	0 - 3600	I4	Secs
1000175	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM3_HOLD_TIMES_PM3_Max_Pre-Process_Hold_Time	0 - 3600	I4	Secs
1000176	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM4_HOLD_TIMES_PM4_Max_Pre-Process_Hold_Time	0 - 3600	I4	Secs
1000177	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM5_HOLD_TIMES_PM5_Max_Pre-Process_Hold_Time	0 - 3600	I4	Secs
1000178	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM6_HOLD_TIMES_PM6_Max_Pre-Process_Hold_Time	0 - 3600	I4	Secs
1000179	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM1_HOLD_TIMES_PM1_Max_Post-Process_Hold_Time	0 - 3600	I4	Secs
1000180	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM2_HOLD_TIMES_PM2_Max_Post-Process_Hold_Time	0 - 3600	I4	Secs
1000181	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM3_HOLD_TIMES_PM3_Max_Post-Process_Hold_Time	0 - 3600	I4	Secs
1000182	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM4_HOLD_TIMES_PM4_Max_Post-Process_Hold_Time	0 - 3600	I4	Secs
1000183	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM5_HOLD_TIMES_PM5_Max_Post-Process_Hold_Time	0 - 3600	I4	Secs
1000184	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_PM6_HOLD_TIMES_PM6_Max_Post-Process_Hold_Time	0 - 3600	I4	Secs
1000194	Machine_Config_SECS_II_CIMETRIX_SECS_II_Upload/Download_Recipe_Type	0 = Cassette Recipe 1 = Wafer Recipe	I4	ms
1000195	Machine_Config_SCHEDULER_PREDICTIVE_MAX_HOLD_TIMES_Max_LoadLock_Vacuum_Arm_Hold_Time	0 - 3600	I4	Secs
1000196	Machine_Config_SCHEDULER_PREDICTIVE_Minimum_LPM_Overtaking_Ratio	0 - 10	F4	None

ID	Name	Values	Format	Units
1000197	Machine_Config_SECS_II_CIMETRIX_SECS_II_COM_Port_for_ID_Reader	1-4	I4	None
1000198	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_GEM_Host_i s_not_communicating		I4	None
1000199	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_GEM_Contro l_State_not_Remote		I4	None
1000200	Machine_Config_DATALOGGING_Energy_Monitoring_Enabled	0 = Not configured 1 = Configured	Bo	None
1000201	Machine_Config_DATALOGGING_Combined_CTC/Datalogger_Fitted	0 = Not configured 1 = Configured	Bo	None
1000202	Machine_Config_MISC_Default_User		A	None
1000203	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Acknowledge d_Hold_or_Abort_Alarm		I4	None
1000204	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Acknowledge d_Operator_Attention_Required		I4	None
1000206	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PROCESS_DEVIATI ON_PM1_Max_Process_Time_Deviation	0 - 100	F4	%
1000207	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PROCESS_DEVIATI ON_PM2_Max_Process_Time_deviation	0 - 100	F4	%
1000208	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PROCESS_DEVIATI ON_PM3_Max_Process_Time_Deviation	0 - 100	F4	%
1000209	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PROCESS_DEVIATI ON_PM4_Max_Process_Time_Deviation	0 - 100	F4	%
1000210	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PROCESS_DEVIATI ON_PM5_Max_Process_Time_Deviation	0 - 100	F4	%
1000211	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PROCESS_DEVIATI ON_PM6_Max_Process_Time_Deviation	0 - 100	F4	%
1000212	Machine_Config_MISC_RE-CLASSIFY_RECIPE_Recipe_Age	0 - 365	I4	Days
1000213	Machine_Config_MISC_RE-CLASSIFY_RECIPE_New_Classification	0 - 1	I4	None
1000214	Machine_Config_SECS_II_GW_SECS_II_RECIPE_SECURITY_Production		Bo	None
1000215	Machine_Config_SECS_II_GW_SECS_II_RECIPE_SECURITY_Developme nt		Bo	None
1000216	Machine_Config_SECS_II_GW_SECS_II_RECIPE_SECURITY_Maintenanc e		Bo	None
1000217	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PM_INACTIVE_TIM ES_PM1_Max_Inactive_Time	0 - 100	I4	Mins
1000218	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PM_INACTIVE_TIM ES_PM2_Max_Inactive_Time	0 - 100	I4	Mins
1000219	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PM_INACTIVE_TIM ES_PM3_Max_Inactive_Time	0 - 100	I4	Mins
1000220	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PM_INACTIVE_TIM ES_PM4_Max_Inactive_Time	0 - 100	I4	Mins
1000221	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PM_INACTIVE_TIM ES_PM5_Max_Inactive_Time	0 - 100	I4	Mins
1000222	Machine_Config_SCHEDULER_PREDICTIVE_MAX_PM_INACTIVE_TIM ES_PM6_Max_Inactive_Time	0 - 100	I4	Mins
1000223	Machine_Config_SCHEDULER_PREDICTIVE_Reschedule_on_PM_Hold_T ime	0 - 600	I4	Secs
1000224	Machine_Config_SCHEDULER_PREDICTIVE_ADJUST_RESIDENCE_TI ME_PM1_Residence_Time_Adjustment	-60 - +60	F4	Secs
1000225	Machine_Config_SCHEDULER_PREDICTIVE_ADJUST_RESIDENCE_TI ME_PM2_Residence_Time_Adjustment	-60 - +60	F4	Secs
1000226	Machine_Config_SCHEDULER_PREDICTIVE_ADJUST_RESIDENCE_TI ME_PM3_Residence_Time_Adjustment	-60 - +60	F4	Secs
1000227	Machine_Config_SCHEDULER_PREDICTIVE_ADJUST_RESIDENCE_TI ME_PM4_Residence_Time_Adjustment	-60 - +60	F4	Secs
1000228	Machine_Config_SCHEDULER_PREDICTIVE_ADJUST_RESIDENCE_TI ME_PM5_Residence_Time_Adjustment	-60 - +60	F4	Secs
1000229	Machine_Config_SCHEDULER_PREDICTIVE_ADJUST_RESIDENCE_TI ME_PM6_Residence_Time_Adjustment	-60 - +60	F4	Secs
1000230	Machine_Config_PARALLEL_GROUPS_GROUP_6_Parallel_Group_6_Nam e		A	None
1000231 - 1000236	Machine_Config_PARALLEL_GROUPS_GROUP_6_xxx_Module_in_Group _6		A	None

ID	Name	Values	Format	Units
1000237	Machine_Config_PARALLEL_GROUPS_GROUP_7_Parallel_Group_7_Name		A	None
1000238 - 1000243	Machine_Config_PARALLEL_GROUPS_GROUP_7_xxx_Module_in_Group_7		A	None
1000244	Machine_Config_PARALLEL_GROUPS_GROUP_8_Parallel_Group_8_Name		A	None
1000245 - 1000250	Machine_Config_PARALLEL_GROUPS_GROUP_8_xxx_Module_in_Group_8		A	None
1000251	Machine_Config_PARALLEL_GROUPS_GROUP_9_Parallel_Group_9_Name		A	None
1000252 - 1000257	Machine_Config_PARALLEL_GROUPS_GROUP_9_xxx_Module_in_Group_9		A	None
1000258	Machine_Config_PARALLEL_GROUPS_GROUP_10_Parallel_Group_10_Name		A	None
1000259 - 1000264	Machine_Config_PARALLEL_GROUPS_GROUP_10_xxx_Module_in_Group_10		A	None
1000265	Machine_Config_PARALLEL_GROUPS_GROUP_11_Parallel_Group_11_Name		A	None
1000266 - 1000271	Machine_Config_PARALLEL_GROUPS_GROUP_11_xxx_Module_in_Group_11		A	None
1000272	Machine_Config_PARALLEL_GROUPS_GROUP_12_Parallel_Group_12_Name		A	None
1000273 - 1000278	Machine_Config_PARALLEL_GROUPS_GROUP_12_xxx_Module_in_Group_12		A	None
1000279	Machine_Config_PARALLEL_GROUPS_GROUP_13_Parallel_Group_13_Name		A	None
1000280 - 1000285	Machine_Config_PARALLEL_GROUPS_GROUP_13_xxx_Module_in_Group_13		A	None
1000286	Machine_Config_PARALLEL_GROUPS_GROUP_14_Parallel_Group_14_Name		A	None
1000287 - 1000292	Machine_Config_PARALLEL_GROUPS_GROUP_14_xxx_Module_in_Group_14		A	None
1000293	Machine_Config_PARALLEL_GROUPS_GROUP_15_Parallel_Group_15_Name		A	None
1000294 - 1000299	Machine_Config_PARALLEL_GROUPS_GROUP_15_xxx_Module_in_Group_15		A	None
1000300	Machine_Config_PARALLEL_GROUPS_GROUP_16_Parallel_Group_16_Name		A	None
1000301 - 1000306	Machine_Config_PARALLEL_GROUPS_GROUP_16_xxx_Module_in_Group_16		A	None
1000307	Machine_Config_PARALLEL_GROUPS_GROUP_17_Parallel_Group_17_Name		A	None
1000308 - 1000313	Machine_Config_PARALLEL_GROUPS_GROUP_17_xxx_Module_in_Group_17		A	None
1000314	Machine_Config_PARALLEL_GROUPS_GROUP_18_Parallel_Group_18_Name		A	None
1000315 - 1000320	Machine_Config_PARALLEL_GROUPS_GROUP_18_xxx_Module_in_Group_18		A	None
1000321	Machine_Config_PARALLEL_GROUPS_GROUP_19_Parallel_Group_19_Name		A	None
1000322 - 1000327	Machine_Config_PARALLEL_GROUPS_GROUP_19_xxx_Module_in_Group_19		A	None
1000328	Machine_Config_PARALLEL_GROUPS_GROUP_20_Parallel_Group_20_Name		A	None
1000329 - 1000334	Machine_Config_PARALLEL_GROUPS_GROUP_20_xxx_Module_in_Group_20		A	None
1000340	Machine_Config_LAMP_TOWER_Lamp_Tower_Type	1 = CBCIO Relay16 2 = PCI 7250	I4	None
1000342	Machine_Config_MISC_CTI_PUMP_CONFIG_COM_Port	1 - 3	I4	None
1000343	Machine_Config_LAMP_TOWER_Lamp_4_colour	0 = None 1 = Red 2 = Yellow 3 = Green 4 = Blue	I4	None

ID	Name	Values	Format	Units
1000344	Machine_Config_LAMP_TOWER_Lamp_3_colour	0 = None 1 = Red 2 = Yellow 3 = Green 4 = Blue	I4	None
1000345	Machine_Config_LAMP_TOWER_Lamp_2_colour	0 = None 1 = Red 2 = Yellow 3 = Green 4 = Blue	I4	None
1000346	Machine_Config_LAMP_TOWER_Lamp_1_colour	0 = None 1 = Red 2 = Yellow 3 = Green 4 = Blue	I4	None
1000355	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_HSMS_SETTINGS_1st_Host_Connection_Connection_Type		I4	None
1000356	Machine_Config_SECS_II_CIMETRIX_SECS_II_COMMS_SETUP_HSMS_SETTINGS_1st_Host_Connection_IP_Address		A	None
1000360	Machine_Config_DATALOGGING_Write_.csv_file_at_end_of_cassette		Bo	None
1000361	Machine_Config_User_Defined_Type_User_Defined_Type_Name		A	None
1000363	Machine_Config_User_Defined_Type_2nd_Type		A	None
1000364	Machine_Config_User_Defined_Type_3rd_Type		A	None
1000365	Machine_Config_User_Defined_Type_4nd_Type		A	None
1000366	Machine_Config_User_Defined_Type_5nd_Type		A	None
1000367	Machine_Config_User_Defined_Type_6nd_Type		A	None
1000370	Machine_Config_User_Defined_Type_User_Defined_Objects_Centraliser_Type		A	None
1000379	Machine_Config_User_Defined_Type_User_Defined_Objects_Primary_Aligner_Type		A	None
1000381	Machine_Config_User_Defined_Type_User_Defined_Objects_Station_11_Type		A	None
1000390	Machine_Config_DATALOGGING_Output_path_for_.csv_dump_file		A	None
1000396	Machine_Config_SECS_II_CIMETRIX_SECS_II_LOGGING_Override_Default_Settings		Bo	None
1000397	Machine_Config_SECS_II_CIMETRIX_SECS_II_LOGGING_Logging_Directory		A	None
1000398	Machine_Config_SECS_II_CIMETRIX_SECS_II_LOGGING_Max_File_Size		I4	MB
1000399	Machine_Config_SECS_II_CIMETRIX_SECS_II_LOGGING_Max_Log_Files		I4	MB
1000400	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_Load_Lock_Wafer_Vent_Time		F4	Secs
1000401	Machine_Config_LAMP_TOWER_EQUIPMENT_CONTROL_Lamp_4_Equipment_Override		Bo	None
1000402	Machine_Config_LAMP_TOWER_EQUIPMENT_CONTROL_Lamp_3_Equipment_Override		Bo	None
1000403	Machine_Config_LAMP_TOWER_EQUIPMENT_CONTROL_Lamp_2_Equipment_Override		Bo	None
1000404	Machine_Config_LAMP_TOWER_EQUIPMENT_CONTROL_Lamp_1_Equipment_Override		Bo	None
1000405	Machine_Config_LAMP_TOWER_EQUIPMENT_CONTROL_Alarm_Equipment_Override		Bo	None
1000406	Machine_Config_LAMP_TOWER_Mute_Button_Fitted		Bo	None
1000410	Machine_Config_DATALOGGING_Use_LotID_for_Filename		Bo	None
1000412	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_All_Manual_Access_Mode		I4	
1000413	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_At_Least_One_Auto_Access_Mode		I4	
1000414	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Carrier_Completed_Online-Remote		I4	

ID	Name	Values	Format	Units
1000415	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_Carrier_Completed_Offline/Local		I4	
1000423	Machine_Config_MISC_Force_Confirmation_On_Save_of_Recipe_After_Change		Bo	
1000424	Machine_Config_DATALOGGING_Database_Auto-Swap		Bo	
1000425	Machine_Config_DATALOGGING_Auto-Swap_Trigger		I4	%
1000426	Machine_Config_DATALOGGING_Database_Nearly_Full_Warning		I4	%
1000427	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_COOLDOWN_HOLD_TIMES_Cooldown_Max_Vacuum_Arm_Hold_Time		I4	Secs
1000429	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_COOLDOWN_HOLD_TIMES_Cooldown_Max_Post-Process_Hold_Time		I4	Secs
1000430	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_BUFFER_HOLD_TIMES_Buffer_Max_Vacuum_Arm_Hold_Time		I4	Secs
1000432	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_BUFFER_HOLD_TIMES_Buffer_Max_Post-Process_Hold_Time		I4	Secs
1000433	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM1_HOLD_TIMES_PM1_Min_Vacuum_Arm_Hold_Time		I4	Secs
1000434	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM2_HOLD_TIMES_PM2_Min_Vacuum_Arm_Hold_Time		I4	Secs
1000435	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM3_HOLD_TIMES_PM3_Min_Vacuum_Arm_Hold_Time		I4	Secs
1000436	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM4_HOLD_TIMES_PM4_Min_Vacuum_Arm_Hold_Time		I4	Secs
1000437	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM5_HOLD_TIMES_PM5_Min_Vacuum_Arm_Hold_Time		I4	Secs
1000438	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM6_HOLD_TIMES_PM6_Min_Vacuum_Arm_Hold_Time		I4	Secs
1000445	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM1_HOLD_TIMES_PM1_Min_Post-Process_Hold_Time		I4	Secs
1000446	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM2_HOLD_TIMES_PM2_Min_Post-Process_Hold_Time		I4	Secs
1000447	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM3_HOLD_TIMES_PM3_Min_Post-Process_Hold_Time		I4	Secs
1000448	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM4_HOLD_TIMES_PM4_Min_Post-Process_Hold_Time		I4	Secs
1000449	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM5_HOLD_TIMES_PM5_Min_Post-Process_Hold_Time		I4	Secs
1000450	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_PM6_HOLD_TIMES_PM6_Min_Post-Process_Hold_Time		I4	Secs
1000451	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_COOLDOWN_HOLD_TIMES_Cooldown_Min_Vacuum_Arm_Hold_Time		I4	Secs
1000453	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_COOLDOWN_HOLD_TIMES_Cooldown_Min_Post-Process_Hold_Time		I4	Secs
1000454	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_BUFFER_HOLD_TIMES_Buffer_Min_Vacuum_Arm_Hold_Time		I4	Secs
1000456	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_BUFFER_HOLD_TIMES_Buffer_Min_Post-Process_Hold_Time		I4	Secs
1000457	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_Min_LoadLock_Vacuum_Arm_Hold_Time		I4	Secs
1000458	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_Cooldown_Place_Time		F4	Secs
1000459	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_Cooldown_Pick_Time		F4	Secs
1000460	Machine_Config_SCHEDULER_PREDICTIVE_CASS_RECIPES_DEFAULT_S_Partial_Path		Bo	
1000461	Machine_Config_SCHEDULER_PREDICTIVE_Eject_Cassette_On_Completion_of_Last_Wafer		Bo	
1000462	Machine_Config_SCHEDULER_PREDICTIVE_ACTIVITY_TIMES_300mm_ACTIVITIES_MWD_Index_Time		F4	Secs
1000463	Machine_Config_SCHEDULER_PREDICTIVE_MIN/MAX_HOLD_TIMES_Max_LPM_Post-Load_Hold_Time		I4	Secs
1000464	Machine_Config_MISC_Module_Counters_Monitoring_Enabled		Bo	
1000465	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_All_PM's_Idle		I4	None

ID	Name	Values	Format	Units
1000466	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_One_or_more_PMs_Manual		I4	None
1000467	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_One_or_more_PMs_at_Service		I4	None
1000468	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_One_or_more_PMs_at_Hold_or_Abort		I4	None
1000469	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Use_Standard_Batch_Sizes		Bo	None
1000470	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_initial_Batch_Size		I4	None
1000471	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Batch_Increment		I4	None
1000472	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Use_Standard_Solve_Times		I4	Secs
1000473	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_initial_Solve_Time		I4	Secs
1000474	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Stop_Solve_Time		I4	Secs
1000475	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Restart_Solve_Time		I4	Secs
1000476	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_First_Batch_Solve_Time		I4	Secs
1000477	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Max_Batch_Solve_Time		I4	Secs
1000478	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Limit_Solution_Improvement_Time		I4	Secs
1000479	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Max_Solution_Improvement_Time		I4	Secs
1000480	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Use_Standard_Search_Technique		I4	Secs
1000481	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Use_Non-Postpone_Search		I4	Secs
1000482	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Use_Second_Solution_Search		I4	Secs
1000483	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Time_reserved_for_Second_Solution_Search		I4	Secs
1000484	Machine_Config_SCHEDULER_PREDICTIVE_ADVANCED_SETTINGS_Use_Secondary_Batch_Freeze_Point		I4	Secs
1000485	Machine_Config_MISC_COLLECT_DATA_Log_Path		A	None
1000486	Machine_Config_MISC_COLLECT_DATA_Maximum_Log_Files		I4	None
1000489	Machine_Config_SCHEDULER_Multi-Pass_Cassette_Recipes_Enabled		Bo	None
1000509	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_VCH_Door_Open_Required		I4	
1000510	Machine_Config_LAMP_TOWER_LAMP_TOWER_CONFIG_VCH_Door_Close_Required		I4	
1000511	Machine_Config_MISC_Input_Product_Type		Bo	
1000512	Machine_Config_DATALOGGING_Stop_Scheduler_to_Perform_DB_Auto_Swap		Bo	
1000513	Machine_Config_SCHEDULER_EVENT_DRIVEN_Buffer_Wafer_Conditioning_Enable_Buffer_Wafer_Conditioning		Bo	
1000514	Machine_Config_SCHEDULER_EVENT_DRIVEN_Buffer_Wafer_Conditioning_Buffer_Wafer_Limit_Type		I4	
1000515	Machine_Config_SCHEDULER_EVENT_DRIVEN_Buffer_Wafer_Conditioning_Maximum_Wafer_Count		I4	
1000517	Machine_Config_SCHEDULER_EVENT_DRIVEN_Buffer_Wafer_Conditioning_Buffer_Wafer_Limit_Warning_Level		I4	
1000518	Machine_Config_MISC_CTI_Compressors		I4	
1000524	Machine_Config_SECS_II_CIMETRIX_SECS_II_RECIPE_SECURITY_Production		Bo	
1000525	Machine_Config_SECS_II_CIMETRIX_SECS_II_RECIPE_SECURITY_Development		Bo	
1000526	Machine_Config_SECS_II_CIMETRIX_SECS_II_RECIPE_SECURITY_Maintenance		Bo	
1000529	Machine_Config_MISC_Recipe_Barcode_Reader_Fitted		Bo	

ID	Name	Values	Format	Units
1000530	Machine_Config_SECS_II_CIMETRIX_SECS_II_Display_Wafer_Recipe_Names		Bo	

22 Appendix D - Module Equipment Specific Equipment Constants

NB: The equipment constants in this section are not intended to be modified by the host.

Due to the fact that most module types can be configured for most positions on the SPTS fxP Equipment, the following rules are used to work out the Equipment Constant identifiers (ECID) for the modules.

The ECID is computed from the following equation:

$EC\ ID = (station\ number * 100000) + (station\ type\ offset * 1000) + 1001000 + config\ Id\ offset;$

(1001000 is added to make sure that the computed ECID clears any other VID defined.)

Station Number :-

- 0 = Transport
- 1 = VCE A
- 2 = Process Module 1
- 3 = Process Module 2
- 4 = Process Module 3
- 5 = Process Module 4
- 6 = Process Module 5
- 7 = Process Module 6
- 8 = VCE B
- 10 = Cool Station

Station Type :-

- 4 = Sputter Deposition PM
- 7 = HSE PM
- 9 = Heat PM
- 20 = GTM/Level 1 Brooks MX Transport
- 21 = GTM/Level 1 Brooks Coolstation
- 22 = GTM/Level 1 Brooks MX Cassette
- 23 = GTM/Level 1 Brooks Inliner
- 24 = Etch PM
- 25 = Deposition RevB PM
- 26 = SoftEtch RevB PM
- 27 = Heat RevB PM
- 46 = C3M (Bridge)
- 53=Primaxx Monarch 25
- 56 = c2L Transport
- 58 = Pro CVE PM

The module equipment constants together with their config id offsets are defined as follows
(the complete name of each variable is StatX Y Z EquipmentConstantName where X is the station number Y is the station type and Z is the Config section name)

22.1.2 Forefill PM

ID offset	Name	Values	Format	Units
1	Statx_ForceFill_Config_STATION_Name		A	
2	Statx_ForceFill_Config_VACUUM_Backup_Pump_Active_High		Bo	
3	Statx_ForceFill_Config_VACUUM_Close_line_vacuum_valve_trip	0 - 9999	I4	mTorr
5	Statx_ForceFill_Config_VACUUM_Foreline_pumpdown_trip_pressure	0 - 9999	I4	mTorr
6	Statx_ForceFill_Config_VACUUM_Foreline_pumpdown_trip_timeout	10 - 3600	I4	Secs
7	Statx_ForceFill_Config_VACUUM_HP_vac_valve_actuation_timeout	5 - 60	I4	Secs
8	Statx_ForceFill_Config_VACUUM_Penning_gauge_pressure_trip	0 - 60	I4	mTorr
9	Statx_ForceFill_Config_VACUUM_Penning_gauge_pressure_timeout	0 - 120	I4	Secs
10	Statx_ForceFill_Config_VACUUM_Pump_to_base_pressure_trip	5e-9 - 5	F4	Torr
11	Statx_ForceFill_Config_VACUUM_Roughing_Pressure_chamber_trip_timeout	0 - 600	I4	mTorr
12	Statx_ForceFill_Config_VACUUM_Roughing_Vacuum_chamber_trip_timeout	0 - 600	I4	mTorr
13	Statx_ForceFill_Config_VACUUM_Pump_to_base_pressure_timeout	10 - 300	I4	Secs
14	Statx_ForceFill_Config_VACUUM_Chamber_roughing_trip_pressure	0 - 9999	I4	mTorr
15	Statx_ForceFill_Config_VACUUM_Close_hivac_and_penning_gauge_trip	0 - 9999	I4	mTorr
16	Statx_ForceFill_Config_VACUUM_1st_stage_over_pressure_trip(close_Hivac)	0 - 999	I4	mTorr
17	Statx_ForceFill_Config_VACUUM_2nd_stage_over_pressure_trip(goto_Abort)	0 - 999	I4	mTorr
18	Statx_ForceFill_Config_VACUUM_Post-process_roughing_before_closing_LV_vlvs	0 - 9999	I4	mTorr
19	Statx_ForceFill_Config_VACUUM_TURBO_PUMP_Turbo_Pump_Type	1 = TCP380 2 = TCP121 3 = Alcatel	I4	
20	Statx_ForceFill_Config_VACUUM_TURBO_PUMP_Turbo_At_Speed_Timeout	10 - 3600	I4	Secs
21	Statx_ForceFill_Config_VACUUM_TURBO_PUMP_Turbo_Pump_vent_timeout	30 - 300	I4	Secs
22	Statx_ForceFill_Config_VACUUM_TURBO_PUMP_Turbo_threshold_trip_pressure	0 - 999	I4	mTorr
23	Statx_ForceFill_Config_LIFT_Nominal_Handling_position	10 - 18.5	F4	mm
24	Statx_ForceFill_Config_LIFT_Handling_position_band	0.3 - 1	F4	mm
25	Statx_ForceFill_Config_LIFT_Maximum_chamber_drop_during_process	0.5 - 3.5	F4	mm
26	Statx_ForceFill_Config_LIFT_Down_movement_stop_position_offset	0 - 1	F4	mm
27	Statx_ForceFill_Config_LIFT_Chamber_closed_position	33 - 36	F4	mm
28	Statx_ForceFill_Config_LIFT_Lift_Timeout: start_hydraulic_pressure_monitor	0 - 5	F4	mm
29	Statx_ForceFill_Config_LIFT_Lift_Timeout: start_ramp_down	0 - 10	F4	mm
30	Statx_ForceFill_Config_LIFT_Lift: Change_to_slow_speed_offset	0 - 4	F4	mm
31	Statx_ForceFill_Config_LIFT_Chamber_close: Change_to_slow_speed_offset	0 - 4	F4	mm
32	Statx_ForceFill_Config_LIFT_Chamber_move & lift_timeout (up_or_down)	0 - 300	F4	Secs
33	Statx_ForceFill_Config_LIFT_Up_movement_stop_position_offset	0 - 1	F4	mm
34	Statx_ForceFill_Config_HYDRAULIC_SYS_Manual_move_speed	0 - 2000	I4	
35	Statx_ForceFill_Config_HYDRAULIC_SYS_Wafer_move_fast_speed	0 - 4000	I4	
36	Statx_ForceFill_Config_HYDRAULIC_SYS_Wafer_move_slow_speed	0 - 4000	I4	
37	Statx_ForceFill_Config_HYDRAULIC_SYS_Wafer_move_ramp_increment	0 - 4000	I4	
38	Statx_ForceFill_Config_HYDRAULIC_SYS_Wafer_move_ramp_decrement	0 - 4000	I4	
39	Statx_ForceFill_Config_HYDRAULIC_SYS_Chamber_closure_fast_speed	0 - 4000	I4	
40	Statx_ForceFill_Config_HYDRAULIC_SYS_Chamber_closure_slow_speed	0 - 4000	I4	
41	Statx_ForceFill_Config_HYDRAULIC_SYS_Chamber_closure_ramp_increment	0 - 4000	I4	
42	Statx_ForceFill_Config_HYDRAULIC_SYS_Chamber_closure_ramp_decrement	0 - 4000	I4	
43	Statx_ForceFill_Config_HYDRAULIC_SYS_Chamber_closure_final_drive	0 - 4000	I4	
44	Statx_ForceFill_Config_HYDRAULIC_SYS_Max_Hydraulic_pressure_during_chamber_move	15 - 60	I4	Bar
45	Statx_ForceFill_Config_HYDRAULIC_SYS_Minimum_preload_pressure	30 - 220	I4	Bar
46	Statx_ForceFill_Config_HYDRAULIC_SYS_Chamber_closed_pressure_trip	0 - 200	I4	
47	Statx_ForceFill_Config_HYDRAULIC_SYS_Hydraulic_Pump_on_delay_time	0 - 10	I4	Mins

	e			
48	Statx_ForceFill_Config_HYDRAULIC_SYS_Minimum_Seal_Force_In_Proces ss	0 - 140	I4	tonnes
49	Statx_ForceFill_Config_HP_SYSTEM_Gas_Pack_Mode	1 - 2	I4	
50	Statx_ForceFill_Config_HP_SYSTEM_Gas_Pack_Type	1 - 2	I4	
52	Statx_ForceFill_Config_HP_SYSTEM_Inlet_pres._pressurisation_timeout	60 - 3600	I4	Secs
53	Statx_ForceFill_Config_HP_SYSTEM_Chamber_pressurisation_timeout	120 - 600	I4	Secs
54	Statx_ForceFill_Config_HP_SYSTEM_Min_inlet_press_offset_before_chamb er_closure	0 - 500	I4	Bar
56	Statx_ForceFill_Config_HP_SYSTEM_HP_Vent_stage_1_trip	0 - 2000	I4	Bar
57	Statx_ForceFill_Config_HP_SYSTEM_HP_Vent_stage_2_trip	0 - 2000	I4	Bar
58	Statx_ForceFill_Config_HP_SYSTEM_Min._Cham._Pres._for_lift_check_in_ process	20 - 50	I4	Bar
59	Statx_ForceFill_Config_HP_SYSTEM_Chamber_pressure_warning	0 - 100	I4	
60	Statx_ForceFill_Config_HP_SYSTEM_Chamber_pressure_hold	0 - 100	I4	
61	Statx_ForceFill_Config_HP_SYSTEM_Chamber_pressure_abort	0 - 100	I4	
63	Statx_ForceFill_Config_TOP_HEATER_Vacuum_Maximum_Power	0 - 100	I4	%
64	Statx_ForceFill_Config_TOP_HEATER_Vacuum_Proportional_Band	0 - 1000	I4	
65	Statx_ForceFill_Config_TOP_HEATER_Vacuum_Derivative_Time_Constant	0 - 9999	I4	
67	Statx_ForceFill_Config_TOP_HEATER_Process_maximum_power	0 - 100	I4	%
68	Statx_ForceFill_Config_TOP_HEATER_Process_Proportional_Band	0 - 1000	I4	
69	Statx_ForceFill_Config_TOP_HEATER_Process_Derivative_Time_Constant	0 - 9999	I4	
70	Statx_ForceFill_Config_TOP_HEATER_T/C_Warning	0 - 100	I4	°C
71	Statx_ForceFill_Config_TOP_HEATER_T/C_Hold	0 - 100	I4	°C
72	Statx_ForceFill_Config_TOP_HEATER_T/C_Abort	0 - 100	I4	°C
74	Statx_ForceFill_Config_BOTTOM_HEATER_Vacuum_Maximum_Power	0 - 100	I4	%
75	Statx_ForceFill_Config_BOTTOM_HEATER_Vacuum_Proportional_Band	0 - 1000	I4	
76	Statx_ForceFill_Config_BOTTOM_HEATER_Vacuum_Derivative_Time_Co nstant	0 - 9999	I4	
78	Statx_ForceFill_Config_BOTTOM_HEATER_Process_maximum_power	0 - 100	I4	%
79	Statx_ForceFill_Config_BOTTOM_HEATER_Process_Proportional_Band	0 - 1000	I4	
80	Statx_ForceFill_Config_BOTTOM_HEATER_Process_Derivative_Time_Con stant	0 - 9999	I4	
81	Statx_ForceFill_Config_BOTTOM_HEATER_T/C_Warning	0 - 100	I4	°C
82	Statx_ForceFill_Config_BOTTOM_HEATER_T/C_Hold	0 - 100	I4	°C
83	Statx_ForceFill_Config_BOTTOM_HEATER_T/C_Abort	0 - 100	I4	°C
84	Statx_ForceFill_Config_MISC_Int/Conv_Temperature_fault_limit_(Abort)	35 - 200	I4	
85	Statx_ForceFill_Config_MISC_Int/Conv_Temperature_fault_limit_(Warning)	30 - 200	I4	
86	Statx_ForceFill_Config_MISC_Warm_up_temperature_offset	0 - 999	I4	°C
87	Statx_ForceFill_Config_MISC_Temperature_band_error_timeout	300 - 1800	I4	Secs
88	Statx_ForceFill_Config_MISC_Top_heater_T/C_trip_before_getting_to_vent	50 - 300	I4	°C
89	Statx_ForceFill_Config_MISC_Maximum_HOLD_Time_before_Aborting	30 - 300	I4	Secs
90	Statx_ForceFill_Config_MISC_Max_Allowed_Process_Time	60 - 3600	I4	Secs
91	Statx_ForceFill_Config_MISC_Gas_pack_booster_switch_off_point	36 - 40	I4	Bar
92	Statx_ForceFill_Config_MISC_Time_from_completing_Process_back_to_Rea dy	0 - 300	I4	Secs
999	Statx_ForceFill_Config_STATION_Align_wafer_on_exit		Bo	

22.1.3 Sputter Deposition PM

ID offset	Name	Values	Format	Units
1	Statx_SDep_Config_STATION_Name		A	
2	Statx_SDep_Config_VACUUM_Capman_Maximum_Scale	1 - 10000	I4	
3	Statx_SDep_Config_VACUUM_Foreline_Roughing_Trip	1 - 500	I4	mTorr
4	Statx_SDep_Config_VACUUM_Foreline_Roughing_Timeout	1 - 3600	I4	Secs
5	Statx_SDep_Config_VACUUM_Chamber_Roughing_Trip	1e-3 - 6e-1	F4	Torr
6	Statx_SDep_Config_VACUUM_Pirani-Capman_Cross_Over_Trip	100 - 1400	I4	mTorr
7	Statx_SDep_Config_VACUUM_Pirani-Capman_Cross_Over_Timeout	1 - 3600	I4	Secs
8	Statx_SDep_Config_VACUUM_Capman-Ion_Gauge_Cross_Over_Trip	1e-3 - 9.99e-3	F4	Torr
9	Statx_SDep_Config_VACUUM_Capman-Ion_Gauge_Cross_Over_Timeout	0 - 3600	I4	Secs
10	Statx_SDep_Config_VACUUM_Additional_Chamber_Vent_Time	0 - 3600	I4	Secs
11	Statx_SDep_Config_VACUUM_Maximum_Pump_to_Base_Time	0 - 60	I4	Mins
12	Statx_SDep_Config_TARGET_SHUTTER_Shutter_Fitted		Bo	
13	Statx_SDep_Config_TARGET_Name		A	
14	Statx_SDep_Config_TARGET_Power_Supply_Type	0 = ET 12 1 = AE MDX 15 2 = AE MDX 30 3 = RPG 100E 4 = Pinnacle+ 800V	I4	
15	Statx_SDep_Config_TARGET_Maximum_Power	0 - 3200	I4	W
16	Statx_SDep_Config_TARGET_Life_Expectancy	0 - 10000	I4	kWhrs
17	Statx_SDep_Config_TARGET_Reactive_Correction_Factor	0 - 100	I4	%
18	Statx_SDep_Config_TARGET_POWER_BANDS_Power_Warning_Band	0 - 100	I4	%
19	Statx_SDep_Config_TARGET_POWER_BANDS_Power_Hold_Band	0 - 100	I4	%
20	Statx_SDep_Config_TARGET_POWER_BANDS_Power_Abort_Band	0 - 100	I4	%
21	Statx_SDep_Config_TARGET_MOTOR_SPEED_Nominal_Motor_Speed	1 - 500	I4	rpm
25	Statx_SDep_Config_TARGET_TOOLING_FACTORS_Tooling_Factor_Default_Use	0 = Calc Thickness 1 = Calc Power 2 = Calc Time	I4	
26	Statx_SDep_Config_TARGET_TOOLING_FACTORS_0th_Order_Default_TF_Correction_Value		F4	
27	Statx_SDep_Config_TARGET_TOOLING_FACTORS_1st_Order_Default_TF_Correction_Value		F4	
28	Statx_SDep_Config_TARGET_TOOLING_FACTORS_2nd_Order_Default_TF_Correction_Value		F4	
29	Statx_SDep_Config_TARGET_TOOLING_FACTORS_3rd_Order_Default_TF_Correction_Value		F4	
30	Statx_SDep_Config_TARGET_TOOLING_FACTORS_4th_Order_Default_TF_Correction_Value		F4	
31	Statx_SDep_Config_TARGET_TOOLING_FACTORS_0th_Order_Default_Reactive_Correction_Value		F4	
32	Statx_SDep_Config_TARGET_TOOLING_FACTORS_1st_Order_Default_Reactive_Correction_Value		F4	
33	Statx_SDep_Config_TARGET_TOOLING_FACTORS_2nd_Order_Default_Reactive_Correction_Value		F4	
34	Statx_SDep_Config_TARGET_TOOLING_FACTORS_3rd_Order_Default_Reactive_Correction_Value		F4	
35	Statx_SDep_Config_TARGET_TOOLING_FACTORS_4th_Order_Default_Reactive_Correction_Value		F4	
36	Statx_SDep_Config_GASES_GAS_1_Gas_1_Fitted		Bo	
37	Statx_SDep_Config_GASES_GAS_1_Gas_1_Name		A	
38	Statx_SDep_Config_GASES_GAS_1_Gas_1_Maximum_Flow	0 - 3000	I4	sccm
39	Statx_SDep_Config_GASES_GAS_1_Gas_1_Conversion_Factor	0 - 3	F4	
40	Statx_SDep_Config_GASES_GAS_1_Gas_1_Warning_Band	0 - 100	I4	%
41	Statx_SDep_Config_GASES_GAS_1_Gas_1_Hold_Band	0 - 100	I4	%
42	Statx_SDep_Config_GASES_GAS_1_Gas_1_Abort_Band	0 - 100	I4	%
43	Statx_SDep_Config_GASES_GAS_2_Gas_2_Fitted		Bo	
44	Statx_SDep_Config_GASES_GAS_2_Gas_2_Name		A	
45	Statx_SDep_Config_GASES_GAS_2_Gas_2_Maximum_Flow	0 - 3000	I4	sccm
46	Statx_SDep_Config_GASES_GAS_2_Gas_2_Conversion_Factor	0 - 3	F4	
47	Statx_SDep_Config_GASES_GAS_2_Gas_2_Warning_Band	0 - 100	I4	%
48	Statx_SDep_Config_GASES_GAS_2_Gas_2_Hold_Band	0 - 100	I4	%

ID offset	Name	Values	Format	Units
49	Statx_SDep_Config_GASES_GAS_2_Gas_2_Abort_Band	0 - 100	I4	%
50	Statx_SDep_Config_GASES_GAS_3_Gas_3_Fitted		Bo	
51	Statx_SDep_Config_GASES_GAS_3_Gas_3_Name		A	
52	Statx_SDep_Config_GASES_GAS_3_Gas_3_Maximum_Flow	0 - 3000	I4	sccm
53	Statx_SDep_Config_GASES_GAS_3_Gas_3_Conversion_Factor	0 - 3	F4	
54	Statx_SDep_Config_GASES_GAS_3_Gas_3_Warning_Band	0 - 100	I4	%
55	Statx_SDep_Config_GASES_GAS_3_Gas_3_Hold_Band	0 - 100	I4	%
56	Statx_SDep_Config_GASES_GAS_3_Gas_3_Abort_Band	0 - 100	I4	%
57	Statx_SDep_Config_GASES_Nitrogen_Gas_Line	0 - 3	I4	
58	Statx_SDep_Config_PLATEN_STANDARD_PLATEN_Movable_Platten		Bo	
59	Statx_SDep_Config_PLATEN_STANDARD_PLATEN_Cooling_Required_f or_Heater_Trip	0 - 1000	I4	°C
60	Statx_SDep_Config_PLATEN_STANDARD_PLATEN_TEMP_BANDS_Co ntrol_Temperature_Warning_Band	0 - 1000	I4	°C
61	Statx_SDep_Config_PLATEN_STANDARD_PLATEN_TEMP_BANDS_Co ntrol_Temperature_Hold_Band	0 - 1000	I4	°C
62	Statx_SDep_Config_PLATEN_STANDARD_PLATEN_TEMP_BANDS_Co ntrol_Temperature_Abort_Band	0 - 1000	I4	°C
63	Statx_SDep_Config_PLATEN_STANDARD_PLATEN_TEMP_BANDS_Saf ety_Temperature_Warning_Band	0 - 1000	I4	°C
64	Statx_SDep_Config_PLATEN_STANDARD_PLATEN_TEMP_BANDS_Saf ety_Temperature_Hold_Band	0 - 1000	I4	°C
65	Statx_SDep_Config_PLATEN_STANDARD_PLATEN_TEMP_BANDS_Saf ety_Temperature_Abort_Band	0 - 1000	I4	°C
66	Statx_SDep_Config_RF_Platten_RF_Fitted		Bo	
67	Statx_SDep_Config_RF_Platten_RF_Name		A	
68	Statx_SDep_Config_RF_Platten_RF_Supply_Type	0 = CM13-6 1 = LF 12 2 = LF 24 3 = RFX 600 4 = RFX II 5 = PDX 5000 6 = RFX 2150	I4	
69	Statx_SDep_Config_RF_Platten_RF_Tune_Pot_Auto-Match		Bo	
70	Statx_SDep_Config_RF_Platten_RF_Load_Pot_Auto-Match		Bo	
71	Statx_SDep_Config_RF_POWER_BANDS_Platten_RF_Forward_Power_War ning_Band	5 - 100	I4	%
72	Statx_SDep_Config_RF_POWER_BANDS_Platten_RF_Forward_Power_Hol d_Band	5 - 100	I4	%
73	Statx_SDep_Config_RF_POWER_BANDS_Platten_RF_Forward_Power_Abo rt_Band	5 - 100	I4	%
74	Statx_SDep_Config_RF_POWER_BANDS_Platten_RF_Reflected_Power_Wa rning_Band	5 - 100	I4	%
75	Statx_SDep_Config_RF_POWER_BANDS_Platten_RF_Reflected_Power_Hol d_Band	5 - 100	I4	%
76	Statx_SDep_Config_RF_POWER_BANDS_Platten_RF_Reflected_Power_Ab ort_Band	5 - 100	I4	%
77	Statx_SDep_Config_CRYO_Cryo_Pump_Type	1 = OnBoard CTI 2 = Leybold 3 = Alcatel	I4	
83	Statx_SDep_Config_CRYO_Maximum_Gas_Load	0 - 999	I4	BL
88	Statx_SDep_Config_CRYO_TEMP_BANDS_Cryo_Temperature_Warning_B and	0 - 100	I4	K
89	Statx_SDep_Config_CRYO_TEMP_BANDS_Cryo_Temperature_Hold_Band	0 - 100	I4	K
90	Statx_SDep_Config_CRYO_TEMP_BANDS_Cryo_Temperature_Abort_Ban d	0 - 100	I4	K
91	Statx_SDep_Config_MISC_Maximum_HOLD_Time_before_Aborting	0 - 3600	I4	Secs
92	Statx_SDep_Config_MISC_Time_from_completing_Process_back_to_Ready	0 - 30	I4	Secs
93	Statx_SDep_Config_PRESSURES_Atmospheric_Cross_Over_Trip	600 - 800	F4	Torr
94	Statx_SDep_Config_PRESSURES_Intermediate_Cross_Over_Trip	0.5 - 3	F4	Torr
95	Statx_SDep_Config_PRESSURES_Rough_Cross_Over_Trip	1e-7 - 9.99e-3	F4	Torr

ID offset	Name	Values	Format	Units
96	Statx_SDep_Config_VACUUM_Ion_Gauge_Type	0 = Standard 1 = ITR 100 2 = Micro-Ion 358	I4	
97	Statx_SDep_Config_VACUUM_Ion_Gauge_Gas_Conversion_Factor	0.1 - 9.99	F4	
98	Statx_SDep_Config_ESC_ESC_Fitted		Bo	
99	Statx_SDep_Config_ESC_CLAMPING_VOLT_BANDS_ESC_Clamping_Voltage_Warning_Band	0 - 100	I4	%
100	Statx_SDep_Config_ESC_CLAMPING_VOLT_BANDS_ESC_Clamping_Voltage_Hold_Band	0 - 100	I4	%
101	Statx_SDep_Config_ESC_CLAMPING_VOLT_BANDS_ESC_Clamping_Voltage_Abort_Band	0 - 100	I4	%
102	Statx_SDep_Config_ESC_ARGON_PRESS_BANDS_ESC_Ar_Pressure_Warning_Band	0 - 100	I4	%
103	Statx_SDep_Config_ESC_ARGON_PRESS_BANDS_ESC_Ar_Pressure_Hold_Band	0 - 100	I4	%
104	Statx_SDep_Config_ESC_ARGON_PRESS_BANDS_ESC_Ar_Pressure_Abort_Band	0 - 100	I4	%
105	Statx_SDep_Config_ESC_ARGON_FLOW_BANDS_ESC_Ar_Flow_Warning_Band	0 - 20	I4	sccm
106	Statx_SDep_Config_ESC_ARGON_FLOW_BANDS_ESC_Ar_Flow_Hold_Band	0 - 20	I4	sccm
107	Statx_SDep_Config_ESC_ARGON_FLOW_BANDS_ESC_Ar_Flow_Abort_Band	0 - 20	I4	sccm
108	Statx_SDep_Config_DC_COIL_DC_Coil_Fitted		Bo	
109	Statx_SDep_Config_DC_COIL_COIL_RF_Upper_Coil_Current_Warning_Band	0 - 100	I4	%
110	Statx_SDep_Config_DC_COIL_COIL_RF_Upper_Coil_Current_Hold_Band	0 - 100	I4	%
111	Statx_SDep_Config_DC_COIL_COIL_RF_Upper_Coil_Current_Abort_Band	0 - 100	I4	%
112	Statx_SDep_Config_DC_COIL_COIL_RF_Lower_Coil_Current_Warning_Band	0 - 100	I4	%
113	Statx_SDep_Config_DC_COIL_COIL_RF_Lower_Coil_Current_Hold_Band	0 - 100	I4	%
114	Statx_SDep_Config_DC_COIL_COIL_RF_Lower_Coil_Current_Abort_Band	0 - 100	I4	%
115	Statx_SDep_Config_GASES_Vent_Valve_Upstream_of_Gas_Manifold_Valve		Bo	
116	Statx_SDep_Config_TARGET_Target_Life_Warning	0 - 100	I4	%
117	Statx_SDep_Config_MISC_Chamber_Size	0 = Standard 1 = Hi-Fill 2 = Ultra	I4	
118	Statx_SDep_Config_TARGET_SHUTTER_Shutter_over_wafer		Bo	
119	Statx_SDep_Config_VACUUM_External_RGA_fault_inputs		Bo	
120	Statx_SDep_Config_DC_COIL_Reactive_Correction_Factor	0 - 100	I4	%
121	Statx_SDep_Config_DC_COIL_TOOLING_FACTORS_0th_Order_Default_TF_Correction_Value_(AHF)		F4	
122	Statx_SDep_Config_DC_COIL_TOOLING_FACTORS_1st_Order_Default_TF_Correction_Value_(AHF)		F4	
123	Statx_SDep_Config_DC_COIL_TOOLING_FACTORS_2nd_Order_Default_TF_Correction_Value_(AHF)		F4	
124	Statx_SDep_Config_DC_COIL_TOOLING_FACTORS_3rd_Order_Default_TF_Correction_Value_(AHF)		F4	
125	Statx_SDep_Config_DC_COIL_TOOLING_FACTORS_4th_Order_Default_TF_Correction_Value_(AHF)		F4	
126	Statx_SDep_Config_DC_COIL_TOOLING_FACTORS_0th_Order_Default_Reactive_Correction_Value_(AHF)		F4	
127	Statx_SDep_Config_DC_COIL_TOOLING_FACTORS_1st_Order_Default_Reactive_Correction_Value_(AHF)		F4	
128	Statx_SDep_Config_DC_COIL_TOOLING_FACTORS_2nd_Order_Default_Reactive_Correction_Value_(AHF)		F4	
129	Statx_SDep_Config_DC_COIL_TOOLING_FACTORS_3rd_Order_Default_Reactive_Correction_Value_(AHF)		F4	
130	Statx_SDep_Config_DC_COIL_TOOLING_FACTORS_4th_Order_Default_Reactive_Correction_Value_(AHF)		F4	
133	Statx_SDep_Config_DC_COIL_AHF_Acc_Factor	1 - 100	I4	%

ID offset	Name	Values	Format	Units
135	Statx_SDep_Config_TARGET_MOVING_MAGNETRON_High_Offset_Acc_Correction_Factor	1 - 100	I4	%
136	Statx_SDep_Config_TARGET_MOVING_MAGNETRON_Moving_Magnetron_Fitted		Bo	
137	Statx_SDep_Config_TARGET_MOVING_MAGNETRON_Magnet_Offset	10 - 30	F4	mm
138	Statx_SDep_Config_ESC_ESC_Type	0 = Cold ESC 1 = Hot ESC	I4	
147	Statx_SDep_Config_ESC_ESC_Default_Argon_Pressure_Demand	0 - 20	I4	Torr
150	Statx_SDep_Config_TARGET_MOVING_MAGNETRON_Magnet_Offset_At_Home	8 - 12	F4	mm
152	Statx_SDep_Config_TARGET_BAND_MONITORING_Max_Strike_Time	0.2 - 9.99	F4	Secs
153	Statx_SDep_Config_TARGET_BAND_MONITORING_Max_Ramp_Time	0.2 - 9.99	F4	Secs
154	Statx_SDep_Config_TARGET_BAND_MONITORING_Target_Supply_Monitor_Delay	0.2 - 9.99	F4	Secs
155	Statx_SDep_Config_TARGET_BAND_MONITORING_%_Power_before_Process_Timer	10 - 99.9	F4	%
156	Statx_SDep_Config_TARGET_BAND_MONITORING_Band_Monitoring_Sample_Rate	0.2 - 9.99	F4	Secs
158	Statx_SDep_Config_MISC_Lamp_Bakeout_Heater_Fitted		Bo	
159	Statx_SDep_Config_MISC_Lamp_Bakeout_Max_On_Time	2 - 60	I4	Mins
160	Statx_SDep_Config_TARGET_BAND_MONITORING_Strike_Retry_Required		Bo	
161	Statx_SDep_Config_TARGET_BAND_MONITORING_Strike_Retry_Times	1 - 9	I4	
162	Statx_SDep_Config_TARGET_BAND_MONITORING_Strike_Retry_Delay	0.1 - 9.99	F4	
163	Statx_SDep_Config_GASES_Gas_Pulse_Required		Bo	
164	Statx_SDep_Config_PLATEN_Recirculator_Fitted		Bo	
165	Statx_SDep_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Temp_Warning_Band	0 - 70	I4	°C
166	Statx_SDep_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Temp_Hold_Band	0 - 70	I4	°C
167	Statx_SDep_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Temp_Abort_Band	0 - 70	I4	°C
168	Statx_SDep_Config_VACUUM_Raise_Lift_After_Backfill		Bo	
169	Statx_SDep_Config_TARGET_Shielding_Life_Expectancy	0 - 10000	I4	kWhrs
173	Statx_SDep_Config_TARGET_Abort_on_reading_V_while_target_off		Bo	
175	Statx_SDep_Config_PLATEN_Platten_Heater_/Chiller_Stays_ON_in_Abort		Bo	
969	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_1st_Stage_Temp_Control	0 - 999	I4	K
970	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Delay_Start	0 - 9999	I4	Mins
971	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Delay_Restart	0 - 999	I4	Mins
972	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Fast_Regen_Rough_Test	10 - 999	I4	Secs
973	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Ext_Purge_Time	0 - 9999	I4	Mins
974	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Repurge_Time	0 - 9999	I4	Mins
975	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Repurge_Cycles	0 - 20	I4	
976	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Base_Pressure	25 - 200	I4	Mic
977	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Rate_of_Rise_Limit	1 - 100	I4	Mic/Min
978	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Rate_of_Rise_Cycles	0 - 40	I4	
980	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Power_Failure	0 - 2	I4	
981	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Power_Failure_Temperature	0 - 80	I4	K
982	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Pump_Elapsed_Time	0 - 60000	I4	Hrs
983	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Time_between_Full_Regens	0 - 60000	I4	Hrs
984	Statx_SDep_Config_CRYO_CTI_CRYO_CONFIG_Time_between_Fast_Regens	0 - 60000	I4	Hrs
995	Statx_SDep_Config_MISC_Alignment_Offset_Controller_Fitted		Bo	
996	Statx_SDep_Config_STATION_Active_Handling		Bo	
999	Statx_SDep_Config_STATION_Align_wafer_on_exit		Bo	

22.1.4 HSE PM

ID offset	Name	Values	Format	Units
1	Statx_HSE_Config_STATION_Name		A	
2	Statx_HSE_Config_VACUUM_Capman_Maximum_Scale	1 - 10000	I4	
3	Statx_HSE_Config_VACUUM_Foreline_Roughing_Trip	1 - 500	I4	mTorr
4	Statx_HSE_Config_VACUUM_Foreline_Roughing_Timeout	620914	I4	Secs
5	Statx_HSE_Config_VACUUM_Chamber_Roughing_Trip	1e-3 - 6e-1	F4	Torr
6	Statx_HSE_Config_VACUUM_Pirani-Capman_Cross_Over_Trip	100 - 1400	I4	mTorr
7	Statx_HSE_Config_VACUUM_Pirani-Capman_Cross_Over_Timeout	620914	I4	Secs
8	Statx_HSE_Config_VACUUM_Capman-Ion_Gauge_Cross_Over_Trip	1e-3 - 9.99e-3	F4	Torr
9	Statx_HSE_Config_VACUUM_Capman-Ion_Gauge_Cross_Over_Timeout	0 - 3600	I4	Secs
10	Statx_HSE_Config_VACUUM_Additional_Chamber_Vent_Time	0 - 3600	I4	Secs
11	Statx_HSE_Config_VACUUM_Maximum_Pump_to_Base_Time	0 - 60	I4	Minutes
12	Statx_HSE_Config_GASES_GAS_1_Gas_1_Fitted		Bo	
13	Statx_HSE_Config_GASES_GAS_1_Gas_1_Name		A	
14	Statx_HSE_Config_GASES_GAS_1_Gas_1_Maximum_Flow	0 - 3000	I4	sccm
15	Statx_HSE_Config_GASES_GAS_1_Gas_1_Conversion_Factor		F4	
16	Statx_HSE_Config_GASES_GAS_1_Gas_1_Warning_Band	0 - 100	I4	%
17	Statx_HSE_Config_GASES_GAS_1_Gas_1_Hold_Band	0 - 100	I4	%
18	Statx_HSE_Config_GASES_GAS_1_Gas_1_Abort_Band	0 - 100	I4	%
19	Statx_HSE_Config_GASES_GAS_2_Gas_2_Fitted		Bo	
20	Statx_HSE_Config_GASES_GAS_2_Gas_2_Name		A	
21	Statx_HSE_Config_GASES_GAS_2_Gas_2_Maximum_Flow	0 - 3000	I4	sccm
22	Statx_HSE_Config_GASES_GAS_2_Gas_2_Conversion_Factor		F4	
23	Statx_HSE_Config_GASES_GAS_2_Gas_2_Warning_Band	0 - 100	I4	%
24	Statx_HSE_Config_GASES_GAS_2_Gas_2_Hold_Band	0 - 100	I4	%
25	Statx_HSE_Config_GASES_GAS_2_Gas_2_Abort_Band	0 - 100	I4	%
27	Statx_HSE_Config_GASES_GAS_3_Gas_3_Name		A	
28	Statx_HSE_Config_GASES_GAS_3_Gas_3_Maximum_Flow	0 - 3000	I4	sccm
29	Statx_HSE_Config_GASES_GAS_3_Gas_3_Conversion_Factor		F4	
30	Statx_HSE_Config_GASES_GAS_3_Gas_3_Warning_Band	0 - 100	I4	%
31	Statx_HSE_Config_GASES_GAS_3_Gas_3_Hold_Band	0 - 100	I4	%
32	Statx_HSE_Config_GASES_GAS_3_Gas_3_Abort_Band	0 - 100	I4	%
33	Statx_HSE_Config_RF_PLATEN_RF_Platten_RF_Name		A	
34	Statx_HSE_Config_RF_PLATEN_RF_Platten_RF_Supply_Type	0 = CM13-6 1 = LF 12 2 = LF 24 3 = RFX 600 4 = RFX II 5 = PDX 5000 6 = RFX 2150	I4	
35	Statx_HSE_Config_RF_PLATEN_RF_Platten_RF_Tune_Pot_Auto-Match		Bo	
36	Statx_HSE_Config_RF_PLATEN_RF_Platten_RF_Load_Pot_Auto-Match		Bo	
37	Statx_HSE_Config_RF_PLATEN_RF_POWER_BANDS_Platten_RF_Forward_Power_Warning_Band	0 - 100	I4	%
38	Statx_HSE_Config_RF_PLATEN_RF_POWER_BANDS_Platten_RF_Forward_Power_Hold_Band	0 - 100	I4	%
39	Statx_HSE_Config_RF_PLATEN_RF_POWER_BANDS_Platten_RF_Forward_Power_Abort_Band	0 - 100	I4	%
40	Statx_HSE_Config_RF_PLATEN_RF_POWER_BANDS_Platten_RF_Reflected_Power_Warning_Band	0 - 100	I4	%
41	Statx_HSE_Config_RF_PLATEN_RF_POWER_BANDS_Platten_RF_Reflected_Power_Hold_Band	0 - 100	I4	%
42	Statx_HSE_Config_RF_PLATEN_RF_POWER_BANDS_Platten_RF_Reflected_Power_Abort_Band	0 - 100	I4	%
43	Statx_HSE_Config_RF_PLATEN_RF_Platten_RF_Tune_Pot_Preposition	0 - 100	F4	%
44	Statx_HSE_Config_RF_PLATEN_RF_Platten_RF_Load_Pot_Preposition	0 - 100	F4	%
45	Statx_HSE_Config_RF_COIL_RF_Coil_RF_Name		A	

ID offset	Name	Values	Format	Units
46	Statx_HSE_Config_RF_COIL_RF_Coil_RF_Supply_Type	0 = CM13-6 1 = LF 12 2 = LF 24 3 = RFX 600 4 = RFX II 5 = PDX 5000 6 = RFX 2150	I4	
47	Statx_HSE_Config_RF_COIL_RF_Coil_RF_Tune_Pot_Auto-Match		Bo	
48	Statx_HSE_Config_RF_COIL_RF_Coil_RF_Load_Pot_Auto-Match		Bo	
49	Statx_HSE_Config_RF_COIL_RF_POWER_BANDS_Coil_RF_Forward_Power_Warning_Band	5 - 100	I4	%
50	Statx_HSE_Config_RF_COIL_RF_POWER_BANDS_Coil_RF_Forward_Power_Hold_Band	5 - 100	I4	%
51	Statx_HSE_Config_RF_COIL_RF_POWER_BANDS_Coil_RF_Forward_Power_Abort_Band	5 - 100	I4	%
52	Statx_HSE_Config_RF_COIL_RF_POWER_BANDS_Coil_RF_Reflected_Power_Warning_Band	5 - 100	I4	%
53	Statx_HSE_Config_RF_COIL_RF_POWER_BANDS_Coil_RF_Reflected_Power_Hold_Band	5 - 100	I4	%
54	Statx_HSE_Config_RF_COIL_RF_POWER_BANDS_Coil_RF_Reflected_Power_Abort_Band	5 - 100	I4	%
55	Statx_HSE_Config_RF_COIL_RF_Coil_RF_Tune_Pot_Preposition	0 - 100	F4	%
56	Statx_HSE_Config_RF_COIL_RF_Coil_RF_Load_Pot_Preposition	0 - 100	F4	%
57	Statx_HSE_Config_RF_COIL_RF_Coil_RF_Strike/Load_Power_ramp_increment	1 - 999	I4	W/100ms
58	Statx_HSE_Config_ESC_Maximum_Platen_Temperature	0 - 70	I4	°C
59	Statx_HSE_Config_PLATEN_Platen_Temperature_Stabilisation_Time	1 - 999	I4	Minutes
60	Statx_HSE_Config_PLATEN_Control_Temperature_Warning_Band	0 - 1000	I4	°C
61	Statx_HSE_Config_PLATEN_Control_Temperature_Hold_Band	0 - 1000	I4	°C
62	Statx_HSE_Config_PLATEN_Control_Temperature_Abort_Band	0 - 1000	I4	°C
63	Statx_HSE_Config_PLATEN_Safety_Temperature_Warning_Band	0 - 1000	I4	°C
64	Statx_HSE_Config_PLATEN_Safety_Temperature_Hold_Band	0 - 1000	I4	°C
65	Statx_HSE_Config_PLATEN_Safety_Temperature_Abort_Band	0 - 1000	I4	°C
66	Statx_HSE_Config_ESC_ESC_Fitted		Bo	
67	Statx_HSE_Config_ESC_Maximum_Argon_Back_Pressure_Flow	0 - 20	I4	sccm
68	Statx_HSE_Config_ESC_Argon_Back_Pressure_Initial_Limit	0 - 20000	I4	mTorr
69	Statx_HSE_Config_ESC_De-chuck_Plasma_Enabled		Bo	
70	Statx_HSE_Config_ESC_De-chuck_Plasma_Coil_Power	0 - 600	I4	W
71	Statx_HSE_Config_ESC_De-chuck_Plasma_ESC_On_Time	0 - 60	I4	Secs
72	Statx_HSE_Config_ESC_De-chuck_Plasma_ESC_Off_Time	0 - 60	I4	Secs
73	Statx_HSE_Config_ESC_ARGON_PRESS_BANDS_Argon_Back_Pressure_Warning_Band	0 - 100	I4	%
74	Statx_HSE_Config_ESC_ARGON_PRESS_BANDS_Argon_Back_Pressure_Hold_Band	0 - 100	I4	%
75	Statx_HSE_Config_ESC_ARGON_PRESS_BANDS_Argon_Back_Pressure_Abort_Band	0 - 100	I4	%
76	Statx_HSE_Config_ESC_Recirculator_Fitted		Bo	
77	Statx_HSE_Config_ESC_TEMP_BANDS_Recirculator_Temp_Warning_Band	0 - 70	I4	°C
78	Statx_HSE_Config_ESC_TEMP_BANDS_Recirculator_Temp_Hold_Band	0 - 70	I4	°C
79	Statx_HSE_Config_ESC_TEMP_BANDS_Recirculator_Temp_Abort_Band	0 - 70	I4	°C
80	Statx_HSE_Config_CRYO_Cryo_Pump_Type	1 = OnBoard CTI 2 = Leybold 3 = Alcatel	I4	
86	Statx_HSE_Config_CRYO_Maximum_Gas_Load	0 - 999	I4	BL
91	Statx_HSE_Config_CRYO_TEMP_BANDS_Cryo_Temperature_Warning_Band	0 - 100	I4	K
92	Statx_HSE_Config_CRYO_TEMP_BANDS_Cryo_Temperature_Hold_Band	0 - 100	I4	K
93	Statx_HSE_Config_CRYO_TEMP_BANDS_Cryo_Temperature_Abort_Band	0 - 100	I4	K
94	Statx_HSE_Config_MISC_Maximum_HOLD_Time_before_Aborting	0 - 3600	I4	Secs
95	Statx_HSE_Config_MISC_Time_from_completing_Process_back_to_Ready	0 - 30	I4	Secs
96	Statx_HSE_Config_MISC_Backfill_Pressurisation_Timeout	1 - 10	I4	Mins
97	Statx_HSE_Config_MISC_Gas_Stabilisation_Time	0 - 60	I4	Secs

ID offset	Name	Values	Format	Units
98	Statx_HSE_Config_PRESSURES_Atmospheric_Cross_Over_Trip	600 - 800	F4	Torr
99	Statx_HSE_Config_PRESSURES_Intermediate_Cross_Over_Trip	0.5 - 3	F4	Torr
100	Statx_HSE_Config_PRESSURES_Rough_Cross_Over_Trip	1e-7 - 9.99e-3	F4	Torr
101	Statx_HSE_Config_VACUUM_Ion_Gauge_Type	0 = Standard 1 = ITR 100 2 = Micro-Ion 358	I4	
102	Statx_HSE_Config_VACUUM_Ion_Gauge_Gas_Conversion_Factor	1e-1 - 9.99	F4	
103	Statx_HSE_Config_RF_PLATEN_RF_Maximum_Accumulated_Platten_Power	0 - 999	I4	KWHrs
106	Statx_HSE_Config_MISC_Two_Stage_Lift_Fitted		Bo	
107	Statx_HSE_Config_VACUUM_External_RGA_fault_inputs		Bo	
108	Statx_HSE_Config_RF_OPTICAL_SENSOR_Sensor_Configured		Bo	
109	Statx_HSE_Config_RF_OPTICAL_SENSOR_Lower_Warning	0 - 100	I4	%
110	Statx_HSE_Config_RF_OPTICAL_SENSOR_Lower_Hold	0 - 100	I4	%
111	Statx_HSE_Config_RF_OPTICAL_SENSOR_Lower_Abort	0 - 100	I4	%
112	Statx_HSE_Config_RF_OPTICAL_SENSOR_Upper_Warning	0 - 100	I4	%
113	Statx_HSE_Config_RF_OPTICAL_SENSOR_Upper_Hold	0 - 100	I4	%
114	Statx_HSE_Config_RF_OPTICAL_SENSOR_Upper_Abort	0 - 100	I4	%
115	Statx_HSE_Config_VACUUM_Pump_To_Base_At_End_Of_Process		Bo	
116	Statx_HSE_Config_CRYO_TURBO_PUMP_Turbo_At_Speed_Timeout	120 - 600	I4	Secs
117	Statx_HSE_Config_CRYO_TURBO_PUMP_Turbo_Foreline_Pumpdown_trip	20 - 200	I4	mTorr
118	Statx_HSE_Config_CRYO_TURBO_PUMP_Turbo_Foreline_Pumpdown_Timeout	20 - 300	I4	Secs
119	Statx_HSE_Config_CRYO_TURBO_PUMP_Turbo_Speed_Warning_Band	0 - 100	I4	rpm
120	Statx_HSE_Config_CRYO_TURBO_PUMP_Turbo_Speed_Hold_Band	0 - 100	I4	rpm
121	Statx_HSE_Config_CRYO_TURBO_PUMP_Turbo_Speed_Abort_Band	0 - 100	I4	rpm
122	Statx_HSE_Config_CRYO_APC_APC_Position_Warning_Band	0 - 100	I4	
123	Statx_HSE_Config_CRYO_APC_APC_Position_Hold_Band	0 - 100	I4	
124	Statx_HSE_Config_CRYO_APC_APC_Position_Abort_Band	0 - 100	I4	
128	Statx_HSE_Config_CRYO_APC_Fitted		Bo	
129	Statx_HSE_Config_RF_COIL_RF_Load_/Tune_Pots_pre-position_to_recipe_values		Bo	
130	Statx_HSE_Config_RF_PLATEN_RF_Load_/Tune_Pots_pre-position_to_recipe_values		Bo	
969	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_1st_Stage_Temp_Control	0 - 999	I4	K
970	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Delay_Start	0 - 9999	I4	Mins
971	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Delay_Restart	0 - 999	I4	Mins
972	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Fast_Regen_Rough_Test	0 - 999	I4	Secs
973	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Ext_Purge_Time	0 - 9999	I4	Mins
974	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Repurge_Time	0 - 9999	I4	Mins
975	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Repurge_Cycles	0 - 20	I4	
976	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Base_Pressure	25 - 200	I4	Mic
977	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Rate_of_Rise_Limit	1 - 100	I4	Mic/Min
978	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Rate_of_Rise_Cycles	0 - 40	I4	
980	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Power_Failure	0 - 2	I4	
981	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Power_Failure_Temperature	0 - 80	I4	K
982	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Pump_Elapsed_Time	0 - 60000	I4	Hrs
983	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Time_between_Full_Regens	0 - 60000	I4	Hrs
984	Statx_HSE_Config_CRYO_CTI_CRYO_CONFIG_Time_between_Fast_Regens	0 - 60000	I4	Hrs
999	Statx_HSE_Config_STATION_Align_wafer_on_exit		Bo	

22.1.5 Heat PM

ID offset	Name	Values	Format	Units
1	Statx_PreHeat_Config_STATION_Name		A	
2	Statx_PreHeat_Config_VACUUM_Foreline_Roughing_Trip	1e-3 – 2	F4	Torr
3	Statx_PreHeat_Config_VACUUM_Foreline_Roughing_Timeout	10 – 300	I4	Secs
4	Statx_PreHeat_Config_VACUUM_Chamber_Roughing_Trip	1e-3 – 2	F4	Torr
5	Statx_PreHeat_Config_VACUUM_Backup_Pump_Active_High		Bo	
6	Statx_PreHeat_Config_VACUUM_Backup_Pump_On_Timeout	10 – 60	I4	Secs
7	Statx_PreHeat_Config_VACUUM_Turbo_Pump_Type	1 = TCP380 2 = TCP121 3 = Alcatel	I4	None
8	Statx_PreHeat_Config_VACUUM_Turbo_At_Speed_Timeout	0 - 60	I4	Mins
9	Statx_PreHeat_Config_VACUUM_Additional_Chamber_Vent_Time	0 – 60	I4	Secs
10	Statx_PreHeat_Config_VACUUM_Process_Pressure_Limit	0 – 1e-1	F4	Torr
11	Statx_PreHeat_Config_LAMP_Stabilisation_Time	0 – 60	I4	Secs
12	Statx_PreHeat_Config_LAMP_Lamp_Power_Warning_Band	0 – 100	I4	%
13	Statx_PreHeat_Config_LAMP_Lamp_Power_Hold_Band	0 – 100	I4	%
14	Statx_PreHeat_Config_LAMP_Lamp_Power_Abort_Band	0 – 100	I4	%
15	Statx_PreHeat_Config_MISC_Maximum_HOLD_Time_before_Aborting	0 – 3600	I4	Secs
16	Statx_PreHeat_Config_MISC_Abort_Delay_Timeout	0 – 60	I4	Secs
17	Statx_PreHeat_Config_MISC_Automatic_Bakeout_Required		Bo	
18	Statx_PreHeat_Config_MISC_Time_from_completing_Process_back_to_Read_y	0 – 60	I4	Secs
19	Statx_PreHeat_Config_PRESSURES_Atmospheric_Cross_Over_Trip	600 – 800	F4	Torr
20	Statx_PreHeat_Config_PRESSURES_Intermediate_Cross_Over_Trip	0.5 – 3	F4	Torr
21	Statx_PreHeat_Config_PRESSURES_Rough_Cross_Over_Trip	1e-7 – 9.99e-3	F4	Torr
22	Statx_PreHeat_Config_VACUUM_Ion_Gauge_Type	0 = Standard 1 = ITR 100 2 = Micro-Ion 358	I4	None
23	Statx_PreHeat_Config_VACUUM_Ion_Gauge_Gas_Conversion_Factor	1e-1 – 9.89	F4	None
24	Statx_PreHeat_Config_VACUUM_External_RGA_fault_inputs		Bo	
25	Statx_PreHeat_Config_MISC_Align_Wafer		Bo	
26	Statx_PreHeat_Config_MISC_Compressed_Air_Cooling		Bo	
27	Statx_PreHeat_Config_VACUUM_Process_Pressure_Limit_Fault_Level	0 = Warning 1 = Hold 2 = Abort	I4	None
28	Statx_PreHeat_Config_MISC_Water_ON_in_Idle		Bo	
999	Statx_PreHeat_Config_STATION_Align_wafer_on_exit		Bo	

22.1.7 GTM/Level 1 Brooks MX Transport

ID offset	Name	Values	Format	Units
1	Stat0_MXTransport_Config_STATION_Name		A	
2	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_A_Fitted		Bo	
3	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_1_Fitted		Bo	
4	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_2_Fitted		Bo	
5	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_3_Fitted		Bo	
6	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_4_Fitted		Bo	
7	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_5_Fitted		Bo	
8	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_6_Fitted		Bo	
9	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_B_Fitted		Bo	
10	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_A_Exclusive_Arbitration_Policy		Bo	
11	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_1_Exclusive_Arbitration_Policy		Bo	
12	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_2_Exclusive_Arbitration_Policy		Bo	
13	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_3_Exclusive_Arbitration_Policy		Bo	
14	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_4_Exclusive_Arbitration_Policy		Bo	
15	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_5_Exclusive_Arbitration_Policy		Bo	
16	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_6_Exclusive_Arbitration_Policy		Bo	
17	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_B_Exclusive_Arbitration_Policy		Bo	
18	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_A_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
19	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_1_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
20	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_2_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
21	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_3_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
22	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_4_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
23	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_5_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
24	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_6_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
25	Stat0_MXTransport_Config_SLOT_VALVES_SLOT_VALVE_B_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
34	Stat0_MXTransport_Config_VACUUM_Pressure_Gauge_Type	0 = GP Convectron 1 = Triple Gauge	I4	
36	Stat0_MXTransport_Config_VACUUM_Base_Pressure	1e-8 - 3e-1	F4	Torr
37	Stat0_MXTransport_Config_VACUUM_Roughing_XOver_Trip	1e-7 - 1e+1	F4	Torr
38	Stat0_MXTransport_Config_VACUUM_Hivac_Pump_Type	0 = None 1 = Turbo 2 = Cryo	I4	
39	Stat0_MXTransport_Config_VACUUM_Base_Pressure_Timeout	10 - 1200	I4	Secs
40	Stat0_MXTransport_Config_VACUUM_Vent_Timeout	10 - 600	I4	Secs
41	Stat0_MXTransport_Config_VACUUM_Over_Vent_Time	0 - 30	I4	Secs
42	Stat0_MXTransport_Config_VACUUM_Atmospheric_Differential_Pressure	600 - 800	F4	Torr
43	Stat0_MXTransport_Config_VACUUM_TM_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
44	Stat0_MXTransport_Config_VACUUM_Roughing_Manifold_Pressure_Trip	1e-7 - 1e+1	F4	Torr
45	Stat0_MXTransport_Config_VACUUM_Backup_Pump_Fitted		Bo	
47	Stat0_MXTransport_Config_VACUUM_Maximum_Turbo_Speed	0 - 9999	I4	Hz
49	Stat0_MXTransport_Config_MISC_Robot_Arm(s)_to_be_used_for_Wafer_Scheduling	0 = Both 1 = Arm A 2 = Arm B	I4	
50	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_1_Fitted		Bo	
51	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_1_Name		A	
52	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_2_Fitted		Bo	

ID offset	Name	Values	Format	Units
53	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_2_Name		A	
54	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_3_Fitted		Bo	
55	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_3_Name		A	
56	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_4_Fitted		Bo	
57	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_4_Name		A	
58	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_5_Fitted		Bo	
59	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_5_Name		A	
60	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_6_Fitted		Bo	
61	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_6_Name		A	
62	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_7_Fitted		Bo	
63	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_7_Name		A	
64	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_8_Fitted		Bo	
65	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_8_Name		A	
66	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_9_Fitted		Bo	
67	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_9_Name		A	
68	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_10_Fitted		Bo	
69	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_1_Gas_10_Name		A	
70	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_11_Fitted		Bo	
71	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_11_Name		A	
72	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_12_Fitted		Bo	
73	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_12_Name		A	
74	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_13_Fitted		Bo	
75	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_13_Name		A	
76	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_14_Fitted		Bo	
77	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_14_Name		A	
78	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_15_Fitted		Bo	
79	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_15_Name		A	
80	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_16_Fitted		Bo	
81	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_16_Name		A	
82	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_17_Fitted		Bo	
83	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_17_Name		A	
84	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_18_Fitted		Bo	
85	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_18_Name		A	
86	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_19_Fitted		Bo	
87	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_19_Name		A	
88	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_20_Fitted		Bo	
89	Stat0_MXTransport_Config_GDU_GAS_MANIFOLD_2_Gas_20_Name		A	
90	Stat0_MXTransport_Config_MISC_Pneumatics_Alarm_Reported_Time	0 - 300	I4	Secs
91	Stat0_MXTransport_Config_MISC_Roughing_Pump_Alarm_Reported_Time	0 - 300	I4	Secs
92	Stat0_MXTransport_Config_MISC_Backup_Pump_Alarm_Reported_Time	0 - 300	I4	Secs
93	Stat0_MXTransport_Config_WATER_DETECTION_Water_Detection_by_Software		Bo	
94	Stat0_MXTransport_Config_WATER_DETECTION_Water_Detection_Enabled		Bo	
95	Stat0_MXTransport_Config_WATER_DETECTION_Water_Detection_Alarm_Reported_Time	0 - 300	I4	Secs
97	Stat0_MXTransport_Config_VACUUM_Display_in_Exponential_Format		Bo	
98	Stat0_MXTransport_Config_VACUUM_Single_Vent_Valve_Fitted		Bo	
99	Stat0_MXTransport_Config_MISC_Robot_COM_Port	1 - 8	I4	
100	Stat0_MXTransport_Config_VACUUM_ATM_Switch_Fitted		Bo	
101	Stat0_MXTransport_Config_VACUUM_CRYO_Pump_Temperature_Abort_Limit	0 - 120	I4	K
102	Stat0_MXTransport_Config_VACUUM_Controllable_Roughing_Pump		Bo	
103	Stat0_MXTransport_Config_VACUUM_Atmospheric_Pressure	0 - 760	F4	Torr
104	Stat0_MXTransport_Config_VACUUM_Roughing_Timeout	10 - 600	I4	Secs
105	Stat0_MXTransport_Config_GDU_GDU_Fitted		Bo	
106	Stat0_MXTransport_Config_VACUUM_Module_Roughing_Gauge_Fitted		Bo	
107	Stat0_MXTransport_Config_MISC_Trace_at_Debug_Level		Bo	
108	Stat0_MXTransport_Config_MISC_Maximum_Size_of_Trace_Log_File	1 - 10	I4	MB
109	Stat0_MXTransport_Config_MISC_Push_Centraliser_Fitted		Bo	
110	Stat0_MXTransport_Config_MISC_Delay_While_Extended_to_Push_Centraliser	0 - 1	F4	Secs

ID offset	Name	Values	Format	Units
111	Stat0_MXTransport_Config_MISC_Robot_Home_Timeout	40 – 120	F4	Secs
112	Stat0_MXTransport_Config_MISC_Robot_Rotate_Timeout	5 – 60	F4	Secs
113	Stat0_MXTransport_Config_MISC_Robot_Pick / Place_Timeout	8 - 60	F4	Secs
114	Stat0_MXTransport_Config_MISC_Robot_Extend / Retract_Timeout	8 - 60	F4	Secs
115	Stat0_MXTransport_Config_MISC_Robot_Up / Down_Timeout	8 – 60	F4	Secs
116	Stat0_MXTransport_Config_MISC_Robot_Simple_Command_Timeout	5 – 30	F4	Secs
117	Stat0_MXTransport_Config_MISC_Robot_Capture_Timeout	0 – 3000	F4	Secs
118	Stat0_MXTransport_Config_MISC_Push_Centraliser_used_for_larger_wafers		Bo	
119	Stat0_MXTransport_Config_VACUUM_TURBO_Turbo_Pump_COM_Port	1 – 8	I4	
120	Stat0_MXTransport_Config_VACUUM_TURBO_Turbo_At_Speed_Trip	0 – 100	I4	%
121	Stat0_MXTransport_Config_VACUUM_TURBO_Turbo_At_Speed_Timeout	0 – 600	I4	Secs
122	Stat0_MXTransport_Config_COUNTERS_Robot_Cycle		Bo	
123	Stat0_MXTransport_Config_COUNTERS_Wafers_Run		Bo	
124	Stat0_MXTransport_Config_COUNTERS_Total_Wafers_Run		Bo	
125	Stat0_MXTransport_Config_SLOT_VALVES_COOLSTATION_Strict_Slot_Valve_Policy_for_Cooler		Bo	
126	Stat0_MXTransport_Config_SLOT_VALVES_COOLSTATION_Vacuum_Differential_Pressure		Bo	
127	Stat0_MXTransport_Config_MISC_Auto_Re-Pump_VCEs		Bo	
969	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_1st_Stage_Temp_Control	0 - 999	I4	K
970	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Delay_Start	0 - 9999	I4	Minutes
971	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Delay_Restart	0 - 9999	I4	Minutes
972	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Fast_Regen_Rough_Test	0 - 999	I4	Secs
973	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Ext_Purge_Time	0 - 9999	I4	Minutes
974	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Repurge_Time	0 - 9999	I4	Minutes
975	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Repurge_Cycles	0 - 20	I4	
976	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Base_Pressure	25 - 200	I4	Mic
977	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Rate_of_Rise_Limit	0 - 100	I4	Mic/Min
978	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Rate_of_Rise_Cycles	0 - 255	I4	
980	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Power_Failure	0 - 2	I4	
981	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Power_Failure_Temperature	10 - 80	I4	K
982	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Pump_Elapsed_Time	0 - 60000	I4	Hrs
983	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Time_between_Full_Regens	0 - 60000	I4	Hrs
984	Stat0_MXTransport_Config_VACUUM_CRYO_CRYO_CONFIG_Time_between_Fast_Regens	0 - 60000	I4	Hrs

22.1.8 C2L Transport

ID offset	Name	Values	Format	Units
1	Stat0_c2LTransport_Config_STATION_Name		A	
2	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_A_Fitted		Bo	
3	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_1_Fitted		Bo	
4	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_2_Fitted		Bo	
5	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_3_Fitted		Bo	
10	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_A_Exclusive_Arbitration_Policy		Bo	
11	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_1_Exclusive_Arbitration_Policy		Bo	
12	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_2_Exclusive_Arbitration_Policy		Bo	
13	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_3_Exclusive_Arbitration_Policy		Bo	
18	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_A_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
19	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_1_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
20	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_2_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
21	Stat0_C2LTransport_Config_SLOT_VALVES_SLOT_VALVE_3_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
34	Stat0_C2LTransport_Config_VACUUM_Pressure_Gauge_Type	0 = GP Convectron 1 = Triple Gauge	I4	
36	Stat0_C2LTransport_Config_VACUUM_Base_Pressure	1e-8 - 3e-1	F4	Torr
37	Stat0_C2LTransport_Config_VACUUM_Roughing_XOver_Trip	1e-7 - 1e+1	F4	Torr
38	Stat0_C2LTransport_Config_VACUUM_Hivac_Pump_Type	0 = Roughin Only 1 = Turbo	I4	
39	Stat0_C2LTransport_Config_VACUUM_Base_Pressure_Timeout	10 - 1200	I4	Secs
40	Stat0_C2LTransport_Config_VACUUM_Vent_Timeout	10 - 600	I4	Secs
41	Stat0_C2LTransport_Config_VACUUM_Over_Vent_Time	0 - 30	I4	Secs
42	Stat0_C2LTransport_Config_VACUUM_Atmospheric_Differential_Pressure	600 - 800	F4	Torr
43	Stat0_C2LTransport_Config_VACUUM_TM_Vacuum_Differential_Pressure	1e-8 - 3e-1	F4	Torr
44	Stat0_C2LTransport_Config_VACUUM_Roughing_Manifold_Pressure_Trip	1e-7 - 1e+1	F4	Torr
90	Stat0_C2LTransport_Config_MISC_Pneumatics_Alarm_Reported_Time	0 - 300	I4	Secs
93	Stat0_C2LTransport_Config_WATER_DETECTION_Water_Detection_by_Software		Bo	
94	Stat0_C2LTransport_Config_WATER_DETECTION_Water_Detection_Enabled		Bo	
95	Stat0_C2LTransport_Config_WATER_DETECTION_Water_Detection_Alarm_Reported_Time	0 - 300	I4	Secs
97	Stat0_C2LTransport_Config_VACUUM_Display_in_Exponential_Format		Bo	
99	Stat0_C2LTransport_Config_MISC_Robot_COM_Port	1 - 8	I4	
100	Stat0_C2LTransport_Config_VACUUM_ATM_Switch_Fitted		Bo	
103	Stat0_C2LTransport_Config_VACUUM_Atmospheric_Pressure	0 - 760	F4	Torr
104	Stat0_C2LTransport_Config_VACUUM_Roughing_Timeout	10 - 600	I4	Secs
106	Stat0_C2LTransport_Config_VACUUM_Module_Roughing_Gauge_Fitted		Bo	
107	Stat0_C2LTransport_Config_MISC_Trace_at_Debug_Level		Bo	
108	Stat0_C2LTransport_Config_MISC_Maximum_Size_of_Trace_Log_File	1 - 10	I4	MB
109	Stat0_C2LTransport_Config_MISC_Push_Centraliser_Fitted		Bo	
110	Stat0_C2LTransport_Config_MISC_Delay_While_Extended_to_Push_Centraliser	0 - 1	F4	Secs
111	Stat0_C2LTransport_Config_MISC_Robot_Home_Timeout	40 - 120	F4	Secs
112	Stat0_C2LTransport_Config_MISC_Robot_Rotate_Timeout	5 - 60	F4	Secs
113	Stat0_C2LTransport_Config_MISC_Robot_Pick / Place_Timeout	8 - 60	F4	Secs
114	Stat0_C2LTransport_Config_MISC_Robot_Extend / Retract_Timeout	8 - 60	F4	Secs
115	Stat0_C2LTransport_Config_MISC_Robot_Up / Down_Timeout	8 - 60	F4	Secs
116	Stat0_C2LTransport_Config_MISC_Robot_Simple_Command_Timeout	5 - 30	F4	Secs
117	Stat0_C2LTransport_Config_MISC_Robot_Capture_Timeout	0 - 3000	F4	Secs
118	Stat0_C2LTransport_Config_MISC_Push_Centraliser_used_for_larger_wafers		Bo	
119	Stat0_C2LTransport_Config_VACUUM_TURBO_Turbo_Pump_COM_Port	1 - 8	I4	
120	Stat0_C2LTransport_Config_VACUUM_TURBO_Turbo_At_Speed_Trip	0 - 100	I4	%

ID offset	Name	Values	Format	Units
121	Stat0_C2LTransport_Config_VACUUM_TURBO_Turbo_At_Speed_Timeout	0 – 600	I4	Secs
122	Stat0_C2LTransport_Config_COUNTERS_Robot_Cycle		Bo	
123	Stat0_C2LTransport_Config_COUNTERS_Wafers_Run		Bo	
124	Stat0_C2LTransport_Config_COUNTERS_Total_Wafers_Run		Bo	
127	Stat0_C2LTransport_Config_MISC_Auto_Re-Pump_VCEs		Bo	
128	Stat0_c2LTransport_Config_VACUUM_Pressure_Differential_Check_Timeout	0 – 60	I4	Secs
129	Stat0_c2LTransport_Config_MISC_Leak-up_Rate_Unit	0 – 1	I4	
130	Stat0_c2LTransport_Config_MISC_Robot_Communication_Type	0 – 1	I4	
134	Stat0_c2LTransport_Config_MISC_Keep_VCE_Slot_Valves_Open		Bo	

22.1.9 GTM/Level 1 Brooks Coolstation:-

ID offset	Name	Values	Format	Units
1	Stat10_TopCooler_Config_STATION_Station_Name		A	
2	Stat10_TopCooler_Config_STATION_CoolStation_in_Station	1 – 16	I4	None
3	Stat10_TopCooler_Config_MISC_Dual_Gas_Lines_Fitted		Bo	
4	Stat10_TopCooler_Config_MISC_Number_of_Charging_Cycles	1 – 5	I4	None
5	Stat10_TopCooler_Config_MISC_Delay_Between_Charges	0 – 10	F4	Secs
999	Stat10_TopCooler_Config_STATION_Align_wafer_on_exit		Bo	

22.1.10 GTM/Level 1 Brooks MX Cassette:-

In EC name, x = 1 for VCE A and 8 for VCE B

ID offset	Name	Values	Format	Units
1	Statx_VCE_Config_STATION_Name		A	
2	Statx_VCE_Config_VACUUM_Pressure_Gauge_Type	0 = GP Convectron 1 = Triple Gauge	I4	
4	Statx_VCE_Config_VACUUM_Base_Pressure	1e-8 - 3e-1	F4	Torr
5	Statx_VCE_Config_VACUUM_Slow_Rough_-_>_Fast_Rough_Cross_Over	1e-1 - 9.99e+2	F4	Torr
6	Statx_VCE_Config_VACUUM_Fast_Roughing_XOver_Trip	1e-7 - 1e+1	F4	Torr
7	Statx_VCE_Config_VACUUM_Slow_Vent_XOver_Trip	1e-1 - 9.99e+2	F4	Torr
8	Statx_VCE_Config_VACUUM_Base_Pressure_Timeout	10 - 1200	I4	Secs
9	Statx_VCE_Config_VACUUM_Vent_Timeout	10 - 600	I4	Secs
10	Statx_VCE_Config_VACUUM_Over_Vent_Time	0 - 30	I4	Secs
11	Statx_VCE_Config_VACUUM_Hivac_Pump_Type	0 = None 1 = Turbo 2 = Cryo	I4	
12	Statx_VCE_Config_MISC_Platform_Extend		Bo	
20	Statx_VCE_Config_VACUUM_Display_in_Exponential_Format		Bo	
21	Statx_VCE_Config_MISC_Number_of_Wafers_Entry_Enabled		Bo	
22	Statx_VCE_Config_MISC_Auto_Eject_End	0 = Ejected 1 = Vented	I4	
23	Statx_VCE_Config_MISC_Include_Pump_in_Close_Door_Operation		Bo	
24	Statx_VCE_Config_VACUUM_ATM_Switch_Fitted		Bo	
25	Statx_VCE_Config_MISC_VCE_COM_Port	1 - 8	I4	
26	Statx_VCE_Config_VACUUM_Turbo_Pump_COM_Port	1 - 8	I4	
27	Statx_VCE_Config_VACUUM_Atmospheric_Pressure	0 - 760	F4	Torr
28	Statx_VCE_Config_VACUUM_Roughing_Timeout	10 - 600	I4	Secs
29	Statx_VCE_Config_VACUUM_Turbo_At_Speed_Trip	0 - 100	I4	%
30	Statx_VCE_Config_VACUUM_Turbo_At_Speed_Timeout	0 - 600	I4	Secs
31	Statx_VCE_Config_MISC_SMIF_Robot_Type	0 = None 1 = LPI2200 2 = ARM2125 3 = LPT2150	I4	
32	Statx_VCE_Config_MISC_SMIF_COM_Port	1 - 8	I4	
33	Statx_VCE_Config_MISC_Clear_number_of_wafers_in_cassette		Bo	
34	Statx_VCE_Config_MISC_Enable_Cross_and_Double_Slot_Detection		Bo	
35	Statx_VCE_Config_MISC_Max_Thickness_Deviation_for_Double_Slot_Detection	100 - 2000	I4	
36	Statx_VCE_Config_VACUUM_Abort_Faults_for_Pumping_Timeouts		Bo	
37	Statx_VCE_Config_MISC_Pre-Vent_Delay		I4	Secs
38	Statx_VCE_Config_MISC_Post-Vent_Delay		I4	Secs
40	Statx_VCE_Config_MISC_Cassette_Size		I4	
999	Statx_VCE_Config_STATION_Align_wafer_on_exit		Bo	

22.1.11 EtchModule: -

ID offset	Name	Values	Format	Units
1	Statx_Etch_Config_STATION_Name		A	
2	Statx_Etch_Config_GAS_BOX_Last_Gas_on_Manifold_One	1 - 8	I4	
3	Statx_Etch_Config_GAS_BOX_Exhaust_Extract_Fitted		Bo	
4	Statx_Etch_Config_GAS_BOX_Exhaust_Extract_Enabled		Bo	
5	Statx_Etch_Config_GAS_BOX_Exhaust_Extract_Fault_Level	1 - 3	I4	
6	Statx_Etch_Config_GAS_BOX_Shutdown_Vent_Time	0 - 1200	F4	Secs
9	Statx_Etch_Config_GAS_BOX_GAS_1_Fitted		Bo	
10	Statx_Etch_Config_GAS_BOX_GAS_1_Name		A	
11	Statx_Etch_Config_GAS_BOX_GAS_1_Symbol		A	
12	Statx_Etch_Config_GAS_BOX_GAS_1_Full_Scale	0 - 10000	F4	sccm
16	Statx_Etch_Config_GAS_BOX_GAS_1_Purge_Valve_Fitted		Bo	
17	Statx_Etch_Config_GAS_BOX_GAS_1_Gas_Off_in_Hold		Bo	
20	Statx_Etch_Config_GAS_BOX_GAS_2_Fitted		Bo	
21	Statx_Etch_Config_GAS_BOX_GAS_2_Name		A	
22	Statx_Etch_Config_GAS_BOX_GAS_2_Symbol		A	
23	Statx_Etch_Config_GAS_BOX_GAS_2_Full_Scale	0 - 10000	F4	sccm
27	Statx_Etch_Config_GAS_BOX_GAS_2_Purge_Valve_Fitted		Bo	
28	Statx_Etch_Config_GAS_BOX_GAS_2_Gas_Off_in_Hold		Bo	
31	Statx_Etch_Config_GAS_BOX_GAS_3_Fitted		Bo	
32	Statx_Etch_Config_GAS_BOX_GAS_3_Name		A	
33	Statx_Etch_Config_GAS_BOX_GAS_3_Symbol		A	
34	Statx_Etch_Config_GAS_BOX_GAS_3_Full_Scale	0 - 10000	F4	sccm
38	Statx_Etch_Config_GAS_BOX_GAS_3_Purge_Valve_Fitted		Bo	
39	Statx_Etch_Config_GAS_BOX_GAS_3_Gas_Off_in_Hold		Bo	
42	Statx_Etch_Config_GAS_BOX_GAS_4_Fitted		Bo	
43	Statx_Etch_Config_GAS_BOX_GAS_4_Name		A	
44	Statx_Etch_Config_GAS_BOX_GAS_4_Symbol		A	
45	Statx_Etch_Config_GAS_BOX_GAS_4_Full_Scale	0 - 10000	F4	sccm
49	Statx_Etch_Config_GAS_BOX_GAS_4_Purge_Valve_Fitted		Bo	
50	Statx_Etch_Config_GAS_BOX_GAS_4_Gas_Off_in_Hold		Bo	
53	Statx_Etch_Config_GAS_BOX_GAS_5_Fitted		Bo	
54	Statx_Etch_Config_GAS_BOX_GAS_5_Name		A	
55	Statx_Etch_Config_GAS_BOX_GAS_5_Symbol		A	
56	Statx_Etch_Config_GAS_BOX_GAS_5_Full_Scale	0 - 10000	F4	sccm
60	Statx_Etch_Config_GAS_BOX_GAS_5_Purge_Valve_Fitted		Bo	
61	Statx_Etch_Config_GAS_BOX_GAS_5_Gas_Off_in_Hold		Bo	
64	Statx_Etch_Config_GAS_BOX_GAS_6_Fitted		Bo	
65	Statx_Etch_Config_GAS_BOX_GAS_6_Name		A	
66	Statx_Etch_Config_GAS_BOX_GAS_6_Symbol		A	
67	Statx_Etch_Config_GAS_BOX_GAS_6_Full_Scale	0 - 10000	F4	sccm
71	Statx_Etch_Config_GAS_BOX_GAS_6_Purge_Valve_Fitted		Bo	
72	Statx_Etch_Config_GAS_BOX_GAS_6_Gas_Off_in_Hold		Bo	
75	Statx_Etch_Config_GAS_BOX_GAS_7_Fitted		Bo	
76	Statx_Etch_Config_GAS_BOX_GAS_7_Name		A	
77	Statx_Etch_Config_GAS_BOX_GAS_7_Symbol		A	
78	Statx_Etch_Config_GAS_BOX_GAS_7_Full_Scale	0 - 10000	F4	sccm
82	Statx_Etch_Config_GAS_BOX_GAS_7_Purge_Valve_Fitted		Bo	
83	Statx_Etch_Config_GAS_BOX_GAS_7_Gas_Off_in_Hold		Bo	
86	Statx_Etch_Config_GAS_BOX_GAS_8_Fitted		Bo	
87	Statx_Etch_Config_GAS_BOX_GAS_8_Name		A	
88	Statx_Etch_Config_GAS_BOX_GAS_8_Symbol		A	
89	Statx_Etch_Config_GAS_BOX_GAS_8_Full_Scale	0 - 10000	F4	sccm
93	Statx_Etch_Config_GAS_BOX_GAS_8_Purge_Valve_Fitted		Bo	
94	Statx_Etch_Config_GAS_BOX_GAS_8_Gas_Off_in_Hold		Bo	
99	Statx_Etch_Config_TEMPERATURES_GAS_BOX_HEATER_Fitted		Bo	
100	Statx_Etch_Config_TEMPERATURES_GAS_BOX_HEATER_Name		A	
102	Statx_Etch_Config_TEMPERATURES_GAS_BOX_HEATER_Max_Temperature	0 - 300	F4	°C
103	Statx_Etch_Config_TEMPERATURES_GAS_BOX_HEATER_Maximum_Rate_of_Change	0 - 99999	F4	°C/min

ID offset	Name	Values	Format	Units
106	Statx_Etch_Config_TEMPERATURES_GAS_BOX_HEATER_Default_Temperature	0 - 300	F4	°C
107	Statx_Etch_Config_TEMPERATURES_GAS_BOX_HEATER_Tolerance_Warning_band	0 - 100	F4	°C
108	Statx_Etch_Config_TEMPERATURES_GAS_BOX_HEATER_Tolerance_Fault_band	0 - 100	F4	°C
110	Statx_Etch_Config_TEMPERATURES_CHAMBER_WALL_Fitted		Bo	
111	Statx_Etch_Config_TEMPERATURES_CHAMBER_WALL_Name		A	
113	Statx_Etch_Config_TEMPERATURES_CHAMBER_WALL_Max_Temperature	0 - 300	F4	°C
114	Statx_Etch_Config_TEMPERATURES_CHAMBER_WALL_Maximum_Rate_of_Change	0 - 99999	F4	°C/min
117	Statx_Etch_Config_TEMPERATURES_CHAMBER_WALL_Default_Temperature	0 - 300	F4	°C
118	Statx_Etch_Config_TEMPERATURES_CHAMBER_WALL_Tolerance_Warning_band	0 - 100	F4	°C
119	Statx_Etch_Config_TEMPERATURES_CHAMBER_WALL_Tolerance_Fault_band	0 - 100	F4	°C
121	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Heater_Control_Type	0 = Not Fitted 1 = Watlow Monitoring 2 = Watlow Controlling 3 = Recirculator Monitoring 4 = Recirculator Controlling	I4	
122	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Name		A	
124	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Max_Temperature	0 - 300	F4	°C
125	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Maximum_Rate_of_Change	0 - 99999	F4	°C/min
128	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Default_Temperature	-40 - 300	F4	°C
129	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Tolerance_Warning_band	0 - 100	F4	°C
130	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Tolerance_Fault_band	0 - 100	F4	°C
132	Statx_Etch_Config_TEMPERATURES_UPPER_CHAMBER_Fitted		Bo	
133	Statx_Etch_Config_TEMPERATURES_UPPER_CHAMBER_Name		A	
135	Statx_Etch_Config_TEMPERATURES_UPPER_CHAMBER_Max_Temperature	0 - 500	F4	°C
136	Statx_Etch_Config_TEMPERATURES_UPPER_CHAMBER_Maximum_Rate_of_Change	0 - 99999	F4	°C/min
139	Statx_Etch_Config_TEMPERATURES_UPPER_CHAMBER_Default_Temperature	0 - 500	F4	°C
140	Statx_Etch_Config_TEMPERATURES_UPPER_CHAMBER_Tolerance_Warning_band	0 - 100	F4	°C
141	Statx_Etch_Config_TEMPERATURES_UPPER_CHAMBER_Tolerance_Fault_band	0 - 100	F4	°C
206	Statx_Etch_Config_PRESSURES_Software_Control_of_backing_pump		Bo	
210	Statx_Etch_Config_PRESSURES_Max_Pressure_Allowed_in_Recipe	0 - 100000	F4	mTorr
211	Statx_Etch_Config_PRESSURES_Pumpout_Pressure	0 - 100000	F4	mTorr
212	Statx_Etch_Config_MISC_Go_to_IDLE_Timeout	0 - 3600	F4	Secs
214	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_Max_Power	0 - 9999	F4	W
215	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_Full_Scale	0 - 10000	F4	W
216	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_Monitor_RF_Reflected_Power		Bo	
217	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_Reflected_Full_Scale	0 - 10000	F4	W
218	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_Peak_to_Peak_Max_Volts	0 - 9999	F4	V
219	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_Peak_to_Peak_Full_Scale	0 - 10000	F4	V
220	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_DC_Bias_Max_Volts	0 - 9999	F4	V
221	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_DC_Bias_Full_Scale	0 - 10000	F4	V

ID offset	Name	Values	Format	Units
224	Statx_Etch_Config_HELIUM_BP_Maxium_Helium_Flow	0 - 50	I4	sccm
274	Statx_Etch_Config_MISC_Auto_Restore_after_Hold		Bo	
275	Statx_Etch_Config_MISC_Restore_Delay	1 - 99	F4	Secs
276	Statx_Etch_Config_MISC_Max_Number_of_Auto_Restores_per_Recipe	1 - 9	I4	
277	Statx_Etch_Config_MISC_Band_Monitoring_Delay	0 - 600	F4	Secs
278	Statx_Etch_Config_MISC_Maximum_HOLD_Time_before_Aborting	0 - 9999	F4	Secs
281	Statx_Etch_Config_PRESSURES_Rough_Cross_Over_Trip	0 - 10000	F4	mTorr
288	Statx_Etch_Config_HELIUM_BP_Fitted		Bo	
289	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_Max_Power	0 - 9999	F4	W
290	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_Full_Scale	0 - 10000	F4	W
291	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_Monitor_RF_Reflected_Power		Bo	
292	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_Reflected_Full_Scale	0 - 10000	F4	W
293	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_Peak_to_Peak_Max_Volts	0 - 9999	F4	V
294	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_Peak_to_Peak_Full_Scale	0 - 10000	F4	V
295	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_DC_Bias_Max_Volts	0 - 9999	F4	V
296	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_DC_Bias_Full_Scale	0 - 10000	F4	V
299	Statx_Etch_Config_ENDPOINT_Detectors_EPD_1_Fitted		Bo	
300	Statx_Etch_Config_ENDPOINT_Detectors_EPD_2_Fitted		Bo	
304	Statx_Etch_Config_MISC_MORI_Max_MORI_inner_d.c._current	0 - 130	F4	Amps
305	Statx_Etch_Config_HELIUM_BP_Maximum_Pressure	0 - 50	I4	Torr
306	Statx_Etch_Config_MISC_MORI_Max_MORI_outer_d.c._current	0 - 130	F4	Amps
307	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_Fitted		Bo	
308	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_Fitted		Bo	
309	Statx_Etch_Config_MISC_ESC_ESC_Fitted		Bo	
310	Statx_Etch_Config_ENDPOINT_Detectors_EPD_1_Full_Scale	0 - 50	F4	V
311	Statx_Etch_Config_PRESSURES_Fill_Rate_Start_Pressure	0 - 10000	F4	mTorr
312	Statx_Etch_Config_PRESSURES_Fill_Rate_End_Pressure	0 - 10000	F4	mTorr
314	Statx_Etch_Config_ENDPOINT_Detectors_EPD_2_Full_Scale	0 - 50	F4	V
315	Statx_Etch_Config_PRESSURES_Low_range_pressure_sensor_fitted		Bo	
316	Statx_Etch_Config_PRESSURES_Low_range_sensor_maximum_range	0 - 500	F4	mTorr
317	Statx_Etch_Config_PRESSURES_High_range_sensor_maximum_range	0 - 100000	F4	mTorr
318	Statx_Etch_Config_PRESSURES_Chamber_roughing_valve_fitted		Bo	
320	Statx_Etch_Config_PRESSURES_Foreline_pressure_fault_level	0 - 100000	F4	mTorr
321	Statx_Etch_Config_PRESSURES_Foreline_pressure_gauge_maximum	0 - 800000	F4	mTorr
326	Statx_Etch_Config_ENDPOINT_Detectors_EPD_1_Endpoint_Type	0 = SPTS fxP 1 = Monochromator 2 = SpectraView	I4	
327	Statx_Etch_Config_ENDPOINT_Detectors_EPD_2_Endpoint_Type	0 = SPTS fxP 1 = Monochromator 2 = SpectraView	I4	
328	Statx_Etch_Config_GAS_BOX_Manifold_2_Fitted		Bo	
329	Statx_Etch_Config_GAS_BOX_GAS_1_MFC_Type	0 = Millipore 1 = Unit 2 = MKS 3 = Aera	I4	
330	Statx_Etch_Config_GAS_BOX_GAS_2_MFC_Type	0 = Millipore 1 = Unit 2 = MKS 3 = Aera	I4	
331	Statx_Etch_Config_GAS_BOX_GAS_3_MFC_Type	0 = Millipore 1 = Unit 2 = MKS 3 = Aera	I4	
332	Statx_Etch_Config_GAS_BOX_GAS_4_MFC_Type	0 = Millipore 1 = Unit 2 = MKS 3 = Aera	I4	
333	Statx_Etch_Config_GAS_BOX_GAS_5_MFC_Type	0 = Millipore 1 = Unit 2 = MKS 3 = Aera	I4	

ID offset	Name	Values	Format	Units
334	Statx_Etch_Config_GAS_BOX_GAS_6_MFC_Type	0 = Millipore 1 = Unit 2 = MKS 3 = Aera	I4	
335	Statx_Etch_Config_GAS_BOX_GAS_7_MFC_Type	0 = Millipore 1 = Unit 2 = MKS 3 = Aera	I4	
336	Statx_Etch_Config_GAS_BOX_GAS_8_MFC_Type	0 = Millipore 1 = Unit 2 = MKS 3 = Aera	I4	
337	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_1_Fitted		Bo	
338	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_1_Name		A	
339	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_1_Temperature	0 - 120	F4	°C
340	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_1_Tolerance_Warning_band	0 - 100	F4	°C
341	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_1_Tolerance_Fault_band	0 - 100	F4	°C
342	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_2_Fitted		Bo	
343	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_2_Name		A	
344	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_2_Temperature	0 - 120	F4	°C
345	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_2_Tolerance_Warning_band	0 - 100	F4	°C
346	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_2_Tolerance_Fault_band	0 - 100	F4	°C
347	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_3_Fitted		Bo	
348	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_3_Name		A	
349	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_3_Temperature	0 - 120	F4	°C
350	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_3_Tolerance_Warning_band	0 - 100	F4	°C
351	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_3_Tolerance_Fault_band	0 - 100	F4	°C
352	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_4_Fitted		Bo	
353	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_4_Name		A	
354	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_4_Temperature	0 - 120	F4	°C
355	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_4_Tolerance_Warning_band	0 - 100	F4	°C
356	Statx_Etch_Config_TEMPERATURES_THERMOCOUPLE_4_Tolerance_Fault_band	0 - 100	F4	°C
357	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_MATCHING_UNIT_Matching_Unit_type	0 = Variable Match 1 = Fixed Match	I4	
358	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_MATCHING_UNIT_Load_Capacitor_Range_1->	1 - 5	I4	
359	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_MATCHING_UNIT_Tune_Capacitor_Range_1->	1 - 5	I4	
360	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_MATCHING_UNIT_Matching_Unit_type	0 = Variable Match 1 = Fixed Match	I4	
361	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_MATCHING_UNIT_Load_Capacitor_Range_1->	1 - 5	I4	
362	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_MATCHING_UNIT_Tune_Capacitor_Range_1->	1 - 5	I4	
363	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_ATTENUATOR_Attenuator_Fitted		Bo	
364	Statx_Etch_Config_HELIUM_BP_Flow_Warning_level	0 - 50	I4	sccm
365	Statx_Etch_Config_HELIUM_BP_Flow_Fault_level	0 - 50	I4	sccm
366	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_MATCHING_UNIT_Padding_Capacitors	1 - 5	I4	
368	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_ATTENUATOR_Attenuator_Ratio_1:	1 - 1000	F4	
369	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_MATCHING_UNIT_Tune_Capacitor_relay_open_power_limit	0 - 10000	F4	W

ID offset	Name	Values	Format	Units
370	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_MATCHING_UNIT_Tune_Capacitor_relay_close_power_limit	0 - 10000	F4	W
371	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_MATCHING_UNIT_Load_Capacitor_relay_open_power_limit	0 - 10000	F4	W
372	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_MATCHING_UNIT_Load_Capacitor_relay_close_power_limit	0 - 10000	F4	W
373	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_ATTENUATOR_Attenuator_Maximum_Power	0 - 9999	F4	W
374	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_MATCHING_UNIT_Padding_Capacitors	1 - 5	I4	
375	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_MATCHING_UNIT_Tune_Capacitor_relay_open_power_limit	0 - 10000	F4	W
376	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_MATCHING_UNIT_Tune_Capacitor_relay_close_power_limit	0 - 10000	F4	W
377	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_MATCHING_UNIT_Load_Capacitor_relay_open_power_limit	0 - 10000	F4	W
378	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_MATCHING_UNIT_Load_Capacitor_relay_close_power_limit	0 - 10000	F4	W
379	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_ATTENUATOR_Attenuator_Switching_Level	0 - 9999	F4	W
380	Statx_Etch_Config_PRESSURES_APC_Type	0 = Vat PM6 1 = Vat 61.2 2 = MKS 683	I4	
381	Statx_Etch_Config_PRESSURES_MKS_638_Gain	0 - 100	F4	
382	Statx_Etch_Config_PRESSURES_MKS_638_Phase	0 - 100	F4	
383	Statx_Etch_Config_PRESSURES_Sensor_Isolation_Valves_Fitted		Bo	
384	Statx_Etch_Config_ENDPOINT_Detectors_EPD_1_Name		A	
385	Statx_Etch_Config_ENDPOINT_Detectors_EPD_2_Name		A	
386	Statx_Etch_Config_GAS_BOX_GAS_1_Action_on_GDU_error	0 = Abort 1 = Hold 2 = Warning 3 = Not GDU Gas	I4	
387	Statx_Etch_Config_GAS_BOX_GAS_2_Action_on_GDU_error	0 = Abort 1 = Hold 2 = Warning 3 = Not GDU Gas	I4	
388	Statx_Etch_Config_GAS_BOX_GAS_3_Action_on_GDU_error	0 = Abort 1 = Hold 2 = Warning 3 = Not GDU Gas	I4	
389	Statx_Etch_Config_GAS_BOX_GAS_4_Action_on_GDU_error	0 = Abort 1 = Hold 2 = Warning 3 = Not GDU Gas	I4	
390	Statx_Etch_Config_GAS_BOX_GAS_5_Action_on_GDU_error	0 = Abort 1 = Hold 2 = Warning 3 = Not GDU Gas	I4	
391	Statx_Etch_Config_GAS_BOX_GAS_6_Action_on_GDU_error	0 = Abort 1 = Hold 2 = Warning 3 = Not GDU Gas	I4	
392	Statx_Etch_Config_GAS_BOX_GAS_7_Action_on_GDU_error	0 = Abort 1 = Hold 2 = Warning 3 = Not GDU Gas	I4	
393	Statx_Etch_Config_GAS_BOX_GAS_8_Action_on_GDU_error	0 = Abort 1 = Hold 2 = Warning 3 = Not GDU Gas	I4	
394	Statx_Etch_Config_HELIUM_BP_Band_Monitoring_Delay	0 - 600	F4	Secs
395	Statx_Etch_Config_TEMPERATURES_GAS_BOX_HEATER_Electrical_Heater_Controller_controlling_temperature		Bo	

ID offset	Name	Values	Format	Units
396	Statx_Etch_Config_TEMPERATURES_CHAMBER_WALL_Electrical_Heat_Controller_controlling_temperature		Bo	
398	Statx_Etch_Config_TEMPERATURES_UPPER_CHAMBER_Electrical_Heat_Controller_controlling_temperature		Bo	
400	Statx_Etch_Config_PRESSURES_Turbo_alarm_signals_connected		Bo	
401	Statx_Etch_Config_PRESSURES_Analogue_Foreline_Gauge_Fitted		Bo	
402	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_Enable_RF_hardware_fault_signals		Bo	
403	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_Enable_RF_hardware_fault_signals		Bo	
404	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_MATCHING_UNIT_Padding_Capacitor_relay_open_power_limit	0 - 10000	F4	W
405	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_MATCHING_UNIT_Padding_Capacitor_relay_close_power_limit	0 - 10000	F4	W
406	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_MATCHING_UNIT_Padding_Capacitor_relay_open_power_limit	0 - 10000	F4	W
407	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_MATCHING_UNIT_Padding_Capacitor_relay_close_power_limit	0 - 10000	F4	W
408	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Minimum_Temperature_(recirculator)	-40 - 40	F4	°C
409	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Monitor_ESC_coolant_flow_(recirculator)		Bo	
410	Statx_Etch_Config_RF_SUPPLIES_Monitor_coolant_water_flow		Bo	
411	Statx_Etch_Config_MISC_MORI_Monitor_MORI_water_flow		Bo	
412	Statx_Etch_Config_PRESSURES_Monitor_Turbo_coolant_water_flow		Bo	
413	Statx_Etch_Config_MISC_DSi_Monitor_DSi_belljar_coolant_flow		Bo	
414	Statx_Etch_Config_MISC_MORI_Inner_coil_drive_gain	0 - 10	F4	
415	Statx_Etch_Config_MISC_MORI_Inner_coil_feedback_gain	0 - 10	F4	
416	Statx_Etch_Config_MISC_MORI_Outer_coil_drive_gain	0 - 10	F4	
417	Statx_Etch_Config_MISC_MORI_Outer_coil_feedback_gain	0 - 10	F4	
418	Statx_Etch_Config_MISC_MORI_Coils_in_voltage_control_mode		Bo	
419	Statx_Etch_Config_MISC_MORI_Max_inner_coil_voltage	0 - 50	F4	V
420	Statx_Etch_Config_MISC_MORI_Max_outer_coil_voltage	0 - 50	F4	V
421	Statx_Etch_Config_MISC_MORI_Max_combined_coil_current	0 - 50	F4	V
422	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_Serial_control_of_Apex_generator		Bo	
423	Statx_Etch_Config_RF_SUPPLIES_SOURCE_RF_Serial_control_of_Apex_generator		Bo	
424	Statx_Etch_Config_MISC_ESC_ESC_voltage_Full_Scale	0 - 10000	F4	V
425	Statx_Etch_Config_MISC_ESC_ESC_minimum_voltage_limit	0 - 10000	F4	V
430	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Lower_Temperature_Cap_(recirculator)	-40 - 100	F4	°C
431	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Upper_Temperature_Cap_(recirculator)	0 - 300	F4	°C
434	Statx_Etch_Config_PRESSURES_Maximum_Gauge_Zero_Adjustment_Percentage	1 - 10	F4	
435	Statx_Etch_Config_MISC_DSi_Datalogging_Frequency	1 - 5	I4	Hz
436	Statx_Etch_Config_FEATURES_Dependent_Steps_Enabled		Bo	
437	Statx_Etch_Config_FEATURES_APC_Position_Band_Monitoring_Enabled		Bo	
438	Statx_Etch_Config_FEATURES_Pressure_Values_True_Pressure_Values	0 - 1000	F4	
439	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	
440	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	
441	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	
442	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	
443	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	
444	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	
445	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	
446	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	
447	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	
448	Statx_Etch_Config_FEATURES_Pressure_Values_Gauge_Readings	0 - 1000	F4	
449	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	
450	Statx_Etch_Config_FEATURES_Pressure_Values	0 - 1000	F4	

ID offset	Name	Values	Format	Units
451	Statx_Etch_Config_FEATURES_Pressure_Values__	0 - 1000	F4	
452	Statx_Etch_Config_FEATURES_Pressure_Values__	0 - 1000	F4	
453	Statx_Etch_Config_FEATURES_Pressure_Values__	0 - 1000	F4	
454	Statx_Etch_Config_FEATURES_Pressure_Values__	0 - 1000	F4	
455	Statx_Etch_Config_FEATURES_Pressure_Values__	0 - 1000	F4	
456	Statx_Etch_Config_FEATURES_Pressure_Values__	0 - 1000	F4	
457	Statx_Etch_Config_FEATURES_Pressure_Values__	0 - 1000	F4	
458	Statx_Etch_Config_FEATURES_Pressure_Adjustment		Bo	
459	Statx_Etch_Config_FEATURES_Wafer_Count	0 – Running 1 = Total	I4	
460	Statx_Etch_Config_HELIUM_BP_ESC_Nitrogen_Purge_Fitted__		Bo	
461	Statx_Etch_Config_MISC_Trace_at_Debug_Level		Bo	
462	Statx_Etch_Config_MISC_Maximum_Size_of_Trace_Log_File	1 – 20	I4	MB
463	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_RF_Hours_Warning_Level	0 - 867000	F4	Hrs
464	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_RF_Hours_Error_Level	0 - 867000	F4	Hrs
465	Statx_Etch_Config_MISC_DSi_Edge_Protection_Ring_Fitted		Bo	
540	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_Monitor_Chiller_Warning_Signal		Bo	
550	Statx_Etch_Config_RF_SUPPLIES_Platen_LF_Fitted		Bo	
551	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_Max_Power	0 – 9999	F4	W
552	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_Full_Scale	0 – 10000	F4	W
553	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_Monitor_RF_Reflected_Power		Bo	
554	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_Reflected_Full_Scale	0 – 10000	F4	W
555	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_Peak_to_Peak_Max_Volts	0 – 9999	F4	V
556	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_Peak_to_Peak_Full_Scale	0 – 10000	F4	V
557	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_DC_Bias_Max_Volts	0 – 9999	F4	V
558	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_DC_Bias_Full_Scale	0 - 10000	F4	V
559	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_Time_period_before_out_of_tolerance_reported	0.1 – 0.5	F4	Secs
560	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_Loop_iterations_before_out_of_tolerance_reported	1 – 9999	I4	
561	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_Serial_control_of_LFGS_generator		Bo	
579	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_MATCHING_UNIT_Transformer_Tap_Range_1->	1 – 5	I4	
580	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_MATCHING_UNIT_Transformer_Tap_Relay_Open_Power_Limit	0 – 125	F4	W
581	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_LF_MATCHING_UNIT_Transformer_Tap_Relay_Close_Power_Limit	0 – 125	F4	W
590	Statx_Etch_Config_RF_SUPPLIES_Endpoint_RF_Fitted		Bo	
591	Statx_Etch_Config_RF_SUPPLIES_CLARITAS_Min_Power	0 – 100	F4	W
592	Statx_Etch_Config_RF_SUPPLIES_CLARITAS_Max_Power	0 – 600	F4	W
594	Statx_Etch_Config_RF_SUPPLIES_CLARITAS_Monitor_RF_Reflected_Power		Bo	
594	Statx_Etch_Config_RF_SUPPLIES_CLARITAS_Reflected_Full_Scale	0 – 10000	F4	W
595	Statx_Etch_Config_RF_SUPPLIES_CLARITAS_Peak_to_Peak_Max_Volts	0 – 9999	F4	V
596	Statx_Etch_Config_RF_SUPPLIES_CLARITAS_Peak_to_Peak_Full_Scale	0 – 10000	F4	V
598	Statx_Etch_Config_RF_SUPPLIES_CLARITAS_MATCHING_UNIT_Tune_Capacitor_Range_1->	1 – 2	I4	
599	Statx_Etch_Config_RF_SUPPLIES_CLARITAS_MATCHING_UNIT_Tune_Capacitor_relay_open_power_limit	0 – 5500	F4	W
600	Statx_Etch_Config_RF_SUPPLIES_CLARITAS_MATCHING_UNIT_Tune_Capacitor_relay_close_power_limit	0 – 5500	F4	W
601	Statx_Etch_Config_RF_SUPPLIES_CLARITAS_Full_Scale	0 – 600	F4	W
602	Statx_Etch_Config_MISC_r4P_Handling_Max_pressure_to_open_slot_valve	1 – 100	F4	mTorr
603	Statx_Etch_Config_MISC_r4P_Handling_Allow_Atmospheric_Handling		Bo	

ID offset	Name	Values	Format	Units
604	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Control_Option	0 – 3	I4	
605	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Pump/TPU_Fault_1	0 – 6	I4	
606	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Pump/TPU_Fault_2	0 – 6	I4	
607	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Pump/TPU_Fault_3	0 – 6	I4	
608	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Pump/TPU_Fault_4	0 – 6	I4	
610	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Fault_Definition_1		A	
611	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Fault_Definition_2		A	
612	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Fault_Definition_3		A	
613	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Fault_Definition_4		A	
615	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Output_Relay_(S KW_15)	0-3	I4	
616	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Output_Relay_(S KW_16)	0-3	I4	
617	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_-_HF_MATCHING_UNIT_Monitor_Capacitor_Positions		Bo	
621	Statx_Etch_Config_ENDPOINT_Detectors_SpectraView_Fitted		Bo	
622	Statx_Etch_Config_ENDPOINT_Detectors_SpectraView_Name		A	
623	Statx_Etch_Config_ENDPOINT_Detectors_OES_1_Fitted		Bo	
624	Statx_Etch_Config_ENDPOINT_Detectors_OES_1_Name		A	
625	Statx_Etch_Config_ENDPOINT_Detectors_OES_1_Server		A	
626	Statx_Etch_Config_ENDPOINT_Detectors_OES_1_Port	0-99999	I4	
627	Statx_Etch_Config_ENDPOINT_Detectors_OES_2_Fitted		Bo	
628	Statx_Etch_Config_ENDPOINT_Detectors_OES_2_Name		A	
629	Statx_Etch_Config_ENDPOINT_Detectors_OES_2_Server		A	
630	Statx_Etch_Config_ENDPOINT_Detectors_OES_2_Port	0-99999	I4	
631	Statx_Etch_Config_ENDPOINT_Detectors_SpectraView_Use_TCP/IP_Connection		Bo	
632	Statx_Etch_Config_ENDPOINT_Detectors_SpectraView_Server		A	
634	Statx_Etch_Config_ENDPOINT_Detectors_SpectraView_Verity_Instance_Number	1-8	I4	
635	Statx_Etch_Config_ENDPOINT_Detectors_Use_Version_2_Algorithms		Bo	
637	Statx_Etch_Config_ENDPOINT_Detectors_OES_1_Server	0-2	I4	
638	Statx_Etch_Config_ENDPOINT_Detectors_OES_2_Server	0-2	I4	
639	Statx_Etch_Config_ENDPOINT_Detectors_OES_1_USB_Deivce_Serial_Number_(Auto_for_automatic_selection)		A	
640	Statx_Etch_Config_ENDPOINT_Detectors_OES_2_USB_Deivce_Serial_Number_(Auto_for_automatic_selection)		A	
641	Statx_Etch_Config_ENDPOINT_Detectors_OES_1_Spectrum_data_path		A	
642	Statx_Etch_Config_ENDPOINT_Detectors_OES_1_Max_disk_usage_(MB)	0-102400	I4	
643	Statx_Etch_Config_ENDPOINT_Detectors_OES_1_Min_disk_remaining_(MB)	0-102400	I4	
644	Statx_Etch_Config_ENDPOINT_Detectors_OES_1_Delete_old_data_at_disk_limits		Bo	
650	Statx_Etch_Config_MISC_Fast_datalogging_in_Gas_Stab		Bo	
651	Statx_Etch_Config_MISC_ESC_Voltage_control	0-1	I4	
662	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_Max_Power	0-9999	F4	W
663	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_Full_Scale	0-10000	F4	W
664	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_Monitor_RF_Reflected_Power		Bo	
665	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_Reflected_Full_Scale	0-10000	F4	W
666	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_Peak_to_Peak_Max_Volts	0-9999	F4	V

ID offset	Name	Values	Format	Units
667	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_Peak_to_Peak_Full_Scale	0-10000	F4	V
671	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_MATCHING_UNIT_Matching_Unit_type	0-4	I4	
672	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_MATCHING_UNIT_Padding_Capacitors	1-5	I4	
673	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_MATCHING_UNIT_Padding_Capacitor_relay_open_power_limit	0-10000	F4	W
674	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_MATCHING_UNIT_Padding_Capacitor_relay_close_power_limit	0-10000	F4	W
675	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_MATCHING_UNIT_Load_Capacitor_Range_1->	1-5	I4	
676	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_MATCHING_UNIT_Tune_Capacitor_Range_1->	1-5	I4	
677	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_MATCHING_UNIT_Load_Capacitor_relay_open_power_limit	0-100	F4	W
678	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_MATCHING_UNIT_Load_Capacitor_relay_close_power_limit	0-100	F4	W
679	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_MATCHING_UNIT_Tune_Capacitor_relay_open_power_limit	0-5500	F4	W
680	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_MATCHING_UNIT_Tune_Capacitor_relay_close_power_limit	0-5500	F4	W
681	Statx_Etch_Config_RF_SUPPLIES_SECONDARY_SOURCE_RF_Enable_RF_hardware_fault_signals		Bo	
690	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Output_Relay_(SKW_13)	0-1	I4	
691	Statx_Etch_Config_FEATURES_PUMP/TPU_MONITOR_Output_Relay_(SKW_14)	0-1	I4	
701	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_Fitted		Bo	
702	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_Name		A	
703	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_Symbol		A	
704	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_Full_Scale	0-10000	F4	sccm
708	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_Purge_Valve_Fitted		Bo	
709	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_Gas_Off_in_Hold		Bo	
712	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_MFC_Type	0-5	I4	
713	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_Action_on_GDU_error	0-4	I4	
714	Statx_Etch_Config_RF_SUPPLIES_PLATEN_RF_HF_MATCHING_UNIT_Padding_Capacitor_3/4_Relay_through_power_limit	0-1000	F4	W
720	Statx_Etch_Config_COUNTERS_RF_Hours_Bias		Bo	
721	Statx_Etch_Config_COUNTERS_RF_Hours_Source		Bo	
722	Statx_Etch_Config_COUNTERS_RF_Hours_Recipe		Bo	
723	Statx_Etch_Config_COUNTERS_RF_Hours_Autoclean		Bo	
724	Statx_Etch_Config_COUNTERS_RF_Hours		Bo	
725	Statx_Etch_Config_COUNTERS_Total_RF_Hours		Bo	
726	Statx_Etch_Config_COUNTERS_ESC_on		Bo	
727	Statx_Etch_Config_COUNTERS_MFC_1_cycle		Bo	
728	Statx_Etch_Config_COUNTERS_MFC_2_cycle		Bo	
729	Statx_Etch_Config_COUNTERS_MFC_3_cycle		Bo	
730	Statx_Etch_Config_COUNTERS_MFC_4_cycle		Bo	
731	Statx_Etch_Config_COUNTERS_MFC_5_cycle		Bo	
732	Statx_Etch_Config_COUNTERS_MFC_6_cycle		Bo	
733	Statx_Etch_Config_COUNTERS_MFC_7_cycle		Bo	
734	Statx_Etch_Config_COUNTERS_MFC_8_cycle		Bo	
735	Statx_Etch_Config_COUNTERS_MFC_9_cycle		Bo	
740	Statx_Etch_Config_TEMPERATURES_PLATEN_HEATER_SMC_Chiller_Local_Mode		Bo	
742	Statx_Etch_Config_GAS_BOX_Max_Total_Gas_Flow	500-1200	I4	sccm
761	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_1_TPU_Action	0-2	I4	
762	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_2_TPU_Action	0-2	I4	
763	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_3_TPU_Action	0-2	I4	
764	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_4_TPU_Action	0-2	I4	

ID offset	Name	Values	Format	Units
765	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_5_TPU_Action	0-2	I4	
766	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_6_TPU_Action	0-2	I4	
767	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_1_TPU_Action	0-2	I4	
768	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_2_TPU_Action	0-2	I4	
769	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_TPU_Action	0-2	I4	
780	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_1_Flow_Adjustment_Enabled		Bo	
781	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_2_Flow_Adjustment_Enabled		Bo	
782	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_3_Flow_Adjustment_Enabled		Bo	
783	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_4_Flow_Adjustment_Enabled		Bo	
784	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_5_Flow_Adjustment_Enabled		Bo	
785	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_6_Flow_Adjustment_Enabled		Bo	
786	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_1_Flow_Adjustment_Enabled		Bo	
787	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_2_Flow_Adjustment_Enabled		Bo	
788	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_Flow_Adjustment_Enabled		Bo	
790	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_1_Flow_Adjustment	-99 - 99	F4	%
791	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_2_Flow_Adjustment	-99 - 99	F4	%
792	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_3_Flow_Adjustment	-99 - 99	F4	%
793	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_4_Flow_Adjustment	-99 - 99	F4	%
794	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_5_Flow_Adjustment	-99 - 99	F4	%
795	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_6_Flow_Adjustment	-99 - 99	F4	%
796	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_1_Flow_Adjustment	-99 - 99	F4	%
797	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_2_Flow_Adjustment	-99 - 99	F4	%
798	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_Flow_Adjustment	-99 - 99	F4	%
800	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_1_Flow_Adjustment_Explanation		A	
801	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_2_Flow_Adjustment_Explanation		A	
802	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_3_Flow_Adjustment_Explanation		A	
803	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_4_Flow_Adjustment_Explanation		A	
804	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_5_Flow_Adjustment_Explanation		A	
805	Statx_Etch_Config_GAS_BOX_PRIMARY_GAS_6_Flow_Adjustment_Explanation		A	
806	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_1_Flow_Adjustment_Explanation		A	
807	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_2_Flow_Adjustment_Explanation		A	
808	Statx_Etch_Config_GAS_BOX_SECONDARY_GAS_3_Flow_Adjustment_Explanation		A	
810	Statx_Etch_Config_HELIUM_BP_Start_Backside_Gas_Pumpout_During_Deck_Gas_Stab		Bo	
963	Statx_Etch_Config_ENDPOINT_Detectors_Use_Endpoint_Viewer		Bo	
964	Statx_Etch_Config_MISC_Log_recipe_set_values_to_database		Bo	
999	Statx_Etch_Config_STATION_Align_wafer_on_exit		Bo	

22.1.12 Deposition RevB PM

ID offset	Name	Values	Format	Units
1	Statx_Deposition_Config_STATION_Name		A	
2	Statx_Deposition_Config_VACUUM_Roughing_Valve_Open_Trip	1 - 500	I4	mTorr
3	Statx_Deposition_Config_VACUUM_Hivac_Open_Trip	1e-3 - 6e-1	F4	Torr
4	Statx_Deposition_Config_VACUUM_Roughing_Timeout	1 - 3600	I4	Secs
5	Statx_Deposition_Config_VACUUM_Ion_Gauge_On_Pressure	1e-3 - 9.99e-3	F4	Torr
7	Statx_Deposition_Config_VACUUM_Ion_Gauge_Gas_Conversion_Factor	1e-1 - 9.899	F4	
8	Statx_Deposition_Config_VACUUM_Maximum_Pump_to_Base_Time	0 - 60	I4	Mins
9	Statx_Deposition_Config_VACUUM_Throttle_Fitted		Bo	
10	Statx_Deposition_Config_VACUUM_Atmospheric_Sensor_Hysteresis	0 - 3600	I4	Secs
11	Statx_Deposition_Config_VACUUM_Module_Roughing_Gauge_Fitted		Bo	
12	Statx_Deposition_Config_TARGET_SHUTTER_Shutter_Fitted		Bo	
13	Statx_Deposition_Config_TARGET_Name		A	
14	Statx_Deposition_Config_TARGET_Maximum_Power	0 - 40000	I4	W
15	Statx_Deposition_Config_TARGET_Life_Expectancy	0 - 10000	I4	kWHrs
16	Statx_Deposition_Config_TARGET_Reactive_Correction_Factor	0 - 100	I4	
17	Statx_Deposition_Config_TARGET_Power_Supply_Type	0 = Pinnacle 1 = Pinnacle+ 2 = Pinnacle+ HV	I4	
18	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_Tooling_Factor_Default_Use	0 = Calc Thickness 1 = Calc Power 2 = Calc Time	I4	
19	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_0th_Order_Default_TF_Correction_Value		F4	
20	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_1st_Order_Default_TF_Correction_Value		F4	
21	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_2nd_Order_Default_TF_Correction_Value		F4	
22	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_3rd_Order_Default_TF_Correction_Value		F4	
23	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_4th_Order_Default_TF_Correction_Value		F4	
24	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_0th_Order_Default_Reactive_Correction_Value		F4	
25	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_1st_Order_Default_Reactive_Correction_Value		F4	
26	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_2nd_Order_Default_Reactive_Correction_Value		F4	
27	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_3rd_Order_Default_Reactive_Correction_Value		F4	
28	Statx_Deposition_Config_TARGET_TOOLING_FACTORS_4th_Order_Default_Reactive_Correction_Value		F4	
29	Statx_Deposition_Config_GASES_GAS_1_Fitted		Bo	
30	Statx_Deposition_Config_GASES_GAS_1_Name		A	
31	Statx_Deposition_Config_GASES_GAS_1_Max_Flow	0 - 3000	I4	sccm
32	Statx_Deposition_Config_GASES_GAS_1_Conversion_Factor	0 - 3	F4	
33	Statx_Deposition_Config_GASES_GAS_1_Reactive_Gas		Bo	
34	Statx_Deposition_Config_GASES_GAS_2_Fitted		Bo	
35	Statx_Deposition_Config_GASES_GAS_2_Name		A	
36	Statx_Deposition_Config_GASES_GAS_2_Max_Flow	0 - 3000	I4	sccm
37	Statx_Deposition_Config_GASES_GAS_2_Conversion_Factor	0 - 3	F4	
38	Statx_Deposition_Config_GASES_GAS_2_Reactive_Gas		Bo	
39	Statx_Deposition_Config_GASES_GAS_3_Fitted		Bo	
40	Statx_Deposition_Config_GASES_GAS_3_Name		A	
41	Statx_Deposition_Config_GASES_GAS_3_Max_Flow	0 - 3000	I4	sccm
42	Statx_Deposition_Config_GASES_GAS_3_Conversion_Factor	0 - 3	F4	
43	Statx_Deposition_Config_GASES_GAS_3_Reactive_Gas		Bo	
44	Statx_Deposition_Config_GASES_GAS_4_Fitted		Bo	
45	Statx_Deposition_Config_GASES_GAS_4_Name		A	
46	Statx_Deposition_Config_GASES_GAS_4_Max_Flow	0 - 3000	I4	sccm
47	Statx_Deposition_Config_GASES_GAS_4_Conversion_Factor	0 - 3	F4	
48	Statx_Deposition_Config_GASES_GAS_4_Reactive_Gas		Bo	

ID offset	Name	Values	Format	Units
49	Statx_Deposition_Config_PLATEN_STANDARD_PLATEN_Max_Platen_Temp_for_Vent	50 - 150	I4	degC
50	Statx_Deposition_Config_PLATEN_STANDARD_PLATEN_Platen_Stabilisation_Time	0 - 999	I4	Mins
51	Statx_Deposition_Config_PLATEN_STANDARD_PLATEN_Control_Temperature_Warning_Band	0 - 1000	I4	degC
52	Statx_Deposition_Config_PLATEN_STANDARD_PLATEN_Control_Temperature_Abort_Band	0 - 1000	I4	degC
53	Statx_Deposition_Config_RF_Platen_RF_Fitted		Bo	
55	Statx_Deposition_Config_RF_Platen_Control_Mode	0 = DC Bias 1 = Forward Power 2 = Load Power	I4	
56	Statx_Deposition_Config_RF_Platen_RF_Tune_Pot_Auto-Match		Bo	
57	Statx_Deposition_Config_RF_Platen_RF_Load_Pot_Auto-Match		Bo	
58	Statx_Deposition_Config_RF_POWER_BANDS_Platen_RF_Reflected_Power_Warning_Band	0 - 100	I4	%
59	Statx_Deposition_Config_RF_POWER_BANDS_Platen_RF_Reflected_Power_Hold_Band	0 - 100	I4	%
60	Statx_Deposition_Config_RF_POWER_BANDS_Platen_RF_Reflected_Power_Abort_Band	1 - 99	I4	%
61	Statx_Deposition_Config_CRYO_Cryo_Pump_Type	0 = OnBoard CTI Cryo 1 = Turbo Pump	I4	
62	Statx_Deposition_Config_CRYO_Maximum_Gas_Load	0 - 999	I4	BL
63	Statx_Deposition_Config_CRYO_Pump_Temperature_Warning_Limit	0 - 120	I4	K
64	Statx_Deposition_Config_CRYO_Pump_Temperature_Abort_Limit	0 - 120	I4	K
65	Statx_Deposition_Config_MISC_Maximum_HOLD_Time_before_Aborting	0 - 3600	I4	Secs
66	Statx_Deposition_Config_MISC_Time_from_completing_Process_back_to_Ready	0 - 30	I4	Secs
67	Statx_Deposition_Config_MISC_Backfill_Pressurisation_Timeout	1 - 10	F4	Mins
68	Statx_Deposition_Config_MISC_Warning_Percentages_-_Config_Tolerances	0 - 99	F4	%
69	Statx_Deposition_Config_MISC_Warning_Percentages_-_Config_Max	0 - 99	F4	%
73	Statx_Deposition_Config_MISC_Band_Monitoring_Delay	0 - 600	F4	Secs
74	Statx_Deposition_Config_PRESSURES_Atmospheric_Cross_Over_Trip	600 - 800	F4	Torr
75	Statx_Deposition_Config_PRESSURES_Intermediate_Cross_Over_Trip	0.5 - 3	F4	Torr
76	Statx_Deposition_Config_PRESSURES_Rough_Cross_Over_Trip	1e-7 - 9.99e-3	F4	Torr
77	Statx_Deposition_Config_ESC_ESC_Fitted		Bo	
78	Statx_Deposition_Config_ESC_CLAMPING_VOLT_BANDS_ESC_Voltage_Full_Scale	0 - 10000	I4	V
79	Statx_Deposition_Config_ESC_CLAMPING_VOLT_BANDS_ESC_Voltage_Warning	1 - 99	I4	%
80	Statx_Deposition_Config_ESC_CLAMPING_VOLT_BANDS_ESC_Voltage_Abort	1 - 99	I4	%
82	Statx_Deposition_Config_ESC_ARGON_FLOW_BANDS_ESC_Flow_Warning	1 - 20	F4	sccm
83	Statx_Deposition_Config_ESC_ARGON_FLOW_BANDS_ESC_Flow_Abort	1 - 20	F4	sccm
84	Statx_Deposition_Config_MISC_Backfill_-_Pins_Cycle_Req.		Bo	
86	Statx_Deposition_Config_DC_COIL_Upper_Coil_Fitted		Bo	
87	Statx_Deposition_Config_DC_COIL_Lower_Coil_Fitted		Bo	
88	Statx_Deposition_Config_TARGET_ARC_PARAMS_Arc_Detect_Time	0 = 0 μ S 1 = 1 μ S 2 = 2 μ S 3 = 5 μ S 4 = 10 μ S 5 = 20 μ S 6 = 50 μ S 7 = 100 μ S 8 = 200 μ S 9 = 500 μ S	I4	

ID offset	Name	Values	Format	Units
89	Statx_Deposition_Config_TARGET_ARC_PARAMS_Arc_Shutdown_Time	0 = 10 μ S 1 = 20 μ S 2 = 30 μ S 3 = 40 μ S 4 = 50 μ S 5 = 100 μ S 6 = 200 μ S 7 = 500 μ S 8 = 1000 μ S 9 = 2500 μ S	I4	
90	Statx_Deposition_Config_TARGET_ARC_PARAMS_Arc_Trip_Level	25 - 200	I4	V
91	Statx_Deposition_Config_TARGET_ARC_PARAMS_Hard_Arc_Count_Limit	0 - 10000	I4	
92	Statx_Deposition_Config_TARGET_ARC_PARAMS_Out_of_Setpoint_Limit	1 - 10	F4	Secs
93	Statx_Deposition_Config_RF_Fixed_Matching		Bo	
94	Statx_Deposition_Config_TARGET_Target_Life_Warning	0 - 100	I4	%
95	Statx_Deposition_Config_TARGET_POWER_BANDS_Power_Warning_Band	0 - 100	I4	%
96	Statx_Deposition_Config_TARGET_POWER_BANDS_Power_Hold_Band	0 - 100	I4	%
97	Statx_Deposition_Config_TARGET_POWER_BANDS_Power_Abort_Band	1 - 99	I4	%
98	Statx_Deposition_Config_MISC_Chamber_Size	0 = Standard 1 = HiFill 2 = Ultra	I4	
99	Statx_Deposition_Config_TARGET_SHUTTER_Shutter_over_wafer		Bo	
100	Statx_Deposition_Config_RGA_RGA_Fitted		Bo	
101	Statx_Deposition_Config_RGA_RGA_Type	0 = Microvision 1 = Microvision IP 2 = HPQ2-IP	I4	
102	Statx_Deposition_Config_ESC_ARGON_PRESS_BANDS_ESC_Pressure_Warning	1 - 9	I4	%
103	Statx_Deposition_Config_ESC_ARGON_PRESS_BANDS_ESC_Pressure_Abort	1 - 9	I4	%
105	Statx_Deposition_Config_PLATEN_RECIRCULATOR_PLATEN_Platten_Stabilisation_Time	1 - 999	I4	Mins
106	Statx_Deposition_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Temp_Stabilisation_Time	1 - 999	I4	Mins
107	Statx_Deposition_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Temp_Warning_Band	0 - 70	I4	degC
108	Statx_Deposition_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Temp_Abort_Band	1 - 70	I4	degC
109	Statx_Deposition_Config_GASES_GAS_1_Cryo_Pump_Conversion_Factor	0 - 3	F4	
110	Statx_Deposition_Config_GASES_GAS_2_Cryo_Pump_Conversion_Factor	0 - 3	F4	
111	Statx_Deposition_Config_GASES_GAS_3_Cryo_Pump_Conversion_Factor	0 - 3	F4	
112	Statx_Deposition_Config_GASES_GAS_4_Cryo_Pump_Conversion_Factor	0 - 3	F4	
113	Statx_Deposition_Config_PLATEN_STANDARD_PLATEN_Max_Platten_Temp_for_Process	50 - 750	I4	degC
114	Statx_Deposition_Config_MISC_Maximum_Bakeout_Temp	0 - 120	I4	degC
115	Statx_Deposition_Config_ESC_ESC_Pumpout_Pressure	1e-3 - 1e-1	F4	Torr
116	Statx_Deposition_Config_PLATEN_Platten_Heater_ON_in_Abort		Bo	
117	Statx_Deposition_Config_RF_DC_Bias_Full_Scale	0 = 1000V 1 = 100V	I4	
118	Statx_Deposition_Config_PLATEN_RECIRCULATOR_PLATEN_Max_Platten_Temp_for_Process	20 - 80	I4	degC
120	Statx_Deposition_Config_PLATEN_WAFER_LIFT_Handling_Height	0 - 10	F4	mm
121	Statx_Deposition_Config_PLATEN_WAFER_LIFT_Rotation_Height	0 - 10	F4	mm
122	Statx_Deposition_Config_TARGET_MOVING_MAGNETRON_Moving_Magnetron_Fitted		Bo	
123	Statx_Deposition_Config_TARGET_MOVING_MAGNETRON_High_Offset_Acc_Correction_Factor	1 - 100	I4	%
124	Statx_Deposition_Config_TARGET_MOVING_MAGNETRON_Magnet_Offset	10 - 30	F4	mm
125	Statx_Deposition_Config_TARGET_MOVING_MAGNETRON_Magnet_Offset_At_Home	8 - 12	F4	mm

ID offset	Name	Values	Format	Units
126	Statx_Deposition_Config_PLATEN_WAFER_LIFT_Wafer_Lift_Type	0 = Pneumatic Lift 1 = Rotation Lift 2 = Servo Lift	I4	
127	Statx_Deposition_Config_PLATEN_WAFER_LIFT_Max_Allowable_Shielding_Height_During_Process	0 - 10	F4	mm
129	Statx_Deposition_Config_DC_COIL_Reactive_Correction_Factor	0 - 100	I4	%
130	Statx_Deposition_Config_DC_COIL_AHF_Acc_Factor	1 - 100	I4	%
133	Statx_Deposition_Config_DC_COIL_TOOLING_FACTORS_0th_Order_Default_TF_Correction_Value		F4	
134	Statx_Deposition_Config_DC_COIL_TOOLING_FACTORS_1st_Order_Default_TF_Correction_Value		F4	
135	Statx_Deposition_Config_DC_COIL_TOOLING_FACTORS_2nd_Order_Default_TF_Correction_Value		F4	
136	Statx_Deposition_Config_DC_COIL_TOOLING_FACTORS_3rd_Order_Default_TF_Correction_Value		F4	
137	Statx_Deposition_Config_DC_COIL_TOOLING_FACTORS_4th_Order_Default_TF_Correction_Value		F4	
138	Statx_Deposition_Config_DC_COIL_TOOLING_FACTORS_0th_Order_Default_Reactive_Correction_Value		F4	
139	Statx_Deposition_Config_DC_COIL_TOOLING_FACTORS_1st_Order_Default_Reactive_Correction_Value		F4	
140	Statx_Deposition_Config_DC_COIL_TOOLING_FACTORS_2nd_Order_Default_Reactive_Correction_Value		F4	
141	Statx_Deposition_Config_DC_COIL_TOOLING_FACTORS_3rd_Order_Default_Reactive_Correction_Value		F4	
142	Statx_Deposition_Config_DC_COIL_TOOLING_FACTORS_4th_Order_Default_Reactive_Correction_Value		F4	
143	Statx_Deposition_Config_PLATEN_Platten_Heater_Type	0 = Standard 1 = Recirc 0 - 70 2 = Recirc -40 - 80	I4	
144	Statx_Deposition_Config_GASES_Gas_Pulse_Required		Bo	
145	Statx_Deposition_Config_TARGET_BAND_MONITORING_Max_Strike_Time	2 - 9.9	F4	Secs
146	Statx_Deposition_Config_TARGET_BAND_MONITORING_Max_Ramp_Time	1 - 9.9	F4	Secs
147	Statx_Deposition_Config_TARGET_BAND_MONITORING_%_Power_before_Process_Timer	1 - 99	F4	%
148	Statx_Deposition_Config_TARGET_BAND_MONITORING_Target_Supply_Monitor_Delay	1 - 9.9	F4	Secs
150	Statx_Deposition_Config_TARGET_BAND_MONITORING_Strike_Retry_Required		Bo	
151	Statx_Deposition_Config_TARGET_BAND_MONITORING_Strike_Retry_Times	1 - 9	I4	
152	Statx_Deposition_Config_TARGET_BAND_MONITORING_Strike_Retry_Delay	1 - 9.9	F4	
153	Statx_Deposition_Config_TARGET_Shielding_Life_Expectancy	0 - 10000	I4	kWhrs
154	Statx_Deposition_Config_TARGET_ARC_PARAMS_Micro_Arc_Count_Limit	0 - 10000	I4	
155	Statx_Deposition_Config_PLATEN_STANDARD_PLATEN_Safety_Temperature_Warning_Band	0 - 1000	I4	degC
156	Statx_Deposition_Config_PLATEN_STANDARD_PLATEN_Safety_Temperature_Abort_Band	0 - 1000	I4	degC
157	Statx_Deposition_Config_PLATEN_Moving_Platten_Fitted		Bo	
158	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_1_Mass_Number	0 - 80	I4	AMU
159	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_2_Mass_Number	0 - 80	I4	AMU
160	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_3_Mass_Number	0 - 80	I4	AMU
161	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_4_Mass_Number	0 - 80	I4	AMU
162	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_5_Mass_Number	0 - 80	I4	AMU

ID offset	Name	Values	Format	Units
163	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_6_Mass_Number	0 - 80	I4	AMU
164	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_7_Mass_Number	0 - 80	I4	AMU
165	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_8_Mass_Number	0 - 80	I4	AMU
166	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_9_Mass_Number	0 - 80	I4	AMU
167	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_10_Mass_Number	0 - 80	I4	AMU
168	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_1_Partial_Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
169	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_2_Partial_Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
170	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_3_Partial_Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
171	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_4_Partial_Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
172	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_5_Partial_Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
173	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_6_Partial_Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
174	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_7_Partial_Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
175	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_8_Partial_Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
176	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_9_Partial_Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
177	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_10_Partial_Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
178	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_1_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
179	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_2_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
180	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_3_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
181	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_4_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
182	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_5_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
183	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_6_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
184	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_7_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
185	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_8_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
186	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_9_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
187	Statx_Deposition_Config_RGA_MASS_TABLE_MASS_NUMBER_10_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
188	Statx_Deposition_Config_RGA_PARAMETERS_Accuracy	0 - 8	I4	
189	Statx_Deposition_Config_RGA_PARAMETERS_Source_Index	0 = Base Pressure 1 = Mid Pressure 2 = Leak Hunt 3 = HP Analytical 4 = HP General	I4	
190	Statx_Deposition_Config_RGA_PARAMETERS_Gain_Index	0 = No Gain (x1) 1 = Low Gain (x100) 2 = High Gain (x20k)	I4	
191	Statx_Deposition_Config_RGA_PARAMETERS_Filter_Mode	0 = Peak Centre 1 = Peak Maximum 2 = Peak Average	I4	

ID offset	Name	Values	Format	Units
192	Statx_Deposition_Config_RGA_MASS_TABLE_PP_monitoring_faults_severity_	0 = None 1 = Warning 2 = Hold 3 = Abort	I4	
193	Statx_Deposition_Config_RGA_MASS_TABLE_Device_faults_severity_	0 = None 1 = Warning 2 = Hold 3 = Abort	I4	
194	Statx_Deposition_Config_RGA_MASS_TABLE_Fault-out_after_process_completed		Bo	
195	Statx_Deposition_Config_TARGET_Magnetron_Motor_Type	0 = Fixed Speed 1 = Variable Speed	I4	
196	Statx_Deposition_Config_TARGET_VAR_SPEED_MAG_MOTOR_Max_Motor_Speed	100 - 500	F4	RPM
197	Statx_Deposition_Config_TARGET_VAR_SPEED_MAG_MOTOR_Min_Motor_Speed	20 - 500	F4	RPM
198	Statx_Deposition_Config_TARGET_VAR_SPEED_MAG_MOTOR_Motor_Speed_Monitor_Delay	5 - 300	I4	Secs
199	Statx_Deposition_Config_TARGET_VAR_SPEED_MAG_MOTOR_Motor_Speed_Warning_Limit	0 - 100	I4	%
200	Statx_Deposition_Config_TARGET_VAR_SPEED_MAG_MOTOR_Motor_Speed_Abort_Limit	0 - 100	I4	%
201	Statx_Deposition_Config_TARGET_VAR_SPEED_MAG_MOTOR_Enable_Status_Diagnostic		Bo	
202	Statx_Deposition_Config_TARGET_Pulse_Reversal_Time	40 - 500	I4	µS
203	Statx_Deposition_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Flow_Sensor_Fitted	0 = Not Fitted 1 = Fitted	Bo	
204	Statx_Deposition_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Flow_Sensor_Fitted		Bo	
205	Statx_Deposition_Config_ESC_ARGON_FLOW_BANDS_ESC_Flow_Monitoring_Delay	0 - 600	F4	Secs
206	Statx_Deposition_Config_TARGET_Abort_on_reading_V_while_target_off		Bo	
207	Statx_Deposition_Config_CRYO_TEMP_BANDS_1st_Stage_Temp_Warning	0 - 120	I4	K
208	Statx_Deposition_Config_CRYO_TEMP_BANDS_1st_Stage_Temp_Abort	0 - 120	I4	K
209	Statx_Deposition_Config_CRYO_TEMP_BANDS_2nd_Stage_Temp_Warning	0 - 100	I4	K
210	Statx_Deposition_Config_CRYO_TEMP_BANDS_2nd_Stage_Temp_Abort	0 - 100	I4	K
211	Statx_Deposition_Config_MISC_Trace_at_Debug_Level		Bo	
212	Statx_Deposition_Config_MISC_Maximum_Size_of_Trace_Log_File	1 - 10	I4	MB
213	Statx_Deposition_Config_PLATEN_WAFER_LIFT_Shadow_Shield_to_Platen_Spacing_at_Home	1.5 - 10	F4	mm
215	Statx_Deposition_Config_GASES_Analogue_MFCs_Fitted		Bo	
218	Statx_Deposition_Config_DC_COIL_Load_/Tune_Pots_pre-position_to_recipe_values		Bo	
220	Statx_Deposition_Config_RF_Per_Step_Matching_Positions		Bo	
221	Statx_Deposition_Config_VACUUM_PRESSURE_BANDS_Warning_Band	1-99	I4	%
222	Statx_Deposition_Config_VACUUM_PRESSURE_BANDS_Hold_Band	1-99	I4	%
223	Statx_Deposition_Config_VACUUM_PRESSURE_BANDS_Abort_Band	1-99	I4	%
224	Statx_Deposition_Config_DC_COIL_Power_Supply_Type	0-1	I4	
225	Statx_Deposition_Config_DC_COIL_Power_Supply_Type	0-1	I4	
226	Statx_Deposition_Config_ESC_Per-Step_ESC_Required		Bo	
227	Statx_Deposition_Config_MISC_Bakeout_Lamp_Fitted		Bo	
228	Statx_Deposition_Config_MISC_Bakeout_Lamp_Max_On_Time	0-60	I4	Minutes
230	Statx_Deposition_Config_PLATEN_RECIRCULATOR_PLATEN_Safety_Temperature_Warning_Band	0-1000	I4	°C
231	Statx_Deposition_Config_PLATEN_RECIRCULATOR_PLATEN_Safety_Temperature_Abort_Band	0-1000	I4	°C
969	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_1st_Stage_Temp_Control	0 - 999	I4	K
970	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Delay_Start	0 - 9999	I4	Mins

ID offset	Name	Values	Format	Units
971	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Delay_Restart	0 - 999	I4	Mins
972	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Fast_Regen_Rough_Test	10 - 999	I4	Secs
973	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Ext_Purge_Time	0 - 9999	I4	Mins
974	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Repurge_Time	0 - 9999	I4	Mins
975	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Repurge_Cycles	0 - 20	I4	
976	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Base_Pressure	25 - 200	I4	Mic
977	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Rate_of_Rise_Limit	1 - 100	I4	Mic/Min
978	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Rate_of_Rise_Cycles	0 - 40	I4	
980	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Power_Failure	0 - 2	I4	
981	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Power_Failure_Temperature	0 - 80	I4	K
982	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Pump_Elapsed_Time	0 - 60000	I4	Hrs
983	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Time_between_Full_Regens	0 - 60000	I4	Hrs
984	Statx_Deposition_Config_CRYO_CTI_CRYO_CONFIG_Time_between_Fast_Regens	0 - 60000	I4	Hrs
985	Statx_Deposition_Config_CRYO_CTI_TURBO_CONFIG_Runup_Speed	0 - 100	I4	Mins
986	Statx_Deposition_Config_CRYO_CTI_TURBO_CONFIG_Base_Pressure	0 - 50	I4	Mic
987	Statx_Deposition_Config_CRYO_CTI_TURBO_CONFIG_Threshold_Speed	0 - 70	I4	
988	Statx_Deposition_Config_CRYO_CTI_TURBO_CONFIG_Regen_Temp_Limit	0 - 310	I4	K
992	Statx_Deposition_Config_CRYO_CTI_TURBO_CONFIG_Shutdown_Mode	0 - 1	I4	
993	Statx_Deposition_Config_CRYO_CTI_TURBO_CONFIG_Regen_Mode	0 - 1	I4	
994	Statx_Deposition_Config_CRYO_CTI_TURBO_CONFIG_Water_Pump_Temp	0 - 107	I4	K
995	Statx_Deposition_Config_MISC_Alignment_Offset_Controller_Fitted		Bo	
996	Statx_Deposition_Config_STATION_Active_Handling		Bo	
999	Statx_Deposition_Config_STATION_Align_wafer_on_exit		Bo	

22.1.13 SoftEtch RevB PM

ID offset	Name	Values	Format	Units
1	Statx_Softetch_Config_STATION_Name		A	
2	Statx_Softetch_Config_VACUUM_Roughing_Valve_Open_Trip	1 - 500	I4	mTorr
3	Statx_Softetch_Config_VACUUM_Hivac_Open_Trip	1e-3 - 6e-1	F4	Torr
4	Statx_Softetch_Config_VACUUM_Roughing_Timeout	1 - 3600	I4	Secs
5	Statx_Softetch_Config_VACUUM_Ion_Gauge_On_Pressure	1e-3 - 9.99e-3	F4	Torr
7	Statx_Softetch_Config_VACUUM_Ion_Gauge_Gas_Conversion_Factor	1e-1 - 9.9	F4	
8	Statx_Softetch_Config_VACUUM_Maximum_Pump_to_Base_Time	0 - 60	I4	Mins
10	Statx_Softetch_Config_VACUUM_Atmospheric_Sensor_Hysteresis	0 - 3600	I4	Secs
11	Statx_Softetch_Config_VACUUM_Module_Roughing_Gauge_Fitted		Bo	
12	Statx_Softetch_Config_GASES_GAS_1_Fitted		Bo	
13	Statx_Softetch_Config_GASES_GAS_1_Name		A	
14	Statx_Softetch_Config_GASES_GAS_1_Max_Flow	0 - 3000	I4	sccm
15	Statx_Softetch_Config_GASES_GAS_1_Conversion_Factor	0 - 3	F4	
16	Statx_Softetch_Config_GASES_GAS_1_Backfill_Gas		Bo	
17	Statx_Softetch_Config_GASES_GAS_2_Fitted		Bo	
18	Statx_Softetch_Config_GASES_GAS_2_Name		A	
19	Statx_Softetch_Config_GASES_GAS_2_Max_Flow	0 - 3000	I4	sccm
20	Statx_Softetch_Config_GASES_GAS_2_Conversion_Factor	0 - 3	F4	
21	Statx_Softetch_Config_GASES_GAS_2_Backfill_Gas		Bo	
22	Statx_Softetch_Config_GASES_GAS_3_Fitted		Bo	
23	Statx_Softetch_Config_GASES_GAS_3_Name		A	
24	Statx_Softetch_Config_GASES_GAS_3_Max_Flow	0 - 3000	I4	sccm
25	Statx_Softetch_Config_GASES_GAS_3_Conversion_Factor	0 - 3	F4	
27	Statx_Softetch_Config_GASES_GAS_4_Fitted		Bo	
28	Statx_Softetch_Config_GASES_GAS_4_Name		A	
29	Statx_Softetch_Config_GASES_GAS_4_Max_Flow	0 - 3000	I4	sccm
30	Statx_Softetch_Config_GASES_GAS_4_Conversion_Factor	0 - 3	F4	
31	Statx_Softetch_Config_GASES_GAS_4_Backfill_Gas		Bo	
32	Statx_Softetch_Config_RF_PLATEN_RF_Platen_RF_Name		A	
35	Statx_Softetch_Config_RF_PLATEN_RF_Platen_RF_Tune_Pot_Auto-Match		Bo	
36	Statx_Softetch_Config_RF_PLATEN_RF_Platen_RF_Load_Pot_Auto-Match		Bo	
37	Statx_Softetch_Config_RF_PLATEN_RF_POWER_BANDS_Platen_RF_Relected_Power_Warning_Band	0 - 100	I4	%
38	Statx_Softetch_Config_RF_PLATEN_RF_POWER_BANDS_Platen_RF_Relected_Power_Hold_Band	0 - 100	I4	%
39	Statx_Softetch_Config_RF_PLATEN_RF_POWER_BANDS_Platen_RF_Relected_Power_Abort_Band	1 - 99	I4	%
40	Statx_Softetch_Config_RF_PLATEN_RF_Maximum_Accumulated_Platen_Power	0 - 999	I4	KWHrs
41	Statx_Softetch_Config_RF_COIL_RF_Coil_RF_Name		A	
44	Statx_Softetch_Config_RF_COIL_RF_Coil_RF_Tune_Pot_Auto-Match		Bo	
45	Statx_Softetch_Config_RF_COIL_RF_Coil_RF_Load_Pot_Auto-Match		Bo	
46	Statx_Softetch_Config_RF_COIL_RF_POWER_BANDS_Coil_RF_Reflected_Power_Warning_Band	0 - 100	I4	%
47	Statx_Softetch_Config_RF_COIL_RF_POWER_BANDS_Coil_RF_Reflected_Power_Hold_Band	0 - 100	I4	%
48	Statx_Softetch_Config_RF_COIL_RF_POWER_BANDS_Coil_RF_Reflected_Power_Abort_Band	1 - 99	I4	%
50	Statx_Softetch_Config_PLATEN_STANDARD_PLATEN_Platen_Stabilisation_Time	1 - 999	I4	Mins
51	Statx_Softetch_Config_PLATEN_STANDARD_PLATEN_Control_Temperature_Warning_Band	0 - 1000	I4	degC
52	Statx_Softetch_Config_PLATEN_STANDARD_PLATEN_Control_Temperature_Abort_Band	0 - 1000	I4	degC
54	Statx_Softetch_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Temp_Warning_Band	0 - 70	I4	degC
55	Statx_Softetch_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Temp_Abort_Band	1 - 70	I4	degC
56	Statx_Softetch_Config_PLATEN_RECIRCULATOR_PLATEN_Platen_Stabilisation_Time	1 - 999	I4	Mins

ID offset	Name	Values	Format	Units
57	Statx_Softetch_Config_PLATEN_RECIRCULATOR_PLATEN_Recirculator_Temp_Stabilisation_Time	1 - 999	I4	Mins
58	Statx_Softetch_Config_ESC_ESC_Fitted		Bo	
60	Statx_Softetch_Config_ESC_CLAMPING_VOLT_BANDS_ESC_Voltage_Warning	1 - 99	I4	%
61	Statx_Softetch_Config_ESC_CLAMPING_VOLT_BANDS_ESC_Voltage_Abort	1 - 99	I4	%
63	Statx_Softetch_Config_ESC_ARGON_FLOW_BANDS_ESC_Flow_Warning	1 - 20	I4	sccm
64	Statx_Softetch_Config_ESC_ARGON_FLOW_BANDS_ESC_Flow_Abort	1 - 20	I4	sccm
65	Statx_Softetch_Config_ESC_ESC_Pumpout_Pressure	1e-3 - 1e-1	F4	Torr
67	Statx_Softetch_Config_PUMPING_Pump_Type	0 = CTI OnBoard Cryo 1 = CTI OnBoard Turbo 2 = Standalone Turbo	I4	
68	Statx_Softetch_Config_PUMPING_Maximum_Gas_Load	0 - 999	I4	BL
69	Statx_Softetch_Config_PUMPING_Pump_Temperature_Warning_Limit	0 - 120	I4	K
70	Statx_Softetch_Config_PUMPING_Pump_Temperature_Abort_Limit	0 - 120	I4	K
71	Statx_Softetch_Config_MISC_Maximum_HOLD_Time_before_Aborting	0 - 3600	I4	Secs
72	Statx_Softetch_Config_MISC_Time_from_completing_Process_back_to_Ready	0 - 30	I4	Secs
73	Statx_Softetch_Config_MISC_Backfill_Pressurisation_Timeout	1 - 10	I4	Mins
75	Statx_Softetch_Config_MISC_Warning_Percentages_-_Config_Tolerances	0 - 99	F4	%
76	Statx_Softetch_Config_MISC_Warning_Percentages_-_Config_Max	0 - 99	F4	%
80	Statx_Softetch_Config_MISC_Band_Monitoring_Delay	0 - 600	F4	Secs
81	Statx_Softetch_Config_PRESSURES_Atmospheric_Cross_Over_Trip	600 - 800	F4	Torr
82	Statx_Softetch_Config_PRESSURES_Intermediate_Cross_Over_Trip	0.5 - 3	F4	Torr
83	Statx_Softetch_Config_PRESSURES_Rough_Cross_Over_Trip	1e-7 - 9.9e-3	F4	Torr
84	Statx_Softetch_Config_RF_PLATEN_RF_Fixed_Matching		Bo	
85	Statx_Softetch_Config_RF_COIL_RF_Fixed_Matching		Bo	
86	Statx_Softetch_Config_PLATEN_STANDARD_PLATEN_Max_Platten_Temp_for_Vent	50 - 150	I4	degC
87	Statx_Softetch_Config_RGA_RGA_Fitted		Bo	
88	Statx_Softetch_Config_RGA_RGA_Type	0 = Microvision 1 = Microvision IP	I4	
89	Statx_Softetch_Config_ESC_ARGON_PRESS_BANDS_ESC_Pressure_Warning	1 - 9	I4	%
90	Statx_Softetch_Config_ESC_ARGON_PRESS_BANDS_ESC_Pressure_Abort	1 - 9	I4	%
91	Statx_Softetch_Config_GASES_GAS_1_Cryo_Pump_Conversion_Factor	0 - 3	F4	
92	Statx_Softetch_Config_GASES_GAS_2_Cryo_Pump_Conversion_Factor	0 - 3	F4	
93	Statx_Softetch_Config_GASES_GAS_3_Cryo_Pump_Conversion_Factor	0 - 3	F4	
94	Statx_Softetch_Config_GASES_GAS_4_Cryo_Pump_Conversion_Factor	0 - 3	F4	
95	Statx_Softetch_Config_PLATEN_STANDARD_PLATEN_Max_Platten_Temp_for_Process	50 - 700	I4	degC
96	Statx_Softetch_Config_MISC_Maximum_Bakeout_Temp	0 - 110	I4	degC
97	Statx_Softetch_Config_PLATEN_Platten_Heater_Type	0 = Standard 1 = Recirc 0 - 70 2 = Recirc -40 - 80	I4	
98	Statx_Softetch_Config_PLATEN_STANDARD_PLATEN_Safety_Temperature_Warning_Band	0 - 1000	I4	degC
99	Statx_Softetch_Config_PLATEN_STANDARD_PLATEN_Safety_Temperature_Abort_Band	0 - 1000	I4	degC
100	Statx_Softetch_Config_PUMPING_TURBO_PARAMETERS_Backup_Pressure_Trip	10 - 500	I4	mTorr
101	Statx_Softetch_Config_PUMPING_TURBO_PARAMETERS_Backup_Pressure_Timeout	1 - 999	I4	Mins
102	Statx_Softetch_Config_PUMPING_TURBO_PARAMETERS_Turbo_At-Speed_Timeout	1 - 999	I4	Mins
105	Statx_Softetch_Config_RF_PLATEN_RF_ACCUM_POWER_LEVELS_Accum_Power_Warning_Level	0 - 100	I4	%
106	Statx_Softetch_Config_RF_PLATEN_RF_ACCUM_POWER_LEVELS_Accum_Power_Hold_Level	0 - 100	I4	%

ID offset	Name	Values	Format	Units
107	Statx_Softetch_Config_RF_PLATEN_RF_ACCUM_POWER_LEVELS_Accum_Power_Abort_Level	0 – 100	I4	%
108	Statx_Softetch_Config_PUMPING_TEMP_BANDS_1st_Stage_Temp._Warning	0 – 120	I4	K
109	Statx_Softetch_Config_PUMPING_TEMP_BANDS_1st_Stage_Temp._Abort	0 – 120	I4	K
110	Statx_Softetch_Config_PUMPING_TEMP_BANDS_2nd_Stage_Temp._Warning	0 – 100	I4	K
111	Statx_Softetch_Config_PUMPING_TEMP_BANDS_2nd_Stage_Temp._Abort	0 – 100	I4	K
112	Statx_Softetch_Config_RF_COIL_RF_Activate_Arc_Detection		Bo	
113	Statx_Softetch_Config_RF_COIL_RF_Abort_On_Arc_Detection		Bo	
114	Statx_Softetch_Config_RF_PLATEN_RF_Activate_Arc_Detection		Bo	
115	Statx_Softetch_Config_RF_PLATEN_RF_Abort_On_Arc_Detection		Bo	
116	Statx_Softetch_Config_VACUUM_Triple_Gauge_Only		Bo	
119	Statx_Softetch_Config_GASES_Analogue_MFCs_Fitted		Bo	
121	Statx_Softetch_Config_MISC_Emulate_Sigma200_Process_Timing		Bo	
122	Statx_Softetch_Config_MISC_Tenth_of_Sec._Process_Timeout		Bo	
123	Statx_Softetch_Config_PLATEN_STANDARD_PLATEN_Safety_Thermocouple_Fitted		Bo	
124	Statx_Softetch_Config_RF_PLATEN_RF_Platten_RF_Supply_Type	0-2	I4	
125	Statx_Softetch_Config_RF_COIL_RF_Coil_RF_Supply_Type	0-1	I4	
126	Statx_Softetch_Config_MISC_Exclusive_Backing/Roughing_Pump		Bo	
127	Statx_Softetch_Config_STATION_Type	0-2	I4	
128	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_Platten_RF_Name		A	
129	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_Platten_RF_Supply_Type	0-2	I4	
130	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_Control_Mode	0-1	I4	
132	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_Platten_RF_Tune_Pot_Auto-Match		Bo	
133	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_Platten_RF_Load_Pot_Auto-Match		Bo	
134	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_Activate_Arc_Detection		Bo	
135	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_Abort_On_Arc_Detection		Bo	
136	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_REF_POWER_BANDS_Platten_RF_Reflected_Power_Warning_Band	0-100	I4	%
137	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_REF_POWER_BANDS_Platten_RF_Reflected_Power_Hold_Band	0-100	I4	%
138	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_REF_POWER_BANDS_Platten_RF_Reflected_Power_Abort_Band	1-99	I4	%
139	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_Maximum_Accumulated_Platten_Power	0-999	I4	KW.Hours
140	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_ACCUM_POWER_LEVELS_Accum_Power_Warning_Level	0-100	I4	%
141	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_ACCUM_POWER_LEVELS_Accum_Power_Hold_Level	0-100	I4	%
142	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_ACCUM_POWER_LEVELS_Accum_Power_Abort_Level	0-100	I4	%
143	Statx_Softetch_Config_RF_DIODE_ETCH_MATCHING_UNIT_Load_Capacitor_Range	0-1	I4	
144	Statx_Softetch_Config_RF_DIODE_ETCH_MATCHING_UNIT_Tune_Capacitor_Range	0-3	I4	
145	Statx_Softetch_Config_RF_DIODE_ETCH_MATCHING_UNIT_Load_Capacitor_relay_open_power_limit	0-10000	F4	W
146	Statx_Softetch_Config_RF_DIODE_ETCH_MATCHING_UNIT_Load_Capacitor_relay_close_power_limit	0-10000	F4	W
147	Statx_Softetch_Config_RF_DIODE_ETCH_MATCHING_UNIT_Tune_Capacitor_relay_open_power_limit	0-10000	F4	W
148	Statx_Softetch_Config_RF_DIODE_ETCH_MATCHING_UNIT_Tune_Capacitor_relay_close_power_limit	0-10000	F4	W
149	Statx_Softetch_Config_RF_DIODE_ETCH_MATCHING_UNIT_Peak_to_Peak_Full_Scale	0-10000	F4	Volts

ID offset	Name	Values	Format	Units
150	Statx_Softetch_Config_RF_DIODE_ETCH_MATCHING_UNIT_Peak_to_Peak_Max_Volts	0-9999	F4	Volts
151	Statx_Softetch_Config_RF_DIODE_ETCH_MATCHING_UNIT_DC_Bias_Full_Scale	0-10000	F4	Volts
152	Statx_Softetch_Config_RF_DIODE_ETCH_MATCHING_UNIT_DC_Bias_Max_Volts	0-9999	F4	Volts
153	Statx_Softetch_Config_RF_DIODE_ETCH_PLATEN_RF_Max_Reflected_Power	0-1500	I4	Watts
965	Statx_Softetch_Config_STATION_Module_Wafer_Align_Warning_Limit	0-5	F4	mm
966	Statx_Softetch_Config_STATION_Module_Wafer_Align_Abort_Limit	0-5	F4	mm
969	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_1st_Stage_Temp_Control	0 - 999	I4	K
970	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Delay_Start	0 - 9999	I4	Mins
971	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Delay_Restart	0 - 999	I4	Mins
972	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Fast_Regen_Rough_Test	10 - 999	I4	Secs
973	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Ext_Purge_Time	0 - 9999	I4	Mins
974	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Repurge_Time	0 - 9999	I4	Mins
975	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Repurge_Cycles	0 - 20	I4	
976	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Base_Pressure	25 - 200	I4	Mic
977	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Rate_of_Rise_Limit	1 - 100	I4	Mic/Min
978	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Rate_of_Rise_Cycles	0 - 40	I4	
980	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Power_Failure	0 - 2	I4	
981	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Power_Failure_Temperature	0 - 80	I4	K
982	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Pump_Elapsed_Time	0 - 60000	I4	Hrs
983	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Time_between_Full_Regens	0 - 60000	I4	Hrs
984	Statx_Softetch_Config_PUMPING_CTI_CRYO_CONFIG_Time_between_Fast_Regens	0 - 60000	I4	Hrs
985	Statx_Softetch_Config_PUMPING_CTI_TURBO_CONFIG_Runup_Speed	0 - 100	I4	Mins
986	Statx_Softetch_Config_PUMPING_CTI_TURBO_CONFIG_Base_Pressure	0 - 50	I4	Mic
987	Statx_Softetch_Config_PUMPING_CTI_TURBO_CONFIG_Threshold_Speed	0 - 70	I4	
988	Statx_Softetch_Config_PUMPING_CTI_TURBO_CONFIG_Regen_Temp_Limit	0 - 310	I4	K
992	Statx_Softetch_Config_PUMPING_CTI_TURBO_CONFIG_Shutdown_Mode	0 - 1	I4	
993	Statx_Softetch_Config_PUMPING_CTI_TURBO_CONFIG_Regen_Mode	0 - 1	I4	
994	Statx_Softetch_Config_PUMPING_CTI_TURBO_CONFIG_Water_Pump_Temp	0 - 107	I4	K
996	Statx_Softetch_Config_STATION_Active_Handling		Bo	
999	Statx_Softetch_Config_STATION_Align_wafer_on_exit		Bo	

22.1.14 Heat RevB PM

ID offset	Name	Values	Format	Units
1	Statx_HeatNT_Config_STATION_Name		A	
2	Statx_HeatNT_Config_VACUUM_Foreline_Roughing_Trip	1e-3 - 3	F4	Torr
3	Statx_HeatNT_Config_VACUUM_Foreline_Roughing_Timeout	10 - 300	I4	Secs
4	Statx_HeatNT_Config_VACUUM_Chamber_Roughing_Trip	1e-3 - 3	F4	Torr
5	Statx_HeatNT_Config_VACUUM_Turbo_At_Speed_Timeout	1 - 10	I4	Mins
7	Statx_HeatNT_Config_VACUUM_Ion_Gauge_Gas_Conversion_Factor	0.1 - 9.9	F4	
8	Statx_HeatNT_Config_VACUUM_Atmospheric_Sensor_Hysteresis	0 - 3600	I4	Secs
9	Statx_HeatNT_Config_MISC_Maximum_HOLD_Time_before_Aborting	0 - 3600	I4	Secs
10	Statx_HeatNT_Config_MISC_Time_from_completing_Process_back_to_Read_y	0 - 60	I4	Secs
11	Statx_HeatNT_Config_MISC_Centraliser		Bo	
12	Statx_HeatNT_Config_MISC_Align_Wafer		Bo	
13	Statx_HeatNT_Config_PRESSURES_Atmospheric_Cross_Over_Trip	600 - 800	F4	Torr
14	Statx_HeatNT_Config_PRESSURES_Intermediate_Cross_Over_Trip	0.5 - 3	F4	Torr
15	Statx_HeatNT_Config_PRESSURES_Rough_Cross_Over_Trip	1e-7 - 1e-4	F4	Torr
16	Statx_HeatNT_Config_MISC_Maximum_Bakeout_Temp	0 - 100	I4	°C
17	Statx_HeatNT_Config_RGA_RGA_Fitted		Bo	
18	Statx_HeatNT_Config_RGA_RGA_Type	0 = Microvision 1 = Microvision IP 2 = HPQ2-IP	I4	
19	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_1_Mass_N umber	0 - 80	I4	AMU
20	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_2_Mass_N umber	0 - 80	I4	AMU
21	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_3_Mass_N umber	0 - 80	I4	AMU
22	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_4_Mass_N umber	0 - 80	I4	AMU
23	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_5_Mass_N umber	0 - 80	I4	AMU
24	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_6_Mass_N umber	0 - 80	I4	AMU
25	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_7_Mass_N umber	0 - 80	I4	AMU
26	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_8_Mass_N umber	0 - 80	I4	AMU
27	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_9_Mass_N umber	0 - 80	I4	AMU
28	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_10_Mass_ Number	0 - 80	I4	AMU
29	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_1_Partial_P ressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
30	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_2_Partial_P ressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
31	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_3_Partial_P ressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
32	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_4_Partial_P ressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
33	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_5_Partial_P ressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
34	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_6_Partial_P ressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
35	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_7_Partial_P ressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
36	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_8_Partial_P ressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
37	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_9_Partial_P ressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
38	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_10_Partial_ Pressure_Warning_Limit	1e-11 - 1e-1	F4	Torr
39	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_1_Partial_P ressure_Fault_Limit	1e-11 - 1e-1	F4	Torr

ID offset	Name	Values	Format	Units
40	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_2_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
41	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_3_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
42	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_4_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
43	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_5_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
44	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_6_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
45	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_7_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
46	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_8_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
47	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_9_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
48	Statx_HeatNT_Config_RGA_MASS_TABLE_MASS_NUMBER_10_Partial_Pressure_Fault_Limit	1e-11 - 1e-1	F4	Torr
49	Statx_HeatNT_Config_RGA_PARAMETERS_Accuracy	0 - 8	I4	
50	Statx_HeatNT_Config_RGA_PARAMETERS_Source_Index	0 = Base Pressure 1 = Mid Pressure 2 = Leak Hunt 3 = HP Analytical 4 = HP General	I4	
51	Statx_HeatNT_Config_RGA_PARAMETERS_Gain_Index	0 = No Gain (x1) 1 = Low Gain (x100) 2 = High Gain (x20k)	I4	
52	Statx_HeatNT_Config_RGA_PARAMETERS_Filter_Mode	0 = Peak Centre 1 = Peak Maximum 2 = Peak Average	I4	
53	Statx_HeatNT_Config_RGA_MASS_TABLE_PP_monitoring_faults_severity_	0 = None 1 = Warning 2 = Hold 3 = Abort	I4	
54	Statx_HeatNT_Config_RGA_MASS_TABLE_Device_faults_severity_	0 = None 1 = Warning 2 = Hold 3 = Abort	I4	
55	Statx_HeatNT_Config_RGA_MASS_TABLE_Fault-out_after_process_completed		Bo	
56	Statx_HeatNT_Config_MISC_Trace_at_Debug_Level		Bo	
57	Statx_HeatNT_Config_MISC_Maximum_Size_of_Trace_Log_File	1 - 10	I4	MB
58	Statx_HeatNT_Config_MISC_Water_ON_in_Idle		Bo	
996	Stat4_HeatNT_Config_STATION_Active_Handling		Bo	
999	Statx_HeatNT_Config_STATION_Align_wafer_on_exit		Bo	

22.1.15 Delta APM PM

ID offset	Name	Values	Format	Units
1	Statx_DeltaAPM_Config_STATION_Name		A	
2	Statx_DeltaAPM_Config_STATION_Idle_Recipe_in_use		Bo	
3	Statx_DeltaAPM_Config_STATION_Recipe_Name		A	
4	Statx_DeltaAPM_Config_STATION_Time_between_Recipes	1 – 3600	I4	Minutes
5	Statx_DeltaAPM_Config_GAS_BOX_Exhaust_Extract_Fault_Level	0=None 1=Warning 2=Hold 3=Abort	I4	
6	Statx_DeltaAPM_Config_GAS_BOX_Pump/Purge_from_Idle_to_Ready_?		Bo	
10	Statx_DeltaAPM_Config_GAS_BOX_GAS_1_Conversion_Factor	0 – 10	F4	
11	Statx_DeltaAPM_Config_GAS_BOX_GAS_1_Gas_Off_In_Hold		Bo	
12	Statx_DeltaAPM_Config_GAS_BOX_GAS_1_Vent_Flow	0 – 10000	F4	sccm
13	Statx_DeltaAPM_Config_GAS_BOX_GAS_1_Vent_Tolerance	0 – 99	F4	%
14	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Fitted		Bo	
15	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Name		A	
16	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Full_Scale	0 – 10000	F4	sccm
17	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Conversion_Factor	0 – 10	F4	
18	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Gas_Type	0 =General 1=Deposition 2=Clean	I4	
19	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Gas_Interlock_Type	0=Primary 1=Secondary-Green 2=Secondary-Red	I4	
20	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Gas_Off_In_Hold		Bo	
21	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_TPU_ON_with_this_gas_?		Bo	
22	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_TPU_Type	0=Hi Flow 1=Int. Flow	I4	
23	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Purge_Valve_Fitted		Bo	
24	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Purge_Conversion_Factor	0 - 10	F4	
25	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Fitted		Bo	
26	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Name		A	
27	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Full_Scale	0 – 10000	F4	sccm
28	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Conversion_Factor	0 – 10	F4	
29	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Gas_Type	0 =General 1=Deposition 2=Clean	I4	
30	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Gas_Interlock_Type	0=Primary 1=Secondary-Green 2=Secondary-Red	I4	
31	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Gas_Off_In_Hold		Bo	
32	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_TPU_ON_with_this_gas_?		Bo	
33	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_TPU_Type	0=Hi Flow 1=Int. Flow	I4	
34	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Purge_Valve_Fitted		Bo	
35	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Purge_Conversion_Factor	0 - 10	F4	
36	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Fitted		Bo	
37	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Name		A	
38	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Full_Scale	0 – 10000	F4	sccm
39	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Conversion_Factor	0 – 10	F4	
40	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Gas_Type	0 =General 1=Deposition 2=Clean	I4	
41	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Gas_Interlock_Type	0=Primary 1=Secondary-Green 2=Secondary-Red	I4	
42	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Gas_Off_In_Hold		Bo	
43	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_TPU_ON_with_this_gas_?		Bo	
44	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_TPU_Type	0=Hi Flow 1=Int. Flow	I4	
45	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Purge_Valve_Fitted		Bo	
46	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Purge_Conversion_Factor	0 - 10	F4	

ID offset	Name	Values	Format	Units
47	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Fitted		Bo	
48	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Name		A	
49	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Full_Scale	0 – 10000	F4	sccm
50	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Conversion_Factor	0 – 10	F4	
51	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Gas_Type	0 =General 1=Deposition 2=Clean	I4	
52	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Gas_Interlock_Type	0=Primary 1=Secondary-Green 2=Secondary-Red	I4	
53	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Gas_Off_In_Hold		Bo	
54	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_TPU_ON_with_this_gas_?		Bo	
55	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_TPU_Type	0=Hi Flow 1=Int. Flow	I4	
56	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Purge_Valve_Fitted		Bo	
57	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Purge_Conversion_Factor	0 - 10	F4	
58	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Fitted		Bo	
59	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Name		A	
60	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Full_Scale	0 – 10000	F4	sccm
61	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Conversion_Factor	0 – 10	F4	
62	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Gas_Type	0 =General 1=Deposition 2=Clean	I4	
63	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Gas_Interlock_Type	0=Primary 1=Secondary-Green 2=Secondary-Red	I4	
64	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Gas_Off_In_Hold		Bo	
65	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_TPU_ON_with_this_gas_?		Bo	
66	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_TPU_Type	0=Hi Flow 1=Int. Flow	I4	
67	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Purge_Valve_Fitted		Bo	
68	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Purge_Conversion_Factor	0 - 10	F4	
69	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Fitted		Bo	
70	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Name		A	
71	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Full_Scale	0 – 10000	F4	sccm
72	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Conversion_Factor	0 – 10	F4	
73	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Gas_Type	0 =General 1=Deposition 2=Clean	I4	
74	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Gas_Interlock_Type	0=Primary 1=Secondary-Green 2=Secondary-Red	I4	
75	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Gas_Off_In_Hold		Bo	
76	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_TPU_ON_with_this_gas_?		Bo	
77	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_TPU_Type	0=Hi Flow 1=Int. Flow	I4	
78	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Purge_Valve_Fitted		Bo	
79	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Purge_Conversion_Factor	0 - 10	F4	
80	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Fitted		Bo	
81	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Name		A	
82	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Full_Scale	0 – 10000	F4	sccm
83	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Conversion_Factor	0 – 10	F4	
84	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Gas_Type	0 =General 1=Deposition 2=Clean	I4	
85	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Gas_Interlock_Type	0=Primary 1=Secondary-Green 2=Secondary-Red	I4	
86	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Gas_Off_In_Hold		Bo	
87	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_TPU_ON_with_this_gas_?		Bo	
88	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_TPU_Type	0=Hi Flow 1=Int. Flow	I4	
89	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Purge_Valve_Fitted		Bo	

ID offset	Name	Values	Format	Units
90	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Purge_Conversion_Factor	0 - 10	F4	
91	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Fitted		Bo	
92	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Name		A	
93	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Full_Scale	0 – 10000	F4	sccm
94	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Conversion_Factor	0 – 10	F4	
95	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Gas_Type	0 =General 1=Deposition 2=Clean	I4	
96	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Gas_Interlock_Type	0=Primary 1=Secondary-Green 2=Secondary-Red	I4	
97	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Gas_Off_In_Hold		Bo	
98	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_TPU_ON_with_this_gas_?		Bo	
99	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_TPU_Type	0=Hi Flow 1=Int. Flow	I4	
100	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Purge_Valve_Fitted		Bo	
101	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Purge_Conversion_Factor	0 - 10	F4	
102	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Fitted		Bo	
103	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Name		A	
104	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Full_Scale	0 – 10000	F4	sccm
105	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Conversion_Factor	0 – 10	F4	
106	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Gas_Type	0 =General 1=Deposition 2=Clean	I4	
107	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Gas_Interlock_Type	0=Primary 1=Secondary-Green 2=Secondary-Red	I4	
108	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Gas_Off_In_Hold		Bo	
109	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_TPU_ON_with_this_gas_?		Bo	
110	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_TPU_Type	0=Hi Flow 1=Int. Flow	I4	
111	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Purge_Valve_Fitted		Bo	
112	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Purge_Conversion_Factor	0 - 10	F4	
113	Statx_DeltaAPM_Config_HEATER_BOX_Sensor_Disconnected_Temperature	-10 - +5	F4	°C
114	Statx_DeltaAPM_Config_HEATER_BOX_Safe_Handling_Temperature	0 – 50	F4	°C
115	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_Fitted		Bo	
117	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_Name		A	
118	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_Max_Power	0 – 99	I4	%
119	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_Max_Temperature	0 – 200	F4	°C
120	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_P_Constant	0 - 99999	F4	
121	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_I_Constant	0 – 99999	F4	
122	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_D_Constant	0 – 99999	F4	
123	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_Temperature	0 – 130	F4	°C
124	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_Tolerance	0 – 100	F4	°C
125	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_Control_/_Safety_Sensor_Full_Scale	0 – 1000	F4	°C
126	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_CONT_/_SAFETY_BAND_Control_/_Safety_Temp_Warning_Band	0 – 100	I4	°C
127	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_CONT_/_SAFETY_BAND_Control_/_Safety_Temp_Hold_Band	0 – 100	I4	°C
128	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_CONT_/_SAFETY_BAND_Control_/_Safety_Temp_Abort_Band	1 - 100	I4	°C
129	Statx_DeltaAPM_Config_HEATER_BOX_SHOWERHEAD_Heater_Control_Enabled		Bo	
130	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_Fitted		Bo	
132	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_Name		A	
133	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_Max_Power	0 – 99	I4	%
134	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_Max_Temperature	0 – 550	F4	°C
135	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_P_Constant	0 - 99999	F4	
136	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_I_Constant	0 – 99999	F4	
137	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_D_Constant	0 – 99999	F4	

ID offset	Name	Values	Format	Units
138	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_Temperature	0 – 500	F4	°C
139	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_Tolerance	0 – 100	F4	°C
140	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_Control / _Safety_Sensor_Full_Scale	0 – 1000	F4	°C
141	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_CONT / _SAFETY_BAND_Control / _Safety_Temp_Warning_Band	0 – 100	I4	°C
142	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_CONT / _SAFETY_BAND_Control / _Safety_Temp_Hold_Band	0 – 100	I4	°C
143	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_CONT / _SAFETY_BAND_Control / _Safety_Temp_Abort_Band	1 - 100	I4	°C
144	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_2_Enabled		Bo	
145	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_Fitted		Bo	
147	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_Name		A	
148	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_Max_Power	0 – 99	I4	%
149	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_Max_Temperature	0 – 200	F4	°C
150	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_P_Constant	0 - 99999	F4	
151	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_I_Constant	0 – 99999	F4	
152	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_D_Constant	0 – 99999	F4	
153	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_Temperature	0 – 120	F4	°C
154	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_Tolerance	0 – 100	F4	°C
155	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_Control / _Safety_Sensor_Full_Scale	0 – 1000	F4	°C
156	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_CONT / _SAFETY_BAND_Control / _Safety_Temp_Warning_Band	0 – 100	I4	°C
157	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_CONT / _SAFETY_BAND_Control / _Safety_Temp_Hold_Band	0 – 100	I4	°C
158	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_CONT / _SAFETY_BAND_Control / _Safety_Temp_Abort_Band	1 - 100	I4	°C
159	Statx_DeltaAPM_Config_HEATER_BOX_GAS_INLET_Enabled		Bo	
160	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Fitted		Bo	
162	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Name		A	
163	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Max_Power	0 – 99	I4	%
164	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Max_Temperature	0 – 600	F4	°C
165	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_P_Constant	0 - 99999	F4	
166	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_I_Constant	0 – 99999	F4	
167	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_D_Constant	0 – 99999	F4	
168	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Temperature	0 – 600	F4	°C
169	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Tolerance	0 – 100	F4	%
170	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Vent_Temperature	0 – 550	F4	°C
171	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Control / _Safety_Sensor_Full_Scale	0 – 100	F4	°C
172	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_CONT / _SAFETY_BAND_Control / _Safety_Temp_Warning_Band	0 – 100	I4	°C
173	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_CONT / _SAFETY_BAND_Control / _Safety_Temp_Hold_Band	1 - 100	I4	°C
174	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_CONT / _SAFETY_BAND_Control / _Safety_Temp_Abort_Band		I4	°C
175	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Enabled		Bo	
176	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_Fitted		Bo	
178	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_Name		A	
179	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_Max_Power	0 – 99	I4	%
180	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_Max_Temperature	0 – 200	F4	°C
181	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_P_Constant	0 - 99999	F4	
182	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_I_Constant	0 – 99999	F4	
183	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_D_Constant	0 – 99999	F4	
184	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_Temperature	0 – 150	F4	°C
185	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_Tolerance	0 – 100	F4	°C
186	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_Control / _Safety_Sensor_Full_Scale	0 – 1000	F4	°C
187	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_CONT / _SAFETY_BAND_Control / _Safety_Temp_Warning_Band	0 – 100	I4	°C
188	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_CONT / _SAFETY_BAND_Control / _Safety_Temp_Hold_Band	0 – 100	I4	°C

ID offset	Name	Values	Format	Units
189	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_CONT/_SAFETY_BAND_Control/_Safety_Temp._Abort_Band	1 - 100	I4	°C
190	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_5_Enabled		Bo	
191	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_Fitted		Bo	
193	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_Name		A	
194	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_Max_Power	0 – 99	I4	%
195	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_Max_Temperature	0 – 200	F4	°C
196	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_P_Constant	0 - 99999	F4	
197	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_I_Constant	0 – 99999	F4	
198	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_D_Constant	0 – 99999	F4	
199	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_Temperature	0 – 150	F4	°C
200	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_Tolerance	0 – 100	F4	°C
201	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_Control/_Safety_Sensor_Full_Scale	0 – 1000	F4	°C
202	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_CONT/_SAFETY_BAND_Control/_Safety_Temp._Warning_Band	0 – 100	I4	°C
203	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_CONT/_SAFETY_BAND_Control/_Safety_Temp._Hold_Band	0 – 100	I4	°C
204	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_CONT/_SAFETY_BAND_Control/_Safety_Temp._Abort_Band	1 - 100	I4	°C
205	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_6_Enabled		Bo	
206	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_Fitted		Bo	
208	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_Name		A	
209	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_Max_Power	0 – 99	I4	%
210	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_Max_Temperature	0 – 200	F4	°C
211	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_P_Constant	0 - 99999	F4	
212	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_I_Constant	0 – 99999	F4	
213	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_D_Constant	0 – 99999	F4	
214	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_Temperature	0 – 130	F4	°C
215	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_Tolerance	0 – 100	F4	°C
216	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_Control/_Safety_Sensor_Full_Scale	0 – 1000	F4	°C
217	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_CONT/_SAFETY_BAND_Control/_Safety_Temp._Warning_Band	0 – 100	I4	°C
218	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_CONT/_SAFETY_BAND_Control/_Safety_Temp._Hold_Band	0 – 100	I4	°C
219	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_CONT/_SAFETY_BAND_Control/_Safety_Temp._Abort_Band	1 - 100	I4	°C
220	Statx_DeltaAPM_Config_HEATER_BOX_CHAMBER_Enabled		Bo	
221	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_Fitted		Bo	
223	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_Name		A	
224	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_Max_Power	0 – 99	I4	%
225	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_Max_Temperature	0 – 200	F4	°C
226	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_P_Constant	0 - 99999	F4	
227	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_I_Constant	0 – 99999	F4	
228	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_D_Constant	0 – 99999	F4	
229	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_Temperature	0 – 150	F4	°C
230	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_Tolerance	0 – 100	F4	°C
231	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_Control/_Safety_Sensor_Full_Scale	0 – 1000	F4	°C
232	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_CONT/_SAFETY_BAND_Control/_Safety_Temp._Warning_Band	0 – 100	I4	°C
233	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_CONT/_SAFETY_BAND_Control/_Safety_Temp._Hold_Band	0 – 100	I4	°C
234	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_CONT/_SAFETY_BAND_Control/_Safety_Temp._Abort_Band	1 - 100	I4	°C
235	Statx_DeltaAPM_Config_HEATER_BOX_HEATER_8_Enabled		Bo	
236	Statx_DeltaAPM_Config_HEATER_BOX_Monitor_Temp._1		Bo	
237	Statx_DeltaAPM_Config_HEATER_BOX_Monitor_Temp._2		Bo	
238	Statx_DeltaAPM_Config_HEATER_BOX_Temperature_range_to_monitor	0 – 600	F4	°C
239	Statx_DeltaAPM_Config_HEATER_BOX_Heaters_stay_ON_in_Abort_?		Bo	
240	Statx_DeltaAPM_Config_LIFT_Home_Steps	1 – 10000	F4	Steps

ID offset	Name	Values	Format	Units
241	Statx_DeltaAPM_Config_LIFT_Home_Steps_Tolerance	1 – 10000	F4	Steps
242	Statx_DeltaAPM_Config_LIFT_Wafer_Transfer_to_Electrode_Spacing	1 – 150	F4	mm
243	Statx_DeltaAPM_Config_LIFT_Max_Process_Electrode_Spacing	1 – 100	F4	mm
244	Statx_DeltaAPM_Config_LIFT_Min_Process_Electrode_Spacing	1 – 100	F4	mm
247	Statx_DeltaAPM_Config_LIFT_Lift_Timeout	0 – 100	F4	Secs
248	Statx_DeltaAPM_Config_LIFT_Wafer_Lift_Fitted		Bo	
251	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Fitted		Bo	
253	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Load_Max_Power	0 – 9999	F4	W
254	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Load_Full_Scale	0 - 10000	F4	W
255	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Reflected_Max_Power	0 – 9999	F4	W
256	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Reflected_Full_Scale	0 - 10000	F4	W
257	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Peak_to_Peak_Max_Volts	0 – 9999	F4	V
258	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Peak_to_Peak_Full_Scale	0 - 10000	F4	V
259	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_DC_Bias_Max_Volts	0 – 9999	F4	V
260	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_DC_Bias_Full_Scale	0 - 10000	F4	V
262	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Load_Max_Power	0 – 9999	F4	W
263	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Load_Full_Scale	0 - 10000	F4	W
264	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Reflected_Max_Power	0 – 9999	F4	W
265	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Reflected_Full_Scale	0 - 10000	F4	W
266	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Peak_to_Peak_Max_Volts	0 – 9999	F4	V
267	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Peak_to_Peak_Full_Scale	0 - 10000	F4	V
268	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_DC_Bias_Max_Volts	0 – 9999	F4	V
269	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_DC_Bias_Full_Scale	0 - 10000	F4	V
271	Statx_DeltaAPM_Config_END_POINT_EPD_1_Fitted		Bo	
272	Statx_DeltaAPM_Config_END_POINT_EPD_1_Name		A	
273	Statx_DeltaAPM_Config_END_POINT_EPD_1_Endpoint_Type	0=SPTS 1=Monochromator 2=Spectraview	I4	
274	Statx_DeltaAPM_Config_END_POINT_EPD_1_Full_Scale	0 – 50	F4	V
275	Statx_DeltaAPM_Config_END_POINT_EPD_2_Fitted		Bo	
276	Statx_DeltaAPM_Config_END_POINT_EPD_2_Name		A	
277	Statx_DeltaAPM_Config_END_POINT_EPD_2_Endpoint_Type	0=SPTS 1=Monochromator 2=Spectraview	I4	
278	Statx_DeltaAPM_Config_END_POINT_EPD_2_Full_Scale	0 – 50	F4	V
279	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_Enabled		Bo	
280	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_Pump_Fault_1	0=None 1=Warning 2=Hold 3=Abort 4=Attention	I4	
281	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_Pump_Fault_2	0=None 1=Warning 2=Hold 3=Abort 4=Attention	I4	
282	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_TPU_Fault_1	0=None 1=Warning 2=Hold 3=Abort 4=Attention	I4	
283	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_TPU_Fault_2	0=None 1=Warning 2=Hold 3=Abort 4=Attention	I4	
285	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_Pump_ON_Feedback_Active_Low_?		Bo	
286	Statx_DeltaAPM_Config_VACUUM_CHAMBER_VAC_CONT_Capman_Maximum_Scale	0 – 20000	F4	mTorr
287	Statx_DeltaAPM_Config_VACUUM_CHAMBER_VAC_CONT_Max_Press._Allowed_in_Recipes	0 – 18500	F4	mTorr

ID offset	Name	Values	Format	Units
288	Statx_DeltaAPM_Config_VACUUM_CHAMBER_VAC_CONT_Base_Pressure	0 – 1E+5	F4	mTorr
289	Statx_DeltaAPM_Config_VACUUM_CHAMBER_VAC_CONT_Maximum_Pump_to_Base_Time	0 – 999	F4	Secs
290	Statx_DeltaAPM_Config_VACUUM_CHAMBER_VAC_CONT_Atmospheric_Sensor_Hysteresis	0 – 3600	I4	Secs
291	Statx_DeltaAPM_Config_VACUUM_CHAMBER_VAC_CONT_Fill_Rate_Start_Pressure	0 – 1E+5	F4	mTorr
292	Statx_DeltaAPM_Config_VACUUM_CHAMBER_VAC_CONT_Fill_Rate_End_Pressure	0 – 1E+5	F4	mTorr
293	Statx_DeltaAPM_Config_VACUUM_FORELINE_GAUGE_Foreline_Capman_Max_Scale	0 – 1E+4	F4	mTorr
294	Statx_DeltaAPM_Config_VACUUM_FORELINE_GAUGE_Foreline_Roughing_Trip	1 – 100	F4	mTorr
295	Statx_DeltaAPM_Config_VACUUM_FORELINE_GAUGE_Foreline_Roughing_Timeout	10 – 300	F4	Secs
296	Statx_DeltaAPM_Config_PRESSURES_Atmospheric_Cross_Over_Trip	0 – 800	F4	Torr
297	Statx_DeltaAPM_Config_PRESSURES_Intermediate_Cross_Over_Trip	0 – 300	F4	Torr
298	Statx_DeltaAPM_Config_PRESSURES_Rough_Cross_Over_Trip	0 – 0.01	F4	Torr
299	Statx_DeltaAPM_Config_MISC_Max_Hold_time_before_Aborting	0 – 9999	F4	Secs
300	Statx_DeltaAPM_Config_MISC_Time_from_completing_Process_back_to_Ready	0 – 30	F4	Secs
301	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Fitted		Bo	
302	Statx_DeltaAPM_Config_LIFT_Degas_Electrode_Spacing	1 – 150	F4	mm
303	Statx_DeltaAPM_Config_GAS_BOX_Number_of_Purge_Cycles	0 – 100	I4	
304	Statx_DeltaAPM_Config_MISC_Warning_Percentages_-_Config_Tolerances	0 – 99	F4	%
305	Statx_DeltaAPM_Config_MISC_Warning_Percentages_-_Config_Maximums	0 – 99	F4	%
306	Statx_DeltaAPM_Config_VACUUM_CHAMBER_VAC_CONT_APC_Position_At_Process_End	0 – 100	F4	%
307	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_Pump_Inlet_Purge_Time	0 – 999	F4	Minutes
308	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Symbol	0=H2 1=NH3 2= SiH4 3=O2 4=He 5=C3F8 6=C3H10Si 7=N2O 8=Si2H6 9=C4H12Si 10= NF3	I4	
309	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Symbol	0=H2 1=NH3 2= SiH4 3=O2 4=He 5=C3F8 6=C3H10Si 7=N2O 8=Si2H6 9=C4H12Si 10= NF3	I4	
310	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Symbol	0=H2 1=NH3 2= SiH4 3=O2 4=He 5=C3F8 6=C3H10Si 7=N2O 8=Si2H6 9=C4H12Si 10= NF3	I4	

ID offset	Name	Values	Format	Units
311	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Symbol	0=H2 1=NH3 2= SiH4 3=O2 4=He 5=C3F8 6=C3H10Si 7=N2O 8=Si2H6 9=C4H12Si 10= NF3	I4	
312	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Symbol	0=H2 1=NH3 2= SiH4 3=O2 4=He 5=C3F8 6=C3H10Si 7=N2O 8=Si2H6 9=C4H12Si 10= NF3	I4	
313	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Symbol	0=H2 1=NH3 2= SiH4 3=O2 4=He 5=C3F8 6=C3H10Si 7=N2O 8=Si2H6 9=C4H12Si 10= NF3	I4	
314	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Symbol	0=H2 1=NH3 2= SiH4 3=O2 4=He 5=C3F8 6=C3H10Si 7=N2O 8=Si2H6 9=C4H12Si 10= NF3	I4	
315	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Symbol	0=H2 1=NH3 2= SiH4 3=O2 4=He 5=C3F8 6=C3H10Si 7=N2O 8=Si2H6 9=C4H12Si 10= NF3	I4	
316	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Symbol	0=H2 1=NH3 2= SiH4 3=O2 4=He 5=C3F8 6=C3H10Si 7=N2O 8=Si2H6 9=C4H12Si 10= NF3	I4	

ID offset	Name	Values	Format	Units
317	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Type	0=Analog 1=DeviceNet	I4	
318	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_Fault_Definition		A	
319	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_Fault_Definition		A	
320	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_Fault_Definition		A	
321	Statx_DeltaAPM_Config_VACUUM_PUMP/TPU_MONITOR_Fault_Definition		A	
322	Statx_DeltaAPM_Config_HEATER_BOX_Heated_Foreline_Fitted		Bo	
323	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_AFT_Control_enabled		Bo	
324	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Load_Power_Control		Bo	
325	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Platen_Cooling_Enabled		Bo	
326	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Platen_Cooling_ON_Dead_Band	0 – 100	F4	°C
327	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Platen_Cooling_ON_Hysteresis	0 – 100	F4	°C
328	Statx_DeltaAPM_Config_LIFT_Lift_Encoder_P/N	0 – 2	I4	
329	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Pk-Pk_Monitoring_Fault_Level	0 – 3	I4	
330	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Pk-Pk_Monitoring_Fault_Level	0 – 3	I4	
331	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Vpp_Absolute_value_restr_ike_enable		Bo	
332	Statx_DeltaAPM_Config_GAS_BOX_Pneumatic_Control	0 – 1	I4	
333	Statx_DeltaAPM_Config_GAS_BOX_Gasbox_Mimic_layout	0 – 2	I4	
334	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_Precursor_Name		A	
335	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_LMF_Max_Liquid_Flow	0 – 5	F4	ccm
336	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_LMF_Min_Liquid_Flow_>2%_FS	0 – 5	F4	ccm
337	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_LMF_Closed_<2%_FS	0 – 5	F4	ccm
338	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_Vapour_stab_time	1 – 30	I4	Secs
339	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_Stop_Vapourisation_before_end_of_Process	0 – 10	I4	Secs
340	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Gauge_Max_scale	0 – 1000	F4	psia
341	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Precursor_Pressure	0 – 1000	F4	psia
342	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Warning_Band	0 – 20	I4	psia
343	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Hold_Band	0 – 20	I4	psia
344	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Abort_Band	0 – 20	I4	psia
345	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Min_Pressure_during_Deposition	0 – 20	F4	psia
346	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PCG_PRESSURE_Gauge_Max_scale	0 – 1000	F4	Torr
347	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PCG_PRESSURE_PCG_pressure	0 – 1000	F4	Torr
348	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PCG_PRESSURE_Warning_Band	0 – 20	I4	Torr
349	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PCG_PRESSURE_Hold_Band	0 – 20	I4	Torr
350	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_PCG_PRESSURE_Abort_Band	0 – 20	I4	Torr
351	Statx_DeltaAPM_Config_HEATER_BOX_Heated_Gasline_Fitted		Bo	
352	Statx_DeltaAPM_Config_GAS_BOX_Gasbox_Mimic_layout	0 – 1	I4	
353	Statx_DeltaAPM_Config_MISC_Band_Monitoring_Delay	0 – 600	F4	Secs

ID offset	Name	Values	Format	Units
354	Statx_DeltaAPM_Config_MISC_Trace_at_Debug_Level		Bo	
355	Statx_DeltaAPM_Config_MISC_Maximum_Size_of_Trace_Log_File	1 - 10	I4	MB
356	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Offset	-20 - +20	F4	°C
357	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Licensed_Control		Bo	
358	Statx_DeltaAPM_Config_GAS_BOX_Fire_Detector_Fitted		Bo	
359	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_Allow_Recipe_value_to_be_Edited.		Bo	
360	Statx_DeltaAPM_Config_HEATER_BOX_PLATEN_PLATEN_COOLING_Platen_Cooling_Fitted		Bo	
361	Statx_DeltaAPM_Config_LIFT_Motor_Current	0-5	I4	
362	Statx_DeltaAPM_Config_LIFT_Motor_Standby_Current	0-1	I4	
363	Statx_DeltaAPM_Config_LIFT_Motor_Current	10-75	I4	%
364	Statx_DeltaAPM_Config_LIFT_Motor_Standby_Current	10-99	I4	%
365	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Attenuation_Enabled		Bo	
366	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Attenuation	-99 - 99	F4	%
367	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Attenuation_Explanation		A	
368	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Attenuation_Enabled		Bo	
369	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Attenuation	-99 - 99	F4	%
370	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_Attenuation_Explanation		A	
371	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_Purge_Time	1-6000	I4	Secs
372	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_Pump_Time	1-6000	I4	Secs
373	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_LMF_Max_Process_Liquid_Flow	0-5	F4	ccm
374	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_CLEAN_STEP_Auto_Restore_after_Hold		Bo	
375	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_CLEAN_STEP_Restore_Delay	1-99	F4	Secs
376	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_CLEAN_STEP_Max_Number_of_Auto_Restores_per_Recipe	1-9	I4	
377	Statx_DeltaAPM_Config_RF_SUPPLIES_HF_RF_CLEAN_STEP_Delay_Band_Monitoring		Bo	
378	Statx_DeltaAPM_Config_GAS_BOX_VAPOURIZER_External_Liquid_Source_Fitted		Bo	
379	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Type	0-1	I4	
380	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Default_Frequency	300-500	F4	KHz
382	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Manifold	0-1	I4	
383	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Manifold	0-1	I4	
384	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Manifold	0-1	I4	
385	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Manifold	0-1	I4	
386	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Manifold	0-1	I4	
387	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Manifold	0-1	I4	
388	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Manifold	0-1	I4	
389	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Manifold	0-1	I4	
390	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Manifold	0-1	I4	
392	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Manifold	0-1	I4	
393	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Manifold	0-1	I4	
394	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Manifold	0-1	I4	
395	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Manifold	0-1	I4	
396	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Manifold	0-1	I4	
397	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Manifold	0-1	I4	
398	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Manifold	0-1	I4	
399	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Manifold	0-1	I4	
400	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Manifold	0-1	I4	
401	Statx_DeltaAPM_Config_GAS_BOX_GAS_1_Flow_Adjustment_Explanation		A	
402	Statx_DeltaAPM_Config_GAS_BOX_GAS_2_Flow_Adjustment_Explanation		A	
403	Statx_DeltaAPM_Config_GAS_BOX_GAS_3_Flow_Adjustment_Explanation		A	
404	Statx_DeltaAPM_Config_GAS_BOX_GAS_4_Flow_Adjustment_Explanation		A	
405	Statx_DeltaAPM_Config_GAS_BOX_GAS_5_Flow_Adjustment_Explanation		A	
406	Statx_DeltaAPM_Config_GAS_BOX_GAS_6_Flow_Adjustment_Explanation		A	
407	Statx_DeltaAPM_Config_GAS_BOX_GAS_7_Flow_Adjustment_Explanation		A	
408	Statx_DeltaAPM_Config_GAS_BOX_GAS_8_Flow_Adjustment_Explanation		A	
409	Statx_DeltaAPM_Config_GAS_BOX_GAS_9_Flow_Adjustment_Explanation		A	

ID offset	Name	Values	Format	Units
410	Statx_DeltaAPM_Config_GAS_BOX_GAS_10_Flow_Adjustment_Explana tion		A	
411	Statx_DeltaAPM_Config_HEATER_BOX_MV_CONTROL_CJC_Correction	-5 - 5	F4	°C
412	Statx_DeltaAPM_Config_HEATER_BOX_MV_VAPOURIZER_CJC_Correc tion	-5 - 5	F4	°C
413	Statx_DeltaAPM_Config_RF_SUPPLIES_LF_RF_Allow_Recipe_value_to_b e_Edited.		Bo	
965	Statx_DeltaAPM_Config_STATION_Module_Wafer_Align_Warning_Limit	0 – 5	F4	mm
966	Statx_DeltaAPM_Config_STATION_Module_Wafer_Align_Abort_Limit	1 - 5	F4	mm
999	Statx_DeltaAPM_Config_STATION_Align_wafer_on_exit		Bo	

22.1.16 C3M (Bridge) PM

ID offset	Name	Values	Format	Units
1	Statx_C3M_Config_STATION_Name		A	
2	Statx_C3M_Config_STATION_Idle_Recipe_in_use		Bo	
3	Statx_C3M_Config_STATION_Recipe_Name		A	
4	Statx_C3M_Config_STATION_Time_between_Recipes	1-3600	I4	Minutes
5	Statx_C3M_Config_GAS_BOX_Exhaust_Extract_Fault_Level	0-3	I4	
10	Statx_C3M_Config_GAS_BOX_GAS_1_Flow_Adjustment	-99 - 99	F4	%
11	Statx_C3M_Config_GAS_BOX_GAS_1_Flow_Adjustment_Enabled		Bo	
12	Statx_C3M_Config_GAS_BOX_GAS_1_Vent_Flow	10 - 10000	F4	sccm
13	Statx_C3M_Config_GAS_BOX_GAS_1_Vent_Tolerance	0 - 99	F4	%
14	Statx_C3M_Config_GAS_BOX_GAS_2_Fitted		Bo	
15	Statx_C3M_Config_GAS_BOX_GAS_2_Name		A	
16	Statx_C3M_Config_GAS_BOX_GAS_2_Full_Scale	0 - 10000	F4	sccm
17	Statx_C3M_Config_GAS_BOX_GAS_2_Flow_Adjustment	-99 - 99	F4	%
19	Statx_C3M_Config_GAS_BOX_GAS_2_Gas_Interlock_Type	0-2	I4	
20	Statx_C3M_Config_GAS_BOX_GAS_2_Flow_Adjustment_Enabled		Bo	
21	Statx_C3M_Config_GAS_BOX_GAS_2_TPU_ON_with_this_gas_?		Bo	
22	Statx_C3M_Config_GAS_BOX_GAS_2_TPU_Type	0-1	I4	
25	Statx_C3M_Config_GAS_BOX_GAS_3_Fitted		Bo	
26	Statx_C3M_Config_GAS_BOX_GAS_3_Name		A	
27	Statx_C3M_Config_GAS_BOX_GAS_3_Full_Scale	0-10000	F4	sccm
28	Statx_C3M_Config_GAS_BOX_GAS_3_Flow_Adjustment	-99 - 99	F4	%
30	Statx_C3M_Config_GAS_BOX_GAS_3_Gas_Interlock_Type	0-2	I4	
31	Statx_C3M_Config_GAS_BOX_GAS_3_Flow_Adjustment_Enabled		Bo	
32	Statx_C3M_Config_GAS_BOX_GAS_3_TPU_ON_with_this_gas_?		Bo	
33	Statx_C3M_Config_GAS_BOX_GAS_3_TPU_Type	0-1	I4	
36	Statx_C3M_Config_GAS_BOX_GAS_4_Fitted		Bo	
37	Statx_C3M_Config_GAS_BOX_GAS_4_Name		A	
38	Statx_C3M_Config_GAS_BOX_GAS_4_Full_Scale	0-10000	F4	sccm
39	Statx_C3M_Config_GAS_BOX_GAS_4_Flow_Adjustment	-99 - 99	F4	%
41	Statx_C3M_Config_GAS_BOX_GAS_4_Gas_Interlock_Type	0-2	I4	
42	Statx_C3M_Config_GAS_BOX_GAS_4_Flow_Adjustment_Enabled		Bo	
43	Statx_C3M_Config_GAS_BOX_GAS_4_TPU_ON_with_this_gas_?		Bo	
44	Statx_C3M_Config_GAS_BOX_GAS_4_TPU_Type	0-1	I4	
47	Statx_C3M_Config_GAS_BOX_GAS_5_Fitted		Bo	
48	Statx_C3M_Config_GAS_BOX_GAS_5_Name		A	
49	Statx_C3M_Config_GAS_BOX_GAS_5_Full_Scale	0-10000	F4	sccm
50	Statx_C3M_Config_GAS_BOX_GAS_5_Flow_Adjustment	-99 - 99	F4	%
52	Statx_C3M_Config_GAS_BOX_GAS_5_Gas_Interlock_Type	0-2	I4	
53	Statx_C3M_Config_GAS_BOX_GAS_5_Flow_Adjustment_Enabled		Bo	
54	Statx_C3M_Config_GAS_BOX_GAS_5_TPU_ON_with_this_gas_?		Bo	
55	Statx_C3M_Config_GAS_BOX_GAS_5_TPU_Type	0-1	I4	
58	Statx_C3M_Config_GAS_BOX_GAS_6_Fitted		Bo	
59	Statx_C3M_Config_GAS_BOX_GAS_6_Name		A	
60	Statx_C3M_Config_GAS_BOX_GAS_6_Full_Scale	0-10000	F4	sccm
61	Statx_C3M_Config_GAS_BOX_GAS_6_Flow_Adjustment	-99 - 99	F4	%
63	Statx_C3M_Config_GAS_BOX_GAS_6_Gas_Interlock_Type	0-2	I4	
64	Statx_C3M_Config_GAS_BOX_GAS_6_Flow_Adjustment_Enabled		Bo	
65	Statx_C3M_Config_GAS_BOX_GAS_6_TPU_ON_with_this_gas_?		Bo	
66	Statx_C3M_Config_GAS_BOX_GAS_6_TPU_Type	0-1	I4	
69	Statx_C3M_Config_GAS_BOX_GAS_7_Fitted		Bo	
70	Statx_C3M_Config_GAS_BOX_GAS_7_Name		A	
71	Statx_C3M_Config_GAS_BOX_GAS_7_Full_Scale	0-10000	F4	sccm
72	Statx_C3M_Config_GAS_BOX_GAS_7_Flow_Adjustment	-99 - 99	F4	%
74	Statx_C3M_Config_GAS_BOX_GAS_7_Gas_Interlock_Type	0-2	I4	
75	Statx_C3M_Config_GAS_BOX_GAS_7_Flow_Adjustment_Enabled		Bo	
76	Statx_C3M_Config_GAS_BOX_GAS_7_TPU_ON_with_this_gas_?		Bo	
77	Statx_C3M_Config_GAS_BOX_GAS_7_TPU_Type	0-1	I4	
80	Statx_C3M_Config_GAS_BOX_GAS_8_Fitted		Bo	
81	Statx_C3M_Config_GAS_BOX_GAS_8_Name		A	
82	Statx_C3M_Config_GAS_BOX_GAS_8_Full_Scale	0-10000	F4	sccm

ID offset	Name	Values	Format	Units
83	Statx_C3M_Config_GAS_BOX_GAS_8_Flow_Adjustment	-99 - 99	F4	%
85	Statx_C3M_Config_GAS_BOX_GAS_8_Gas_Interlock_Type	0-2	I4	
86	Statx_C3M_Config_GAS_BOX_GAS_8_Flow_Adjustment_Enabled		Bo	
87	Statx_C3M_Config_GAS_BOX_GAS_8_TPU_ON_with_this_gas_?		Bo	
88	Statx_C3M_Config_GAS_BOX_GAS_8_TPU_Type	0-1	I4	
91	Statx_C3M_Config_VACUUM_TURBO_PUMP_Idle_to_Ready_Delay_Time	10-300	I4	Secs
92	Statx_C3M_Config_VACUUM_TURBO_PUMP_Turbo_At_Speed_Timeout	1-10	I4	Minutes
93	Statx_C3M_Config_VACUUM_TURBO_PUMP_Turbo_Roughing_Trip	1-100	F4	mTorr
94	Statx_C3M_Config_VACUUM_TURBO_PUMP_Turbo_Roughing_Timeout	10-300	I4	Secs
95	Statx_C3M_Config_VACUUM_TURBO_PUMP_Turbo_Hivac_Valve_Trip	1-100	F4	mTorr
96	Statx_C3M_Config_VACUUM_TURBO_PUMP_Turbo_Hivac_Valve_Timeout	10-300	I4	Secs
97	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_Capman/IMT_gauge_crossover_trip	0-10000	F4	mTorr
98	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_Capman/IMT_gauge_crossover_timeout	0-999	I4	Secs
99	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_Base_Pressure_with_IMT_Gauge	9.9E-9 - 1E-3	F4	Torr
100	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Type	0-1	I4	
101	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Default_Frequency	300 - 500	F4	KHz
113	Statx_C3M_Config_HEATER_BOX_Sensor_Disconnected_Temperature	-10 - 5	F4	°C
114	Statx_C3M_Config_HEATER_BOX_Safe_Handling_Temperature	0-50	F4	°C
115	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_Fitted		Bo	
117	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_Name		A	
118	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_Max_Power	0-99	I4	%
119	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_Max_Temperature	0-200	F4	°C
120	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_P_Constant	0-99999	F4	
121	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_I_Constant	0-99999	F4	
122	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_D_Constant	0-99999	F4	
123	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_Temperature	0-130	F4	°C
124	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_Tolerance	0-100	F4	°C
125	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_Control_/_Safety_Sensor_Full_Scale	0-1000	F4	°C
126	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_CONTROL_/_SAFETY_BAND_Control_/_Safety_Temp_Warning_Band	0-100	I4	°C
127	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_CONTROL_/_SAFETY_BAND_Control_/_Safety_Temp_Hold_Band	0-100	I4	°C
128	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_CONTROL_/_SAFETY_BAND_Control_/_Safety_Temp_Abort_Band	1-100	I4	°C
129	Statx_C3M_Config_HEATER_BOX_SHOWERHEAD_Heater_Control_Enabled		Bo	
130	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_Fitted		Bo	
132	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_Name		A	
133	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_Max_Power	0-99	I4	%
134	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_Max_Temperature	0-550	F4	°C
135	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_P_Constant	0-99999	F4	
136	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_I_Constant	0-99999	F4	
137	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_D_Constant	0-99999	F4	
138	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_Temperature	0-500	F4	°C
139	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_Tolerance	0-100	F4	°C
140	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_Control_/_Safety_Sensor_Full_Scale	0-1000	F4	°C
141	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_CONTROL_/_SAFETY_BAND_Control_/_Safety_Temp_Warning_Band	0-100	I4	°C
142	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_CONTROL_/_SAFETY_BAND_Control_/_Safety_Temp_Hold_Band	0-100	I4	°C

ID offset	Name	Values	Format	Units
143	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_CONT/_SAFETY_BAND_Control/_Safety_Temp._Abort_Band	1-100	I4	°C
144	Statx_C3M_Config_HEATER_BOX_GASBOX_VALVE_BLOCK_Enabled		Bo	
145	Statx_C3M_Config_HEATER_BOX_GAS_INLET_Fitted		Bo	
147	Statx_C3M_Config_HEATER_BOX_GAS_INLET_Name		A	
148	Statx_C3M_Config_HEATER_BOX_GAS_INLET_Max_Power	0-99	I4	%
149	Statx_C3M_Config_HEATER_BOX_GAS_INLET_Max_Temperature	0-200	F4	°C
150	Statx_C3M_Config_HEATER_BOX_GAS_INLET_P_Constant	0-99999	F4	
151	Statx_C3M_Config_HEATER_BOX_GAS_INLET_I_Constant	0-99999	F4	
152	Statx_C3M_Config_HEATER_BOX_GAS_INLET_D_Constant	0-99999	F4	
153	Statx_C3M_Config_HEATER_BOX_GAS_INLET_Temperature	0-120	F4	°C
154	Statx_C3M_Config_HEATER_BOX_GAS_INLET_Tolerance	0-100	F4	°C
155	Statx_C3M_Config_HEATER_BOX_GAS_INLET_Control/_Safety_Sensor_Full_Scale	0-1000	F4	°C
156	Statx_C3M_Config_HEATER_BOX_GAS_INLET_CONT/_SAFETY_BAND_Control/_Safety_Temp._Warning_Band	0-100	I4	°C
157	Statx_C3M_Config_HEATER_BOX_GAS_INLET_CONT/_SAFETY_BAND_Control/_Safety_Temp._Hold_Band	0-100	I4	°C
158	Statx_C3M_Config_HEATER_BOX_GAS_INLET_CONT/_SAFETY_BAND_Control/_Safety_Temp._Abort_Band	1-100	I4	°C
159	Statx_C3M_Config_HEATER_BOX_GAS_INLET_Enabled		Bo	
160	Statx_C3M_Config_HEATER_BOX_PLATEN_Fitted		Bo	
162	Statx_C3M_Config_HEATER_BOX_PLATEN_Name		A	
163	Statx_C3M_Config_HEATER_BOX_PLATEN_Max_Power	0-99	I4	%
164	Statx_C3M_Config_HEATER_BOX_PLATEN_Max_Temperature	0-600	F4	°C
165	Statx_C3M_Config_HEATER_BOX_PLATEN_P_Constant	0-99999	F4	
166	Statx_C3M_Config_HEATER_BOX_PLATEN_I_Constant	0-99999	F4	
167	Statx_C3M_Config_HEATER_BOX_PLATEN_D_Constant	0-99999	F4	
168	Statx_C3M_Config_HEATER_BOX_PLATEN_Temperature	0-600	F4	°C
169	Statx_C3M_Config_HEATER_BOX_PLATEN_Tolerance	0-100	F4	°C
170	Statx_C3M_Config_HEATER_BOX_PLATEN_Vent_Temperature	0-550	F4	°C
171	Statx_C3M_Config_HEATER_BOX_PLATEN_Control/_Safety_Sensor_Full_Scale	0-1000	F4	°C
172	Statx_C3M_Config_HEATER_BOX_PLATEN_CONT/_SAFETY_BAND_Control/_Safety_Temp._Warning_Band	0-100	I4	°C
173	Statx_C3M_Config_HEATER_BOX_PLATEN_CONT/_SAFETY_BAND_Control/_Safety_Temp._Hold_Band	0-100	I4	°C
174	Statx_C3M_Config_HEATER_BOX_PLATEN_CONT/_SAFETY_BAND_Control/_Safety_Temp._Abort_Band	1-100	I4	°C
175	Statx_C3M_Config_HEATER_BOX_PLATEN_Enabled		Bo	
176	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_Fitted		Bo	
178	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_Name		A	
179	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_Max_Power	0-99	I4	%
180	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_Max_Temperature	0-200	F4	°C
181	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_P_Constant	0-99999	F4	
182	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_I_Constant	0-99999	F4	
183	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_D_Constant	0-99999	F4	
184	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_Temperature	0-150	F4	°C
185	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_Tolerance	0-100	F4	°C
186	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_Full_Scale	0-1000	F4	°C
187	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_Enabled		Bo	
188	Statx_C3M_Config_HEATER_BOX_MV_CONTROL_CJC_Correction	-5 - 5	F4	°C
189	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_CJC_Correction	-5 - 5	F4	°C
190	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Allow_Recipe_value_to_be_Edit ed.		Bo	
191	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_Fitted		Bo	
193	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_Name		A	
194	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_Max_Power	0-99	I4	%
195	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_Max_Temperature	0-200	F4	°C
196	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_P_Constant	0-99999	F4	
197	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_I_Constant	0-99999	F4	
198	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_D_Constant	0-99999	F4	

ID offset	Name	Values	Format	Units
199	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_Temperature	0-185	F4	°C
200	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_Tolerance	0-100	F4	°C
201	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_Full_Scale	0-1000	F4	°C
202	Statx_C3M_Config_HEATER_BOX_MV_VAPOURIZER_Enabled		Bo	
206	Statx_C3M_Config_HEATER_BOX_CHAMBER_Fitted		Bo	
208	Statx_C3M_Config_HEATER_BOX_CHAMBER_Name		A	
209	Statx_C3M_Config_HEATER_BOX_CHAMBER_Max_Power	0-99	I4	%
210	Statx_C3M_Config_HEATER_BOX_CHAMBER_Max_Temperature	0-200	F4	°C
211	Statx_C3M_Config_HEATER_BOX_CHAMBER_P_Constant	0-99999	F4	
212	Statx_C3M_Config_HEATER_BOX_CHAMBER_I_Constant	0-99999	F4	
213	Statx_C3M_Config_HEATER_BOX_CHAMBER_D_Constant	0-99999	F4	
214	Statx_C3M_Config_HEATER_BOX_CHAMBER_Temperature	0-130	F4	°C
215	Statx_C3M_Config_HEATER_BOX_CHAMBER_Tolerance	0-100	F4	°C
216	Statx_C3M_Config_HEATER_BOX_CHAMBER_Control_/_Safety_Sensor_Full_Scale	0-1000	F4	°C
217	Statx_C3M_Config_HEATER_BOX_CHAMBER_CONT_/_SAFETY_BAND_Control_/_Safety_Temp_Warning_Band	0-100	I4	°C
218	Statx_C3M_Config_HEATER_BOX_CHAMBER_CONT_/_SAFETY_BAND_Control_/_Safety_Temp_Hold_Band	0-100	I4	°C
219	Statx_C3M_Config_HEATER_BOX_CHAMBER_CONT_/_SAFETY_BAND_Control_/_Safety_Temp_Abort_Band	1-100	I4	°C
220	Statx_C3M_Config_HEATER_BOX_CHAMBER_Enabled		Bo	
221	Statx_C3M_Config_HEATER_BOX_HEATER_8_Fitted		Bo	
223	Statx_C3M_Config_HEATER_BOX_HEATER_8_Name		A	
224	Statx_C3M_Config_HEATER_BOX_HEATER_8_Max_Power	0-99	I4	%
225	Statx_C3M_Config_HEATER_BOX_HEATER_8_Max_Temperature	0-200	F4	°C
226	Statx_C3M_Config_HEATER_BOX_HEATER_8_P_Constant	0-99999	F4	
227	Statx_C3M_Config_HEATER_BOX_HEATER_8_I_Constant	0-99999	F4	
228	Statx_C3M_Config_HEATER_BOX_HEATER_8_D_Constant	0-99999	F4	
229	Statx_C3M_Config_HEATER_BOX_HEATER_8_Temperature	0-150	F4	°C
230	Statx_C3M_Config_HEATER_BOX_HEATER_8_Tolerance	0-100	F4	°C
231	Statx_C3M_Config_HEATER_BOX_HEATER_8_Control_/_Safety_Sensor_Full_Scale	0-1000	F4	°C
232	Statx_C3M_Config_HEATER_BOX_HEATER_8_CONT_/_SAFETY_BAND_Control_/_Safety_Temp_Warning_Band	0-100	I4	°C
233	Statx_C3M_Config_HEATER_BOX_HEATER_8_CONT_/_SAFETY_BAND_Control_/_Safety_Temp_Hold_Band	0-100	I4	°C
234	Statx_C3M_Config_HEATER_BOX_HEATER_8_CONT_/_SAFETY_BAND_Control_/_Safety_Temp_Abort_Band	1-100	I4	°C
235	Statx_C3M_Config_HEATER_BOX_HEATER_8_Enabled		Bo	
236	Statx_C3M_Config_HEATER_BOX_Monitor_Temp_1		Bo	
237	Statx_C3M_Config_HEATER_BOX_Monitor_Temp_2		Bo	
238	Statx_C3M_Config_HEATER_BOX_Temperature_range_to_monitor	0-600	F4	°C
239	Statx_C3M_Config_HEATER_BOX_Heaters_stay_ON_in_Abort_?		Bo	
240	Statx_C3M_Config_LIFT_Home_Steps	1-10000	F4	Steps
241	Statx_C3M_Config_LIFT_Home_Steps_Tolerance	1-10000	F4	Steps
242	Statx_C3M_Config_LIFT_Wafer_Transfer_to_Electrode_Spacing	1-150	F4	mm
243	Statx_C3M_Config_LIFT_Max_Process_Electrode_Spacing	1-100	F4	mm
244	Statx_C3M_Config_LIFT_Min_Process_Electrode_Spacing	1-100	F4	mm
245	Statx_C3M_Config_LIFT_Velocity	0-15	F4	Revs/sec
246	Statx_C3M_Config_LIFT_Acceleration	0-20	F4	Revs/sec/s
247	Statx_C3M_Config_LIFT_Lift_Timeout	0-100	F4	Secs
248	Statx_C3M_Config_GAS_BOX_VAPOURIZER_External_Liquid_Source_Fitted		Bo	
249	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_IMT_Isolation_valve_time_delay	0-99	I4	Secs
251	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Fitted		Bo	
253	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Load_Max_Power	0-9999	F4	W
254	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Load_Full_Scale	0-10000	F4	W
255	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Reflected_Max_Power	0-9999	F4	W
256	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Reflected_Full_Scale	0-10000	F4	W

ID offset	Name	Values	Format	Units
257	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Peak_to_Peak_Max_Volts	0-9999	F4	V
258	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Peak_to_Peak_Full_Scale	0-10000	F4	V
259	Statx_C3M_Config_RF_SUPPLIES_LF_RF_DC_Bias_Max_Volts	0-9999	F4	V
260	Statx_C3M_Config_RF_SUPPLIES_LF_RF_DC_Bias_Full_Scale	0-10000	F4	V
262	Statx_C3M_Config_RF_SUPPLIES_HF_RF_Load_Max_Power	0-9999	F4	W
264	Statx_C3M_Config_RF_SUPPLIES_HF_RF_Reflected_Max_Power	0-9999	F4	W
266	Statx_C3M_Config_RF_SUPPLIES_HF_RF_Peak_to_Peak_Max_Volts	0-9999	F4	V
267	Statx_C3M_Config_RF_SUPPLIES_HF_RF_Peak_to_Peak_Full_Scale	0-10000	F4	V
268	Statx_C3M_Config_RF_SUPPLIES_HF_RF_DC_Bias_Max_Volts	0-9999	F4	V
269	Statx_C3M_Config_RF_SUPPLIES_HF_RF_DC_Bias_Full_Scale	0-10000	F4	V
279	Statx_C3M_Config_VACUUM_PUMP/TPU_MONITOR_Enabled		Bo	
280	Statx_C3M_Config_VACUUM_PUMP/TPU_MONITOR_Pump_Fault_1	0-6	I4	
281	Statx_C3M_Config_VACUUM_PUMP/TPU_MONITOR_Pump_Fault_2	0-6	I4	
282	Statx_C3M_Config_VACUUM_PUMP/TPU_MONITOR_TPU_Fault_1	0-6	I4	
283	Statx_C3M_Config_VACUUM_PUMP/TPU_MONITOR_TPU_Fault_2	0-6	I4	
285	Statx_C3M_Config_VACUUM_PUMP/TPU_MONITOR_Pump_ON_Feedback_Active_Low_?		Bo	
286	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_Capman_Maximum_Scale	0-20000	F4	mTorr
287	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_Max_Press._Allowed_in_Recipes	0-18500	F4	mTorr
288	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_Base_Pressure	0-10000	F4	mTorr
289	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_Maximum_Pump_to_Base_Time	0-999	F4	Secs
290	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_Atmospheric_Sensor_Hysteresis	0-3600	I4	Secs
291	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_Fill_Rate_Start_Pressure	0-100000	F4	mTorr
292	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_Fill_Rate_End_Pressure	0-100000	F4	mTorr
293	Statx_C3M_Config_VACUUM_FORELINE_GAUGE_Foreline_Capman_Max_Scale	0-10000	F4	mTorr
294	Statx_C3M_Config_VACUUM_FORELINE_GAUGE_Foreline_Roughing_Trip	1-100	F4	mTorr
295	Statx_C3M_Config_VACUUM_FORELINE_GAUGE_Foreline_Roughing_Timeout	10-300	F4	Secs
296	Statx_C3M_Config_PRESSURES_Atmospheric_Cross_Over_Trip	0-800	F4	Torr
297	Statx_C3M_Config_PRESSURES_Intermediate_Cross_Over_Trip	0-3	F4	Torr
298	Statx_C3M_Config_PRESSURES_Rough_Cross_Over_Trip	0-0.01	F4	Torr
299	Statx_C3M_Config_MISC_Max_Hold_time_before_Aborting	0-9999	F4	Secs
300	Statx_C3M_Config_MISC_Time_from_completing_Process_back_to_Ready	0-30	F4	Secs
301	Statx_C3M_Config_RF_SUPPLIES_HF_RF_Fitted		Bo	
302	Statx_C3M_Config_LIFT_Degas_Electrode_Spacing	1-150	F4	mm
304	Statx_C3M_Config_MISC_Warning_Percentages_-_Config_Tolerances	0-99	F4	%
305	Statx_C3M_Config_MISC_Warning_Percentages_-_Config_Maximums	0-99	F4	%
306	Statx_C3M_Config_VACUUM_CHAMBER_VAC_CONT_APC_Position_At_Process_End	0-100	F4	%
308	Statx_C3M_Config_GAS_BOX_GAS_2_Symbol	0-14	I4	
309	Statx_C3M_Config_GAS_BOX_GAS_3_Symbol	0-14	I4	
310	Statx_C3M_Config_GAS_BOX_GAS_4_Symbol	0-14	I4	
311	Statx_C3M_Config_GAS_BOX_GAS_5_Symbol	0-14	I4	
312	Statx_C3M_Config_GAS_BOX_GAS_6_Symbol	0-14	I4	
313	Statx_C3M_Config_GAS_BOX_GAS_7_Symbol	0-14	I4	
314	Statx_C3M_Config_GAS_BOX_GAS_8_Symbol	0-14	I4	
318	Statx_C3M_Config_VACUUM_PUMP/TPU_MONITOR_Fault_Definition		A	
319	Statx_C3M_Config_VACUUM_PUMP/TPU_MONITOR_Fault_Definition		A	
320	Statx_C3M_Config_VACUUM_PUMP/TPU_MONITOR_Fault_Definition		A	
321	Statx_C3M_Config_VACUUM_PUMP/TPU_MONITOR_Fault_Definition		A	
322	Statx_C3M_Config_HEATER_BOX_Heated_Foreline_Fitted		Bo	
323	Statx_C3M_Config_RF_SUPPLIES_HF_RF_AFT_Control_enabled		Bo	
324	Statx_C3M_Config_RF_SUPPLIES_HF_RF_Load_Power_Control		Bo	

ID offset	Name	Values	Format	Units
325	Statx_C3M_Config_HEATER_BOX_PLATEN_PLATEN_COOLING_Platten_Cooling_Enabled		Bo	
326	Statx_C3M_Config_HEATER_BOX_PLATEN_PLATEN_COOLING_Platten_Cooling_ON_Dead_Band	0-100	F4	°C
327	Statx_C3M_Config_HEATER_BOX_PLATEN_PLATEN_COOLING_Platten_Cooling_ON_Hysteresis	0-100	F4	°C
334	Statx_C3M_Config_GAS_BOX_VAPOURIZER_Precursor_Name		A	
335	Statx_C3M_Config_GAS_BOX_VAPOURIZER_LMF_Liquid_Flow_Full_Scale	0-0.2	F4	ccm
336	Statx_C3M_Config_GAS_BOX_VAPOURIZER_LMF_Min_Liquid_Flow_>2%_FS	0-0.2	F4	ccm
337	Statx_C3M_Config_GAS_BOX_VAPOURIZER_LMF_Closed_<2%_FS	0-5	F4	ccm
338	Statx_C3M_Config_GAS_BOX_VAPOURIZER_Vapour_stab_time	1-30	I4	Secs
339	Statx_C3M_Config_GAS_BOX_VAPOURIZER_Stop_Vapourisation_before_end_of_Process	0-10	I4	Secs
340	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Gauge_Max_scale	0-1000	F4	psia
341	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Precursor_Pressure	0-1000	F4	psia
342	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Warning_Band	0-20	I4	psia
343	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Hold_Band	0-20	I4	psia
344	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Abort_Band	0-20	I4	psia
345	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PRECURSOR_PRESSURE_Min_Pressure_during_Deposition	0-20	F4	Psia
346	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PCG_PRESSURE_Gauge_Max_scale	0-1000	F4	Torr
347	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PCG_PRESSURE_PCG_pressure	0-1000	F4	Torr
348	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PCG_PRESSURE_Warning_Band	0-20	I4	Torr
349	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PCG_PRESSURE_Hold_Band	0-20	I4	Torr
350	Statx_C3M_Config_GAS_BOX_VAPOURIZER_PCG_PRESSURE_Abort_Band	0-20	I4	Torr
351	Statx_C3M_Config_HEATER_BOX_Heated_Gasline_Fitted		Bo	
353	Statx_C3M_Config_MISC_Band_Monitoring_Delay	0-600	F4	Secs
354	Statx_C3M_Config_MISC_Trace_at_Debug_Level		Bo	
355	Statx_C3M_Config_MISC_Maximum_Size_of_Trace_Log_File	1-10	I4	MB
358	Statx_C3M_Config_GAS_BOX_Fire_Detector_Fitted		Bo	
359	Statx_C3M_Config_HEATER_BOX_PLATEN_Allow_Recipe_value_to_be_Edited.		Bo	
360	Statx_C3M_Config_HEATER_BOX_PLATEN_PLATEN_COOLING_Platten_Cooling_Fitted		Bo	
363	Statx_C3M_Config_LIFT_Motor_Current	10-75	I4	%
364	Statx_C3M_Config_LIFT_Motor_Standby_Current	10-99	I4	%
365	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Attenuation_Enabled		Bo	
366	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Attenuation	-99 - 99	F4	%
367	Statx_C3M_Config_RF_SUPPLIES_LF_RF_Attenuation_Explanation		A	
368	Statx_C3M_Config_RF_SUPPLIES_HF_RF_Attenuation_Enabled		Bo	
369	Statx_C3M_Config_RF_SUPPLIES_HF_RF_Attenuation	-99 - 99	F4	%
370	Statx_C3M_Config_RF_SUPPLIES_HF_RF_Attenuation_Explanation		A	
371	Statx_C3M_Config_GAS_BOX_VAPOURIZER_Purge_Time	1-6000	I4	Secs
372	Statx_C3M_Config_GAS_BOX_VAPOURIZER_Pump_Time	1-6000	I4	Secs
373	Statx_C3M_Config_GAS_BOX_VAPOURIZER_LMF_Max_Process_Liquid_Flow	0-0.2	F4	ccm
401	Statx_C3M_Config_GAS_BOX_GAS_1_Flow_Adjustment_Explanation		A	
402	Statx_C3M_Config_GAS_BOX_GAS_2_Flow_Adjustment_Explanation		A	
403	Statx_C3M_Config_GAS_BOX_GAS_3_Flow_Adjustment_Explanation		A	
404	Statx_C3M_Config_GAS_BOX_GAS_4_Flow_Adjustment_Explanation		A	
405	Statx_C3M_Config_GAS_BOX_GAS_5_Flow_Adjustment_Explanation		A	

ID offset	Name	Values	Format	Units
406	Statx_C3M_Config_GAS_BOX_GAS_6_Flow_Adjustment_Explanation		A	
407	Statx_C3M_Config_GAS_BOX_GAS_7_Flow_Adjustment_Explanation		A	
408	Statx_C3M_Config_GAS_BOX_GAS_8_Flow_Adjustment_Explanation		A	
965	Statx_C3M_Config_STATION_Module_Wafer_Align_Warning_Limit	0-5	F4	mm
966	Statx_C3M_Config_STATION_Module_Wafer_Align_Abort_Limit	1-5	F4	mm
999	Statx_C3M_Config_STATION_Align_wafer_on_exit		Bo	

22.1.17 Primaxx Monarch25PM

ID offset	Name	Values	Format	Units
001	Statx_PrimaxxMonarch25_Config_STATION_Name		A	
004	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_LID_Temperature	0-70	F4	°C
005	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_LID_Tolerance_Warning_band	0-70	F4	°C
006	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_LID_Tolerance_Fault_band	1-70	F4	°C
009	Statx_PrimaxxMonarch25_Config_HEATERS_UPPER_CHAMBER_Temperature	0-70	F4	°C
010	Statx_PrimaxxMonarch25_Config_HEATERS_UPPER_CHAMBER_Tolerance_Warning_band	0-70	F4	°C
011	Statx_PrimaxxMonarch25_Config_HEATERS_UPPER_CHAMBER_Tolerance_Fault_band	1-70	F4	°C
014	Statx_PrimaxxMonarch25_Config_HEATERS_LOWER_CHAMBER_Temperature	0-70	F4	°C
015	Statx_PrimaxxMonarch25_Config_HEATERS_LOWER_CHAMBER_Tolerance_Warning_band	0-70	F4	°C
016	Statx_PrimaxxMonarch25_Config_HEATERS_LOWER_CHAMBER_Tolerance_Fault_band	1-70	F4	°C
019	Statx_PrimaxxMonarch25_Config_HEATERS_GAS_PANEL_Temperature	0-70	F4	°C
020	Statx_PrimaxxMonarch25_Config_HEATERS_GAS_PANEL_Tolerance_Warning_band	0-70	F4	°C
021	Statx_PrimaxxMonarch25_Config_HEATERS_GAS_PANEL_Tolerance_Fault_band	1-70	F4	°C
024	Statx_PrimaxxMonarch25_Config_HEATERS_VAPORISER_Temperature	0-70	F4	°C
025	Statx_PrimaxxMonarch25_Config_HEATERS_VAPORISER_Tolerance_Warning_band	0-70	F4	°C
026	Statx_PrimaxxMonarch25_Config_HEATERS_VAPORISER_Tolerance_Fault_band	1-70	F4	°C
029	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_Temperature	0-70	F4	°C
030	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_Tolerance_Warning_band	0-70	F4	°C
031	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_Tolerance_Fault_band	1-70	F4	°C
034	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Temperature	0-70	F4	°C
035	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Tolerance_Warning_band	0-70	F4	°C
036	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Tolerance_Fault_band	1-70	F4	°C
039	Statx_PrimaxxMonarch25_Config_HEATERS_VACUUM_EXHAUST_LINE_Temperature	0-70	F4	°C
040	Statx_PrimaxxMonarch25_Config_HEATERS_VACUUM_EXHAUST_LINE_Tolerance_Warning_band	0-70	F4	°C
041	Statx_PrimaxxMonarch25_Config_HEATERS_VACUUM_EXHAUST_LINE_Tolerance_Fault_band	1-70	F4	°C
044	Statx_PrimaxxMonarch25_Config_HEATERS_N2_LINE_Temperature	0-70	F4	°C
045	Statx_PrimaxxMonarch25_Config_HEATERS_N2_LINE_Tolerance_Warning_band	0-70	F4	°C
046	Statx_PrimaxxMonarch25_Config_HEATERS_N2_LINE_Tolerance_Fault_band	1-70	F4	°C
049	Statx_PrimaxxMonarch25_Config_HEATERS_ELEVATOR_Temperature	0-70	F4	°C
050	Statx_PrimaxxMonarch25_Config_HEATERS_ELEVATOR_Tolerance_Warning_band	0-70	F4	°C
051	Statx_PrimaxxMonarch25_Config_HEATERS_ELEVATOR_Tolerance_Fault_band	1-70	F4	°C
057	Statx_PrimaxxMonarch25_Config_GAS_BOX_N2_MFC3_Full_Scale	0-10000	F4	sccm
058	Statx_PrimaxxMonarch25_Config_GAS_BOX_N2_MFC3_Type	5	I4	
059	Statx_PrimaxxMonarch25_Config_GAS_BOX_HF_Full_Scale	0-30000	F4	sccm
060	Statx_PrimaxxMonarch25_Config_GAS_BOX_HF_MFC_Type	5	I4	
061	Statx_PrimaxxMonarch25_Config_GAS_BOX_HF_External_Pressure_Transducer		Bo	

ID offset	Name	Values	Format	Units
062	Statx_PrimaxxMonarch25_Config_GAS_BOX_HF_HF_Pressure	0-760	F4	Torr
063	Statx_PrimaxxMonarch25_Config_GAS_BOX_HF_HF_Pressure_Warning_Band	0-760	F4	Torr
064	Statx_PrimaxxMonarch25_Config_GAS_BOX_HF_HF_Pressure_Fault_Band	0-760	F4	Torr
065	Statx_PrimaxxMonarch25_Config_GAS_BOX_ALCOHOL_Delivery_System	1	I4	
069	Statx_PrimaxxMonarch25_Config_GAS_BOX_ALCOHOL_Full_Scale	0-2000	F4	µL/min
073	Statx_PrimaxxMonarch25_Config_GAS_BOX_GAS_DETECTORS_HF_Detector_Fitted		Bo	
074	Statx_PrimaxxMonarch25_Config_GAS_BOX_GAS_DETECTORS_Alcohol_Detector_Fitted	Bo 0	Bo	
075	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_Base_Pressure	0-20000	F4	mTorr
076	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_Pump_to_base_timeout	0-600	I4	Secs
077	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_Pump_to_Base_Cross_Over_Timeout	0-600	I4	Secs
078	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_High_Pressure_Pumping_Rate	0-100	I4	Torr/sec
079	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_Pumping_Cross_Over_Pressure	100-300	I4	Torr
080	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_Pressure_Balance_Limit	0-200	I4	Torr
081	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_Atmospheric_Pressure	600-800	I4	Torr
082	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_THROTTLE_Phase	0-100	F4	
083	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_THROTTLE_Gain	0-100	F4	
091	Statx_PrimaxxMonarch25_Config_ELEVATOR_Elevator_Type	1	I4	
092	Statx_PrimaxxMonarch25_Config_ELEVATOR_Unseal_Offset	0-500	I4	
093	Statx_PrimaxxMonarch25_Config_ELEVATOR_Elevator_Zero_Position	200-300	I4	
094	Statx_PrimaxxMonarch25_Config_ELEVATOR_Slot_Interval	200-300	I4	
095	Statx_PrimaxxMonarch25_Config_MISC_Band_Monitoring_Delay	0-600	I4	Secs
096	Statx_PrimaxxMonarch25_Config_MISC_Warning_Percentage	0-100	I4	%
097	Statx_PrimaxxMonarch25_Config_MISC_Trace_at_Debug_Level		Bo	
098	Statx_PrimaxxMonarch25_Config_MISC_Maximum_Size_of_Trace_File	1-10	I4	MB
099	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_Max_Lower_Chamber_Pressure_Drop	0-1000	I4	Torr
100	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_Lower_Chamber_Pressure_Monitoring_Type	0-1	I4	
101	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_Pressure_Equalization_Timeout	0-100	I4	Secs
104	Statx_PrimaxxMonarch25_Config_GAS_BOX_N2_MFC4_Fitted		Bo	
105	Statx_PrimaxxMonarch25_Config_GAS_BOX_N2_MFC4_Full_Scale	0-10000	F4	sccm
106	Statx_PrimaxxMonarch25_Config_GAS_BOX_N2_MFC4_Type	5	I4	
107	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_High_Res._Baratron_Fitted		Bo	
108	Statx_PrimaxxMonarch25_Config_PUMP_INTERFACE_Pump_Interface_Fitted		Bo	
109	Statx_PrimaxxMonarch25_Config_PUMP_INTERFACE_Pump_Input_1		A	
110	Statx_PrimaxxMonarch25_Config_PUMP_INTERFACE_Pump_Fault_1_Type	0=None 1=Warning 2=Abort	I4	
111	Statx_PrimaxxMonarch25_Config_PUMP_INTERFACE_Pump_Input_2		A	
112	Statx_PrimaxxMonarch25_Config_PUMP_INTERFACE_Pump_Fault_2_Type	0=None 1=Warning 2=Abort	I4	
113	Statx_PrimaxxMonarch25_Config_PUMP_INTERFACE_Pump_Input_3	A	A	
114	Statx_PrimaxxMonarch25_Config_PUMP_INTERFACE_Pump_Fault_3_Type	0=None 1=Warning 2=Abort	I4	
115	Statx_PrimaxxMonarch25_Config_PUMP_INTERFACE_Pump_Input_4	A	A	

ID offset	Name	Values	Format	Units
116	Statx_PrimaxxMonarch25_Config_PUMP_INTERFACE_Pump_Fault_4_Type	0=None 1=Warning 2=Abort	I4	
117	Statx_PrimaxxMonarch25_Config_PUMP_INTERFACE_Pump_Startup_Grace_Time	0-300	F4	Secs
118	Statx_PrimaxxMonarch25_Config_INTERLOCKS_Facility_Interlock_1		A	
119	Statx_PrimaxxMonarch25_Config_INTERLOCKS_Facility_Interlock_1_Type	0=None 2=Abort	I4	
120	Statx_PrimaxxMonarch25_Config_INTERLOCKS_Facility_Interlock_2		A	
121	Statx_PrimaxxMonarch25_Config_INTERLOCKS_Facility_Interlock_2_Type	0=None 2=Abort	I4	
122	Statx_PrimaxxMonarch25_Config_INTERLOCKS_Facility_Interlock_3		A	
123	Statx_PrimaxxMonarch25_Config_INTERLOCKS_Facility_Interlock_3_Type	0=None 2=Abort	I4	
124	Statx_PrimaxxMonarch25_Config_INTERLOCKS_Facility_Interlock_4		A	
125	Statx_PrimaxxMonarch25_Config_INTERLOCKS_Facility_Interlock_4_Type	0=None 2=Abort	I4	
127	Statx_PrimaxxMonarch25_Config_ELEVATOR_Position_Tolerance	0-100	I4	
128	Statx_PrimaxxMonarch25_Config_MISC_Restoring_Band_Monitoring_Delay	0-600	I4	Secs
129	Statx_PrimaxxMonarch25_Config_PRESSURE_CONTROL_Auto_Calibration_of_Lower_Gauge		Bo	
130	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Slave_1_Fitted		Bo	
131	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Slave_2_Fitted		Bo	
132	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Slave_3_Fitted		Bo	
133	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Slave_4_Fitted		Bo	
134	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Slave_5_Fitted		Bo	
135	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Slave_6_Fitted		Bo	
136	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Slave_7_Fitted		Bo	
137	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Slave_8_Fitted		Bo	
140	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
141	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
142	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
143	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
144	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
145	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
146	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
147	Statx_PrimaxxMonarch25_Config_HEATERS_PROCESS_MIX_ZONE_B_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
150	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_ZONE_C_SLAVE_HEATERS_Slave_1_Fitted		Bo	
151	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_ZONE_C_SLAVE_HEATERS_Slave_2_Fitted		Bo	
152	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_ZONE_C_SLAVE_HEATERS_Slave_3_Fitted		Bo	
153	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_ZONE_C_SLAVE_HEATERS_Slave_4_Fitted		Bo	
154	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_ZONE_C_SLAVE_HEATERS_Slave_5_Fitted		Bo	

ID offset	Name	Values	Format	Units
155	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Slave_6_Fitted		Bo	
156	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Slave_7_Fitted		Bo	
157	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Slave_8_Fitted		Bo	
160	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
161	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
162	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
163	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
164	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
165	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
166	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
167	Statx_PrimaxxMonarch25_Config_HEATERS_CHAMBER_INLET_LINE_Z ONE_C_SLAVE_HEATERS_Tolerance_Warning_Band	0-70	F4	°C
170	Statx_PrimaxxMonarch25_Config_ELEVATOR_Sealed_Position_Tolerance	0-250	I4	
999	Statx_PrimaxxMonarch25_Config_STATION_Align_wafer_on_exit		Bo	

22.1.18 Pro CVE PM

ID offset	Name	Values	Format	Units
1	Statx_ProCve_Config_STATION_Name		A	
3	Statx_ProCve_Config_STATION_SETTINGS_Ramping_Enabled		Bo	
9	Statx_ProCve_Config_STATION_SETTINGS_Max_Process_Time	1 - 57600	F4	Secs
10	Statx_ProCve_Config_STATION_SETTINGS_Max_Stabilisation_Time	1 - 600	F4	Secs
13	Statx_ProCve_Config_STATION_SETTINGS_Max_Cooling_Interval	1 - 600	F4	Secs
14	Statx_ProCve_Config_STATION_SETTINGS_Max_Cooling_Time	1 - 600	F4	Secs
15	Statx_ProCve_Config_STATION_SETTINGS_Max_Cooling_Pressure	1 - 5000	F4	Torr
16	Statx_ProCve_Config_STATION_SETTINGS_Vent_Purge_Cycles_(Sub-chamber_closed)	0 - 1000	I4	
17	Statx_ProCve_Config_STATION_SETTINGS_Vent_Purge_Cycles_(Sub-chamber_open)	0 - 1000	I4	
18	Statx_ProCve_Config_PUMPING_APC_APC_Type	0 - 6	I4	
19	Statx_ProCve_Config_PUMPING_APC_Valve_open-close_timeout	1 - 60	F4	Secs
20	Statx_ProCve_Config_PUMPING_APC_Process_gauge_valve_isolation_pressure	1 - 1000	F4	mTorr
21	Statx_ProCve_Config_PUMPING_APC_Upper_operating_pressure	1 - 10000000	F4	mTorr
22	Statx_ProCve_Config_PUMPING_APC_ANGLE_Grace_Time	0 - 100	F4	Secs
23	Statx_ProCve_Config_PUMPING_APC_ANGLE_Decay_Time	0 - 100	F4	Secs
24	Statx_ProCve_Config_PUMPING_APC_PRESSURE_Grace_Time	0 - 100	F4	Secs
25	Statx_ProCve_Config_PUMPING_APC_PRESSURE_Decay_Time	0 - 100	F4	Secs
26	Statx_ProCve_Config_PUMPING_APC_PRESSURE_TOLERANCE_Upper_Alarm_Hold_Off_Time	0 - 100	F4	Secs
27	Statx_ProCve_Config_PUMPING_APC_PRESSURE_TOLERANCE_Upper_Warning_Hold_Off_Time	0 - 100	F4	Secs
28	Statx_ProCve_Config_PUMPING_APC_PRESSURE_TOLERANCE_Lower_Warning_Hold_Off_Time	0 - 100	F4	Secs
29	Statx_ProCve_Config_PUMPING_APC_PRESSURE_TOLERANCE_Lower_Alarm_Hold_Off_Time	0 - 100	F4	Secs
30	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Pump_On_Sensor_Fitted		Bo	
31	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Inverted		Bo	
32	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Pump_Error_Sensor_Fitted		Bo	
33	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Inverted		Bo	
34	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Pump_Alarm_Sensor_Fitted		Bo	
35	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Inverted		Bo	
36	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Pump_On_Demand_Fitted		Bo	
37	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Inverted		Bo	
38	Statx_ProCve_Config_PUMPING_BACKING_PUMP_PM_on-off_count_trigger	1 - 1000000	F4	
39	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Backup_Purge_Overrun_Timer	1 - 6000	F4	Secs
40	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Foreline_Pumping_Time	1 - 600	F4	Secs
41	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Run_hours_warning	1 - 100000	F4	Hrs
42	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Pump_starts_warning	1 - 100000	F4	
43	Statx_ProCve_Config_PUMPING_BACKING_PUMP_Pump_faults_warning	1 - 100000	F4	
44	Statx_ProCve_Config_PUMPING_BACKING_PUMP_PURGE_VALVE_Fitted		Bo	
45	Statx_ProCve_Config_PUMPING_BACKING_PUMP_PURGE_VALVE_Open_Valve_Demand_Inverted		Bo	
46	Statx_ProCve_Config_PUMPING_BACKING_PUMP_PURGE_VALVE_PM_Valve_open-close_count_trigger	1 - 1000000	F4	
47	Statx_ProCve_Config_PUMPING_BACKING_PUMP_PURGE_VALVE_Valve_open-close_timeout	1 - 600	F4	Secs
48	Statx_ProCve_Config_PUMPING_EXHAUST_MONITORING_Fitted		Bo	
49	Statx_ProCve_Config_PUMPING_EXHAUST_MONITORING_Facilities_Exhaust_Fault_Sensor_Fitted		Bo	
50	Statx_ProCve_Config_PUMPING_EXHAUST_MONITORING_Inverted		Bo	

ID offset	Name	Values	Format	Units
51	Statx_ProCve_Config_PUMPING_EXHAUST_MONITORING_Process_Gas_Present_Fitted		Bo	
52	Statx_ProCve_Config_PUMPING_EXHAUST_MONITORING_PM_Valve_open-close_count_trigger	1 - 1000000	F4	
53	Statx_ProCve_Config_PUMPING_EXHAUST_MONITORING_Ovrrun_Time	0 - 600	F4	Secs
81	Statx_ProCve_Config_PUMPING_SOURCE_PUMP_VALVE_Fitted		Bo	
82	Statx_ProCve_Config_PUMPING_SOURCE_PUMP_VALVE_PM_Valve_open-close_count_trigger	1 - 1000000	F4	
83	Statx_ProCve_Config_PRESSURES_ATMOSPHERE_SWITCH_Pressure_Sensor_Input_Inverted		Bo	
84	Statx_ProCve_Config_PRESSURES_ATMOSPHERE_SWITCH_PM_on-off_count_trigger	1 - 1000000	F4	
85	Statx_ProCve_Config_PRESSURES_VACUUM_SWITCH_Pressure_Sensor_Input_Inverted		Bo	
86	Statx_ProCve_Config_PRESSURES_VACUUM_SWITCH_PM_on-off_count_trigger	1 - 1000000	F4	
87	Statx_ProCve_Config_PRESSURES_CHAMBER_GAUGE_Type	0 - 2	I4	
88	Statx_ProCve_Config_PRESSURES_FORELINE_VACUUM_SWT_Pressure_Sensor_Input_Inverted		Bo	
89	Statx_ProCve_Config_PRESSURES_FORELINE_VACUUM_SWT_PM_on-off_count_trigger	1 - 1000000	F4	
90	Statx_ProCve_Config_PRESSURES_GAS_FEED_VACUUM_SWT_Pressure_Sensor_Input_Inverted		Bo	
91	Statx_ProCve_Config_PRESSURES_GAS_FEED_VACUUM_SWT_PM_on-off_count_trigger	1 - 1000000	F4	
92	Statx_ProCve_Config_PUMPING_SOURCE_PUMP_VALVE_Open_Valve_Demand_Inverted		Bo	
103	Statx_ProCve_Config_BSG_COOLING_PUMP_VALVE_PM_Valve_open-close_count_trigger	1 - 1000000	F4	
126	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_Fitted		Bo	
127	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_Type	0 - 6	I4	
128	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_Airarm_Input_Fitted		Bo	
129	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_Inverted		Bo	
130	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Too_cold_debounce_timer	0 - 100	F4	Secs
131	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Too_hot_debounce_timer	0 - 100	F4	Secs
132	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_High_tolerance_alarm_debounce_timer	0 - 100	F4	Secs
133	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Low_tolerance_alarm_debounce_timer	0 - 100	F4	Secs
134	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Vent_Temperature	0 - 100	F4	Â°C
135	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Upper_Vent_Temperature_Limit	0 - 100	F4	Â°C
136	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Lower_Vent_Temperature_Limit	0 - 100	F4	Â°C
137	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_PM_on-off_count_trigger	1 - 1000000	F4	
138	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Chiller_on-off_timeout	1 - 60	F4	Secs
139	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Chiller_noflow-flowing_timeout	1 - 60	F4	Secs
140	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Startup_Temperature	0 - 100	F4	Â°C
141	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Upper_Safety_Temperature_Limit	0 - 100	F4	Â°C
142	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SETTINGS_Lower_Safety_Temperature_Limit	-50 - 100	F4	Â°C

ID offset	Name	Values	Format	Units
143	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SE TTINGS_Stabilisation_band_around_setpoint	0 - 100	F4	Â°C
144	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SE TTINGS_Time_within_band_before_becoming_stabilised	1 - 600	F4	Secs
145	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SE TTINGS_Stabilisation_Timeout	1 - 6000	F4	Secs
146	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SE TTINGS_TEMPERATURE_Grace_Time	0 - 600	F4	Secs
147	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_SE TTINGS_TEMPERATURE_Decay_Time	0 - 600	F4	Secs
148	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_A NTI_CON_UNIT_Fitted		Bo	
149	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_A NTI_CON_UNIT_Trip_Temperature	0 - 90	F4	Â°C
150	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_A NTI_CON_UNIT_PM_Valve_open-close_count_trigger	1 - 1000000	F4	
151	Statx_ProCve_Config_HEATERS_&_CHILLERS_CHILLERS_PLATEN_A NTI_CON_UNIT_Valve_open-close_timeout	1 - 60	F4	Secs
164	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_CHAMB ER_BLOCK_Fitted		Bo	
168	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_CHAMB ER_BLOCK_Switch_off_if_gasbox_door_is_open		Bo	
169	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_CHAMB ER_BLOCK_PM_on-off_count_trigger	1 - 1000000	F4	
170	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_GAS_B OX_Fitted		Bo	
174	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_GAS_B OX_Switch_off_if_gasbox_door_is_open		Bo	
175	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_GAS_B OX_PM_on-off_count_trigger	1 - 1000000	F4	
176	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_SOURC E_Fitted		Bo	
180	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_SOURC E_Switch_off_if_gasbox_door_is_open		Bo	
181	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_SOURC E_PM_on-off_count_trigger	1 - 1000000	F4	
182	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_GAS_PA NEL_Fitted		Bo	
186	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_GAS_PA NEL_Switch_off_if_gasbox_door_is_open		Bo	
187	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_GAS_PA NEL_PM_on-off_count_trigger	1 - 1000000	F4	
188	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_ Fitted		Bo	
189	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_I NPUTS_Underrange_Fitted		Bo	
190	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_I NPUTS_Sensor_Break_Fitted		Bo	
192	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_I NPUTS_Pre-tune_Mode_Fitted		Bo	
193	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_I NPUTS_Loop_Alarm_Fitted		Bo	
194	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_I NPUTS_Auto_Mode_Fitted		Bo	
199	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_ SETTINGS_Failed_to_change_state_timer	1 - 60	F4	Secs
200	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_ SETTINGS_Slow_to_change_state_timer	1 - 60	F4	Secs
201	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_ SETTINGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C
202	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_ SETTINGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
203	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_ SETTINGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C

ID offset	Name	Values	Format	Units
204	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_SETTINGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
205	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_SETTINGS_Vent_Temperature	-50 - 500	F4	Â°C
206	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_SETTINGS_Startup_Temperature	-50 - 500	F4	Â°C
207	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_SETTINGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
208	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_SETTINGS_TEMPERATURE_Decay_Time	0 - 100	F4	Secs
209	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_SETTINGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs
210	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_CHAMBER_SETTINGS_MANUAL_POWER_Decay_Time	0 - 100	F4	Secs
211	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_Fitted		Bo	
212	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_INPUT_S_Underrange_Fitted		Bo	
213	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_INPUT_S_Sensor_Break_Fitted		Bo	
215	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_INPUT_S_Pre-tune_Mode_Fitted		Bo	
216	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_INPUT_S_Loop_Alarm_Fitted		Bo	
217	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_INPUT_S_Auto_Mode_Fitted		Bo	
222	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_Failed_to_change_state_timer	1 - 60	F4	Secs
223	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_Slow_to_change_state_timer	1 - 60	F4	Secs
224	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C
225	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
226	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C
227	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
228	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_Vent_Temperature	-50 - 500	F4	Â°C
229	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_Startup_Temperature	-50 - 500	F4	Â°C
230	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
231	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_TEMPERATURE_Decay_Time	0 - 100	F4	Secs
232	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs
233	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LIFT_SETTI_NGS_MANUAL_POWER_Decay_Time	0 - 100	F4	Secs
234	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_Fitted		Bo	
235	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_I_NPUTS_Underrange_Fitted		Bo	
236	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_I_NPUTS_Sensor_Break_Fitted		Bo	
238	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_I_NPUTS_Pre-tune_Mode_Fitted		Bo	
239	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_I_NPUTS_Loop_Alarm_Fitted		Bo	
240	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_I_NPUTS_Auto_Mode_Fitted		Bo	
245	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_Failed_to_change_state_timer	1 - 60	F4	Secs

ID offset	Name	Values	Format	Units
246	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_Slow_to_change_state_timer	1 - 60	F4	Secs
247	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C
248	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
249	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C
250	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
251	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_Vent_Temperature	-50 - 500	F4	Â°C
252	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_Startup_Temperature	-50 - 500	F4	Â°C
253	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
254	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_TEMPERATURE_Decay_Time	0 - 100	F4	Secs
255	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs
256	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GAS_FEED_SETTINGS_MANUAL_POWER_Decay_Time	0 - 100	F4	Secs
257	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_Fitted		Bo	
258	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_INPUTS_Underrange_Fitted		Bo	
259	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_INPUTS_Sensor_Break_Fitted		Bo	
261	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_INPUTS_Pre-tune_Mode_Fitted		Bo	
262	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_INPUTS_Loop_Alarm_Fitted		Bo	
263	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_INPUTS_Auto_Mode_Fitted		Bo	
268	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_Failed_to_change_state_timer	1 - 60	F4	Secs
269	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_Slow_to_change_state_timer	1 - 60	F4	Secs
270	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C
271	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
272	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C
273	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
274	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_Vent_Temperature	-50 - 500	F4	Â°C
275	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_Startup_Temperature	-50 - 500	F4	Â°C
276	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
277	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_TEMPERATURE_Decay_Time	0 - 100	F4	Secs
278	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs
279	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_GASBOX_FAN_SETTINGS_MANUAL_POWER_Decay_Time	0 - 100	F4	Secs
280	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO_TTL_1_Fitted		Bo	
281	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO_TTL_1_INPUTS_Underrange_Fitted		Bo	
282	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO_TTL_1_INPUTS_Sensor_Break_Fitted		Bo	

ID offset	Name	Values	Format	Units
284	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_INPUTS_Pre-tune_Mode_Fitted		Bo	
285	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_INPUTS_Loop_Alarm_Fitted		Bo	
286	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_INPUTS_Auto_Mode_Fitted		Bo	
291	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_Failed_to_change_state_timer	1 - 60	F4	Secs
292	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_Slow_to_change_state_timer	1 - 60	F4	Secs
293	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C
294	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
295	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C
296	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
297	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_Vent_Temperature	-50 - 500	F4	Â°C
298	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_Startup_Temperature	-50 - 500	F4	Â°C
299	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
300	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_TEMPERATURE_Decay_Time	0 - 100	F4	Secs
301	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs
302	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_1_SETTINGS_MANUAL_POWER_Decay_Time	0 - 100	F4	Secs
303	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_Fitted		Bo	
304	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_INPUTS_Underrange_Fitted		Bo	
305	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_INPUTS_Sensor_Break_Fitted		Bo	
307	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_INPUTS_Pre-tune_Mode_Fitted		Bo	
308	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_INPUTS_Loop_Alarm_Fitted		Bo	
309	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_INPUTS_Auto_Mode_Fitted		Bo	
314	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_Failed_to_change_state_timer	1 - 60	F4	Secs
315	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_Slow_to_change_state_timer	1 - 60	F4	Secs
316	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C
317	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
318	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C
319	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
320	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_Vent_Temperature	-50 - 500	F4	Â°C
321	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_Startup_Temperature	-50 - 500	F4	Â°C
322	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
323	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_TEMPERATURE_Decay_Time	0 - 100	F4	Secs
324	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs

ID offset	Name	Values	Format	Units
325	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_BO TTLE_2_SETTINGS_MANUAL_POWER_Decay_Time	0 - 100	F4	Secs
326	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_Fitted		Bo	
327	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_INPUTS_Underrange_Fitted		Bo	
328	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_INPUTS_Sensor_Break_Fitted		Bo	
330	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_INPUTS_Pre-tune_Mode_Fitted		Bo	
331	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_INPUTS_Loop_Alarm_Fitted		Bo	
332	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_INPUTS_Auto_Mode_Fitted		Bo	
337	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_Failed_to_change_state_timer	1 - 60	F4	Secs
338	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_Slow_to_change_state_timer	1 - 60	F4	Secs
339	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C
340	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
341	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C
342	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
343	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_Vent_Temperature	-50 - 500	F4	Â°C
344	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_Startup_Temperature	-50 - 500	F4	Â°C
345	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
346	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_TEMPERATURE_Decay_Time	0 - 100	F4	Secs
347	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs
348	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_LOWER_GA S_PANEL_SETTINGS_MANUAL_POWER_Decay_Time	0 - 100	F4	Secs
349	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_Fitted		Bo	
350	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_INPUTS_Underrange_Fitted		Bo	
351	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_INPUTS_Sensor_Break_Fitted		Bo	
353	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_INPUTS_Pre-tune_Mode_Fitted		Bo	
354	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_INPUTS_Loop_Alarm_Fitted		Bo	
355	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_INPUTS_Auto_Mode_Fitted		Bo	
360	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_SETTINGS_Failed_to_change_state_timer	1 - 60	F4	Secs
361	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_SETTINGS_Slow_to_change_state_timer	1 - 60	F4	Secs
362	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_SETTINGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C
363	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_SETTINGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
364	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_SETTINGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C
365	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_SETTINGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
366	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS _PANEL_SETTINGS_Vent_Temperature	-50 - 500	F4	Â°C

ID offset	Name	Values	Format	Units
367	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS_PANEL_SETTINGS_Startup_Temperature	-50 - 500	F4	Â°C
368	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS_PANEL_SETTINGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
369	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS_PANEL_SETTINGS_TEMPERATURE_Ddecay_Time	0 - 100	F4	Secs
370	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS_PANEL_SETTINGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs
371	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_UPPER_GAS_PANEL_SETTINGS_MANUAL_POWER_Ddecay_Time	0 - 100	F4	Secs
372	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_Fitted		Bo	
373	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_INPUTS_Underrange_Fitted		Bo	
374	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_INPUTS_Sensor_Break_Fitted		Bo	
376	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_INPUTS_Pre-tune_Mode_Fitted		Bo	
377	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_INPUTS_Loop_Alarm_Fitted		Bo	
378	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_INPUTS_Auto_Mode_Fitted		Bo	
383	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_Failed_to_change_state_timer	1 - 60	F4	Secs
384	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_Slow_to_change_state_timer	1 - 60	F4	Secs
385	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C
386	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
387	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C
388	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
389	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_Vent_Temperature	-50 - 500	F4	Â°C
390	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_Startup_Temperature	-50 - 500	F4	Â°C
391	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
392	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_TEMPERATURE_Ddecay_Time	0 - 100	F4	Secs
393	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs
394	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_SOURCE_LINES_SETTINGS_MANUAL_POWER_Ddecay_Time	0 - 100	F4	Secs
395	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_Fitted		Bo	
396	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_INPUTS_Underrange_Fitted		Bo	
397	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_INPUTS_Sensor_Break_Fitted		Bo	
399	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_INPUTS_Pre-tune_Mode_Fitted		Bo	
400	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_INPUTS_Loop_Alarm_Fitted		Bo	
401	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_INPUTS_Auto_Mode_Fitted		Bo	
406	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_Failed_to_change_state_timer	1 - 60	F4	Secs
407	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_Slow_to_change_state_timer	1 - 60	F4	Secs
408	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C

ID offset	Name	Values	Format	Units
409	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
410	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C
411	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
412	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_Vent_Temperature	-50 - 500	F4	Â°C
413	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_Startup_Temperature	-50 - 500	F4	Â°C
414	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
415	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_TEMPERATURE_Decay_Time	0 - 100	F4	Secs
416	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs
417	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_1_SETTINGS_MANUAL_POWER_Decay_Time	0 - 100	F4	Secs
418	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_Fitted		Bo	
419	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_INPUTS_Underrange_Fitted		Bo	
420	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_INPUTS_Sensor_Break_Fitted		Bo	
422	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_INPUTS_Pre-tune_Mode_Fitted		Bo	
423	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_INPUTS_Loop_Alarm_Fitted		Bo	
424	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_INPUTS_Auto_Mode_Fitted		Bo	
429	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_Failed_to_change_state_timer	1 - 60	F4	Secs
430	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_Slow_to_change_state_timer	1 - 60	F4	Secs
431	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_Upper_Safety_Temperature_Limit	-50 - 500	F4	Â°C
432	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_Lower_Safety_Temperature_Limit	-50 - 500	F4	Â°C
433	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_Upper_Vent_Temperature_Limit	-50 - 500	F4	Â°C
434	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_Lower_Vent_Temperature_Limit	-50 - 500	F4	Â°C
435	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_Vent_Temperature	-50 - 500	F4	Â°C
436	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_Startup_Temperature	-50 - 500	F4	Â°C
437	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_TEMPERATURE_Grace_Time	0 - 100	F4	Secs
438	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_TEMPERATURE_Decay_Time	0 - 100	F4	Secs
439	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_MANUAL_POWER_Grace_Time	0 - 100	F4	Secs
440	Statx_ProCve_Config_HEATERS_&_CHILLERS_HEATERS_EXPANSION_CHAMBER_2_SETTINGS_MANUAL_POWER_Decay_Time	0 - 100	F4	Secs
441	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_EXPANSION_CHAMBERS_Fitted		Bo	
445	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_EXPANSION_CHAMBERS_Switch_off_if_gasbox_door_is_open		Bo	
446	Statx_ProCve_Config_HEATERS_&_CHILLERS_CONTACTORS_EXPANSION_CHAMBERS_PM_on-off_count_trigger	1 - 1000000	F4	
476	Statx_ProCve_Config_GAS_BOX_EXTRACT_FLOW_SENSOR_Fitted		Bo	
477	Statx_ProCve_Config_GAS_BOX_EXTRACT_FLOW_SENSOR_Fault_Sensor_Inverted		Bo	

ID offset	Name	Values	Format	Units
478	Statx_ProCve_Config_GAS_BOX_EXTRACT_FLOW_SENSOR_PM_on-off_count_trigger	1 - 1000000	F4	
506	Statx_ProCve_Config_WAFER_HANDLING_SUB-CHAMBER_LIFT_PM_down-up_count_trigger	1 - 1000000	F4	
507	Statx_ProCve_Config_MISC_Trace_at_Debug_Level		Bo	
508	Statx_ProCve_Config_MISC_Maximum_Size_of_Trace_Log_File	1 - 10	I4	MB
511	Statx_ProCve_Config_MISC_Time_from_completing_Process_back_to_REA DY	0 - 30	F4	Secs
558	Statx_ProCve_Config_PUMPING_APC_APC_Gain	0 - 22	I4	
568	Statx_ProCve_Config_PUMPING_APC_Has_gain_mode		Bo	
570	Statx_ProCve_Config_GAS_BOX_MFC_BYPASS_VALVE_PM_on-off_count_trigger	1 - 1000000	F4	
571	Statx_ProCve_Config_SOLID_DELIVERY_SOURCE_BOTTLE_2_PM_dow n-up_count_trigger	1 - 1000000	F4	
572	Statx_ProCve_Config_SOLID_DELIVERY_SOURCE_2_ISOL._VALVE_P M_Valve_open-close_count_trigger	1 - 1000000	F4	
573	Statx_ProCve_Config_SOLID_DELIVERY_SOURCE_PURGE_VALVE_PM _Valve_open-close_count_trigger	1 - 1000000	F4	
574	Statx_ProCve_Config_SOLID_DELIVERY_UPPER_PANEL_VALVE_PM_ Valve_open-close_count_trigger	1 - 1000000	F4	
575	Statx_ProCve_Config_GAS_BOX_CHAMBER_VENT_VALVE_Fitted		Bo	
576	Statx_ProCve_Config_GAS_BOX_CHAMBER_VENT_VALVE_PM_on- off_count_trigger	1 - 1000000	F4	
577	Statx_ProCve_Config_GAS_BOX_SOURCE_GAUGE_VALVE_Fitted		Bo	
578	Statx_ProCve_Config_GAS_BOX_SOURCE_GAUGE_VALVE_PM_on- off_count_trigger	1 - 1000000	F4	
579	Statx_ProCve_Config_GAS_BOX_GASBOX_DOOR_SENSOR_Fitted		Bo	
580	Statx_ProCve_Config_GAS_BOX_GASBOX_DOOR_SENSOR_Close_senso r_Inverted		Bo	
581	Statx_ProCve_Config_GAS_BOX_GASBOX_DOOR_SENSOR_PM_on- off_count_trigger	1 - 1000000	F4	
582	Statx_ProCve_Config_SOLID_DELIVERY_SOURCE_BOTTLE_1_PM_dow n-up_count_trigger	1 - 1000000	F4	
583	Statx_ProCve_Config_SOLID_DELIVERY_SOURCE_1_ISOL._VALVE_P M_Valve_open-close_count_trigger	1 - 1000000	F4	
584	Statx_ProCve_Config_GAS_BOX_Continuous_Only_Gasbox		Bo	
585	Statx_ProCve_Config_PULSED_SETTINGS_Intermediate_Pressure	0 - 30	F4	Torr
586	Statx_ProCve_Config_PULSED_SETTINGS_XeF2_Use_Formula_Gradient	-999 - 999	F4	
587	Statx_ProCve_Config_PULSED_SETTINGS_XeF2_Use_Formula_Offset	-999 - 999	F4	
588	Statx_ProCve_Config_PULSED_SETTINGS_Valve_Overlap_Delay_Time	0 - 30	F4	Secs
590	Statx_ProCve_Config_PULSED_SETTINGS_Common_Timeout	0 - 600	F4	Secs
591	Statx_ProCve_Config_PULSED_SETTINGS_XeF2_Pressure_Tolerance	0 - 100	F4	%
592	Statx_ProCve_Config_PULSED_SETTINGS_N2_Pressure_Tolerance	0 - 100	F4	%
593	Statx_ProCve_Config_PULSED_SETTINGS_Expansion_Chamber_Pressure_ Debounce_Time	0 - 30	F4	Secs
594	Statx_ProCve_Config_STATION_SETTINGS_Pump_to_base_timeout	0 - 3600	F4	Secs
595	Statx_ProCve_Config_PULSED_SETTINGS_XeF2_Pressure_Prediction_Fact or	0 - 10	F4	
596	Statx_ProCve_Config_PULSED_SETTINGS_N2_Pressure_Prediction_Factor	0 - 10	F4	
597	Statx_ProCve_Config_PULSED_SETTINGS_Minimum_Fill_Pressure_XeF2	0 - 100	F4	%
598	Statx_ProCve_Config_PULSED_SETTINGS_Minimum_Fill_Pressure_N2	0 - 100	F4	%
599	Statx_ProCve_Config_PULSED_SETTINGS_FLOW_TOLERANCE	0 - 100	F4	%
600	Statx_ProCve_Config_PULSED_SETTINGS_PRESSURE_TOLERANCE	0 - 100	F4	%
601	Statx_ProCve_Config_PULSED_SETTINGS_Stabilisation_time	0 - 3600	F4	Secs
602	Statx_ProCve_Config_MEASURED_VALUE_EPD_Measured_Value_Endpoi nt_Enabled		Bo	
603	Statx_ProCve_Config_MEASURED_VALUE_EPD_Sample_Set_Size	1 - 100	I4	
604	Statx_ProCve_Config_MEASURED_VALUE_EPD_Sample_Interval	0.1 - 60	F4	Secs
605	Statx_ProCve_Config_MEASURED_VALUE_EPD_NDIR_Fitted		Bo	
999	Statx_ProCve_Config_STATION_Align_wafer_on_exit		Bo	
2001	Statx_ProCve_Config_GAS_BOX_GAS_1_Fitted		Bo	
2003	Statx_ProCve_Config_GAS_BOX_GAS_1_Symbol		A	
2004	Statx_ProCve_Config_GAS_BOX_GAS_1_MFC_Full_Scale	0 - 5000	F4	sccm

ID offset	Name	Values	Format	Units
2005	Statx_ProCve_Config_GAS_BOX_GAS_1_MFC_Max_usable	0 - 5000	F4	sccm
2006	Statx_ProCve_Config_GAS_BOX_GAS_1_MFC_Flow_start-stop_timeout	0 - 100	F4	Secs
2007	Statx_ProCve_Config_GAS_BOX_GAS_1_MFC_FLOW_Grace_Time	0 - 100	F4	Secs
2008	Statx_ProCve_Config_GAS_BOX_GAS_1_MFC_FLOW_Decay_Time	0 - 100	F4	Secs
2009	Statx_ProCve_Config_GAS_BOX_GAS_1_MFC_FLOW_TOLERANCE_Up per_Alarm_Hold_Off_Time	0 - 100	F4	Secs
2010	Statx_ProCve_Config_GAS_BOX_GAS_1_MFC_FLOW_TOLERANCE_Up per_Warning_Hold_Off_Time	0 - 100	F4	Secs
2011	Statx_ProCve_Config_GAS_BOX_GAS_1_MFC_FLOW_TOLERANCE_Lo wer_Warning_Hold_Off_Time	0 - 100	F4	Secs
2012	Statx_ProCve_Config_GAS_BOX_GAS_1_MFC_FLOW_TOLERANCE_Lo wer_Alarm_Hold_Off_Time	0 - 100	F4	Secs
2013	Statx_ProCve_Config_GAS_BOX_GAS_1_SETTINGS_Calibration_Gas		A	
2014	Statx_ProCve_Config_GAS_BOX_GAS_1_SETTINGS_Conversion_Factor	0 - 10	F4	
2017	Statx_ProCve_Config_GAS_BOX_GAS_1_SETTINGS_Flow_during_gas_sta bilisation		Bo	
2018	Statx_ProCve_Config_GAS_BOX_GAS_1_SETTINGS_Flow_gas_in_Hold		Bo	
2019	Statx_ProCve_Config_GAS_BOX_GAS_1_SETTINGS_Is_a_chemical_proce ss_gas		Bo	
2020	Statx_ProCve_Config_GAS_BOX_GAS_1_SETTINGS_Needs_manifold_val ve_open		Bo	
2021	Statx_ProCve_Config_GAS_BOX_GAS_1_SETTINGS_Purge\Prime_lower_f low_threshold	0 - 5000	F4	sccm
2022	Statx_ProCve_Config_GAS_BOX_GAS_1_SETTINGS_Purge\Prime_upper_f low_threshold	0 - 5000	F4	sccm
2023	Statx_ProCve_Config_GAS_BOX_GAS_1_SETTINGS_Leak_test_lower_flo w_threshold	0 - 5000	F4	sccm
2024	Statx_ProCve_Config_GAS_BOX_GAS_1_SETTINGS_Gas_residence_time	0 - 100	F4	Secs
2025	Statx_ProCve_Config_GAS_BOX_GAS_1_OUT_VALVE_PM_Valve_open- close_count_trigger	1 - 1000000	F4	
2026	Statx_ProCve_Config_GAS_BOX_GAS_1_IN_VALVE_PM_Valve_open- close_count_trigger	1 - 1000000	F4	
2032	Statx_ProCve_Config_GAS_BOX_GAS_1_COMPATIBILITY_Compatible_ with_Gas_2		Bo	
2101	Statx_ProCve_Config_GAS_BOX_GAS_2_Fitted		Bo	
2102	Statx_ProCve_Config_GAS_BOX_GAS_2_Type	0 - 2	I4	
2103	Statx_ProCve_Config_GAS_BOX_GAS_2_Symbol		A	
2104	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_Full_Scale	0 - 5000	F4	sccm
2105	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_Max_usable	0 - 5000	F4	sccm
2106	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_Flow_start-stop_timeout	0 - 100	F4	Secs
2107	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_FLOW_Grace_Time	0 - 100	F4	Secs
2108	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_FLOW_Decay_Time	0 - 100	F4	Secs
2109	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_FLOW_TOLERANCE_Up per_Alarm_Hold_Off_Time	0 - 100	F4	Secs
2110	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_FLOW_TOLERANCE_Up per_Warning_Hold_Off_Time	0 - 100	F4	Secs
2111	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_FLOW_TOLERANCE_Lo wer_Warning_Hold_Off_Time	0 - 100	F4	Secs
2112	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_FLOW_TOLERANCE_Lo wer_Alarm_Hold_Off_Time	0 - 100	F4	Secs
2113	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Calibration_Gas		A	
2114	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Conversion_Factor	0 - 10	F4	
2115	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Purge_Conversion_F actor	0 - 10	F4	
2116	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Allow_MFC_Fillrate		Bo	
2117	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Flow_during_gas_sta bilisation		Bo	
2118	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Flow_gas_in_Hold		Bo	
2119	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Is_a_chemical_proce ss_gas		Bo	
2120	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Needs_manifold_val ve_open		Bo	

ID offset	Name	Values	Format	Units
2121	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Purge\Prime_lower_flow_threshold	0 - 5000	F4	sccm
2122	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Purge\Prime_upper_flow_threshold	0 - 5000	F4	sccm
2123	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Leak_test_lower_flow_threshold	0 - 5000	F4	sccm
2124	Statx_ProCve_Config_GAS_BOX_GAS_2_SETTINGS_Gas_residence_time	0 - 100	F4	Secs
2125	Statx_ProCve_Config_GAS_BOX_GAS_2_OUT_VALVE_PM_Valve_open-close_count_trigger	1 - 1000000	F4	
2126	Statx_ProCve_Config_GAS_BOX_GAS_2_PURGE_VALVE_PM_Valve_open-close_count_trigger	1 - 1000000	F4	
2131	Statx_ProCve_Config_GAS_BOX_GAS_2_COMPATIBILITY-Compatible_with_Gas_1		Bo	
2150	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_DEFAULT_TOLERANCE_S_Upper_Abort	0 - 100	F4	sccm
2151	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_DEFAULT_TOLERANCE_S_Upper_Warn	0 - 100	F4	sccm
2152	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_DEFAULT_TOLERANCE_S_Lower_Warn	0 - 100	F4	sccm
2153	Statx_ProCve_Config_GAS_BOX_GAS_2_MFC_DEFAULT_TOLERANCE_S_Lower_Abort	0 - 100	F4	sccm

23 Appendix E - Module Equipment Specific Status Variables

Due to the fact that most module types can be configured for most positions on the SPTS fxP Equipment, the following rules are used to work out the variable identifiers (VID) for the modules.

The VID is computed from the following equation:

$$\text{VID} = (\text{station number} * 10000) + (\text{station type offset} * 100) + (\text{variable offset}) + 10000$$

(10000 is added to make sure that the computed VID clears any other VID defined for general use.)

Station Number :-

- 0 = Transport
- 1 = VCE A
- 2 = Process Module 1
- 3 = Process Module 2
- 4 = Process Module 3
- 5 = Process Module 4
- 6 = Process Module 5
- 7 = Process Module 6
- 8 = VCE B
- 10 = Cool Station

Station Type :-

- 3 = Forcefill PM
- 4 = Sputter Deposition PM
- 7 = HSE PM
- 9 = Heat PM
- 20 = GTM/Level 1 Brooks MX Transport
- 21 = GTM/Level 1 Brooks Coolstation
- 22 = GTM/Level 1 Brooks MX Cassette
- 24 = Etch PM
- 25 = Deposition RevB PM
- 26 = SoftEtch RevB PM
- 27 = Heat RevB PM
- 46 = C3M (Bridge)
- 53 = Primaxx Monarch 25
- 56 = c2L Transport
- 58 = Pro CVE PM

(the complete name of each variable is StatX Y MV VariableName or StatX Y DSV VariableName where X is the station number and Y is the station type, MV is used for analogue values and DSV is used for digital values).

23.1.1 Forcefill PM:-

ID Offset	VariableName	Description	Format	Units
0	Statx_ForceFill_MV_chamberPirani	Chamber Pirani Pressure	U2	mTorr
1	Statx_ForceFill_MV_forelinePirani	Foreline Manifold Pirani Pressure	U2	mTorr
2	Statx_ForceFill_MV_turboResPirani	Turbo Reservoir Pressure	U2	mTorr
3	Statx_ForceFill_MV_penningGauge	Penning Gauge Pressure	F8	Torr
4	Statx_ForceFill_MV_chamberPressure	Chamber Pressure	U2	Bar
5	Statx_ForceFill_MV_hydraulicPressure	Hydraulic Pressure	U2	Bar
6	Statx_ForceFill_MV_inletPressure	Inlet Pressure	U2	Bar
7	Statx_ForceFill_MV_ventPressure	Vent Pressure	U2	Bar
8	Statx_ForceFill_MV_reservoirPressure	Reservoir Pressure	U2	Bar
9	Statx_ForceFill_MV_supplyPressure	Supply Pressure	U2	Bar
10	Statx_ForceFill_MV_liftPosition	Lift Position	F4	mm
11	Statx_ForceFill_MV_recipeStepNo	Recipe Step Number	U2	-
12	Statx_ForceFill_MV_processTime	Process Timer	U2	Secs
13	Statx_ForceFill_MV_topHeaterTemp1	Top Heater Temperature	U2	Deg C
14	Statx_ForceFill_MV_topHeaterTemp2	Top Heater Temperature	U2	Deg C
15	Statx_ForceFill_MV_topHeaterControlTemp	Top Heater Control Temperature	U2	Deg C
16	Statx_ForceFill_MV_topHeaterFeedThruTemp	Top Heater FeedThru Temperature	U2	Deg C
17	Statx_ForceFill_MV_bottomHeaterTemp1	Bottom Heater Temperature	U2	Deg C
18	Statx_ForceFill_MV_bottomHeaterTemp2	Bottom Heater Temperature	U2	Deg C
19	Statx_ForceFill_MV_bottomHeaterControlTemp	Bottom Heater Temperature	U2	Deg C
20	Statx_ForceFill_MV_bottomHeaterFeedThruTemp	Bottom Heater FeedThru Temperature	U2	Deg C

23.1.2 Sputter Deposition PM: -

ID offset	Variable Name	Description	Format	Units
0	Statx_SDep_MV_chamberCapManPres	50 mT Chamber CapMan Pressure	F4	Torr
1	Statx_SDep_MV_chamberCapManPres2	10 Torr Chamber CapMan Pressure	F4	Torr
2	Statx_SDep_MV_chamberIonPres	Chamber Ion Gauge Pressure	F4	Torr
3	Statx_SDep_MV_diffPiraniPres	Differential Pirani Pressure	U2	mTorr
4	Statx_SDep_MV_roughingPiraniPres	Roughing Pirani Pressure	U2	mTorr
5	Statx_SDep_MV_RGATurboPirani	RGA Turbo Pirani Pressure	U2	mTorr
6	Statx_SDep_MV_cryoTemp	2 nd Stage Cryo Temperature	U2	Kelvin
7	Statx_SDep_MV_CTIFirstStageTemp	1 st Stage Cryo Temperature	U2	Kelvin
9	Statx_SDep_MV_processStep	Current Process Step	U2	-
10	Statx_SDep_MV_processTime	Process Timer	U2	Secs
11	Statx_SDep_MV_gas1Flow	Gas 1 Flow	U2	sccm
12	Statx_SDep_MV_gas2Flow	Gas 2 Flow	U2	sccm
13	Statx_SDep_MV_gas3Flow	Gas 3 Flow	U2	sccm
14	Statx_SDep_MV_platenControlTemp	Platen Heater Control Temperature	U2	Deg C
15	Statx_SDep_MV_platenSafetyTemp	Platen Heater Safety Temperature	U2	Deg C
16	Statx_SDep_MV_platenForwardPower	Platen RF Forward Power	U2	Watts
17	Statx_SDep_MV_platenReflectedPower	Platen RF Reflected Power	U2	Watts
18	Statx_SDep_MV_platenPeakToPeakVlts	Platen RF Peak To Peak Volts	U2	Volts
19	Statx_SDep_MV_platenDCBias	Platen RF DC Bias	U2	Volts
20	Statx_SDep_MV_platenTunePot	Platen RF Tune Pot Position	F4	%
21	Statx_SDep_MV_platenLoadPot	Platen RF Load Pot Position	F4	%
22	Statx_SDep_MV_targetTachoSpeed	Target Motor Tacho Speed	U2	Rpm
23	Statx_SDep_MV_targetVlts	Target PSU Volts	U2	Volts
24	Statx_SDep_MV_targetAmps	Target PSU Amps	F4	Amps
25	Statx_SDep_MV_targetPower	Target Power	F4	KW
26	Statx_SDep_MV_targetUtilisation	Target Utilisation	F4	%
27	Statx_SDep_MV_accumulatedPower	Target Accumulated Power	F4	KWHrs
28	Statx_SDep_DSV_Gas1Valve	Gas 1 Valve	Bo 0 = Closed 1 = Open	None
29	Statx_SDep_DSV_Gas2Valve	Gas 2 Valve	Bo 0 = Closed 1 = Open	None
30	Statx_SDep_DSV_Gas3Valve	Gas 3 Valve	Bo 0 = Closed 1 = Open	None
31	Statx_SDep_DSV_GasManifoldValve	Gas Manifold Valve	Bo 0 = Closed 1 = Open	None
32	Statx_SDep_DSV_RGAShutoffValve	RGA ShutOff Valve	Bo 0 = Closed 1 = Open	None
33	Statx_SDep_DSV_DiffPumpValve	Diff Pump Valve	Bo 0 = Closed 1 = Open	None
34	Statx_SDep_DSV_WaterValves	Water Valves	Bo 0 = Closed 1 = Open	None
35	Statx_SDep_DSV_TargetMotor	Target Motor	Bo F = Off 1 = On	None
36	Statx_SDep_DSV_TargetContactor	Target Contactor	Bo 0 = Off 1 = On	None

ID offset	Variable Name	Description	Format	Units
37	Statx_SDep_DSV_CapacitiveManometerShutoff Valve	Capicative Manometer Shutoff Valve	Bo 0 = Closed 1 = Open	None
38	Statx_SDep_DSV_IonGauge	Ion Gauge	Bo 0 = Closed 1 = Open	None
39	Statx_SDep_DSV_PlattenContactor	Platen Contactor	Bo 0 = Closed 1 = Open	None
40	Statx_SDep_DSV_PlattenCoolingValve	Platen Cooling Valve	Bo 0 = Closed 1 = Open	None
41	Statx_SDep_DSV_PlattenRF	Platen RF	Bo 0 = Closed 1 = Open	None
42	Statx_SDep_DSV_ChamberVentValve	Chamber Vent Valve	Bo 0 = Closed 1 = Open	None
43	Statx_SDep_DSV_RoughingValve	Roughing Valve	Bo 0 = Closed 1 = Open	None
44	Statx_SDep_DSV_SliceLift	Slice Lift (or Wafer Lift)	U1 bit 0 = drive bit 1 = up f/b bit 2 = down f/b	None
45	Statx_SDep_DSV_HivacValve	Hivac Valve	U1 bit 0 = drive bit 1 = open f/b bit 2 = closed f/b	None
46	Statx_SDep_MV_toolingFactor	Tooling Factor	F4	A/KW.sec
47	Statx_SDep_MV_reactiveToolingfactor	Reactive Tooling Factor	F4	A/KW.sec
48	Statx_SDep_MV_toolingfactorAHF	Tooling Factor AHF	F4	A/KW.sec
49	Statx_SDep_MV_reactiveToolingfactorAHF	Reactive Tooling Factor AHF	F4	A/KW.sec
50	Statx_SDep_MV_altToolingfactor	Alternative Tooling Factor	F4	A/KW.sec
51	Statx_SDep_MV_altReactiveToolingfactor	Alternative Reactive Tooling Factor	F4	A/KW.sec
52	Statx_SDep_MV_shieldingUsage	Shielding Accumulated Usage	U2	KW.hr

23.1.3 HSE PM: -

ID offset	Variable Name	Description	Format	Units
0	Statx_HSE_MV_chamberCapManPres	50 mT Chamber CapMan Pressure	F4	Torr
1	Statx_HSE_MV_chamberIonPres	Chamber Ion Gauge Pressure	F4	Torr
2	Statx_HSE_MV_diffPiraniPres	Differential Pirani Pressure	U2	mTorr
3	Statx_HSE_MV_roughingPiraniPres	Roughing Pirani Pressure	U2	mTorr
4	Statx_HSE_MV_RGATurboPirani	RGA Turbo Pirani Pressure	U2	mTorr
5	Statx_HSE_MV_cryoTemp	2 nd Stage Cryo Temperature	U2	Kelvin
6	Statx_HSE_MV_CTIFirstStageTemp	1 st Stage Cryo Temperature	U2	Kelvin
8	Statx_HSE_MV_processStep	Current Process Step	U2	-
9	Statx_HSE_MV_processTime	Process Timer	U2	Secs
10	Statx_HSE_MV_gas1Flow	Gas 1 Flow	U2	sccm
11	Statx_HSE_MV_gas2Flow	Gas 2 Flow	U2	sccm
12	Statx_HSE_MV_gas3Flow	Gas 3 Flow	U2	sccm
13	Statx_HSE_MV_platenControlTemperature	Platen Heater Control Temperature	U2	Deg C
14	Statx_HSE_MV_platenSafetyTemperature	Platen Heater Safety Temperature	U2	Deg C
15	Statx_HSE_MV_platenForwardPower	Platen RF Forward Power	U2	Watts
16	Statx_HSE_MV_platenReflectedPower	Platen RF Reflected Power	U2	Watts
17	Statx_HSE_MV_platenPeakToPeakVlts	Platen RF Peak To Peak Volts	U2	Volts
18	Statx_HSE_MV_platenDCBias	Platen RF DC Bias	U2	Volts
19	Statx_HSE_MV_platenTunePot	Platen RF Tune Pot Position	F4	%
20	Statx_HSE_MV_platenLoadPot	Platen RF Load Pot Position	F4	%
21	Statx_HSE_MV_backfillPressure	Backfill Pressure	U2	Torr
22	Statx_HSE_MV_ABPpressure	Argon Back Pressure	F4	Torr
23	Statx_HSE_MV_ABPflow	Argon Back Pressure Flow	U2	Sccm
24	Statx_HSE_MV_RecirculatorTemp	Recirculator Temperature	U2	Deg C
25	Statx_HSE_MV_coilForwardPower	Coil RF Forward Power	U2	Watts
26	Statx_HSE_MV_coilReflectedPower	Coil RF Reflected Power	U2	Watts
27	Statx_HSE_MV_coilPeakToPeakVlts	Coil RF Peak to Peak Volts	U2	Volts
28	Statx_HSE_MV_coilDCBias	Coil RF DC Bias	U2	Volts
29	Statx_HSE_MV_coilTunePot	Coil RF Tune Pot Position	F4	%
30	Statx_HSE_MV_coilLoadPot	Coil RF Load Pot Position	F4	%
31	Statx_HSE_DSV_BackfillGasValve	Backfill Gas Valve	Bo 0 = Closed 1 = Open	None
32	Statx_HSE_DSV_ProcessGasValve	Process Gas Valve	Bo 0 = Closed 1 = Open	None
33	Statx_HSE_DSV_GasManifoldValve	Gas Manifold Valve	Bo 0 = Closed 1 = Open	None
34	Statx_HSE_DSV_ChamberVentValve	Chamber Vent Valve	Bo 0 = Closed 1 = Open	None
35	Statx_HSE_DSV_CapacitiveManometerShutOff Valve	Capacitive Manometer Shut-off Valve	Bo 0 = Closed 1 = Open	None
36	Statx_HSE_DSV_IonGauge	Ion Gauge	Bo 0 = Off 1 = On	None
37	Statx_HSE_DSV_CoilRF	Coil RF Generator	Bo 0 = Off 1 = On	None
38	Statx_HSE_DSV_PlattenRF	Platen RF Generator	Bo 0 = Off 1 = On	None

ID offset	Variable Name	Description	Format	Units
39	Statx_HSE_DSV_PlattenContactor	Platen Heater Contactor	Bo 0 = Off 1 = On	None
40	Statx_HSE_DSV_DiffPumpValve	Differential Pumping Valve	Bo 0 = Closed 1 = Open	None
41	Statx_HSE_DSV_AtmosphericSensor	Atmospheric Sensor	Bo F=Vac T=ATM	None
42	Statx_HSE_DSV_BakeoutHeater	Bakeout Heater	Bo 0 = Off 1 = On	None
43	Statx_HSE_DSV_RoughingValve	Roughing Valve	Bo 0 = Closed 1 = Open	None
44	Statx_HSE_DSV_PlattenCoolingValve	Platen Cooling Valve	Bo 0 = Closed 1 = Open	None
45	Statx_HSE_DSV_RGAShutoffValve	RGA Shutoff Valve	Bo 0 = Closed 1 = Open	None
46	Statx_HSE_DSV_HivacValve	Hivac Valve	U1 bit 0 = drive bit 1 = open f/b bit 2 = closed f/b	None
47	Statx_HSE_DSV_ChuckLift	Chuck Lift (or Platen Lift)	U1 bit 0 = drive bit 1 = up f/b bit 2 = down f/b	None
48	Statx_HSE_DSV_SliceLift	Slice Lift (or Wafer Lift)	U1 bit 0 = drive bit 1 = up f/b bit 2 = down f/b	None
49	Statx_HSE_DSV_TurboPump	Turbo Pump	Bo 0 = Off 1 = On	None
50	Statx_HSE_DSV_TurboPumpMains	Turbo Pump Mains	Bo 0 = Off 1 = On	None
51	Statx_HSE_DSV_TurboPumpAtSpeed	Turbo Pump At Speed	Bo 0 = At speed 1 = Not at speed	None
52	Statx_HSE_DSV_TurboForelineValve	Turbo Foreline Valve	Bo 0 = Closed 1 = Open	None
53	Statx_HSE_MV_PlattenAccPower	Platen Accumulated Power	F4	KWHrs

23.1.4 Heat PM: -

ID offset	Variable Name	Description	Format	Units
0	Statx_PreHeat_MV_ForelinePressure	Foreline Pressure	F4	Torr
1	Statx_PreHeat_MV_IonGaugePressure	Ion Gauge Pressure	F4	Torr
2	Statx_PreHeat_MV_ProcessTime	Process Timer	U2	Secs
3	Statx_PreHeat_MV_ProcessStep	Current Process Step	U2	-
4	Statx_PreHeat_MV_LampPower	Lamp Power	U2	Watts
5	Statx_PreHeat_DSV_AtmosphericSensor	Atmospheric Sensor	Bo F=Vac T=ATM	None
6	Statx_PreHeat_DSV_TurboForelineValve	Turbo Foreline Valve	Bo 0 = Closed 1 = Open	None
7	Statx_PreHeat_DSV_TurboVentValve	Turbo Vent Valve	Bo 0 = Closed 1 = Open	None
8	Statx_PreHeat_DSV_WaterValves	Water Valves	Bo 0 = Closed 1 = Open	None
9	Statx_PreHeat_DSV_Lamp	Lamp	Bo 0 = Off 1 = On	None
10	Statx_PreHeat_DSV_BakeoutHeater	Bakeout Heater	Bo 0 = Off 1 = On	None
11	Statx_PreHeat_DSV_CompoundGauge	Compound Gauge	Bo 0 = Closed 1 = Open	None
12	Statx_PreHeat_DSV_SliceLift	Slice Lift (or Wafer Lift)	U1 bit 0 = drive bit 1 = up f/b bit 2 = down f/b	None

23.1.5 GTM/Level 1 Brooks MX Transport:-

ID offset	Variable Name	Description	Format	Units
0	Stat_Transport_MV_TurboOn	Turbo On	U2	None
1	Stat_Transport_MV_TurboPumpSpeed	Turbo Pump Speed	F4	Hertz
3	Stat_Transport_MV_ConvectronGauge_Pressure	Convectron Gauge Pressure	F4	Torr
4	Stat_Transport_MV_CryoOn	Cryo On	U2	None
5	Stat_Transport_MV_CryoPump1stStageTemperature	Cryo Pump 1stStage Temperature	F4	Deg C
6	Stat_Transport_MV_CryoPump2ndStageTemperature	Cryo Pump 2 nd Stage Temperature	F4	Deg C
7	Stat_Transport_MV_RoughingManifoldPressure	Roughing Manifold Pressure	F4	Torr
8	Stat_Transport_MV_BackingManifoldPressure	Backing Manifold Pressure	F4	Torr
9	Stat_Transport_MV_RobotPosition	Robot Position	U2 See Section 24.2	
11	Stat_Transport_MV_AlignerEccentricity	Aligner Eccentricity	F4	Mils
12	Stat_Transport_MV_RobotZPos	Robot Z Pos	Bo 0 = Down 1 = Up	None
13	Stat_Transport_MV_RobotRPos	Robot R Pos	Bo 0 = Retracted 1 = Extended	None
14	Stat_Transport_MV_RobotStationNo	Robot Station No	U2 See Section 24.3	None
15	Stat_Transport_MV_RobotArmExtendPos	Robot Arm Extend Pos	U2 Unknown=0 Retracted=1 Disabled=2	None
16	Stat_Transport_MV_Eccentricity	Eccentricity	F4	Mils
18	Stat_Transport_DSV_VCEASlotValve	VCEA Slot Valve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
19	Stat_Transport_DSV_VCEBSlotValve	VCEB Slot Valve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
20	Stat_Transport_DSV_PM1SlotValve	PM1SlotValve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None

ID offset	Variable Name	Description	Format	Units
21	Stat_Transport_DSV_PM2SlotValve	PM2SlotValve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
22	Stat_Transport_DSV_PM3SlotValve	PM3SlotValve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
23	Stat_Transport_DSV_PM4SlotValve	PM4SlotValve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
24	Stat_Transport_DSV_PM5SlotValve	PM5SlotValve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
25	Stat_Transport_DSV_PM6SlotValve	PM6SlotValve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
26	Stat_Transport_DSV_VacRobotRetractedSensor	Vac Robot Retracted Sensor	Bo F- Retracted T -Extended	None
27	Stat_Transport_DSV_RoughPumpDRPStart	Rough Pump DRP Start	U1 bit 0 = On drive bit 1 = On f/b	None
28	Stat_Transport_DSV_RoughPumpMBPStart	Rough Pump MBP Start	U1 bit 0 = On drive bit 1 = On f/b	None
29	Stat_Transport_DSV_RoughPumpWarning	Rough Pump Warning	Bo 0 = Warning 1 = No warning	None
30	Stat_Transport_DSV_RoughPumpAlarm	Rough Pump Alarm	Bo 0 = No Alarm 1 = Alarm	None

ID offset	Variable Name	Description	Format	Units
31	Stat_Transport_DSV_BackPumpDRPStart	Back Pump DR PStart	U1 bit 0 = On drive bit 1 = On f/b	None
32	Stat_Transport_DSV_BackPumpMBPStart	Back Pump MBP Start	U1 bit 0 = On drive bit 1 = On f/b	None
33	Stat_Transport_DSV_BackPumpWarning	Back Pump Warning	Bo 0 = Warning 1 = No warning	None
34	Stat_Transport_DSV_BackPumpAlarm	Back Pump Alarm	Bo 0 = No Alarm 1 = Alarm	None
35	Stat_Transport_DSV_WaterFault	Water Fault	Bo F – No Flow 1 = Flow	None
36	Stat_Transport_DSV_GasInterlock	Gas Interlock	Bo F – No Interlock T - Interlock	None
37	Stat_Transport_DSV_TurboIsolationClose	Turbo Isolation Close	Bo F – open drive T – Close drive	None
38	Stat_Transport_DSV_FastVentValve	Fast Vent Valve	Bo F – Close drive T – Open drive	None
39	Stat_Transport_DSV_SlowVentValve	Slow Vent Valve	Bo F – Close drive T – Open drive	None
40	Stat_Transport_DSV_WaterFlowValve	Water Flow Valve	Bo F – Close drive T – Open drive	None
41	Stat_Transport_DSV_SlowRoughValve	Slow Rough Valve	Bo F – Close drive T – Open drive	None
42	Stat_Transport_DSV_RoughValve	Rough Valve Close	Bo F – Close drive T – Open drive	None
43	Stat_Transport_DSV_TurboIsolationValveOpen	Turbo Isolation Valve Open	Bo F – Close drive T – Open drive	None
44	Stat_Transport_DSV_InterlockReset	Interlock Reset	Bo T – Reset drive	None
51	Stat_Transport_DSV_AtmosphericSensor	Atmospheric Sensor	Bo 0 = Off 1 = On	None

ID offset	Variable Name	Description	Format	Units
52	Stat_Transport_DSV_CompressedAirOk	Compressed Air Ok	Bo 0 = Not ok 1 = Ok	None
53	Stat_Transport_DSV_NitrogenPressureOk	Nitrogen Pressure Ok	Bo 0 = Not ok 1 = Ok	None
54+x	Stat_Transport_DSV_GasXPressureSwitch	GasX Pressure Switch	Bo 0 = Not ok 1 = Ok	None
74+x	Stat_Transport_DSV_GasXValve	GasX Valve	Bo 0 = Off 1 = On	None
94	Stat_Transport_MV_RobotCycle	Number of Robot Cycles	F4	None
95	Stat_Transport_MV_WafersRun	Counter Wafers Run	F4	None
96	Stat_Transport_MV_TotalWafersRun	Counter Wafers Run (No Reset)	F4	None
97	Stat_Transport_MV_LeakupRate	Leakup Rate	F4	Config dependent
98	Stat_Transport_MV_CryoTimeSinceFastRegen	Time since last fast regen	U2	Hrs
99	Stat_Transport_MV_CryoTimeSinceFullRegen	Time since last full regen	U2	Hrs
100	Stat_Transport_MV_CryoTotalRunningTime	Total running time of cryo pump	U2	Hrs
101	Stat_Transport_MV_RGAmass1PP	RGA Mass1 PP	F4	Torr
102	Stat_Transport_MV_RGAmass2PP	RGA Mass2 PP	F4	Torr
103	Stat_Transport_MV_RGAmass3PP	RGA Mass3 PP	F4	Torr
104	Stat_Transport_MV_RGAmass4PP	RGA Mass4 PP	F4	Torr
105	Stat_Transport_MV_RGAmass5PP	RGA Mass5 PP	F4	Torr
106	Stat_Transport_MV_RGAmass6PP	RGA Mass6 PP	F4	Torr
107	Stat_Transport_MV_RGAmass7PP	RGA Mass7 PP	F4	Torr
108	Stat_Transport_MV_RGAmass8PP	RGA Mass8 PP	F4	Torr
109	Stat_Transport_MV_RGAmass9PP	RGA Mass9 PP	F4	Torr
110	Stat_Transport_MV_RGAmass10PP	RGA Mass10 PP	F4	Torr
111	Stat_Transport_MV_RGACommsConnected	TM Software communication to the RGA	Bo	None
112	Stat_Transport_MV_RGAMonitoring	RGA monitoring – if true then mass readings are valid	Bo	None
113	Stat_Transport_MV_RGAActiveFilament		U2	None

23.1.6 C2L Transport

ID offset	Variable Name	Description	Format	Units
0	Stat_Transport_MV_TurboOn	Turbo On	U2	None
1	Stat_Transport_MV_TurboPumpSpeed	Turbo Pump Speed	F4	Hertz
3	Stat_Transport_MV_ConvectronGauge_Pressure	Convectron Gauge Pressure	F4	Torr
7	Stat_Transport_MV_RoughingManifoldPressure	Roughing Manifold Pressure	F4	Torr
9	Stat_Transport_MV_RobotPosition	Robot Position	U2 See Section 24.2	
11	Stat_Transport_MV_AlignerEccentricity	Aligner Eccentricity	F4	Mils
12	Stat_Transport_MV_RobotZPos	Robot Z Pos	Bo 0 = Down 1 = Up	None
13	Stat_Transport_MV_RobotRPos	Robot R Pos	Bo 0 = Retracted 1 = Extended	None
14	Stat_Transport_MV_RobotStationNo	Robot Station No	U2 See Section 24.3	None
15	Stat_Transport_MV_RobotArmExtendPos	Robot Arm Extend Pos	U2 Unknown=0 Retracted=1 Disabled=2	None
16	Stat_Transport_MV_Eccentricity	Eccentricity	F4	Mils
18	Stat_Transport_DSV_VCEASlotValve	VCEA Slot Valve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
20	Stat_Transport_DSV_PM1SlotValve	PM1SlotValve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
21	Stat_Transport_DSV_PM2SlotValve	PM2SlotValve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
22	Stat_Transport_DSV_PM3SlotValve	PM3SlotValve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
26	Stat_Transport_DSV_VacRobotRetractedSensor	Vac Robot Retracted Sensor	Bo F- Retracted T -Extended	None

ID offset	Variable Name	Description	Format	Units
35	Stat_Transport_DSV_WaterFault	Water Fault	Bo F – No Flow 1 = Flow	None
37	Stat_Transport_DSV_TurboIsolationClose	Turbo Isolation Close	Bo F – open drive T – Close drive	None
38	Stat_Transport_DSV_FastVentValve	Fast Vent Valve	Bo F – Close drive T – Open drive	None
40	Stat_Transport_DSV_WaterFlowValve	Water Flow Valve	Bo F – Close drive T – Open drive	None
42	Stat_Transport_DSV_RoughValve	Rough Valve Close	Bo F – Close drive T – Open drive	None
43	Stat_Transport_DSV_TurboIsolationValveOpen	Turbo Isolation Valve Open	Bo F – Close drive T – Open drive	None
44	Stat_Transport_DSV_InterlockReset	Interlock Reset	Bo T – Reset drive	None
51	Stat_Transport_DSV_AtmosphericSensor	Atmospheric Sensor	Bo 0 = Off 1 = On	None
52	Stat_Transport_DSV_CompressedAirOk	Compressed Air Ok	Bo 0 = Not ok 1 = Ok	None
53	Stat_Transport_DSV_NitrogenPressureOk	Nitrogen Pressure Ok	Bo 0 = Not ok 1 = Ok	None
94	Stat_Transport_MV_RobotCycle	Number of Robot Cycles	F4	None
95	Stat_Transport_MV_WafersRun	Counter Wafers Run	F4	None
96	Stat_Transport_MV_TotalWafersRun	Counter Wafers Run (No Reset)	F4	None

23.1.7 GTM/Level 1 Brooks Coolstation:-

ID offset	Variable Name	Description	Format	Units
0	Stat_TopCooler_DSV_PoppetValve	Poppet Valve	U1 bit 0 = Open drive bit 1 = Close drive bit 2 = Open f/b bit 3 = Close f/b	None
1	Stat_TopCooler_DSV_PressureHigh	Pressure High	Bo F – Not High T – High	None
2	Stat_TopCooler_DSV_PressureLow	Pressure Low	Bo F – Not Low T – Low	None
3	Stat_TopCooler_DSV_ArgonPressureOk	Argon Pressure Ok	Bo F –Not ok T – OK	None
4	Stat_TopCooler_DSV_BackFillValve	Back Fill Valve	Bo F – Closed T – Open	None
5	Stat_TopCooler_DSV_ChargeValve	ChargeValve	Bo F – Closed T – Open	None
6	Stat_TopCooler_DSV_RoughingValve	Roughing Valve	Bo F – Closed T – Open	None
7	Stat_TopCooler_DSV_ArgonValveOpen	Argon Valve Open	Bo F – Closed T – Open	None
8	Stat_TopCooler_DSV_ArgonValveClose	ArgonValveClose	Bo F – Closed T – Open	None

23.1.8 GTM/Level 1 Brooks MX Cassette:-

x = 1 for VCE A or 8 for VCE B

ID offset	Variable Name	Description	Format	Units
0	Statx_VCE_MV_TurboOn	Turbo On	U2	None
1	Statx_VCE_MV_TurboPumpSpeed	Turbo Pump Speed	F4	Hertz
3	Statx_VCE_MV_ConvectronPressure	Convectron Pressure	F4	Torr
4	Statx_VCE_MV_AtLoadPosition	At Load Position	Bo 0 = Not at load position 1 = At load Position	None
5	Statx_VCE_MV_WaferSlideOut	Wafer Slide Out	Bo 0 = No Wafer Slide Out 1 = Wafer Slide Out	None
6	Statx_VCE_MV_CassettePresent	Cassette Present	Bo 0 = No Cassette present 1 = Cassette present	None
7	Statx_VCE_MV_ErrorPresent	Error Present	Bo 0 = No error present 1 = Error present	None
8	Statx_VCE_MV_DoorStatus	Door Status	U2 0 = Unknown 0x01 = Open 0x10 = Closed	None
9	Statx_VCE_MV_CurrentSlotPosition	Current Slot Position	U2	None
10	Statx_VCE_MV_PlatformPosition	Platform Position	U2 0 = Unknown 0x01 = Out 0x10 = In	None
12	Statx_VCE_DSV_TurboIsolationValve	Turbo Isolation Valve	Bo 0 = Closed 1 = Open	None
13	Statx_VCE_DSV_SlowRoughValve	Slow Roughing Valve	Bo 0 = Closed 1 = Open	None
14	Statx_VCE_DSV_SlowVentValve	Slow Vent Valve	Bo 0 = Closed 1 = Open	None
15	Statx_VCE_DSV_FastRoughValve	Fast Roughing Valve	Bo 0 = Closed 1 = Open	None
16	Statx_VCE_DSV_FastVentValve	Fast Vent Valve	Bo 0 = Closed 1 = Open	None
23	Statx_VCE_DSV_AtmosphericSensor	Atmospheric Sensor	Bo 0 = Off 1 = On	None
24	Statx_VCE_MV_NumWafers	Number of Wafers Mapped	U2	None

23.1.9 EtchModule: -

ID offset	Variable Name	Description	Format	Units
0	Statx_Etch_MV_moriInnerCurrent	Mori Inner Current	F4	Amps
1	Statx_Etch_MV_moriOuterCurrent	Mori Outer Current	F4	Amps
2	Statx_Etch_MV_PlatenRFLoadPower	Platen HF Load Power	F4	Watts
3	Statx_Etch_MV_PlatenRFReflectedPower	Platen HF Reflected Power	F4	Watts
4	Statx_Etch_MV_PlatenRFPeakToPeak	Platen HF Peak to Peak	F4	Volts
5	Statx_Etch_MV_PlatenRFLoadCapacitor	Platen RF Load Capacitor	F4	%
6	Statx_Etch_MV_PlatenRFTuningCapacitor	Platen RF Tuning Capacitor	F4	%
7	Statx_Etch_MV_PlatenDcBias	Platen DC Bias	F4	Volts
8	Statx_Etch_MV_SourceRFLoadPower	Source RF Load Power	F4	Watts
9	Statx_Etch_MV_SourceRFReflectedPower	Source RF Reflected Power	F4	Watts
10	Statx_Etch_MV_SourceRFPeakToPeak	Source RF Peak To Peak	F4	Watts
11	Statx_Etch_MV_SourceRFLoadCapacitor	Source RF Load Capacitor	F4	%
12	Statx_Etch_MV_SourceRFTuningCapacitor	Source RF Tuning Capacitor	F4	%
13	Statx_Etch_MV_Heater1Temp	Heater 1 Temp	F4	deg C
14	Statx_Etch_MV_Heater2Temp	Heater 2 Temp	F4	deg C
15	Statx_Etch_MV_Heater3Temp	Heater 3 Temp	F4	deg C
16	Statx_Etch_MV_Heater4Temp	Heater 4 Temp	F4	deg C
17	Statx_Etch_MV_Heater5Temp	Heater 5 Temp	F4	deg C
18	Statx_Etch_MV_Heater6Temp	Heater 6 Temp	F4	deg C
19	Statx_Etch_MV_Heater7Temp	Heater 7 Temp	F4	deg C
20	Statx_Etch_MV_Heater8Temp	Heater 8 Temp	F4	deg C
21	Statx_Etch_MV_ThermoCouple1Temp	ThermoCouple 1 Temp	F4	deg C
22	Statx_Etch_MV_ThermoCouple2Temp	ThermoCouple 2 Temp	F4	deg C
23	Statx_Etch_MV_ThermoCouple3Temp	ThermoCouple 3 Temp	F4	deg C
24	Statx_Etch_MV_ThermoCouple4Temp	ThermoCouple 4 Temp	F4	deg C
25	Statx_Etch_MV_Position	Position	F4	
26	Statx_Etch_MV_PressureLow	Pressure Low	F4	mTorr
27	Statx_Etch_MV_PressureHigh	Pressure High	F4	mTorr
28	Statx_Etch_MV_Pressure	Pressure	F4	mTorr
29	Statx_Etch_MV_Gas1Flow	Gas1Flow	F4	Sccm
30	Statx_Etch_MV_Gas2Flow	Gas2Flow	F4	Sccm
31	Statx_Etch_MV_Gas3Flow	Gas3Flow	F4	Sccm
32	Statx_Etch_MV_Gas4Flow	Gas4Flow	F4	Sccm
33	Statx_Etch_MV_Gas5Flow	Gas5Flow	F4	Sccm
34	Statx_Etch_MV_Gas6Flow	Gas6Flow	F4	Sccm
35	Statx_Etch_MV_Gas7Flow	Gas7Flow	F4	Sccm
36	Statx_Etch_MV_Gas8Flow	Gas8Flow	F4	Sccm
37	Statx_Etch_MV_HeliumBPFlow	Helium BP Flow	F4	Sccm
38	Statx_Etch_MV_HeliumBPPressure	Helium BP Pressure	F4	Torr
39	Statx_Etch_MV_ForeLinePressure	ForeLine Pressure	F4	Sccm
40	Statx_Etch_MV_EscVoltageLeft	EscVoltage Left	F4	Volts
41	Statx_Etch_MV_EscVoltageRight	EscVoltage Right	F4	Volts
42	Statx_Etch_MV_RecirculatorTemp	Recirculator Temp	F4	Deg C
43	Statx_Etch_MV_SourceRfPaddingCapacitor	Source Rf Padding Capacitor	F4	%
44	Statx_Etch_MV_PlatenRfPaddingCapacitor	Platen Rf Padding Capacitor	F4	%
45	Statx_Etch_MV_fillRate	fillRate	F4	
46	Statx_Etch_MV_leakUpRate	Leak Up Rate	F4	
47	Statx_Etch_MV_EpdIntensity	Epd Intensity	F4	
48	Statx_Etch_MV_attenuatorRatio	attenuatorRatio	F4	

ID offset	Variable Name	Description	Format	Units
49	Statx_Etch_MV_gasOnStatus	Gas On Status	U2	None
50	Statx_Etch_DSV_PlattenRFon	Platen RF on	Bo 0 = Off 1 = On	None
51	Statx_Etch_DSV_ResetGasInterlock	Reset Gas Interlock	Bo 0 = Off 1 = On	None
52	Statx_Etch_DSV_BackingPumpStart	Backing Pump Start	Bo 0 = Off 1 = On	None
53	Statx_Etch_DSV_Gas1InletValve	Gas1 Inlet Valve	Bo 0 = Closed 1 = Open	None
54	Statx_Etch_DSV_Gas1PurgeValve	Gas1 Purge Valve	Bo 0 = Closed 1 = Open	None
55	Statx_Etch_DSV_Gas1OutletValve	Gas1 Outlet Valve	Bo 0 = Closed 1 = Open	None
56	Statx_Etch_DSV_Gas2InletValve	Gas2 Inlet Valve	Bo 0 = Closed 1 = Open	None
57	Statx_Etch_DSV_Gas2PurgeValve	Gas2 Purge Valve	Bo 0 = Closed 1 = Open	None
58	Statx_Etch_DSV_Gas2OutletValve	Gas2 Outlet Valve	Bo 0 = Closed 1 = Open	None
59	Statx_Etch_DSV_Gas3InletValve	Gas3 Inlet Valve	Bo 0 = Closed 1 = Open	None
60	Statx_Etch_DSV_Gas3PurgeValve	Gas3 Purge Valve	Bo 0 = Closed 1 = Open	None
61	Statx_Etch_DSV_Gas3OutletValve	Gas3 Outlet Valve	Bo 0 = Closed 1 = Open	None
62	Statx_Etch_DSV_Gas4InletValve	Gas4 Inlet Valve	Bo 0 = Closed 1 = Open	None
63	Statx_Etch_DSV_Gas4PurgeValve	Gas4 Purge Valve	Bo 0 = Closed 1 = Open	None
64	Statx_Etch_DSV_Gas4OutletValve	Gas4 Outlet Valve	Bo 0 = Closed 1 = Open	None
65	Statx_Etch_DSV_Gas5InletValve	Gas5 Inlet Valve	Bo 0 = Closed 1 = Open	None
66	Statx_Etch_DSV_Gas5PurgeValve	Gas5 Purge Valve	Bo 0 = Closed 1 = Open	None
67	Statx_Etch_DSV_Gas5OutletValve	Gas5 Outlet Valve	Bo 0 = Closed 1 = Open	None
68	Statx_Etch_DSV_Gas6InletValve	Gas6 Inlet Valve	Bo 0 = Closed 1 = Open	None
69	Statx_Etch_DSV_Gas6PurgeValve	Gas6 Purge Valve	Bo 0 = Closed 1 = Open	None
70	Statx_Etch_DSV_Gas6OutletValve	Gas6 Outlet Valve	Bo 0 = Closed 1 = Open	None

ID offset	Variable Name	Description	Format	Units
71	Statx_Etch_DSV_Gas7InletValve	Gas7 Inlet Valve	Bo 0 = Closed 1 = Open	None
72	Statx_Etch_DSV_Gas7PurgeValve	Gas7 Purge Valve	Bo 0 = Closed 1 = Open	None
73	Statx_Etch_DSV_Gas7OutletValve	Gas7 Outlet Valve	Bo 0 = Closed 1 = Open	None
74	Statx_Etch_DSV_Gas8InletValve	Gas8 Inlet Valve	Bo 0 = Closed 1 = Open	None
75	Statx_Etch_DSV_Gas8PurgeValve	Gas8 Purge Valve	Bo 0 = Closed 1 = Open	None
76	Statx_Etch_DSV_Gas8OutletValve	Gas8 Outlet Valve	Bo 0 = Closed 1 = Open	None
77	Statx_Etch_DSV_N2Purge1	N2Purge1	Bo 0 = Closed 1 = Open	None
78	Statx_Etch_DSV_ManifoldIsolation1	Manifold Isolation1	Bo 0 = Closed 1 = Open	None
79	Statx_Etch_DSV_ChamberByPass1	Chamber By Pass1	Bo 0 = Closed 1 = Open	None
80	Statx_Etch_DSV_HeliumChamberValve	Helium Chamber Valve	Bo 0 = Closed 1 = Open	None
81	Statx_Etch_DSV_HeliumPumpValve	Helium Pump Valve	Bo 0 = Closed 1 = Open	None
82	Statx_Etch_DSV_ISOPODBaratronIsolation1	ISOPOD Baratron Isolation1	U1 bit 0 = drive bit 1 = f/b 0 = Closed 1 = Open	None
83	Statx_Etch_DSV_BaratronIsolation1	Baratron Isolation1	U1 bit 0 = drive bit 1 = f/b 0 = Closed 1 = Open	None
84	Statx_Etch_DSV_BaratronIsolation2	Baratron Isolation2	U1 bit 0 = drive bit 1 = f/b 0 = Closed 1 = Open	None
85	Statx_Etch_DSV_RoughingValve	Roughing Valve	Bo 0 = Closed 1 = Open	None
86	Statx_Etch_DSV_WaferLift	Wafer Lift	U1 bit 0 = drive bit 1 = f/b 0 = Closed 1 = Open	None
87	Statx_Etch_DSV_ISOPODPlaten	ISOPOD Platen	U1 bit 0 = drive up bit 1 = drive down bit 2 = f/b up bit 4 = f/b down	None

ID offset	Variable Name	Description	Format	Units
88	Statx_Etch_DSV_TurboIsolationValve	Turbo Isolation Valve	Bo 0 = Closed 1 = Open	None
89	Statx_Etch_DSV_NotTurboIsolationValve	Not Turbo Isolation Valve	Bo 0 = Closed 1 = Open	None
90	Statx_Etch_DSV_TurboN2Bleed	Turbo N2 Bleed	Bo 0 = Closed 1 = Open	None
91	Statx_Etch_DSV_ISOPDHiVac	ISOPD HiVac Valve	Bo 0 = Closed 1 = Open	None
92	Statx_Etch_DSV_GasInterlockInput	Gas Interlock Input	Bo 0 = ok 1 = not ok	None
93	Statx_Etch_DSV_TurboAtSpeed	Turbo At Speed	Bo 0 = not at speed 1 = at speed	None
94	Statx_Etch_DSV_TurboAtFault	Turbo At Fault	Bo 0 = not at fault 1 = at fault	None
95	Statx_Etch_DSV_TurboWarningTemp	Turbo Warning Temp	Bo 0 = no warning 1 = warning	None
96	Statx_Etch_DSV_RFCoverOpen	RF Cover Open	Bo 0 = Closed 1 = Open	None
97	Statx_Etch_DSV_24VoltsOK	24 Volts OK	Bo 0 = not ok 1 = ok	None
98	Statx_Etch_DSV_BackingPumpRunning	Backing Pump Running	Bo 0 = not running 1 = running	None
99	Statx_Etch_DSV_BackingPumpWarning	Backing Pump Warning	Bo 0 = no warning 1 = warning	None
100	Statx_Etch_DSV_BackingPumpAlarm	Backing Pump Alarm	Bo 0 = no warning 1 = warning	None
101	Statx_Etch_DSV_BackingPumpExhaustWarn	Backing Pump Exhaust Warn	Bo 0 = no warning 1 = warning	None
102	Statx_Etch_DSV_PlattenTempWarning	Platen Temp Warning	Bo 0 = no warning 1 = warning	None
103	Statx_Etch_DSV_RecirculatorFail	Recirculator Fail	Bo 0 = no fail 1 = fail	None
104	Statx_Etch_DSV_PlattenRFDCBusOK	Platen RF DC Bus OK	Bo 0 = not ok 1 = ok	None
105	Statx_Etch_DSV_SourceRFDCBusOK	Source RF DC Bus OK	Bo 0 = not ok 1 = ok	None
106	Statx_Etch_DSV_PlattenRFGen OverTemp	Platen RF Gen Over Temp	Bo 0 = not over 1 = over	None

ID offset	Variable Name	Description	Format	Units
107	Statx_Etch_DSV_SourceRFGen OverTemp	Source RF Gen OverTemp	Bo 0 = not over 1 = over	None
108	Statx_Etch_DSV_WaterFlowValve1	Water Flow Valve1	Bo 0 = Closed 1 = Open	None
109	Statx_Etch_DSV_WaterFlowValve2	Water Flow Valve2	Bo 0 = Closed 1 = Open	None
110	Statx_Etch_DSV_WaterFlowValve3	Water Flow Valve3	Bo 0 = Closed 1 = Open	None
111	Statx_Etch_DSV_RecirculatorFlow	Recirculator Flow	Bo 0 = No Flow 1 = Flow	None
112	Statx_Etch_DSV_GasExtractOK	Gas Extract OK	Bo 0 = not ok 1 = ok	None
113	Statx_Etch_DSV_AtmosphereSensor	Atmosphere Sensor	Bo 0 = Vac 1 = ATM	None
114	Statx_Etch_MV_ProcessTime	Process Time	U2	Secs
115	Statx_Etch_MV_ProcessStep	Process Step	U2	None
116	Statx_Etch_MV_PlatenRFHours	Platen RF Hours	U2	
117	Statx_Etch_MV_EpdStage	Endpoint Stage	F4	
118	Statx_Etch_MV_EpdTime	Endpoint Time	F4	
119	Statx_Etch_MV_counters.RFTime[RFBIAS]	Counter RF Bias	F4	
120	Statx_Etch_MV_counters.RFTime[RFSOURCE]	Counter RF Source	F4	
121	Statx_Etch_MV_counters.RFTime[RFRECIPE]	Counter RF Recipe	F4	
122	Statx_Etch_MV_counters.RFTime[RFAUTOCL EAN]	Counter RF Auto Clean	F4	
123	Statx_Etch_MV_counters.RFTime[RFTOTAL]	Counter RF Total	F4	
124	Statx_Etch_MV_counters.RFTime[RFTOTALN ORESET]	Counter RF Total (No Reset)	F4	
125	Statx_Etch_MV_counters.EscOn	Counter EscOn	F4	
126	Statx_Etch_MV_counters.MfcCycles[0]	Counter MfcCycles Gas 1	F4	
127	Statx_Etch_MV_counters.MfcCycles[1]	Counter MfcCycles Gas 2	F4	
128	Statx_Etch_MV_counters.MfcCycles[2]	Counter MfcCycles Gas 3	F4	
129	Statx_Etch_MV_counters.MfcCycles[3]	Counter MfcCycles Gas 4	F4	
130	Statx_Etch_MV_counters.MfcCycles[4]	Counter MfcCycles Gas 5	F4	
131	Statx_Etch_MV_counters.MfcCycles[5]	Counter MfcCycles Gas 6	F4	
132	Statx_Etch_MV_counters.MfcCycles[6]	Counter MfcCycles Gas 7	F4	
133	Statx_Etch_MV_counters.MfcCycles[7]	Counter MfcCycles Gas 8	F4	
134	Statx_Etch_MV_counters.MfcCycles[8]	Counter MfcCycles Gas 9	F4	
135	Statx_Etch_MV_SourceRF2LoadPower	Secondary Source RF Load Power	F4	
136	Statx_Etch_MV_SourceRF2ReflectedPower	Secondary Source RF Reflected Power	F4	
137	Statx_Etch_MV_SourceRF2PeakToPeak	Secondary Source RF Peak to Peak	F4	
138	Statx_Etch_MV_SourceRF2LoadCapacitor	Secondary Source RF Load Capacitor	F4	
139	Statx_Etch_MV_SourceRF2TuningCapacitor	Secondary Source RF Tuning Capacitor	F4	
140	Statx_Etch_MV_ProcessTimeFloat	Process Time	F4	
141	Statx_Etch_MV_ClaritasLoadPower	Claritas Load Power	F4	
142	Statx_Etch_MV_ClaritasReflectedPower	Claritas Reflected Power	F4	
143	Statx_Etch_MV_ClaritasPeakToPeak	Claritas Peak To Peak	F4	
144	Statx_Etch_MV_ClaritasTuningCapacitor	Claritas Tuning Capacitor	F4	
145	Statx_Etch_MV_StepNumber	Step Number	U1	
146	Statx_Etch_MV_LoopNumber	Step Loop Number	U2	

ID offset	Variable Name	Description	Format	Units
147	Statx_Etch_MV_NumberOfLoops	Number of Looped Steps	U2	
148	Statx_Etch_MV_Gas9Flow	Gas 9 Flow	F4	Sccm
149	Statx_Etch_DSV_Gas9InletValve		Bo 0 = Closed 1 = Open	
150	Statx_Etch_DSV_Gas9PurgeValve		Bo 0 = Closed 1 = Open	
151	Statx_Etch_DSV_Gas9OutletValve		Bo 0 = Closed 1 = Open	
152	Statx_Etch_MV_SourceRf2PaddingCapacitor		F4	
153	Statx_Etch_MV_PlattenLFTransformerTap		F4	
154	Statx_Etch_MV_SourceRF1AFTFrequency		F4	
155	Statx_Etch_MV_SourceRF2AFTFrequency		F4	
156	Statx_Etch_MV_TurboPumpSpeedPercentage		F4	
157	Statx_Etch_MV_TurboPumpSpeed		F4	
158	Statx_Etch_MV_TurboPumpCurrent		F4	
159	Statx_Etch_MV_TurboPumpTemperature		F4	
160	Statx_Etch_MV_TurboPumpStatus		U2	
161	Statx_Etch_MV_EPStepNum		U2	
162	Statx_Etch_MV_GateOpen		U2	
163	Statx_Etch_MV_DY0Value		F4	
164	Statx_Etch_MV_DY1Value		F4	
165	Statx_Etch_MV_DY2Value		F4	
166	Statx_Etch_MV_DY3Value		F4	
167	Statx_Etch_MV_activeDY		F4	
168	Statx_Etch_MV_RefLevel		F4	
169	Statx_Etch_MV_TriggerLevel		F4	
170	Statx_Etch_MV_loopTimeRemaining		F4	
171	Statx_Etch_MV_timeUntilActiveStep		F4	
172	Statx_Etch_MV_delayTime		F4	
173	Statx_Etch_MV_endTime		F4	
174	Statx_Etch_MV_WaferThermalLimit		F4	
175	Statx_Etch_MV_chillerFlow		F4	
176	Statx_Etch_MV_EPTimestamp		F4	
177	Statx_Etch_MV_EPMonitorIntensity		F4	
178	Statx_Etch_MV_EpdSource		U2	
179	Statx_Etch_MV_restoreTime		U2	
180	Statx_Etch_MV_restoresRemaining		U2	
181	Statx_Etch_MV_bInGasStab		Bo	
182	Statx_Etch_MV_Heater1Controlling		Bo	
183	Statx_Etch_MV_Heater2Controlling		Bo	
184	Statx_Etch_MV_Heater3Controlling		Bo	
185	Statx_Etch_MV_Heater4Controlling		Bo	
186	Statx_Etch_MV_Heater5Controlling		Bo	
187	Statx_Etch_MV_Heater6Controlling		Bo	
188	Statx_Etch_MV_Heater7Controlling		Bo	
189	Statx_Etch_MV_Heater8Controlling		Bo	
190	Statx_Etch_MV_PlattenRFPulseFrequency		F4	
191	Statx_Etch_MV_PlattenRFPulseDutyCycle		F4	
192	Statx_Etch_MV_SourceRFPulseFrequency		F4	

ID offset	Variable Name	Description	Format	Units
193	Statx_Etch_MV_SourceRFPulseDutyCycle		F4	
194	Statx_Etch_MV_StepTime		F4	
195	Statx_Etch_MV_PlattenHFHALOon		Bo	
196	Statx_Etch_MV_SourceRF1HALOon		Bo	
197	Statx_Etch_MV_SourceRF2HALOon		Bo	
198	Statx_Etch_MV_PlattenLFLoadPower	Platen LF Load Power	F4	Watts
199	Statx_Etch_MV_PlattenLFReflectedPower	Platen LF Reflected Power	F4	Watts
200	Statx_Etch_MV_PlattenLFPeakToPeak	Platen LF Peak to Peak	F4	Volts

Configurable gas line names

SVIDs for gas lines are named dependent on module configuration. The names presented in the table above are the generic names. Where a secondary manifold is present, the names are changed to identify the gas number of each manifold

Deposition RevB PM:-

ID offset	Variable Name	Description	Format	Units
0	Statx_Deposition_MV_ProcessTime	Process Time	U2	Secs
1	Statx_Deposition_MV_ProcessStep	Process Step	U2	None
2	Statx_Deposition_MV_PreviousState	Previous State	U2	None
3	Statx_Deposition_MV_capman10T	10T Capman chamber pressure	F4	Torr
4	Statx_Deposition_MV_capman50mT	50mT Capman chamber pressure	F4	Torr
5	Statx_Deposition_MV_chamberIonPres	IonGauge chamber pressure	F4	Torr
6	Statx_Deposition_MV_chamberPressure	Chamber Pressure	F4	Torr
7	Statx_Deposition_MV_moduleRoughingPres	Module Roughing Gauge Pressure	F4	Torr
8	Statx_Deposition_MV_cryoFirstStageTemp	1 st Stage CTI Cryo temperature	F4	Kelvin
9	Statx_Deposition_MV_cryoSecondStageTemp	2 nd Stage CTI Cryo temperature	F4	Kelvin
10	Statx_Deposition_MV_accGasCount	Accumulated gas count	F4	Sl
11	Statx_Deposition_MV_EscVoltage	ESC Voltage	F4	Volts
12	Statx_Deposition_MV_EscBackPressure	ESC Back pressure	F4	Torr
13	Statx_Deposition_MV_EscFlow	ESC flow	F4	Sccm
14	Statx_Deposition_MV_gas1Flow	Gas1 Flow	F4	Sccm
15	Statx_Deposition_MV_gas2Flow	Gas2 Flow	F4	Sccm
16	Statx_Deposition_MV_gas3Flow	Gas3 Flow	F4	Sccm
17	Statx_Deposition_MV_gas4Flow	Gas4 Flow	F4	Sccm
18	Statx_Deposition_MV_upperCurrent	Upper Coil Current	F4	Amps
19	Statx_Deposition_MV_lowerCurrent	Lower Coil Current	F4	Amps
20	Statx_Deposition_MV_platenControlTemp	Platen Control Temperature	F4	DegC
21	Statx_Deposition_MV_platenSafetyTemp	Platen Safety Temperature	F4	DegC
22	Statx_Deposition_MV_platenForwardPower	Platen Forward Power	F4	Watts
23	Statx_Deposition_MV_platenReflectedPower	Platen Reflected Power	F4	Watts
24	Statx_Deposition_MV_platenLoadPower	Platen Load Power	F4	Watts
25	Statx_Deposition_MV_platenPeakToPeakVlts	Platen peak to peak voltage	F4	Volts
26	Statx_Deposition_MV_platenDCBias	Platen DC Bias	F4	Volts
27	Statx_Deposition_MV_platenTunePot	Platen Tune Pot	F4	%
28	Statx_Deposition_MV_PlatenLoadPot	Platen Load Pot	F4	%
29	Statx_Deposition_MV_targetPower	Target Power	F4	KW
30	Statx_Deposition_MV_targetVlts	Target Volts	F4	Volts
31	Statx_Deposition_MV_targetAmps	Target Amps	F4	Amps
32	Statx_Deposition_MV_targetUtilisation	Target Utilisation	F4	%
33	Statx_Deposition_MV_accumulatedPower	Target Accumulated Power	F4	KW.secs
34	Statx_Deposition_MV_bakeoutTemp	Bakeout Temperature	F4	DegC
35	Statx_Deposition_MV_bakeoutSafetyTemp	Bakeout Safety Temperature	F4	DegC
36	Statx_Deposition_MV_targetPulseFreq	Target Pulse Frequency	F4	Hz
37	Statx_Deposition_MV_targetUsageStandard	Target Standard Usage	F4	KW.secs
38	Statx_Deposition_MV_targetUsageAHF	Target AHF Usage	F4	Kwsecs
39	Statx_Deposition_MV_targetUsageMagnetron	Target Magnetron Usage	F4	KW.secs
40	Statx_Deposition_MV_toolingFactor	Tooling Factor	F4	A/KW.sec
41	Statx_Deposition_MV_alternateToolingfactor	Alternative Tooling Factor	F4	A/KW.sec
42	Statx_Deposition_MV_toolingFactorAHF	AHF Tooling Factor	F4	A/KW.sec
43	Statx_Deposition_MV_alternateToolingfactorAHF	AHF Alternative Tooling Factor	F4	A/KW.sec
44	Statx_Deposition_MV_shieldingAccUsage	Shielding Accumulated Usage	F4	KWHrs
45	Statx_Deposition_MV_microArcs	Target Micro Arcs Count	U2	-
46	Statx_Deposition_MV_hardArcs	Target Hard Arcs Count	U2	-
47	Statx_Deposition_MV_MagnetronHoursRotation	Magnetron Rotation Hours	F4	Hrs

ID offset	Variable Name	Description	Format	Units
48	Statx_Deposition_DSV_Gas1Valve	Gas1 Valve	Bo 0 = Closed 1 = Open	None
49	Statx_Deposition_DSV_Gas2Valve	Gas2 Valve	Bo 0 = Closed 1 = Open	None
50	Statx_Deposition_DSV_Gas3Valve	Gas3 Valve	Bo 0 = Closed 1 = Open	None
51	Statx_Deposition_DSV_Gas4Valve	Gas4 Valve	Bo 0 = Closed 1 = Open	None
52	Statx_Deposition_DSV_GasManifoldValve	Gas Manifold Valve	Bo 0 = Closed 1 = Open	None
53	Statx_Deposition_DSV_VentValve	Vent Valve	Bo 0 = Closed 1 = Open	None
54	Statx_Deposition_DSV_EscWaferValveIn	EscWaferValveIn	Bo 0 = Closed 1 = Open	None
55	Statx_Deposition_DSV_EscSupplyValve	EscSupplyValve	Bo 0 = Closed 1 = Open	None
56	Statx_Deposition_DSV_EscPumpoutValve	EscPumpoutValve	Bo 0 = Closed 1 = Open	None
57	Statx_Deposition_DSV_PressureCtrlValve	PressureCtrlValve	Bo 0 = Closed 1 = Open	None
58	Statx_Deposition_DSV_EscSupply	EscSupply	Bo 0 = Off 1 = On	None
59	Statx_Deposition_DSV_EscSupplyPolarity	EscSupplyPolarity	Bo 0 = Off 1 = On	None
60	Statx_Deposition_DSV_Shutter	Shutter	Bo 0 = Out 1 = In	None
61	Statx_Deposition_DSV_MagnetronControl	MagnetronControl	Bo 0 = Off 1 = On	None
62	Statx_Deposition_DSV_WaterControl	WaterControl	Bo 0 = Off 1 = On	None
63	Statx_Deposition_DSV_RGAVValveControl	RGAVValveControl	Bo 0 = Closed 1 = Open	None
64	Statx_Deposition_DSV_PlattenHeater	PlattenHeater	Bo 0 = Off 1 = On	None
65	Statx_Deposition_DSV_BakeoutHeater	BakeoutHeater	Bo 0 = Off 1 = On	None
66	Statx_Deposition_DSV_BakeoutPID	BakeoutPID	Bo 0 = Off 1 = On	None
67	Statx_Deposition_DSV_Turbo	Turbo	Bo 0 = Off 1 = On	None
68	Statx_Deposition_DSV_RoughingValve	RoughingValve	Bo 0 = Closed 1 = Open	None

ID offset	Variable Name	Description	Format	Units
69	Statx_Deposition_DSV_WaferLift1Control	WaferLift1Control	Bo 0 = Off 1 = On	None
70	Statx_Deposition_DSV_WaferLift2Control	WaferLift2Control	Bo 0 = Off 1 = On	None
71	Statx_Deposition_DSV_PlattenCoolingOn	PlattenCoolingOn	Bo 0 = Off 1 = On	None
72	Statx_Deposition_DSV_PlattenLiftControl	PlattenLiftControl	Bo 0 = Off 1 = On	None
73	Statx_Deposition_DSV_HivacValveControl	HivacValveControl	Bo 0 = Closed 1 = Open	None
74	Statx_Deposition_DSV_HivacValveThrottle	HivacValveThrottle	Bo 0 = Closed 1 = Open	None
75	Statx_Deposition_DSV_RGAEmissionsOn	RGAEmissionsOn	Bo 0 = Off 1 = On	None
76	Statx_Deposition_DSV_RGARecipeSelect	RGARecipeSelect	Bo 0 = Off 1 = On	None
77	Statx_Deposition_DSV_RFPlatenOnOff	RFPlatenOnOff	Bo 0 = Off 1 = On	None
78	Statx_Deposition_DSV_RFPlatenLoadAutoPos	RFPlatenLoadAutoPos	Bo 0 = Off 1 = On	None
79	Statx_Deposition_DSV_RFPlatenTuneAutoPos	RFPlatenTuneAutoPos	Bo 0 = Off 1 = On	None
80	Statx_Deposition_DSV_DcUpperCoilControl	DcUpperCoilControl	Bo 0 = Off 1 = On	None
81	Statx_Deposition_DSV_DcLowerCoilControl	DcLowerCoilControl	Bo 0 = Off 1 = On	None
82	Statx_Deposition_DSV_RFPlatenControl1	RFPlatenControl1	Bo 0 = Off 1 = On	None
83	Statx_Deposition_DSV_RFPlatenControl2	RFPlatenControl2	Bo 0 = Off 1 = On	None
84	Statx_Deposition_MV_RGAmass1PP	RGA Mass1 PP	F4	
85	Statx_Deposition_MV_RGAmass2PP	RGA Mass2 PP	F4	
86	Statx_Deposition_MV_RGAmass3PP	RGA Mass3 PP	F4	
87	Statx_Deposition_MV_RGAmass4PP	RGA Mass4 PP	F4	
88	Statx_Deposition_MV_RGAmass5PP	RGA Mass5 PP	F4	
89	Statx_Deposition_MV_RGAmass6PP	RGA Mass6 PP	F4	
90	Statx_Deposition_MV_RGAmass7PP	RGA Mass7 PP	F4	
91	Statx_Deposition_MV_RGAmass8PP	RGA Mass8 PP	F4	
92	Statx_Deposition_MV_RGAmass9PP	RGA Mass9 PP	F4	
93	Statx_Deposition_MV_RGAmass10PP	RGA Mass10 PP	F4	
94	Statx_Deposition_MV_magMotorSpeed	Magnetron Motor Speed	F4	Hz
95	Statx_Deposition_MV_Toolingfactor2		F4	
96	Statx_Deposition_MV_reactiveToolingfactor2		F4	
97	Statx_Deposition_MV_shieldSpacing	Shield Spacing	F4	
98	Statx_Deposition_MV_bakeoutLampPercentagePower		F4	

ID offset	Variable Name	Description	Format	Units
99	Statx_Deposition_MV_turboBackingPres	Turbo Backing Pressure	F4	Torr
100	Statx_Deposition_MV_leakupRate2	Leakup Rate	F4	nT/min
101	Statx_Deposition_MV_movingMagPos	Moving Magnetron Position	F4	
102	Statx_Deposition_MV_ProcessTimeFloat	Process Time	F4	Secs
103	Statx_Deposition_DSV_PhaseAngleBakeoutLampContactor	Phase angle lamp bakeout contactor state	BOOLEAN 0 = Closed 1 = Open	None
104	Statx_Deposition_MV_platenWRPAngle	Angle of WRP	F4	Degrees
105	Statx_Deposition_MV_platenWRPRotationSpeed	Rotation speed of WRP	U2	Hz
106	Statx_Deposition_MV_actualMovingMagPos	Actual moving magnetron position	F4	
107	Statx_Deposition_MV_MovingMagHomeRetries	Number of moving magnetron home retries	U2	

23.1.10 SoftEtch RevB PM:-

ID offset	Variable Name	Description	Format	Units
0	Statx_Softetch_MV_ProcessTime	Process Time	U2	Secs
1	Statx_Softetch_MV_capman10T	10T capman chamber pressure	F4	Torr
2	Statx_Softetch_MV_capman50mT	50mT capman chamber pressure	F4	Torr
3	Statx_Softetch_MV_chamberIonPres	Ion Gauge Chamber Pressure	F4	Torr
4	Statx_Softetch_MV_chamberPressure	Chamber Pressure	F4	Torr
5	Statx_Softetch_MV_moduleRoughingPres	Module Roughing Pressure	F4	Torr
6	Statx_Softetch_MV_cryoFirstStageTemp	First Stage cryo Temp	F4	Kelvin
7	Statx_Softetch_MV_cryoSecondStageTemp	Second Stage cryo Temp	F4	Kelvin
8	Statx_Softetch_MV_accGasCount	Accumulated Gas Count	F4	sl
9	Statx_Softetch_MV_EscVoltage	Esc Voltage	F4	Volts
10	Statx_Softetch_MV_EscBackPressure	Esc Back Pressure	F4	Torr
11	Statx_Softetch_MV_EscFlow	Esc Flow	F4	sccm
12	Statx_Softetch_MV_gas1Flow	Gas 1 Flow	F4	sccm
13	Statx_Softetch_MV_gas2Flow	Gas 2 Flow	F4	sccm
14	Statx_Softetch_MV_gas3Flow	Gas 3 Flow	F4	sccm
15	Statx_Softetch_MV_gas4Flow	Gas 4 Flow	F4	sccm
16	Statx_Softetch_MV_coilForwardPower	Coil Forward Power	F4	Watts
17	Statx_Softetch_MV_coilReflectedPower	Coil Reflected Power	F4	Watts
18	Statx_Softetch_MV_coilLoadPower	Coil Load Power	F4	Watts
19	Statx_Softetch_MV_coilPeakToPeakVlts	Coil PeakToPeak Volts	F4	Volts
20	Statx_Softetch_MV_coilTunePot	Coil Tune Pot	F4	%
21	Statx_Softetch_MV_coilLoadPot	Coil Load Pot	F4	%
22	Statx_Softetch_MV_accPlatenPower	Accumulated Platen Power	F4	KWHrs
23	Statx_Softetch_MV_platenControlTemp	Platen Control Temp	F4	degC
24	Statx_Softetch_MV_platenSafetyTemp	Platen Safety Temp	F4	degC
25	Statx_Softetch_MV_platenForwardPower	Platen Forward Power	F4	Watts
26	Statx_Softetch_MV_platenReflectedPower	Platen Reflected Power	F4	Watts
27	Statx_Softetch_MV_platenLoadPower	Platen Load Power	F4	Watts
28	Statx_Softetch_MV_platenPeakToPeakVlts	Platen PeakToPeak Volts	F4	Volts
29	Statx_Softetch_MV_platenDCBias	Platen DC Bias	F4	Volts
30	Statx_Softetch_MV_platenTunePot	Platen Tune Pot	F4	%
31	Statx_Softetch_MV_platenLoadPot	Platen Load Pot	F4	%
32	Statx_Softetch_MV_bakeoutTemp	Bakeout Temperature	F4	degC
33	Statx_Softetch_MV_bakeoutSafetyTemp	Bakeout Safety Temperature	F4	degC
34	Statx_Softetch_DSV_Gas1Valve	Gas 1 Valve	Bo 0 = Closed 1 = Open	None
35	Statx_Softetch_DSV_Gas2Valve	Gas 2 Valve	Bo 0 = Closed 1 = Open	None
36	Statx_Softetch_DSV_Gas3Valve	Gas 3 Valve	Bo 0 = Closed 1 = Open	None
37	Statx_Softetch_DSV_Gas4Valve	Gas 4 Valve	Bo 0 = Closed 1 = Open	None
38	Statx_Softetch_DSV_GasManifoldValve	Gas Manifold Valve	Bo 0 = Closed 1 = Open	None
39	Statx_Softetch_DSV_VentValve	Vent Valve	Bo 0 = Closed 1 = Open	None

ID offset	Variable Name	Description	Format	Units
40	Statx_Softetch_DSV_EscWaferValve	Esc Wafer Valve	Bo 0 = Closed 1 = Open	None
41	Statx_Softetch_DSV_EscSupplyValve	Esc Supply Valve	Bo 0 = Closed 1 = Open	None
42	Statx_Softetch_DSV_EscPumpoutValve	Esc Pumpout Valve	Bo 0 = Closed 1 = Open	None
43	Statx_Softetch_DSV_EscPressureControlValve	Esc Pressure Control Valve	Bo 0 = Closed 1 = Open	None
44	Statx_Softetch_DSV_EscSupply	Esc Supply	Bo 0 = Off 1 = On	None
45	Statx_Softetch_DSV_EscSupplyPolarity	Esc Supply Polarity	Bo 0 = Off 1 = On	None
46	Statx_Softetch_DSV_WaterControl	Water Control	Bo 0 = Off 1 = On	None
47	Statx_Softetch_DSV_RGAValveControl	RGA Valve Control	Bo 0 = Off 1 = On	None
48	Statx_Softetch_DSV_PlattenHeater	Platen Heater	Bo 0 = Off 1 = On	None
49	Statx_Softetch_DSV_PlattenHeaterPID	Platen Heater PID	Bo 0 = Off 1 = On	None
50	Statx_Softetch_DSV_BakeoutHeater	Bakeout Heater	Bo 0 = Off 1 = On	None
51	Statx_Softetch_DSV_BakoutHeaterPID	Bakout Heater PID	Bo 0 = Off 1 = On	None
52	Statx_Softetch_DSV_RoughingValve	Roughing Valve	Bo 0 = Closed 1 = Open	None
53	Statx_Softetch_DSV_WaferLift1Control	Wafer Lift1 Control	Bo 0 = Off 1 = On	None
54	Statx_Softetch_DSV_WaferLift2Control	Wafer Lift2 Control	Bo 0 = Off 1 = On	None
55	Statx_Softetch_DSV_PlattenCooling	Platen Cooling	Bo 0 = Off 1 = On	None
56	Statx_Softetch_DSV_PlattenBellowsCooling	Platen Bellows Cooling	Bo 0 = Off 1 = On	None
57	Statx_Softetch_DSV_PlattenLiftControl	Platen Lift Control	Bo 0 = Off 1 = On	None
58	Statx_Softetch_DSV_HivacValveControl	Hivac Valve Control	Bo 0 = Off 1 = On	None
59	Statx_Softetch_DSV_HivacThrottleControl	Hivac Throttle Control	Bo 0 = Off 1 = On	None
60	Statx_Softetch_DSV_RGAEmisionOn	RGA Emission On	Bo 0 = Off 1 = On	None

ID offset	Variable Name	Description	Format	Units
61	Statx_Softetch_DSV_RGARecipeSelect1	RGA Recipe Select1	Bo 0 = Off 1 = On	None
62	Statx_Softetch_DSV_RGARecipeSelect2	RGA Recipe Select2	Bo 0 = Off 1 = On	None
63	Statx_Softetch_DSV_RFPlatenOnOff	RF Platen OnOff	Bo 0 = Off 1 = On	None
64	Statx_Softetch_DSV_RFPlatenLoadAutoPos	RF Platen Load Auto Position	Bo 0 = Off 1 = On	None
65	Statx_Softetch_DSV_RFPlatenTuneAutoPos	RF Platen Tune Auto Position	Bo 0 = Off 1 = On	None
66	Statx_Softetch_DSV_RFCoilLoadAutoPos	RF Coil Load Auto Position	Bo 0 = Off 1 = On	None
67	Statx_Softetch_DSV_RFCoilTuneAutoPos	RF Coil Tune Auto Position	Bo 0 = Off 1 = On	None
68	Statx_Softetch_DSV_RFCoilOnOff	RF Coil OnOff	Bo 0 = Off 1 = On	None
69	Statx_Softetch_DSV_RFCoilControl1	RF Coil Control1	Bo 0 = Off 1 = On	None
70	Statx_Softetch_DSV_RFCoilControl2	RF Coil Control2	Bo 0 = Off 1 = On	None
71	Statx_Softetch_DSV_RFPlatenControl1	RF Platen Control1	Bo 0 = Off 1 = On	None
72	Statx_Softetch_DSV_RFPlatenControl2	RF Platen Control2	Bo 0 = Off 1 = On	None
73	Statx_Softetch_MV_ProcessStep	Process Step	U2	None
74	Statx_Softetch_MV_PreviousState	Previous State	U2	None
75	Statx_Softetch_MV_platenLoadCapacitor			
76	Statx_Softetch_MV_platenTuneCapacitor			
77	Statx_Softetch_MV_turboBackingPres			
78	Statx_Softetch_MV_leakupRate2			
79	Statx_Softetch_MV_leakupRate			
80	Statx_Softetch_MV_BSGflow			
81	Statx_Softetch_DSV_BSGSupplyValve			
82	Statx_Softetch_DSV_BSGPumpoutValve			
83	Statx_Softetch_MV_RGAmass1PP			
84	Statx_Softetch_MV_RGAmass1PP			
85	Statx_Softetch_MV_RGAmass3PP			
86	Statx_Softetch_MV_RGAmass4PP			
87	Statx_Softetch_MV_RGAmass5PP			
88	Statx_Softetch_MV_RGAmass6PP			
89	Statx_Softetch_MV_RGAmass7PP			
90	Statx_Softetch_MV_RGAmass8PP			
91	Statx_Softetch_MV_RGAmass9PP			
92	Statx_Softetch_MV_RGAmass10PP			
93	Statx_Softetch_DSV_RGAIsoValve			
94	Statx_Softetch_DSV_CoilRFPolarity			

ID offset	Variable Name	Description	Format	Units
95	Statx_Softetch_MV_ProcessTimeFloat			
96	Statx_Softetch_MV_coilArcEventsPerRun			
97	Statx_Softetch_MV_paramountRFCoilStatus			
98	Statx_Softetch_MV_platenArcEventsPerRun			
99	Statx_Softetch_MV_paramountRFPlatenStatus			
100	Statx_Softetch_MV_remainingWaferCountToBurnIn			
101	Statx_Softetch_DSV_Gas5Valve			
102	Statx_Softetch_MV_gas5Flow			

23.1.11 9 Heat RevB PM:-

ID offset	Variable Name	Description	Format	Units
0	Statx_HeatNT_MV_ProcessTime	Process Time	U2	Secs
1	Statx_HeatNT_MV_ForelinePressure	Foreline Pressure	F4	Torr
2	Statx_HeatNT_MV_chamberPressure	Chamber Pressure	F4	Torr
3	Statx_HeatNT_MV_TurboPumpSpeed	Turbo Pump Speed	F4	Rpm
4	Statx_HeatNT_MV_LampPower	Lamp Power	F4	Watts
5	Statx_HeatNT_MV_bakeoutTemp	Bakeout Temperature	F4	DegC
6	Statx_HeatNT_MV_BakeoutSafetyTemp	Bakeout Safety Temperature	F4	DegC
7	Statx_HeatNT_MV_waferAlignX	Wafer Alignment X	F4	mm
8	Statx_HeatNT_MV_WaferAlignY	Wafer Alignment Y	F4	mm
9	Statx_HeatNT_DSV_AirFeedback	Air Feedback	Bo 0 = Off 1 = On	None
10	Statx_HeatNT_DSV_WaterControl	Water Control	Bo 0 = Off 1 = On	None
11	Statx_HeatNT_DSV_LampControlSupply	Lamp Control Supply	Bo 0 = Off 1 = On	None
12	Statx_HeatNT_DSV_LampControlOnOff	Lamp Control OnOff	Bo 0 = Off 1 = On	None
13	Statx_HeatNT_DSV_BakeoutOnOff	Bakeout OnOff	Bo 0 = Off 1 = On	None
14	Statx_HeatNT_DSV_BakeoutPID	Bakeout PID	Bo 0 = Off 1 = On	None
15	Statx_HeatNT_DSV_TurboOnOff	Turbo OnOff	Bo 0 = Off 1 = On	None
16	Statx_HeatNT_DSV_ChamberRoughingValve	Chamber Roughing Valve	Bo 0 = Closed 1 = Open	None
17	Statx_HeatNT_MV_ProcessStep	Process Step	U2	None
18	Statx_HeatNT_MV_PreviousState	Previous State	U2	None
19	Statx_HeatNT_MV_RGAmass1PP	RGA Mass1 PP	F4	
20	Statx_HeatNT_MV_RGAmass1PP	RGA Mass1 PP	F4	
21	Statx_HeatNT_MV_RGAmass1PP	RGA Mass1 PP	F4	
22	Statx_HeatNT_MV_RGAmass1PP	RGA Mass1 PP	F4	
23	Statx_HeatNT_MV_RGAmass1PP	RGA Mass1 PP	F4	
24	Statx_HeatNT_MV_RGAmass1PP	RGA Mass1 PP	F4	
25	Statx_HeatNT_MV_RGAmass1PP	RGA Mass1 PP	F4	
26	Statx_HeatNT_MV_RGAmass1PP	RGA Mass1 PP	F4	
27	Statx_HeatNT_MV_RGAmass1PP	RGA Mass1 PP	F4	
28	Statx_HeatNT_MV_RGAmass1PP	RGA Mass1 PP	F4	
29	Statx_HeatNT_DSV_RGA_Xtrip	RGA Xtrip	Bo 0 = Off 1 = On	None
30	Statx_HeatNT_MV_PyrometerTemp	Pyrometer Temperature	F4	DegC

23.1.12 Delta APM PM

ID offset	Variable Name	Description	Format	Units
0	Statx_DeltaAPM_MV_ProcessTime	Process Time	U2	Secs
1	Statx_DeltaAPM_MV_ProcessStep	Process Step	U2	None
2	Statx_DeltaAPM_MV_PreviousState	Previous State	U2	None
3	Statx_DeltaAPM_MV_HFLoadPower	HF Load Power	F4	Watts
4	Statx_DeltaAPM_MV_HFReflectedPower	HF Reflected Power	F4	Watts
5	Statx_DeltaAPM_MV_HFPkToPk	HF Pk-To-Pk	F4	Volts
6	Statx_DeltaAPM_MV_HFDCBias	HF DC Bias	F4	Volts
7	Statx_DeltaAPM_MV_HFMURange	HF MU Range	F4	None
8	Statx_DeltaAPM_MV_LFLoadPower	LF Load Power	F4	Watts
9	Statx_DeltaAPM_MV_LFReflectedPower	LF Reflected Power	F4	Watts
10	Statx_DeltaAPM_MV_LFPkToPk	LF Pk-To-Pk	F4	Volts
11	Statx_DeltaAPM_MV_LFDCBias	LF DC Bias	F4	Volts
12	Statx_DeltaAPM_MV_LFMURange	LF MU Range	F4	None
13	Statx_DeltaAPM_MV_LeakupRate	Leakup Rate	F4	mT/min
14	Statx_DeltaAPM_MV_FillRate	Fill Rate	F4	mT/sec
15	Statx_DeltaAPM_MV_EndpointSourceSignal	Endpoint Source	F4	None
16	Statx_DeltaAPM_MV_EndpointStage	Endpoint Stage	F4	None
17	Statx_DeltaAPM_MV_TotalDeposition	Chamber Total Deposition	F4	Mic
18	Statx_DeltaAPM_MV_AccDeposition	Chamber Acc. Deposition	F4	Mic
19	Statx_DeltaAPM_MV_ElectrodeSpacing	Electrode Spacing	F4	Mm
20	Statx_DeltaAPM_MV_ShowerheadHeaterTemp	Showerhead Temp	F4	°C
21	Statx_DeltaAPM_MV_SCIFHeaterTemp	SCIF Heater Temp	F4	°C
22	Statx_DeltaAPM_MV_PlattenHeaterTemp	Platen Heater Temp	F4	°C
23	Statx_DeltaAPM_MV_GasInletHeaterTemp	Gas Inlet Heater	F4	°C
24	Statx_DeltaAPM_MV_APC	APC	F4	%
25	Statx_DeltaAPM_MV_Pressure	Pressure	F4	mT
26	Statx_DeltaAPM_MV_Gas1Flow	Gas 1 Flow	F4	Sccm
27	Statx_DeltaAPM_MV_Gas2Flow	Gas 2 Flow	F4	Sccm
28	Statx_DeltaAPM_MV_Gas3Flow	Gas 3 Flow	F4	Sccm
29	Statx_DeltaAPM_MV_Gas4Flow	Gas 4 Flow	F4	Sccm
30	Statx_DeltaAPM_MV_Gas5Flow	Gas 5 Flow	F4	Sccm
31	Statx_DeltaAPM_MV_Gas6Flow	Gas 6 Flow	F4	Sccm
32	Statx_DeltaAPM_MV_Gas7Flow	Gas 7 Flow	F4	Sccm
33	Statx_DeltaAPM_MV_Gas8Flow	Gas 8 Flow	F4	Sccm
34	Statx_DeltaAPM_MV_Gas9Flow	Gas 9 Flow	F4	Sccm

ID offset	Variable Name	Description	Format	Units
35	Statx_DeltaAPM_MV_Gas10Flow	Gas 10 Flow	F4	sccm
36	Statx_DeltaAPM_DSV_Gas1InletValve	Gas 1 Inlet Valve	Bo 0 = Closed 1 = Open	none
37	Statx_DeltaAPM_DSV_Gas2InletValve	Gas 2 Inlet Valve	Bo 0 = Closed 1 = Open	None
38	Statx_DeltaAPM_DSV_Gas3InletValve	Gas 3 Inlet Valve	Bo 0 = Closed 1 = Open	None
39	Statx_DeltaAPM_DSV_Gas4InletValve	Gas 4 Inlet Valve	Bo 0 = Closed 1 = Open	None
40	Statx_DeltaAPM_DSV_Gas5InletValve	Gas 5 Inlet Valve	Bo 0 = Closed 1 = Open	None
41	Statx_DeltaAPM_DSV_Gas6InletValve	Gas 6 Inlet Valve	Bo 0 = Closed 1 = Open	None
42	Statx_DeltaAPM_DSV_Gas7InletValve	Gas 7 Inlet Valve	Bo 0 = Closed 1 = Open	None
43	Statx_DeltaAPM_DSV_Gas8InletValve	Gas 8 Inlet Valve	Bo 0 = Closed 1 = Open	None
44	Statx_DeltaAPM_DSV_Gas9InletValve	Gas 9 Inlet Valve	Bo 0 = Closed 1 = Open	None
45	Statx_DeltaAPM_DSV_Gas10InletValve	Gas 10 Inlet Valve	Bo 0 = Closed 1 = Open	None
46	Statx_DeltaAPM_DSV_Gas1OutletValve	Gas 1 Outlet Valve	Bo 0 = Closed 1 = Open	None
47	Statx_DeltaAPM_DSV_Gas2OutletValve	Gas 2 Outlet Valve	Bo 0 = Closed 1 = Open	None
48	Statx_DeltaAPM_DSV_Gas3OutletValve	Gas 3 Outlet Valve	Bo 0 = Closed 1 = Open	None
49	Statx_DeltaAPM_DSV_Gas4OutletValve	Gas 4 Outlet Valve	Bo 0 = Closed 1 = Open	None
50	Statx_DeltaAPM_DSV_Gas5OutletValve	Gas 5 Outlet Valve	Bo 0 = Closed 1 = Open	None
51	Statx_DeltaAPM_DSV_Gas6OutletValve	Gas 6 Outlet Valve	Bo 0 = Closed 1 = Open	None
52	Statx_DeltaAPM_DSV_Gas7OutletValve	Gas 7 Outlet Valve	Bo 0 = Closed 1 = Open	None
53	Statx_DeltaAPM_DSV_Gas8OutletValve	Gas 8 Outlet Valve	Bo 0 = Closed 1 = Open	None
54	Statx_DeltaAPM_DSV_Gas9OutletValve	Gas 9 Outlet Valve	Bo 0 = Closed 1 = Open	None
55	Statx_DeltaAPM_DSV_Gas10OutletValve	Gas 10 Outlet Valve	Bo 0 = Closed 1 = Open	None
56	Statx_DeltaAPM_DSV_Gas1PurgeSupplyValve	Gas 1 Purge Supply Valve	Bo 0 = Closed 1 = Open	None

ID offset	Variable Name	Description	Format	Units
57	Statx_DeltaAPM_DSV_Gas2PurgeValve	Gas 2 Purge Valve	Bo 0 = Closed 1 = Open	None
58	Statx_DeltaAPM_DSV_Gas3PurgeValve	Gas 2 Purge Valve	Bo 0 = Closed 1 = Open	None
59	Statx_DeltaAPM_DSV_Gas4PurgeValve	Gas 2 Purge Valve	Bo 0 = Closed 1 = Open	None
60	Statx_DeltaAPM_DSV_Gas5PurgeValve	Gas 2 Purge Valve	Bo 0 = Closed 1 = Open	None
61	Statx_DeltaAPM_DSV_Gas6PurgeValve	Gas 2 Purge Valve	Bo 0 = Closed 1 = Open	None
62	Statx_DeltaAPM_DSV_Gas7PurgeValve	Gas 2 Purge Valve	Bo 0 = Closed 1 = Open	None
63	Statx_DeltaAPM_DSV_Gas8PurgeValve	Gas 2 Purge Valve	Bo 0 = Closed 1 = Open	None
64	Statx_DeltaAPM_DSV_Gas9PurgeValve	Gas 2 Purge Valve	Bo 0 = Closed 1 = Open	None
65	Statx_DeltaAPM_DSV_Gas10PurgeValve	Gas 2 Purge Valve	Bo 0 = Closed 1 = Open	None
66	Statx_DeltaAPM_DSV_HivacValve	Hivac Valve	Bo 0 = Closed 1 = Open	None
67	Statx_DeltaAPM_DSV_ShowerheadHeaterControlling	Showerhead Heater Controlling	Bo 0 = Off 1 = On	None
68	Statx_DeltaAPM_DSV_PlattenHeaterControlling	Platten Heater Controlling	Bo 0 = Off 1 = On	None
69	Statx_DeltaAPM_DSV_ChamberWallsSCIFHeaterControlling	Chamber Walls SCIF Heater Controlling	Bo 0 = Off 1 = On	None
70	Statx_DeltaAPM_DSV_GasInletHeaterControlling	Gas Inlet Heater Controlling	Bo 0 = Off 1 = On	None
71	Statx_DeltaAPM_DSV_MovingPlaten	Moving Platen	U1 bit 0 = drive bit 1 = up f/b bit 2 = down f/b	None
72	Statx_DeltaAPM_DSV_IntTPU	Int. TPU	Bo 0 = Off 1 = On	None
73	Statx_DeltaAPM_DSV_HiTPU	Hi TPU	Bo 0 = Off 1 = On	None
74	Statx_DeltaAPM_MV_ProcessTimeFloat	Process Time as a float	F4	Secs
75	Statx_DeltaAPM_MV_WaferTotalDep	Wafer total deposition	F4	Mic
76	Statx_DeltaAPM_MV_WaferAccDep	Wafer accumulated deposition	F4	Mic
77	Statx_DeltaAPM_MV_SlotValveStatus			
78	Statx_DeltaAPM_MV_HFFForwardPower			
79	Statx_DeltaAPM_MV_SensorArrayTC1			

ID offset	Variable Name	Description	Format	Units
80	Statx_DeltaAPM_MV_SensorArrayTC2			
81	Statx_DeltaAPM_MV_ForeCapPressure			
82	Statx_DeltaAPM_MV_EndpointIntensity			
83	Statx_DeltaAPM_MV_EndpointTime			
84	Statx_DeltaAPM_MV_HFFrequency			
85	Statx_DeltaAPM_MV_HFImpedanceReal			
86	Statx_DeltaAPM_MV_HFImpedanceImaginary			
87	Statx_DeltaAPM_MV_HeaterSaftetyTemp1			
88	Statx_DeltaAPM_MV_HeaterControlling1			
89	Statx_DeltaAPM_MV_HeaterSaftetyTemp2			
90	Statx_DeltaAPM_MV_HeaterControlling2			
91	Statx_DeltaAPM_MV_HeaterSaftetyTemp3			
92	Statx_DeltaAPM_MV_HeaterControlling3			
93	Statx_DeltaAPM_MV_HeaterSaftetyTemp4			
94	Statx_DeltaAPM_MV_HeaterControlling4			
95	Statx_DeltaAPM_MV_HeaterSaftetyTemp5			
96	Statx_DeltaAPM_MV_HeaterControlling5			
97	Statx_DeltaAPM_MV_HeaterSaftetyTemp6			
98	Statx_DeltaAPM_MV_HeaterControlling6			
99	Statx_DeltaAPM_MV_HeaterSaftetyTemp7			
100	Statx_DeltaAPM_MV_HeaterControlling7			
101	Statx_DeltaAPM_MV_HeaterSaftetyTemp8			
102	Statx_DeltaAPM_MV_HeaterControlling8			
103	Statx_DeltaAPM_MV_PCG_Pressure			
104	Statx_DeltaAPM_MV_PrecursorPressure			
105	Statx_DeltaAPM_MV_LiquidFlow			
106	Statx_DeltaAPM_MV_LiquidValve			
107	Statx_DeltaAPM_MV_LiquidUsage			
108	Statx_DeltaAPM_MV_LFForwardPower			
109	Statx_DeltaAPM_MV_LFFrequency			
110	Statx_DeltaAPM_MV_GasPressure1			
111	Statx_DeltaAPM_MV_GasFlowStatus1			
112	Statx_DeltaAPM_MV_GasPressure2			
113	Statx_DeltaAPM_MV_GasFlowStatus2			
114	Statx_DeltaAPM_MV_GasPressure3			
115	Statx_DeltaAPM_MV_GasFlowStatus3			

ID offset	Variable Name	Description	Format	Units
116	Statx_DeltaAPM_GasPressure4			
117	Statx_DeltaAPM_MV_GasFlowStatus4			
118	Statx_DeltaAPM_GasPressure5			
119	Statx_DeltaAPM_MV_GasFlowStatus5			
120	Statx_DeltaAPM_GasPressure6			
121	Statx_DeltaAPM_MV_GasFlowStatus6			
122	Statx_DeltaAPM_GasPressure7			
123	Statx_DeltaAPM_MV_GasFlowStatus7			
124	Statx_DeltaAPM_GasPressure8			
125	Statx_DeltaAPM_MV_GasFlowStatus8			
126	Statx_DeltaAPM_MV_NDIREndpointIntensity			
127	Statx_DeltaAPM_MV_NDIREndpointStage			
128	Statx_DeltaAPM_MV_NDIREndpointTime			
129	Statx_DeltaAPM_MV_LFPlasmaStatus			
130	Statx_DeltaAPM_MV_FixedTimeRemaining			
131	Statx_DeltaAPM_DS_OpticalIsActive			
132	Statx_DeltaAPM_DS_NDIRIsActive			
133	Statx_DeltaAPM_MV_processStage			

23.1.13 C3M (Bridge) PM

ID offset	Variable Name	Description	Format	Units
0	Statx_C3M_MV_ProcessTime	Process Time	U2	Secs
1	Statx_C3M_MV_ProcessStep	Process Step	U2	None
2	Statx_C3M_MV_PreviousState	Previous State	U2	None
3	Statx_C3M_MV_HFLoadPower	HF Load Power	F4	Watts
4	Statx_C3M_MV_HFReflectedPower	HF Reflected Power	F4	Watts
5	Statx_C3M_MV_HFPkToPk	HF Peak to Peak	F4	Volts
6	Statx_C3M_MV_HFDCBias	HF DC Bias	F4	Volts
7	Statx_C3M_MV_HFMURange	HF MU Range	F4	None
8	Statx_C3M_MV_LFLoadPower	LF Load Power	F4	Watts
9	Statx_C3M_MV_LFReflectedPower	LF Reflected Power	F4	Watts
10	Statx_C3M_MV_LFPkToPk	LF Peak to Peak	F4	Volts
11	Statx_C3M_MV_LFDCBias	LF DC Bias	F4	Volts
12	Statx_C3M_MV_LFMURange	LF MU Range	F4	None
13	Statx_C3M_MV_LeakupRate	Leakup Rate	F4	mT/min
14	Statx_C3M_MV_FillRate	Fill Rate	F4	mT/sec
15	Statx_C3M_MV_TotalDeposition	Total Deposition	F4	Mic
16	Statx_C3M_MV_AccDeposition	Accumulated Deposition	F4	Mic
17	Statx_C3M_MV_ElectrodeSpacing	Electrode Spacing	F4	mm
18	Statx_C3M_MV_ShowerheadHeaterTemp	Showerhead Heater Temperature	F4	°C
19	Statx_C3M_MV_SCIFHeaterTemp	SCIF Heater Temperature	F4	°C
20	Statx_C3M_MV_PlatenHeaterTemp	Platen Heater Temperature	F4	°C
21	Statx_C3M_MV_GasInletHeaterTemp	Gas Inlet Heater Temperature	F4	°C
22	Statx_C3M_MV_APC	APC	F4	%
23	Statx_C3M_MV_Pressure	Pressure	F4	Torr
24	Statx_C3M_MV_Gas1Flow	Gas 1 Flow	F4	sccm
25	Statx_C3M_MV_Gas2Flow	Gas 2 Flow	F4	sccm
26	Statx_C3M_MV_Gas3Flow	Gas 3 Flow	F4	sccm
27	Statx_C3M_MV_Gas4Flow	Gas 4 Flow	F4	sccm
28	Statx_C3M_MV_Gas5Flow	Gas 5 Flow	F4	sccm
29	Statx_C3M_MV_Gas6Flow	Gas 6 Flow	F4	sccm
30	Statx_C3M_MV_Gas7Flow	Gas 7 Flow	F4	sccm
31	Statx_C3M_MV_Gas8Flow	Gas 8 Flow	F4	sccm
32	Statx_C3M_DSV_Gas1InletValve	Gas 1 Inlet Valve	Bo 0 = Closed 1 = Open	None
33	Statx_C3M_DSV_Gas2InletValve	Gas 2 Inlet Valve	Bo 0 = Closed 1 = Open	None
34	Statx_C3M_DSV_Gas3InletValve	Gas 3 Inlet Valve	Bo 0 = Closed 1 = Open	None
35	Statx_C3M_DSV_Gas4InletValve	Gas 4 Inlet Valve	Bo 0 = Closed 1 = Open	None
36	Statx_C3M_DSV_Gas5InletValve	Gas 5 Inlet Valve	Bo 0 = Closed 1 = Open	None
37	Statx_C3M_DSV_Gas6InletValve	Gas 6 Inlet Valve	Bo 0 = Closed 1 = Open	None
38	Statx_C3M_DSV_Gas7InletValve	Gas 7 Inlet Valve	Bo 0 = Closed 1 = Open	None

ID offset	Variable Name	Description	Format	Units
39	Statx_C3M_DSV_Gas8InletValve	Gas 8 Inlet Valve	Bo 0 = Closed 1 = Open	None
40	Statx_C3M_DSV_Gas1OutletValve	Gas 1 Outlet Valve	Bo 0 = Closed 1 = Open	None
41	Statx_C3M_DSV_Gas2OutletValve	Gas 2 Outlet Valve	Bo 0 = Closed 1 = Open	None
42	Statx_C3M_DSV_Gas3OutletValve	Gas 3 Outlet Valve	Bo 0 = Closed 1 = Open	None
43	Statx_C3M_DSV_Gas4OutletValve	Gas 4 Outlet Valve	Bo 0 = Closed 1 = Open	None
44	Statx_C3M_DSV_Gas5OutletValve	Gas 5 Outlet Valve	Bo 0 = Closed 1 = Open	None
45	Statx_C3M_DSV_Gas6OutletValve	Gas 6 Outlet Valve	Bo 0 = Closed 1 = Open	None
46	Statx_C3M_DSV_Gas7OutletValve	Gas 7 Outlet Valve	Bo 0 = Closed 1 = Open	None
47	Statx_C3M_DSV_Gas8OutletValve	Gas 8 Outlet Valve	Bo 0 = Closed 1 = Open	None
48	Statx_C3M_DSV_Gas1PurgeSupplyValve	Gas 1 Purge Supply Valve	Bo 0 = Closed 1 = Open	None
49	Statx_C3M_DSV_Gas2PurgeValve	Gas 2 Purge Valve	Bo 0 = Closed 1 = Open	None
50	Statx_C3M_DSV_Gas3PurgeValve	Gas 3 Purge Valve	Bo 0 = Closed 1 = Open	None
51	Statx_C3M_DSV_Gas4PurgeValve	Gas 4 Purge Valve	Bo 0 = Closed 1 = Open	None
52	Statx_C3M_DSV_Gas5PurgeValve	Gas 5 Purge Valve	Bo 0 = Closed 1 = Open	None
53	Statx_C3M_DSV_Gas6PurgeValve	Gas 6 Purge Valve	Bo 0 = Closed 1 = Open	None
54	Statx_C3M_DSV_Gas7PurgeValve	Gas 7 Purge Valve	Bo 0 = Closed 1 = Open	None
55	Statx_C3M_DSV_Gas8PurgeValve	Gas 8 Purge Valve	Bo 0 = Closed 1 = Open	None
56	Statx_C3M_DSV_HivacValve	Hivac Valve	Bo 0 = Closed 1 = Open	None
57	Statx_C3M_DSV_ShowerheadHeaterControlling	Showerhead Heater Controlling	Bo 0 = Off 1 = On	None
58	Statx_C3M_DSV_PlattenHeaterControlling	Platten Heater Controlling	Bo 0 = Off 1 = On	None
59	Statx_C3M_DSV_ChamberWallsSCIFHeaterControlling	Chamber Walls SCIF Heater Controlling	Bo 0 = Off 1 = On	None

ID offset	Variable Name	Description	Format	Units
60	Statx_C3M_DSV_GasInletHeaterControlling	Gas Inlet Heater Controlling	Bo 0 = Off 1 = On	None
61	Statx_C3M_DSV_MovingPlaten	Moving Platen	U1 bit 0 = drive bit 1 = up f/b bit 2 = down f/b	None
62	Statx_C3M_DSV_IntTPU	Int TPU	Bo 0 = Off 1 = On	None
63	Statx_C3M_DSV_HiTPU	Hi TPU	Bo 0 = Off 1 = On	None

23.1.14 Primaxx Monarch 25 PM

ID offset	Variable Name	Description	Format	Units
00	Statx_PrimaxxMonarch25_MV_TotalN2	Total N2	F4	Sccm
01	Statx_PrimaxxMonarch25_MV_ThrottleValveAngle	Throttle Valve Angle	F4	Deg
02	Statx_PrimaxxMonarch25_MV_SlotNumber	Slot Number	F4	None
03	Statx_PrimaxxMonarch25_MV_PositionNumber	Elevator Position	F4	None
04	Statx_PrimaxxMonarch25_MV_Heater[0]	Chamber Lid Temperature	F4	Deg C
05	Statx_PrimaxxMonarch25_MV_Heater[1]	Upper Chamber Temperature	F4	Deg C
06	Statx_PrimaxxMonarch25_MV_Heater[2]	Lower Chamber Temperature	F4	Deg C
07	Statx_PrimaxxMonarch25_MV_Heater[3]	Gas Panel Temperature	F4	Deg C
08	Statx_PrimaxxMonarch25_MV_Heater[4]	Vaporiser Temperature	F4	Deg C
09	Statx_PrimaxxMonarch25_MV_Heater[5]	Process Mix Temperature	F4	Deg C
10	Statx_PrimaxxMonarch25_MV_Heater[6]	Chamber Inlet Line Temperature	F4	Deg C
11	Statx_PrimaxxMonarch25_MV_Heater[7]	Vacuum Exhaust Line Temperature	F4	Deg C
12	Statx_PrimaxxMonarch25_MV_Heater[8]	N2 Line Temperature	F4	Deg C
13	Statx_PrimaxxMonarch25_MV_Heater[9]	Elevator Temperature	F4	Deg C
14	Statx_PrimaxxMonarch25_MV_HFLinePressure	HF Line Pressure	F4	Torr
15	Statx_PrimaxxMonarch25_MV_LowerChamberPressure	Lower Chamber Pressure	F4	Torr
16	Statx_PrimaxxMonarch25_MV_LowRangePressure	Hi Res Gauge Upper Chamber Pressure	F4	Torr
17	Statx_PrimaxxMonarch25_MV_UpperChamberPressure	Upper Chamber Pressure	F4	Torr
18	Statx_PrimaxxMonarch25_MV_MFC1	HF Flow	F4	Sccm
19	Statx_PrimaxxMonarch25_MV_MFC2	Alcohol Flow	F4	Sccm
20	Statx_PrimaxxMonarch25_MV_MFC3	Carrier N2 Flow	F4	Sccm
21	Statx_PrimaxxMonarch25_MV_MFC4	Process N2 Flow	F4	Sccm
22	Statx_PrimaxxMonarch25_ZoneBSlaveHeater[0]	Zone B Slave 1 Temperature	F4	Deg C
23	Statx_PrimaxxMonarch25_ZoneBSlaveHeater[1]	Zone B Slave 2 Temperature	F4	Deg C
24	Statx_PrimaxxMonarch25_ZoneBSlaveHeater[2]	Zone B Slave 3 Temperature	F4	Deg C
25	Statx_PrimaxxMonarch25_ZoneBSlaveHeater[3]	Zone B Slave 4 Temperature	F4	Deg C
26	Statx_PrimaxxMonarch25_ZoneBSlaveHeater[4]	Zone B Slave 5 Temperature	F4	Deg C
27	Statx_PrimaxxMonarch25_ZoneBSlaveHeater[5]	Zone B Slave 6 Temperature	F4	Deg C
28	Statx_PrimaxxMonarch25_ZoneBSlaveHeater[6]	Zone B Slave 7 Temperature	F4	Deg C
29	Statx_PrimaxxMonarch25_ZoneBSlaveHeater[7]	Zone B Slave 8 Temperature	F4	Deg C
30	Statx_PrimaxxMonarch25_ZoneCSlaveHeater[0]	Zone C Slave 1 Temperature	F4	Deg C
31	Statx_PrimaxxMonarch25_ZoneCSlaveHeater[1]	Zone C Slave 2 Temperature	F4	Deg C
32	Statx_PrimaxxMonarch25_ZoneCSlaveHeater[2]	Zone C Slave 3 Temperature	F4	Deg C
33	Statx_PrimaxxMonarch25_ZoneCSlaveHeater[3]	Zone C Slave 4 Temperature	F4	Deg C
34	Statx_PrimaxxMonarch25_ZoneCSlaveHeater[4]	Zone C Slave 5 Temperature	F4	Deg C
35	Statx_PrimaxxMonarch25_ZoneCSlaveHeater[5]	Zone C Slave 6 Temperature	F4	Deg C
36	Statx_PrimaxxMonarch25_ZoneCSlaveHeater[6]	Zone C Slave 7 Temperature	F4	Deg C
37	Statx_PrimaxxMonarch25_ZoneCSlaveHeater[7]	Zone C Slave 8 Temperature	F4	Deg C
38	Statx_PrimaxxMonarch25_HeaterPowerOutput[0]	Chamber Lid Heater Power Output	F4	None
39	Statx_PrimaxxMonarch25_HeaterPowerOutput[1]	Upper Chamber Heater Power Output	F4	None
40	Statx_PrimaxxMonarch25_HeaterPowerOutput[2]	Lower Chamber Heater Power Output	F4	None
41	Statx_PrimaxxMonarch25_HeaterPowerOutput[3]	Gas panel Heater Power Output	F4	None
42	Statx_PrimaxxMonarch25_HeaterPowerOutput[4]	Vaporiser Heater Power Output	F4	None
43	Statx_PrimaxxMonarch25_HeaterPowerOutput[5]	Process Mix Heater Power Output	F4	None
44	Statx_PrimaxxMonarch25_HeaterPowerOutput[6]	Chamber Inlet Line Heater Power Output	F4	None
45	Statx_PrimaxxMonarch25_HeaterPowerOutput[7]	Vacuum Exhaust Line Heater Power Output	F4	None
46	Statx_PrimaxxMonarch25_HeaterPowerOutput[8]	N2 Line Heater Power Output	F4	None
47	Statx_PrimaxxMonarch25_HeaterPowerOutput[9]	Elevator Heater Power Output	F4	None

ID offset	Variable Name	Description	Format	Units
48	Statx_PrimaxxMonarch25_MV_ProcessTime	Step Time	F4	Secs
49	Statx_PrimaxxMonarch25_MV_ProcessStep	Current Step	U2	None
50	Statx_PrimaxxMonarch25_MV_LoopCount	Current Loop	U2	None
51	Statx_PrimaxxMonarch25_MV_LeakupRate	Leak Up rate	F4	mT/min
52	Statx_PrimaxxMonarch25_MV_FillRate	Fill Rate	F4	T/sec
53	Statx_PrimaxxMonarch25_MV_ElevatorMoving	Elevator Moving	Bo	None

23.1.15 Pro CVE PM

ID offset	Variable Name	Description	Format	Units
0	Statx_ProCve_MV_ProcessTime		U2	
1	Statx_ProCve_MV_ProcessStep		U2	
2	Statx_ProCve_MV_PreviousState		U2	
3	Statx_ProCve_MV_ChamberHeaterTemp		F4	
4	Statx_ProCve_MV_LiftHeaterTemp		F4	
5	Statx_ProCve_MV_GasFeedHeaterTemp		F4	
6	Statx_ProCve_MV_GasboxFanHeaterTemp		F4	
7	Statx_ProCve_MV_SourceBottle1HeaterTemp		F4	
8	Statx_ProCve_MV_SourceBottle2HeaterTemp		F4	
9	Statx_ProCve_MV_LowerGasPanelHeaterTemp		F4	
10	Statx_ProCve_MV_UpperGasPanelHeaterTemp		F4	
11	Statx_ProCve_MV_SourceLinesHeaterTemp		F4	
12	Statx_ProCve_MV_PlatenChillerTemp		F4	
13	Statx_ProCve_MV_APCPosition		F4	
14	Statx_ProCve_MV_ProcessPressure		F4	
15	Statx_ProCve_MV_MainChamberPressure		F4	
16	Statx_ProCve_MV_SourcePressure		F4	
17	Statx_ProCve_MV_Bottle1Weight		F4	
18	Statx_ProCve_MV_Bottle2Weight		F4	
19	Statx_ProCve_MV_Gas1Flow		F4	
20	Statx_ProCve_DSV_Gas1InValve		Bo	
21	Statx_ProCve_DSV_Gas1OutValve		Bo	
22	Statx_ProCve_DSV_Gas1BypassValve		Bo	
23	Statx_ProCve_DSV_Source1IsolValve		Bo	
24	Statx_ProCve_DSV_Source2IsolValve		Bo	
25	Statx_ProCve_DSV_SourceGaugeValve		Bo	
26	Statx_ProCve_DSV_UpperPanelValve		Bo	
27	Statx_ProCve_DSV_SourcePumpValve		Bo	
28	Statx_ProCve_DSV_SourcePurgeValve		Bo	
29	Statx_ProCve_DSV_BSGPumpValve		Bo	
30	Statx_ProCve_DSV_VentValve		I4	
31	Statx_ProCve_DSV_SubChamberLift		I4	

24 Appendix F – Status Variable Value Definitions

24.1 Station Type

0 = Station Not Fitted
5 = GTM/Level 1 Brooks MX Transport
12 = GTM/Level 1 Brooks MX Cassette
22 = GTM/Level 1 Brooks Coolstation
31 = GTM/Level 1 Brooks Inliner
40 = Sputter Deposition PM
41 = Deposition RevB PM
55 = HSE PM
57 = SoftEtch RevB PM
86 = C3M (Bridge)
90 = Heat PM
91 = Heat RevB PM
100 = Buffer Station
123 = Pro CVE PM
169 = Delta APM PM
180 = Etch MORI PM
181 = Etch PERIE PM
182 = Etch ICP PM
183 = Etch ISOPOD PM
184 = Etch GPE PM
185 = Etch DSI PM
221 = Primaxx Monarch 25
222 = c2L Transport
255 = Invalid Station
999 = Dummy Station

24.2 Robot Position

0 = Unknown
1 = Home
11 = Arm A at VCE A
12 = Arm A at PM1
13 = Arm A at PM2
14 = Arm A at PM3
15 = Arm A at PM4
16 = Arm A at PM5
17 = Arm A at PM6
18 = Arm A at VCE B
19 = Arm A at Aligner
20 = Arm A At TopCooler
31 = Arm B at VCE A
32 = Arm B at PM1
33 = Arm B at PM2
34 = Arm B at PM3
35 = Arm B at PM4
36 = Arm B at PM5
37 = Arm B at PM6
38 = Arm B at VCE B
39 = Arm B at Aligner
40 = Arm B At TopCooler
50 = Error

24.3 Robot Station Number

1 = VCEA
2 = PM1
3 = PM2
4 = PM3
5 = PM4
6 = PM5
7 = PM6
8 = VCEB
9 = Aligner
10 = TopCooler
11 = Buffer
255 = Unknown

24.4 Wafer Status

PMs and VCEs report Wafer Status as arrays.

For VCEs, each element in the array represents a slot in the cassette.

For PMs, only the first element of the array is valid since all PMs have only a single wafer slot.

0 = Unknown
1 = No Wafer
101 = A1 Wafer
102 = A2 Wafer
103 = A3 Wafer
104 = A4 Wafer
105 = A5 Wafer
106 = A6 Wafer
107 = A7 Wafer
108 = A8 Wafer
109 = A9 Wafer
110 = A10 Wafer
111 = A11 Wafer
112 = A12 Wafer
113 = A13 Wafer
114 = A14 Wafer
115 = A15 Wafer
116 = A16 Wafer
117 = A17 Wafer
118 = A18 Wafer
119 = A19 Wafer
120 = A20 Wafer
121 = A21 Wafer
122 = A22 Wafer
123 = A23 Wafer
124 = A24 Wafer
125 = A25 Wafer
201 = B1 Wafer
202 = B2 Wafer
203 = B3 Wafer
204 = B4 Wafer
205 = B5 Wafer
206 = B6 Wafer
207 = B7 Wafer
208 = B8 Wafer
209 = B9 Wafer
210 = B10 Wafer
211 = B11 Wafer
212 = B12 Wafer
213 = B13 Wafer
214 = B14 Wafer

215 = B15 Wafer
216 = B16 Wafer
217 = B17 Wafer
218 = B18 Wafer
219 = B19 Wafer
220 = B20 Wafer
221 = B21 Wafer
222 = B22 Wafer
223 = B23 Wafer
224 = B24 Wafer
225 = B25 Wafer

131 = Primaxx-25 Module 1Slot 1 Process Wafer
132 = Primaxx-25 Module 1Slot 2 Process Wafer
133 = Primaxx-25 Module 1Slot 3 Process Wafer
134 = Primaxx-25 Module 1Slot 4 Process Wafer
135 = Primaxx-25 Module 1Slot 5 Process Wafer
136 = Primaxx-25 Module 1Slot 6 Process Wafer
137 = Primaxx-25 Module 1Slot 7 Process Wafer
138 = Primaxx-25 Module 1Slot 8 Process Wafer
139 = Primaxx-25 Module 1Slot 9 Process Wafer
140 = Primaxx-25 Module 1Slot 10 Process Wafer
142 = Primaxx-25 Module 1Slot 11 Process Wafer
143 = Primaxx-25 Module 1Slot 12 Process Wafer
144 = Primaxx-25 Module 1Slot 13 Process Wafer
145 = Primaxx-25 Module 1Slot 14 Process Wafer
146 = Primaxx-25 Module 1Slot 15 Process Wafer
147 = Primaxx-25 Module 1Slot 16 Process Wafer
148 = Primaxx-25 Module 1Slot 17 Process Wafer
149 = Primaxx-25 Module 1Slot 18 Process Wafer
150 = Primaxx-25 Module 1Slot 19 Process Wafer
151 = Primaxx-25 Module 1Slot 20 Process Wafer
152 = Primaxx-25 Module 1Slot 21 Process Wafer
153 = Primaxx-25 Module 1Slot 22 Process Wafer
154 = Primaxx-25 Module 1Slot 23 Process Wafer
155 = Primaxx-25 Module 1Slot 24 Process Wafer
156 = Primaxx-25 Module 1Slot 25 Process Wafer

160 = Primaxx-25 Module 1 Slot 0 Dummy Wafer
161 = Primaxx-25 Module 1 Slot 1 Dummy Wafer
162 = Primaxx-25 Module 1 Slot 2 Dummy Wafer
163 = Primaxx-25 Module 1 Slot 3 Dummy Wafer
164 = Primaxx-25 Module 1 Slot 4 Dummy Wafer
165 = Primaxx-25 Module 1 Slot 5 Dummy Wafer
166 = Primaxx-25 Module 1 Slot 6 Dummy Wafer
167 = Primaxx-25 Module 1 Slot 7 Dummy Wafer
168 = Primaxx-25 Module 1 Slot 8 Dummy Wafer
169 = Primaxx-25 Module 1 Slot 9 Dummy Wafer
170 = Primaxx-25 Module 1 Slot 10 Dummy Wafer
171 = Primaxx-25 Module 1 Slot 11 Dummy Wafer
172 = Primaxx-25 Module 1 Slot 12 Dummy Wafer
173 = Primaxx-25 Module 1 Slot13 Dummy Wafer
174 = Primaxx-25 Module 1 Slot 14 Dummy Wafer
175 = Primaxx-25 Module 1 Slot15 Dummy Wafer
176 = Primaxx-25 Module 1 Slot 16 Dummy Wafer
177 = Primaxx-25 Module 1 Slot 17 Dummy Wafer
178 = Primaxx-25 Module 1 Slot 18 Dummy Wafer
179 = Primaxx-25 Module 1 Slot 19 Dummy Wafer
180 = Primaxx-25 Module 1 Slot 20 Dummy Wafer
181 = Primaxx-25 Module 1 Slot 21 Dummy Wafer
182 = Primaxx-25 Module 1 Slot 22 Dummy Wafer

183 = Primaxx-25 Module 1 Slot 23 Dummy Wafer
184 = Primaxx-25 Module 1 Slot 24 Dummy Wafer
185 = Primaxx-25 Module 1 Slot 25 Dummy Wafer
186 = Primaxx-25 Module 1 Slot 26 Dummy Wafer

231 = Primaxx-25 Module 2 Slot 1 Process Wafer
232 = Primaxx-25 Module 2 Slot 2 Process Wafer
233 = Primaxx-25 Module 2 Slot 3 Process Wafer
234 = Primaxx-25 Module 2 Slot 4 Process Wafer
235 = Primaxx-25 Module 2 Slot 5 Process Wafer
236 = Primaxx-25 Module 2 Slot 6 Process Wafer
237 = Primaxx-25 Module 2 Slot 7 Process Wafer
238 = Primaxx-25 Module 2 Slot 8 Process Wafer
239 = Primaxx-25 Module 2 Slot 9 Process Wafer
240 = Primaxx-25 Module 2 Slot 10 Process Wafer
242 = Primaxx-25 Module 2 Slot 11 Process Wafer
243 = Primaxx-25 Module 2 Slot 12 Process Wafer
244 = Primaxx-25 Module 2 Slot 13 Process Wafer
245 = Primaxx-25 Module 2 Slot 14 Process Wafer
246 = Primaxx-25 Module 2 Slot 15 Process Wafer
247 = Primaxx-25 Module 2 Slot 16 Process Wafer
248 = Primaxx-25 Module 2 Slot 17 Process Wafer
249 = Primaxx-25 Module 2 Slot 18 Process Wafer
250 = Primaxx-25 Module 2 Slot 19 Process Wafer
251 = Primaxx-25 Module 2 Slot 20 Process Wafer
252 = Primaxx-25 Module 2 Slot 21 Process Wafer
253 = Primaxx-25 Module 2 Slot 22 Process Wafer
254 = Primaxx-25 Module 2 Slot 23 Process Wafer
255 = Primaxx-25 Module 2 Slot 24 Process Wafer
256 = Primaxx-25 Module 2 Slot 25 Process Wafer

260 = Primaxx-25 Module 2 Slot 0 Dummy Wafer
261 = Primaxx-25 Module 2 Slot 1 Dummy Wafer
262 = Primaxx-25 Module 2 Slot 2 Dummy Wafer
263 = Primaxx-25 Module 2 Slot 3 Dummy Wafer
264 = Primaxx-25 Module 2 Slot 4 Dummy Wafer
265 = Primaxx-25 Module 2 Slot 5 Dummy Wafer
266 = Primaxx-25 Module 2 Slot 6 Dummy Wafer
267 = Primaxx-25 Module 2 Slot 7 Dummy Wafer
268 = Primaxx-25 Module 2 Slot 8 Dummy Wafer
269 = Primaxx-25 Module 2 Slot 9 Dummy Wafer
270 = Primaxx-25 Module 2 Slot 10 Dummy Wafer
271 = Primaxx-25 Module 2 Slot 11 Dummy Wafer
272 = Primaxx-25 Module 2 Slot 12 Dummy Wafer
273 = Primaxx-25 Module 2 Slot 13 Dummy Wafer
274 = Primaxx-25 Module 2 Slot 14 Dummy Wafer
275 = Primaxx-25 Module 2 Slot 15 Dummy Wafer
276 = Primaxx-25 Module 2 Slot 16 Dummy Wafer
277 = Primaxx-25 Module 2 Slot 17 Dummy Wafer
278 = Primaxx-25 Module 2 Slot 18 Dummy Wafer
279 = Primaxx-25 Module 2 Slot 19 Dummy Wafer
280 = Primaxx-25 Module 2 Slot 20 Dummy Wafer
281 = Primaxx-25 Module 2 Slot 21 Dummy Wafer
282 = Primaxx-25 Module 2 Slot 22 Dummy Wafer
283 = Primaxx-25 Module 2 Slot 23 Dummy Wafer
284 = Primaxx-25 Module 2 Slot 24 Dummy Wafer
285 = Primaxx-25 Module 2 Slot 25 Dummy Wafer
286 = Primaxx-25 Module 2 Slot 26 Dummy Wafer

331 = Primaxx-25 Module 3 Slot 1 Process Wafer
332 = Primaxx-25 Module 3 Slot 2 Process Wafer

333 = Primaxx-25 Module 3 Slot 3 Process Wafer
 334 = Primaxx-25 Module 3 Slot 4 Process Wafer
 335 = Primaxx-25 Module 3 Slot 5 Process Wafer
 336 = Primaxx-25 Module 3 Slot 6 Process Wafer
 337 = Primaxx-25 Module 3 Slot 7 Process Wafer
 338 = Primaxx-25 Module 3 Slot 8 Process Wafer
 339 = Primaxx-25 Module 3 Slot 9 Process Wafer
 340 = Primaxx-25 Module 3 Slot 10 Process Wafer
 342 = Primaxx-25 Module 3 Slot 11 Process Wafer
 343 = Primaxx-25 Module 3 Slot 12 Process Wafer
 344 = Primaxx-25 Module 3 Slot 13 Process Wafer
 345 = Primaxx-25 Module 3 Slot 14 Process Wafer
 346 = Primaxx-25 Module 3 Slot 15 Process Wafer
 347 = Primaxx-25 Module 3 Slot 16 Process Wafer
 348 = Primaxx-25 Module 3 Slot 17 Process Wafer
 349 = Primaxx-25 Module 3 Slot 18 Process Wafer
 350 = Primaxx-25 Module 3 Slot 19 Process Wafer
 351 = Primaxx-25 Module 3 Slot 20 Process Wafer
 352 = Primaxx-25 Module 3 Slot 21 Process Wafer
 353 = Primaxx-25 Module 3 Slot 22 Process Wafer
 354 = Primaxx-25 Module 3 Slot 23 Process Wafer
 355 = Primaxx-25 Module 3 Slot 24 Process Wafer
 356 = Primaxx-25 Module 3 Slot 25 Process Wafer

360 = Primaxx-25 Module 3 Slot 0 Dummy Wafer
 361 = Primaxx-25 Module 3 Slot 1 Dummy Wafer
 362 = Primaxx-25 Module 3 Slot 2 Dummy Wafer
 363 = Primaxx-25 Module 3 Slot 3 Dummy Wafer
 364 = Primaxx-25 Module 3 Slot 4 Dummy Wafer
 365 = Primaxx-25 Module 3 Slot 5 Dummy Wafer
 366 = Primaxx-25 Module 3 Slot 6 Dummy Wafer
 367 = Primaxx-25 Module 3 Slot 7 Dummy Wafer
 368 = Primaxx-25 Module 3 Slot 8 Dummy Wafer
 369 = Primaxx-25 Module 3 Slot 9 Dummy Wafer
 370 = Primaxx-25 Module 3 Slot 10 Dummy Wafer
 371 = Primaxx-25 Module 3 Slot 11 Dummy Wafer
 372 = Primaxx-25 Module 3 Slot 12 Dummy Wafer
 373 = Primaxx-25 Module 3 Slot 13 Dummy Wafer
 374 = Primaxx-25 Module 3 Slot 14 Dummy Wafer
 375 = Primaxx-25 Module 3 Slot 15 Dummy Wafer
 376 = Primaxx-25 Module 3 Slot 16 Dummy Wafer
 377 = Primaxx-25 Module 3 Slot 17 Dummy Wafer
 378 = Primaxx-25 Module 3 Slot 18 Dummy Wafer
 379 = Primaxx-25 Module 3 Slot 19 Dummy Wafer
 380 = Primaxx-25 Module 3 Slot 20 Dummy Wafer
 381 = Primaxx-25 Module 3 Slot 21 Dummy Wafer
 382 = Primaxx-25 Module 3 Slot 22 Dummy Wafer
 383 = Primaxx-25 Module 3 Slot 23 Dummy Wafer
 384 = Primaxx-25 Module 3 Slot 24 Dummy Wafer
 385 = Primaxx-25 Module 3 Slot 25 Dummy Wafer
 386 = Primaxx-25 Module 3 Slot 26 Dummy Wafer

431 = Primaxx-25 Module 4 Slot 1 Process Wafer
 432 = Primaxx-25 Module 4 Slot 2 Process Wafer
 433 = Primaxx-25 Module 4 Slot 3 Process Wafer
 434 = Primaxx-25 Module 4 Slot 4 Process Wafer
 435 = Primaxx-25 Module 4 Slot 5 Process Wafer
 436 = Primaxx-25 Module 4 Slot 6 Process Wafer
 437 = Primaxx-25 Module 4 Slot 7 Process Wafer
 438 = Primaxx-25 Module 4 Slot 8 Process Wafer
 439 = Primaxx-25 Module 4 Slot 9 Process Wafer

440 = Primaxx-25 Module 4 Slot 10 Process Wafer
 442 = Primaxx-25 Module 4 Slot 11 Process Wafer
 443 = Primaxx-25 Module 4 Slot 12 Process Wafer
 444 = Primaxx-25 Module 4 Slot 13 Process Wafer
 445 = Primaxx-25 Module 4 Slot 14 Process Wafer
 446 = Primaxx-25 Module 4 Slot 15 Process Wafer
 447 = Primaxx-25 Module 4 Slot 16 Process Wafer
 448 = Primaxx-25 Module 4 Slot 17 Process Wafer
 449 = Primaxx-25 Module 4 Slot 18 Process Wafer
 450 = Primaxx-25 Module 4 Slot 19 Process Wafer
 451 = Primaxx-25 Module 4 Slot 20 Process Wafer
 452 = Primaxx-25 Module 4 Slot 21 Process Wafer
 453 = Primaxx-25 Module 4 Slot 22 Process Wafer
 454 = Primaxx-25 Module 4 Slot 23 Process Wafer
 455 = Primaxx-25 Module 4 Slot 24 Process Wafer
 456 = Primaxx-25 Module 4 Slot 25 Process Wafer

460 = Primaxx-25 Module 4 Slot 0 Dummy Wafer
 461 = Primaxx-25 Module 4 Slot 1 Dummy Wafer
 462 = Primaxx-25 Module 4 Slot 2 Dummy Wafer
 463 = Primaxx-25 Module 4 Slot 3 Dummy Wafer
 464 = Primaxx-25 Module 4 Slot 4 Dummy Wafer
 465 = Primaxx-25 Module 4 Slot 5 Dummy Wafer
 466 = Primaxx-25 Module 4 Slot 6 Dummy Wafer
 467 = Primaxx-25 Module 4 Slot 7 Dummy Wafer
 468 = Primaxx-25 Module 4 Slot 8 Dummy Wafer
 469 = Primaxx-25 Module 4 Slot 9 Dummy Wafer
 470 = Primaxx-25 Module 4 Slot 10 Dummy Wafer
 471 = Primaxx-25 Module 4 Slot 11 Dummy Wafer
 472 = Primaxx-25 Module 4 Slot 12 Dummy Wafer
 473 = Primaxx-25 Module 4 Slot 13 Dummy Wafer
 474 = Primaxx-25 Module 4 Slot 14 Dummy Wafer
 475 = Primaxx-25 Module 4 Slot 15 Dummy Wafer
 476 = Primaxx-25 Module 4 Slot 16 Dummy Wafer
 477 = Primaxx-25 Module 4 Slot 17 Dummy Wafer
 478 = Primaxx-25 Module 4 Slot 18 Dummy Wafer
 479 = Primaxx-25 Module 4 Slot 19 Dummy Wafer
 480 = Primaxx-25 Module 4 Slot 20 Dummy Wafer
 481 = Primaxx-25 Module 4 Slot 21 Dummy Wafer
 482 = Primaxx-25 Module 4 Slot 22 Dummy Wafer
 483 = Primaxx-25 Module 4 Slot 23 Dummy Wafer
 484 = Primaxx-25 Module 4 Slot 24 Dummy Wafer
 485 = Primaxx-25 Module 4 Slot 25 Dummy Wafer
 486 = Primaxx-25 Module 4 Slot 26 Dummy Wafer

531 = Primaxx-25 Module 5 Slot 1 Process Wafer
 532 = Primaxx-25 Module 5 Slot 2 Process Wafer
 533 = Primaxx-25 Module 5 Slot 3 Process Wafer
 534 = Primaxx-25 Module 5 Slot 4 Process Wafer
 535 = Primaxx-25 Module 5 Slot 5 Process Wafer
 536 = Primaxx-25 Module 5 Slot 6 Process Wafer
 537 = Primaxx-25 Module 5 Slot 7 Process Wafer
 538 = Primaxx-25 Module 5 Slot 8 Process Wafer
 539 = Primaxx-25 Module 5 Slot 9 Process Wafer
 540 = Primaxx-25 Module 5 Slot 10 Process Wafer
 542 = Primaxx-25 Module 5 Slot 11 Process Wafer
 543 = Primaxx-25 Module 5 Slot 12 Process Wafer
 544 = Primaxx-25 Module 5 Slot 13 Process Wafer
 545 = Primaxx-25 Module 5 Slot 14 Process Wafer
 546 = Primaxx-25 Module 5 Slot 15 Process Wafer
 547 = Primaxx-25 Module 5 Slot 16 Process Wafer

548 = Primaxx-25 Module 5 Slot 17 Process Wafer
549 = Primaxx-25 Module 5 Slot 18 Process Wafer
550 = Primaxx-25 Module 5 Slot 19 Process Wafer
551 = Primaxx-25 Module 5 Slot 20 Process Wafer
552 = Primaxx-25 Module 5 Slot 21 Process Wafer
553 = Primaxx-25 Module 5 Slot 22 Process Wafer
554 = Primaxx-25 Module 5 Slot 23 Process Wafer
555 = Primaxx-25 Module 5 Slot 24 Process Wafer
556 = Primaxx-25 Module 5 Slot 25 Process Wafer

560 = Primaxx-25 Module 5 Slot 0 Dummy Wafer
561 = Primaxx-25 Module 5 Slot 1 Dummy Wafer
562 = Primaxx-25 Module 5 Slot 2 Dummy Wafer
563 = Primaxx-25 Module 5 Slot 3 Dummy Wafer
564 = Primaxx-25 Module 5 Slot 4 Dummy Wafer
565 = Primaxx-25 Module 5 Slot 5 Dummy Wafer
566 = Primaxx-25 Module 5 Slot 6 Dummy Wafer
567 = Primaxx-25 Module 5 Slot 7 Dummy Wafer
568 = Primaxx-25 Module 5 Slot 8 Dummy Wafer
569 = Primaxx-25 Module 5 Slot 9 Dummy Wafer
570 = Primaxx-25 Module 5 Slot 10 Dummy Wafer
571 = Primaxx-25 Module 5 Slot 11 Dummy Wafer
572 = Primaxx-25 Module 5 Slot 12 Dummy Wafer
573 = Primaxx-25 Module 5 Slot 13 Dummy Wafer
574 = Primaxx-25 Module 5 Slot 14 Dummy Wafer
575 = Primaxx-25 Module 5 Slot 15 Dummy Wafer
576 = Primaxx-25 Module 5 Slot 16 Dummy Wafer
577 = Primaxx-25 Module 5 Slot 17 Dummy Wafer
578 = Primaxx-25 Module 5 Slot 18 Dummy Wafer
579 = Primaxx-25 Module 5 Slot 19 Dummy Wafer
580 = Primaxx-25 Module 5 Slot 20 Dummy Wafer
581 = Primaxx-25 Module 5 Slot 21 Dummy Wafer
582 = Primaxx-25 Module 5 Slot 22 Dummy Wafer
583 = Primaxx-25 Module 5 Slot 23 Dummy Wafer
584 = Primaxx-25 Module 5 Slot 24 Dummy Wafer
585 = Primaxx-25 Module 5 Slot 25 Dummy Wafer
586 = Primaxx-25 Module 5 Slot 26 Dummy Wafer

631 = Primaxx-25 Module 6 Slot 1 Process Wafer
632 = Primaxx-25 Module 6 Slot 2 Process Wafer
633 = Primaxx-25 Module 6 Slot 3 Process Wafer
634 = Primaxx-25 Module 6 Slot 4 Process Wafer
635 = Primaxx-25 Module 6 Slot 5 Process Wafer
636 = Primaxx-25 Module 6 Slot 6 Process Wafer
637 = Primaxx-25 Module 6 Slot 7 Process Wafer
638 = Primaxx-25 Module 6 Slot 8 Process Wafer
639 = Primaxx-25 Module 6 Slot 9 Process Wafer
640 = Primaxx-25 Module 6 Slot 10 Process Wafer
642 = Primaxx-25 Module 6 Slot 11 Process Wafer
643 = Primaxx-25 Module 6 Slot 12 Process Wafer
644 = Primaxx-25 Module 6 Slot 13 Process Wafer
645 = Primaxx-25 Module 6 Slot 14 Process Wafer
646 = Primaxx-25 Module 6 Slot 15 Process Wafer
647 = Primaxx-25 Module 6 Slot 16 Process Wafer
648 = Primaxx-25 Module 6 Slot 17 Process Wafer
649 = Primaxx-25 Module 6 Slot 18 Process Wafer
650 = Primaxx-25 Module 6 Slot 19 Process Wafer
651 = Primaxx-25 Module 6 Slot 20 Process Wafer
652 = Primaxx-25 Module 6 Slot 21 Process Wafer
653 = Primaxx-25 Module 6 Slot 22 Process Wafer
654 = Primaxx-25 Module 6 Slot 23 Process Wafer

655 = Primaxx-25 Module 6 Slot 24 Process Wafer
656 = Primaxx-25 Module 6 Slot 25 Process Wafer

660 = Primaxx-25 Module 6 Slot 0 Dummy Wafer
661 = Primaxx-25 Module 6 Slot 1 Dummy Wafer
662 = Primaxx-25 Module 6 Slot 2 Dummy Wafer
663 = Primaxx-25 Module 6 Slot 3 Dummy Wafer
664 = Primaxx-25 Module 6 Slot 4 Dummy Wafer
665 = Primaxx-25 Module 6 Slot 5 Dummy Wafer
666 = Primaxx-25 Module 6 Slot 6 Dummy Wafer
667 = Primaxx-25 Module 6 Slot 7 Dummy Wafer
668 = Primaxx-25 Module 6 Slot 8 Dummy Wafer
669 = Primaxx-25 Module 6 Slot 9 Dummy Wafer
670 = Primaxx-25 Module 6 Slot 10 Dummy Wafer
671 = Primaxx-25 Module 6 Slot 11 Dummy Wafer
672 = Primaxx-25 Module 6 Slot 12 Dummy Wafer
673 = Primaxx-25 Module 6 Slot 13 Dummy Wafer
674 = Primaxx-25 Module 6 Slot 14 Dummy Wafer
675 = Primaxx-25 Module 6 Slot 15 Dummy Wafer
676 = Primaxx-25 Module 6 Slot 16 Dummy Wafer
677 = Primaxx-25 Module 6 Slot 17 Dummy Wafer
678 = Primaxx-25 Module 6 Slot 18 Dummy Wafer
679 = Primaxx-25 Module 6 Slot 19 Dummy Wafer
680 = Primaxx-25 Module 6 Slot 20 Dummy Wafer
681 = Primaxx-25 Module 6 Slot 21 Dummy Wafer
682 = Primaxx-25 Module 6 Slot 22 Dummy Wafer
683 = Primaxx-25 Module 6 Slot 23 Dummy Wafer
684 = Primaxx-25 Module 6 Slot 24 Dummy Wafer
685 = Primaxx-25 Module 6 Slot 25 Dummy Wafer
686 = Primaxx-25 Module 6 Slot 26 Dummy Wafer

24.5 Station States

0 = Undefined
1 = Reset
2 = Config
3 = Shutdown (Ejected for Brooks Cassette)
4 = Idle (Loaded for Brooks Cassette)
5 = Process
6 = Busy
7 = Service
8 = Held
9 = Aborted
10 = Ready
11 = Going to Shutdown (Ejecting for Brooks Cassette)
12 = Going to Idle (Loading for Brooks Cassette)
13 = Processing
14 = Servicing
15 = Going to Hold
16 = Going to Abort
17 = Going to Ready
18 = Download
19 = Disconnected
20 = Unknown
25 = Handling
30 = Mapping
31 = Closing
32 = Closed

24.6 Wafer Tracking Status Variable

The wafer tracking status variable is a string that contains each station location that a wafer has visited during its time at the machine. There is a separate variable for each wafer of each cassette. The first entry for a wafer will always be the cassette station once the cassette is loaded at that station. The variable is cleared whenever a cassette is removed from the VCE.

The characters in the string represent stations as follows:-

a = Arm A
b = Arm B
1 = VCE A
2 = PM 1
3 = PM 2
4 = PM 3
5 = PM 4
6 = PM 5
7 = PM 6
8 = VCE B
9 = Aligner
A = Cooler
B = Buffer

For example, the status variable VCEAWaferTrackingW01 would contain the string “1a9a2a1” for a wafer that was moved from VCE A to Arm A, aligned and then transferred to PM1 then transferred back to VCE A using Arm A again.

24.7 Energy Consumption Data

The equipment monitors the consumption of raw materials and stores the data in a local database. The data is accessible as daily, weekly, monthly and yearly values and as a grand total.

Data stored is:

Sputter Deposition Process Module:

Material	Units	DataName
Gases	BL	PMx Gas Count
RF Power	KW.Hours	PMx Acc Power

HSE Process Module:

Material	Units	DataName
Gases	BL	PMx Gas Count
Coil Power	KW.Hours	PMx Coil Power

Where x denotes the Process Module number 0 - 5

Data is returned in the format:

```
L, n
  1. L, 6
    1. <A DataName1>
    2. L, 3
      1. A, "DayTotal"
      2. <F8, Day Total>
      3. <A, Units>
    3. L, 3
      1. A, "WeekTotal"
      2. <F8, Week Total>
      3. <A, Units>
    4. L, 3
      1. A, "MonthTotal"
      2. <F8, Month Total>
      3. <A, Units>
    5. L, 3
      1. A, "YearTotal"
      2. <F8, Year Total>
      3. <A, Units>
    6. L, 3
      4. A, "GrandTotal"
      5. <F8, Grand Total>
      6. <A, Units>
  ...
n. L, 6
  1. <A, Datanamen>
  ...
```

25 Appendix G – Wafer Statistical Data

25.1 Statistical Data Collected from Datalogging Database

At the end of each process step an event can now be enabled that has data variables associated with it to provide the summary information from that last step. This data is retrieved from the datalogging database and provided in a single DVID as list with similar format to that displayed by the dataviewer (see below for more details on the format of this variable).

To enable this feature, ECID 5037 (NotifyWaferStatisticalData) must be set to true.

CEID 810 (WaferStatisticalDataAvailable) will then be triggered at the end of each process module recipe step once the data has been retrieved from the database.

The following DVIDs are valid for this event:-

5100 - WaferStatisticalDataDV
 5101 - WaferRecipeDV
 5102 - ModuleRecipeDV
 5110 - CassetteID
 5111 - WaferID
 5113 - StationID
 5116 – StepID
 6102 – PortID

The format of DVID 5100 (WaferStatisticalDataDV) is as described below:-

L, n

1. L, 5

1. <A MV1 Name >
2. <A MV1 Units>
3. <F4 MV1 Min Value>
4. <F4 MV1 Max Value>
5. <F4 MV1 Avg Value>

...

n. L, 5

1. <A MVn Name>
2. <A MVn Units>
3. <F4 MVn Min Value>
4. <F4 MVn Max Value>
5. <F4 MVn Avg Value>

25.2 Statistical Data as Separate DVIDs

As a new feature in this release, the statistical data is now available as separate DVIDs for min, max and average for each of the module status variables. These IDs are listed in the following sections for each available module type (each DVID has the F4 format).

To enable creation of these statistical data DVIDs then ECID 5039 (GenerateStatisticalDVIDs) must be set to true.

To enable creation of Median and Standard Deviation statistics then ECID 5040 (MedianAndStdDeviationRequired) must be set to true. If this value is set to false then the DVIDs relating to these statistical values will not be created.

When using this method of obtaining the statistical data it is recommended that ECID 5037 (NotifyWaferStatisticalData) be set to false so that the same data isn't also being retrieved from the datalogging database as this will be an unnecessary overhead.

The DVIDs will be valid only at the end of a wafer process step in the process modules in the following sections. These DVIDs can be linked to the following collection events:

482	PM1RecipeStepEnd	PM1 Recipe step ended
483	PM2RecipeStepEnd	PM2 Recipe step ended
484	PM3RecipeStepEnd	PM3 Recipe step ended
485	PM4RecipeStepEnd	PM4 Recipe step ended
486	PM5RecipeStepEnd	PM5 Recipe step ended
487	PM6RecipeStepEnd	PM6 Recipe step ended
858	RecipeStepEnd	A new recipe step has finished in a process module

25.2.1 DeltaAPM Statistical Data DVIDs

DVID	Name
13400000	DeltaAPM_DV_HFLoadPower_Min
13400001	DeltaAPM_DV_HFLoadPower_Max
13400002	DeltaAPM_DV_HFLoadPower_Avg
13400003	DeltaAPM_DV_HFLoadPower_Median
13400004	DeltaAPM_DV_HFLoadPower_StdDeviation
13400010	DeltaAPM_DV_HFReflectedPower_Min
13400011	DeltaAPM_DV_HFReflectedPower_Max
13400012	DeltaAPM_DV_HFReflectedPower_Avg
13400013	DeltaAPM_DV_HFReflectedPower_Median
13400014	DeltaAPM_DV_HFReflectedPower_StdDeviation
13400020	DeltaAPM_DV_HFPkToPk_Min
13400021	DeltaAPM_DV_HFPkToPk_Max
13400022	DeltaAPM_DV_HFPkToPk_Avg
13400023	DeltaAPM_DV_HFPkToPk_Median
13400024	DeltaAPM_DV_HFPkToPk_StdDeviation
13400030	DeltaAPM_DV_HFDCBias_Min
13400031	DeltaAPM_DV_HFDCBias_Max
13400032	DeltaAPM_DV_HFDCBias_Avg
13400033	DeltaAPM_DV_HFDCBias_Median
13400034	DeltaAPM_DV_HFDCBias_StdDeviation
13400040	DeltaAPM_DV_HFMURange_Min
13400041	DeltaAPM_DV_HFMURange_Max
13400042	DeltaAPM_DV_HFMURange_Avg
13400043	DeltaAPM_DV_HFMURange_Median
13400044	DeltaAPM_DV_HFMURange_StdDeviation
13400050	DeltaAPM_DV_LFLoadPower_Min
13400051	DeltaAPM_DV_LFLoadPower_Max
13400052	DeltaAPM_DV_LFLoadPower_Avg
13400053	DeltaAPM_DV_LFLoadPower_Median
13400054	DeltaAPM_DV_LFLoadPower_StdDeviation
13400060	DeltaAPM_DV_LFReflectedPower_Min
13400061	DeltaAPM_DV_LFReflectedPower_Max
13400062	DeltaAPM_DV_LFReflectedPower_Avg
13400063	DeltaAPM_DV_LFReflectedPower_Median
13400064	DeltaAPM_DV_LFReflectedPower_StdDeviation
13400070	DeltaAPM_DV_LFPkToPk_Min
13400071	DeltaAPM_DV_LFPkToPk_Max
13400072	DeltaAPM_DV_LFPkToPk_Avg
13400073	DeltaAPM_DV_LFPkToPk_Median
13400074	DeltaAPM_DV_LFPkToPk_StdDeviation
13400080	DeltaAPM_DV_LFDCBias_Min
13400081	DeltaAPM_DV_LFDCBias_Max
13400082	DeltaAPM_DV_LFDCBias_Avg
13400083	DeltaAPM_DV_LFDCBias_Median
13400084	DeltaAPM_DV_LFDCBias_StdDeviation
13400090	DeltaAPM_DV_LFMURange_Min
13400091	DeltaAPM_DV_LFMURange_Max
13400092	DeltaAPM_DV_LFMURange_Avg
13400093	DeltaAPM_DV_LFMURange_Median
13400094	DeltaAPM_DV_LFMURange_StdDeviation
13400100	DeltaAPM_DV_LeakupRate_Min
13400101	DeltaAPM_DV_LeakupRate_Max
13400102	DeltaAPM_DV_LeakupRate_Avg
13400103	DeltaAPM_DV_LeakupRate_Median
13400104	DeltaAPM_DV_LeakupRate_StdDeviation

13400110	DeltaAPM_DV_FillRate_Min
13400111	DeltaAPM_DV_FillRate_Max
13400112	DeltaAPM_DV_FillRate_Avg
13400113	DeltaAPM_DV_FillRate_Median
13400114	DeltaAPM_DV_FillRate_StdDeviation
13400120	DeltaAPM_DV_EndpointSourceSignal_Min
13400121	DeltaAPM_DV_EndpointSourceSignal_Max
13400122	DeltaAPM_DV_EndpointSourceSignal_Avg
13400123	DeltaAPM_DV_EndpointSourceSignal_Median
13400124	DeltaAPM_DV_EndpointSourceSignal_StdDeviation
13400130	DeltaAPM_DV_EndpointStage_Min
13400131	DeltaAPM_DV_EndpointStage_Max
13400132	DeltaAPM_DV_EndpointStage_Avg
13400133	DeltaAPM_DV_EndpointStage_Median
13400134	DeltaAPM_DV_EndpointStage_StdDeviation
13400140	DeltaAPM_DV_TotalDeposition_Min
13400141	DeltaAPM_DV_TotalDeposition_Max
13400142	DeltaAPM_DV_TotalDeposition_Avg
13400143	DeltaAPM_DV_TotalDeposition_Median
13400144	DeltaAPM_DV_TotalDeposition_StdDeviation
13400150	DeltaAPM_DV_AccDeposition_Min
13400151	DeltaAPM_DV_AccDeposition_Max
13400152	DeltaAPM_DV_AccDeposition_Avg
13400153	DeltaAPM_DV_AccDeposition_Median
13400154	DeltaAPM_DV_AccDeposition_StdDeviation
13400160	DeltaAPM_DV_ElectrodeSpacing_Min
13400161	DeltaAPM_DV_ElectrodeSpacing_Max
13400162	DeltaAPM_DV_ElectrodeSpacing_Avg
13400163	DeltaAPM_DV_ElectrodeSpacing_Median
13400164	DeltaAPM_DV_ElectrodeSpacing_StdDeviation
13400170	DeltaAPM_DV_ShowerheadHeaterTemp_Min
13400171	DeltaAPM_DV_ShowerheadHeaterTemp_Max
13400172	DeltaAPM_DV_ShowerheadHeaterTemp_Avg
13400173	DeltaAPM_DV_ShowerheadHeaterTemp_Median
13400174	DeltaAPM_DV_ShowerheadHeaterTemp_StdDeviation
13400180	DeltaAPM_DV_SCIFHeaterTemp_Min
13400181	DeltaAPM_DV_SCIFHeaterTemp_Max
13400182	DeltaAPM_DV_SCIFHeaterTemp_Avg
13400183	DeltaAPM_DV_SCIFHeaterTemp_Median
13400184	DeltaAPM_DV_SCIFHeaterTemp_StdDeviation
13400190	DeltaAPM_DV_PlattenHeaterTemp_Min
13400191	DeltaAPM_DV_PlattenHeaterTemp_Max
13400192	DeltaAPM_DV_PlattenHeaterTemp_Avg
13400193	DeltaAPM_DV_PlattenHeaterTemp_Median
13400194	DeltaAPM_DV_PlattenHeaterTemp_StdDeviation
13400200	DeltaAPM_DV_GasInletHeaterTemp_Min
13400201	DeltaAPM_DV_GasInletHeaterTemp_Max
13400202	DeltaAPM_DV_GasInletHeaterTemp_Avg
13400203	DeltaAPM_DV_GasInletHeaterTemp_Median
13400204	DeltaAPM_DV_GasInletHeaterTemp_StdDeviation
13400210	DeltaAPM_DV_APC_Min
13400211	DeltaAPM_DV_APC_Max
13400212	DeltaAPM_DV_APC_Avg
13400213	DeltaAPM_DV_APC_Median
13400214	DeltaAPM_DV_APC_StdDeviation
13400220	DeltaAPM_DV_Pressure_Min
13400221	DeltaAPM_DV_Pressure_Max

13400222	DeltaAPM_DV_Pressure_Avg
13400223	DeltaAPM_DV_Pressure_Median
13400224	DeltaAPM_DV_Pressure_StdDeviation
13400230	DeltaAPM_DV_Gas1Flow_Min
13400231	DeltaAPM_DV_Gas1Flow_Max
13400232	DeltaAPM_DV_Gas1Flow_Avg
13400233	DeltaAPM_DV_Gas1Flow_Median
13400234	DeltaAPM_DV_Gas1Flow_StdDeviation
13400240	DeltaAPM_DV_Gas2Flow_Min
13400241	DeltaAPM_DV_Gas2Flow_Max
13400242	DeltaAPM_DV_Gas2Flow_Avg
13400243	DeltaAPM_DV_Gas2Flow_Median
13400244	DeltaAPM_DV_Gas2Flow_StdDeviation
13400250	DeltaAPM_DV_Gas3Flow_Min
13400251	DeltaAPM_DV_Gas3Flow_Max
13400252	DeltaAPM_DV_Gas3Flow_Avg
13400253	DeltaAPM_DV_Gas3Flow_Median
13400254	DeltaAPM_DV_Gas3Flow_StdDeviation
13400260	DeltaAPM_DV_Gas4Flow_Min
13400261	DeltaAPM_DV_Gas4Flow_Max
13400262	DeltaAPM_DV_Gas4Flow_Avg
13400263	DeltaAPM_DV_Gas4Flow_Median
13400264	DeltaAPM_DV_Gas4Flow_StdDeviation
13400270	DeltaAPM_DV_Gas5Flow_Min
13400271	DeltaAPM_DV_Gas5Flow_Max
13400272	DeltaAPM_DV_Gas5Flow_Avg
13400273	DeltaAPM_DV_Gas5Flow_Median
13400274	DeltaAPM_DV_Gas5Flow_StdDeviation
13400280	DeltaAPM_DV_Gas6Flow_Min
13400281	DeltaAPM_DV_Gas6Flow_Max
13400282	DeltaAPM_DV_Gas6Flow_Avg
13400283	DeltaAPM_DV_Gas6Flow_Median
13400284	DeltaAPM_DV_Gas6Flow_StdDeviation
13400290	DeltaAPM_DV_Gas7Flow_Min
13400291	DeltaAPM_DV_Gas7Flow_Max
13400292	DeltaAPM_DV_Gas7Flow_Avg
13400293	DeltaAPM_DV_Gas7Flow_Median
13400294	DeltaAPM_DV_Gas7Flow_StdDeviation
13400300	DeltaAPM_DV_Gas8Flow_Min
13400301	DeltaAPM_DV_Gas8Flow_Max
13400302	DeltaAPM_DV_Gas8Flow_Avg
13400303	DeltaAPM_DV_Gas8Flow_Median
13400304	DeltaAPM_DV_Gas8Flow_StdDeviation
13400310	DeltaAPM_DV_Gas9Flow_Min
13400311	DeltaAPM_DV_Gas9Flow_Max
13400312	DeltaAPM_DV_Gas9Flow_Avg
13400313	DeltaAPM_DV_Gas9Flow_Median
13400314	DeltaAPM_DV_Gas9Flow_StdDeviation
13400320	DeltaAPM_DV_Gas10Flow_Min
13400321	DeltaAPM_DV_Gas10Flow_Max
13400322	DeltaAPM_DV_Gas10Flow_Avg
13400323	DeltaAPM_DV_Gas10Flow_Median
13400324	DeltaAPM_DV_Gas10Flow_StdDeviation

25.3 Etch PM Generated Summary Data

A new has been added for higher resolution statistical data being made available over SECSII for Etch modules. Additionally, the data for looped processes is summarised across multiple loops for each step. This means that the statistical data presented at the end of the process is for each step as defined in the recipe rather than every step within every loop, so there is a maximum of 20 summarised steps rather than potentially thousands of summarised steps.

A new Collection Event (CEID 811) has been introduced which is used to capture this step data. This event will occur once for each step of the process and will not occur as soon as the process has completed fully – i.e. the data is not available at the end of each step but only at the end of process.

The following table lists the available DVIDs for the Etch module statistical data items that can be attached to CEID 811. Additionally, the DVIDs normally associated with the end of a process step can also be used

5101 - WaferRecipeDV

5102 - ModuleRecipeDV

5110 - CassetteID

5111 - WaferID

5113 - StationID

5116 – StepID

6102 – PortID

Etch Process Module Statistical Data Variables:-

DVID	Name
12400000	Etch_DV_pressure_Min
12400001	Etch_DV_pressure_Max
12400002	Etch_DV_pressure_Avg
12400004	Etch_DV_pressure_StdDeviation
12400010	Etch_DV_platenHFPower_Min
12400011	Etch_DV_platenHFPower_Max
12400012	Etch_DV_platenHFPower_Avg
12400014	Etch_DV_platenHFPower_StdDeviation
12400020	Etch_DV_platenLFPower_Min
12400021	Etch_DV_platenLFPower_Max
12400022	Etch_DV_platenLFPower_Avg
12400024	Etch_DV_platenLFPower_StdDeviation
12400030	Etch_DV_heBPPressure_Min
12400031	Etch_DV_heBPPressure_Max
12400032	Etch_DV_heBPPressure_Avg
12400034	Etch_DV_heBPPressure_StdDeviation
12400040	Etch_DV_gasFlow1_Min
12400041	Etch_DV_gasFlow1_Max
12400042	Etch_DV_gasFlow1_Avg
12400044	Etch_DV_gasFlow1_StdDeviation
12400050	Etch_DV_gasFlow2_Min
12400051	Etch_DV_gasFlow2_Max
12400052	Etch_DV_gasFlow2_Avg
12400054	Etch_DV_gasFlow2_StdDeviation
12400060	Etch_DV_gasFlow3_Min
12400061	Etch_DV_gasFlow3_Max
12400062	Etch_DV_gasFlow3_Avg
12400064	Etch_DV_gasFlow3_StdDeviation
12400070	Etch_DV_gasFlow4_Min
12400071	Etch_DV_gasFlow4_Max
12400072	Etch_DV_gasFlow4_Avg
12400074	Etch_DV_gasFlow4_StdDeviation
12400080	Etch_DV_gasFlow5_Min
12400081	Etch_DV_gasFlow5_Max

12400082	Etch_DV_gasFlow5_Avg
12400084	Etch_DV_gasFlow5_StdDeviation
12400090	Etch_DV_gasFlow6_Min
12400091	Etch_DV_gasFlow6_Max
12400092	Etch_DV_gasFlow6_Avg
12400094	Etch_DV_gasFlow6_StdDeviation
12400100	Etch_DV_gasFlow7_Min
12400101	Etch_DV_gasFlow7_Max
12400102	Etch_DV_gasFlow7_Avg
12400104	Etch_DV_gasFlow7_StdDeviation
12400110	Etch_DV_gasFlow8_Min
12400111	Etch_DV_gasFlow8_Max
12400112	Etch_DV_gasFlow8_Avg
12400114	Etch_DV_gasFlow8_StdDeviation
12400120	Etch_DV_gasFlow9_Min
12400121	Etch_DV_gasFlow9_Max
12400122	Etch_DV_gasFlow9_Avg
12400124	Etch_DV_gasFlow9_StdDeviation
12400130	Etch_DV_APCPosition_Min
12400131	Etch_DV_APCPosition_Max
12400132	Etch_DV_APCPosition_Avg
12400134	Etch_DV_APCPosition_StdDeviation
12400140	Etch_DV_platenHFReflected_Min
12400141	Etch_DV_platenHFReflected_Max
12400142	Etch_DV_platenHFReflected_Avg
12400144	Etch_DV_platenHFReflected_StdDeviation
12400150	Etch_DV_platenHFVpp_Min
12400151	Etch_DV_platenHFVpp_Max
12400152	Etch_DV_platenHFVpp_Avg
12400154	Etch_DV_platenHFVpp_StdDeviation
12400160	Etch_DV_platenHFTunePos_Min
12400161	Etch_DV_platenHFTunePos_Max
12400162	Etch_DV_platenHFTunePos_Avg
12400164	Etch_DV_platenHFTunePos_StdDeviation
12400170	Etch_DV_platenHFLoadPos_Min
12400171	Etch_DV_platenHFLoadPos_Max
12400172	Etch_DV_platenHFLoadPos_Avg
12400174	Etch_DV_platenHFLoadPos_StdDeviation
12400180	Etch_DV_platenHFDCEBias_Min
12400181	Etch_DV_platenHFDCEBias_Max
12400182	Etch_DV_platenHFDCEBias_Avg
12400184	Etch_DV_platenHFDCEBias_StdDeviation
12400190	Etch_DV_platenLFReflected_Min
12400191	Etch_DV_platenLFReflected_Max
12400192	Etch_DV_platenLFReflected_Avg
12400194	Etch_DV_platenLFReflected_StdDeviation
12400200	Etch_DV_platenLFVpp_Min
12400201	Etch_DV_platenLFVpp_Max
12400202	Etch_DV_platenLFVpp_Avg
12400204	Etch_DV_platenLFVpp_StdDeviation
12400210	Etch_DV_platenLFDCEBias_Min
12400211	Etch_DV_platenLFDCEBias_Max
12400212	Etch_DV_platenLFDCEBias_Avg
12400214	Etch_DV_platenLFDCEBias_StdDeviation
12400220	Etch_DV_primaryPower_Min
12400221	Etch_DV_primaryPower_Max
12400222	Etch_DV_primaryPower_Avg

12400224	Etch_DV_primaryPower_StdDeviation
12400230	Etch_DV_primaryReflected_Min
12400231	Etch_DV_primaryReflected_Max
12400232	Etch_DV_primaryReflected_Avg
12400234	Etch_DV_primaryReflected_StdDeviation
12400240	Etch_DV_primaryVpp_Min
12400241	Etch_DV_primaryVpp_Max
12400242	Etch_DV_primaryVpp_Avg
12400244	Etch_DV_primaryVpp_StdDeviation
12400250	Etch_DV_secondaryPower_Min
12400251	Etch_DV_secondaryPower_Max
12400252	Etch_DV_secondaryPower_Avg
12400254	Etch_DV_secondaryPower_StdDeviation
12400260	Etch_DV_secondaryReflected_Min
12400261	Etch_DV_secondaryReflected_Max
12400262	Etch_DV_secondaryReflected_Avg
12400264	Etch_DV_secondaryReflected_StdDeviation
12400270	Etch_DV_secondaryVpp_Min
12400271	Etch_DV_secondaryVpp_Max
12400272	Etch_DV_secondaryVpp_Avg
12400274	Etch_DV_secondaryVpp_StdDeviation
12400280	Etch_DV_ClaritasPower_Min
12400281	Etch_DV_ClaritasPower_Max
12400282	Etch_DV_ClaritasPower_Avg
12400284	Etch_DV_ClaritasPower_StdDeviation
12400290	Etch_DV_ClartiasReflected_Min
12400291	Etch_DV_ClartiasReflected_Max
12400292	Etch_DV_ClartiasReflected_Avg
12400294	Etch_DV_ClartiasReflected_StdDeviation
12400300	Etch_DV_ClartiasVpp_Min
12400301	Etch_DV_ClartiasVpp_Max
12400302	Etch_DV_ClartiasVpp_Avg
12400304	Etch_DV_ClartiasVpp_StdDeviation
12400310	Etch_DV_HeBPFlow_Min
12400311	Etch_DV_HeBPFlow_Max
12400312	Etch_DV_HeBPFlow_Avg
12400314	Etch_DV_HeBPFlow_StdDeviation
12400320	Etch_DV_forelinePressure_Min
12400321	Etch_DV_forelinePressure_Max
12400322	Etch_DV_forelinePressure_Avg
12400324	Etch_DV_forelinePressure_StdDeviation
12400330	Etch_DV_endpointValue_Min
12400331	Etch_DV_endpointValue_Max
12400332	Etch_DV_endpointValue_Avg
12400334	Etch_DV_endpointValue_StdDeviation
12400340	Etch_DV_tempPlaten_Min
12400341	Etch_DV_tempPlaten_Max
12400342	Etch_DV_tempPlaten_Avg
12400344	Etch_DV_tempPlaten_StdDeviation
12400350	Etch_DV_tempPrimarySource_Min
12400351	Etch_DV_tempPrimarySource_Max
12400352	Etch_DV_tempPrimarySource_Avg
12400354	Etch_DV_tempPrimarySource_StdDeviation
12400360	Etch_DV_tempChamberWall_Min
12400361	Etch_DV_tempChamberWall_Max
12400362	Etch_DV_tempChamberWall_Avg
12400364	Etch_DV_tempChamberWall_StdDeviation

12400370	Etch_DV_tempGasBox_Min
12400371	Etch_DV_tempGasBox_Max
12400372	Etch_DV_tempGasBox_Avg
12400374	Etch_DV_tempGasBox_StdDeviation
12400380	Etch_DV_tempPumpMount_Min
12400381	Etch_DV_tempPumpMount_Max
12400382	Etch_DV_tempPumpMount_Avg
12400384	Etch_DV_tempPumpMount_StdDeviation