

LAPORAN PRAKTIKUM
POSTTEST 3
JARINGAN KOMPUTER




Disusun oleh:
Mahdi Sarwan Abdullah (067)
Kelas (B '25)

PROGRAM STUDI INFORMATIKA
UNIVERSITAS MULAWARMAN
SAMARINDA
2026


1. Soal 1




Langkah pertama yang dilakukan adalah membuka workspace eNSP dan menambahkan 4 buah router dan 2 buah PC. Selanjutnya, hubungkan masing-masing PC 1 ke R1, R1 ke R2, R1 ke R3, R3 ke R4, dan R4 ke PC2 menggunakan kabel jenis copper dengan pasangan port yang telah ditentukan pada gambar topologi jaringan post test 3. Setelah kabel terpasang, blok seluruh topologi tersebut dan tekan tombol start hingga indikator port menyala.

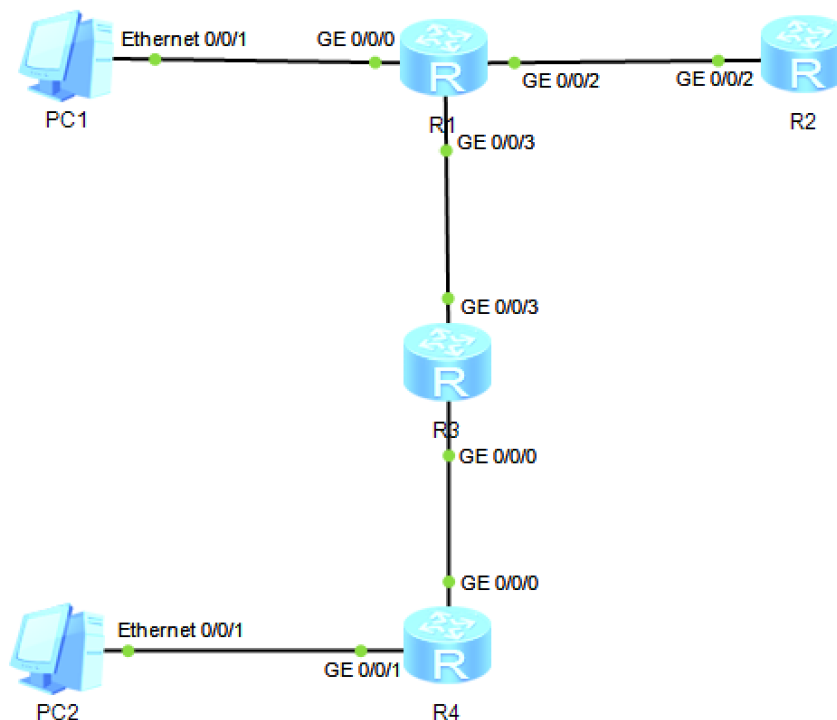

2. Soal 2


Ketik u t m untuk menghilangkan log panjang yang akan muncul seiring melakukan konfigurasi. Lakukan hal ini untuk setiap router (R1, R2, R3, dan R4).

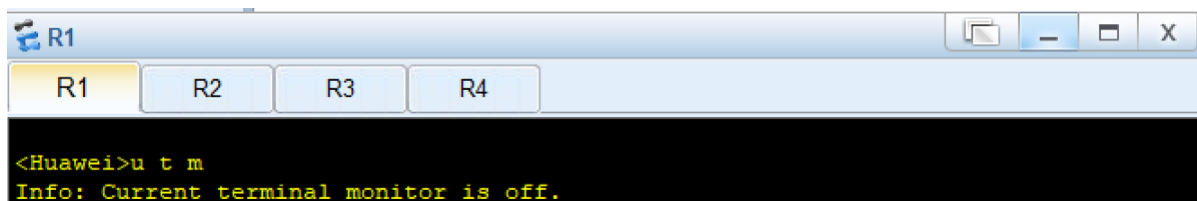

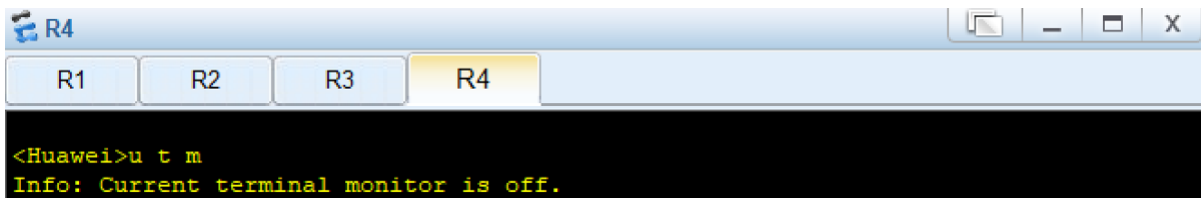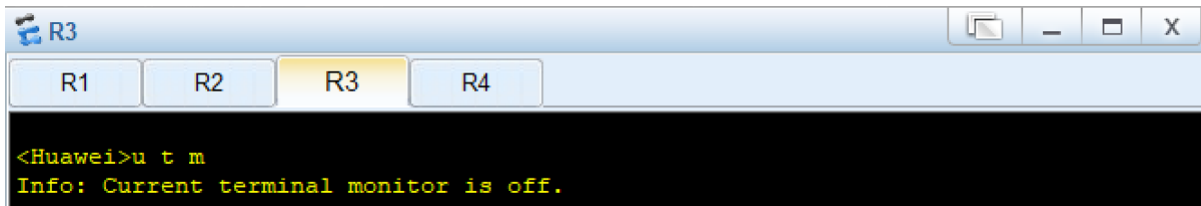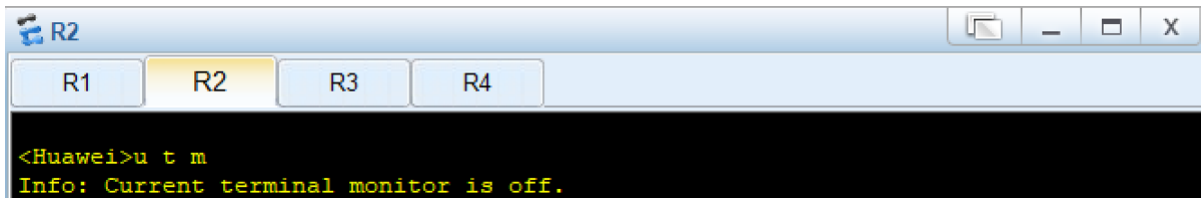


3. Soal 3

Untuk mengganti nama router sesuai ketentuan pada tabel soal di classroom, konfigurasi dilakukan melalui CLI pada masing-masing router. Ketik system-view, lalu sysname R1_067 (R1_nim). Setelah nama diubah, masuk ke interface port g0/0/0 dan tambahkan ip address 192.168.1.254 dengan prefiks 24. Router R1_067 memiliki 3 interface, maka masukkan juga ip address dan prefiks untuk masing-masing interface. Router R1_067 juga memiliki interface loopback0, oleh karena itu kita masuk dulu ke interface Loopback0 dan setelah masuk tambahkan ip address 10.0.1.067 (10.0.1.nim) dengn prefiks 32. Konfigurasi ip sudah berhasil terlihat dari output setelah kita ketik dis this. Lalu q untuk keluar dari interfacenya. Lakukan hal yang sama ke semua router sesuai ketentuan hostname dan ip addressnya.

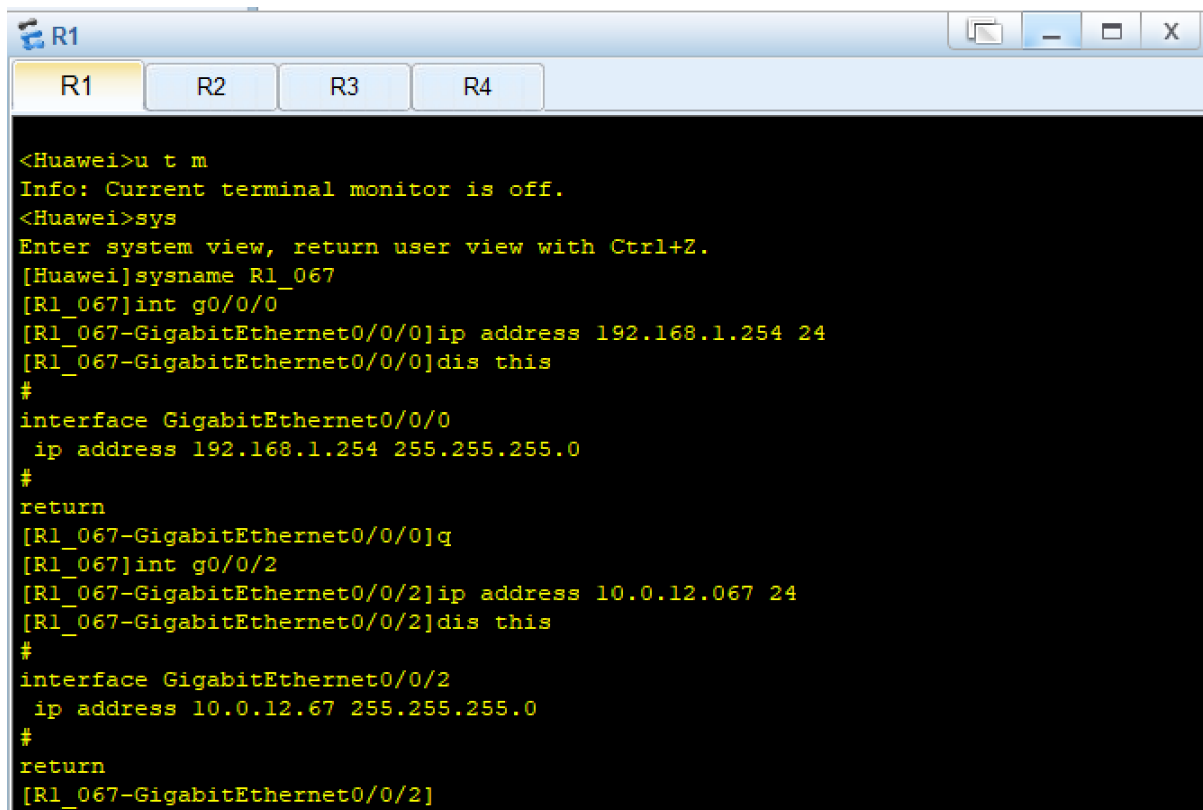


The screenshot shows a terminal window titled 'R1' with tabs for R1, R2, R3, and R4. The terminal displays the following commands and output:

```
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>sys
Enter system view, return user view with Ctrl+Z.
[Huawei]sysname R1_067
[R1_067]int g0/0/0
[R1_067-GigabitEthernet0/0/0]ip address 192.168.1.254 24
[R1_067-GigabitEthernet0/0/0]dis this
#
interface GigabitEthernet0/0/0
 ip address 192.168.1.254 255.255.255.0
#
return
[R1_067-GigabitEthernet0/0/0]q
[R1_067]int g0/0/2
[R1_067-GigabitEthernet0/0/2]ip address 10.0.12.67 24
[R1_067-GigabitEthernet0/0/2]dis this
#
interface GigabitEthernet0/0/2
 ip address 10.0.12.67 255.255.255.0
#
return
[R1_067-GigabitEthernet0/0/2]
```

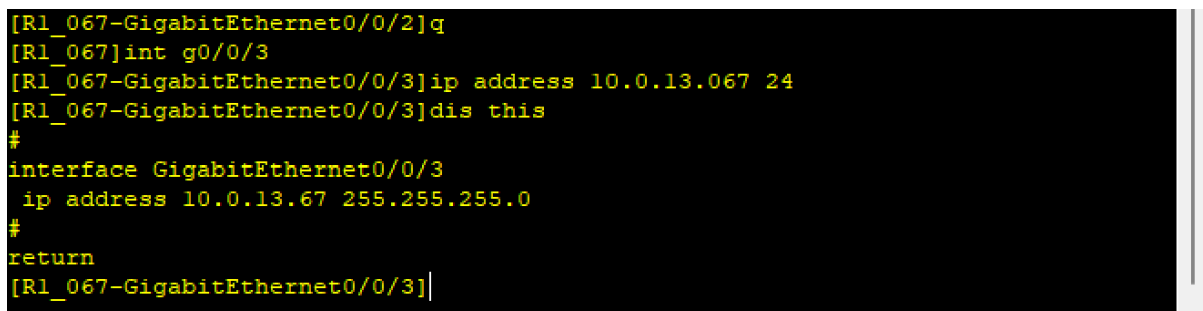


The screenshot shows the continuation of the terminal window with the following commands and output:

```
[R1_067-GigabitEthernet0/0/2]q
[R1_067]int g0/0/3
[R1_067-GigabitEthernet0/0/3]ip address 10.0.13.67 24
[R1_067-GigabitEthernet0/0/3]dis this
#
interface GigabitEthernet0/0/3
 ip address 10.0.13.67 255.255.255.0
#
return
[R1_067-GigabitEthernet0/0/3]
```

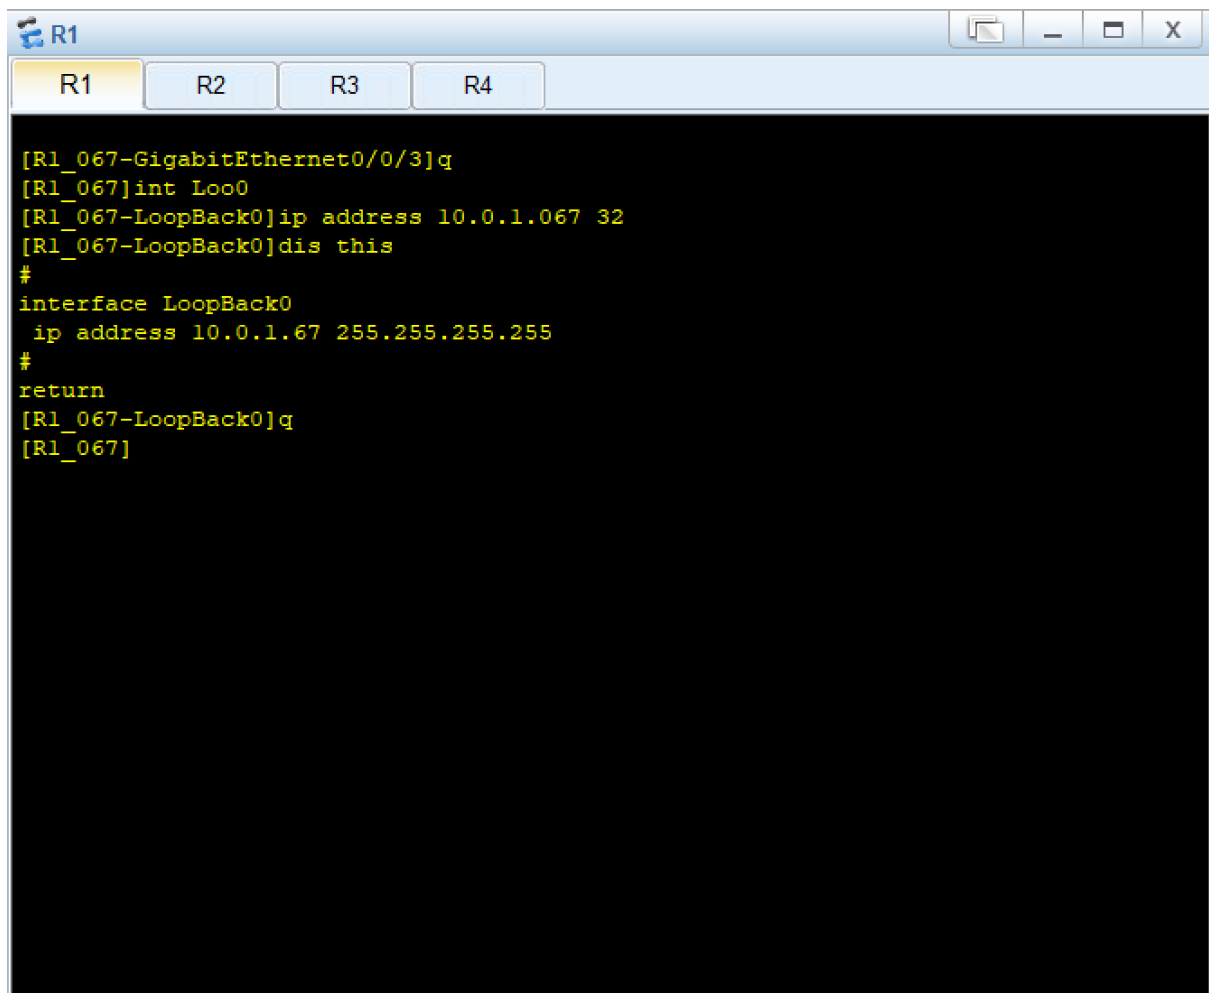
A screenshot of a Cisco Packet Tracer console window for router R1. The window has a title bar with 'R1' and standard window controls. Below the title bar are four tabs labeled R1, R2, R3, and R4, with R1 being the active tab. The main area is a black terminal with yellow text showing the following commands and prompts:

```
[R1_067-GigabitEthernet0/0/3]q
[R1_067]int Loo0
[R1_067-LoopBack0]ip address 10.0.1.067 32
[R1_067-LoopBack0]dis this
#
interface LoopBack0
  ip address 10.0.1.67 255.255.255.255
#
return
[R1_067-LoopBack0]q
[R1_067]
```

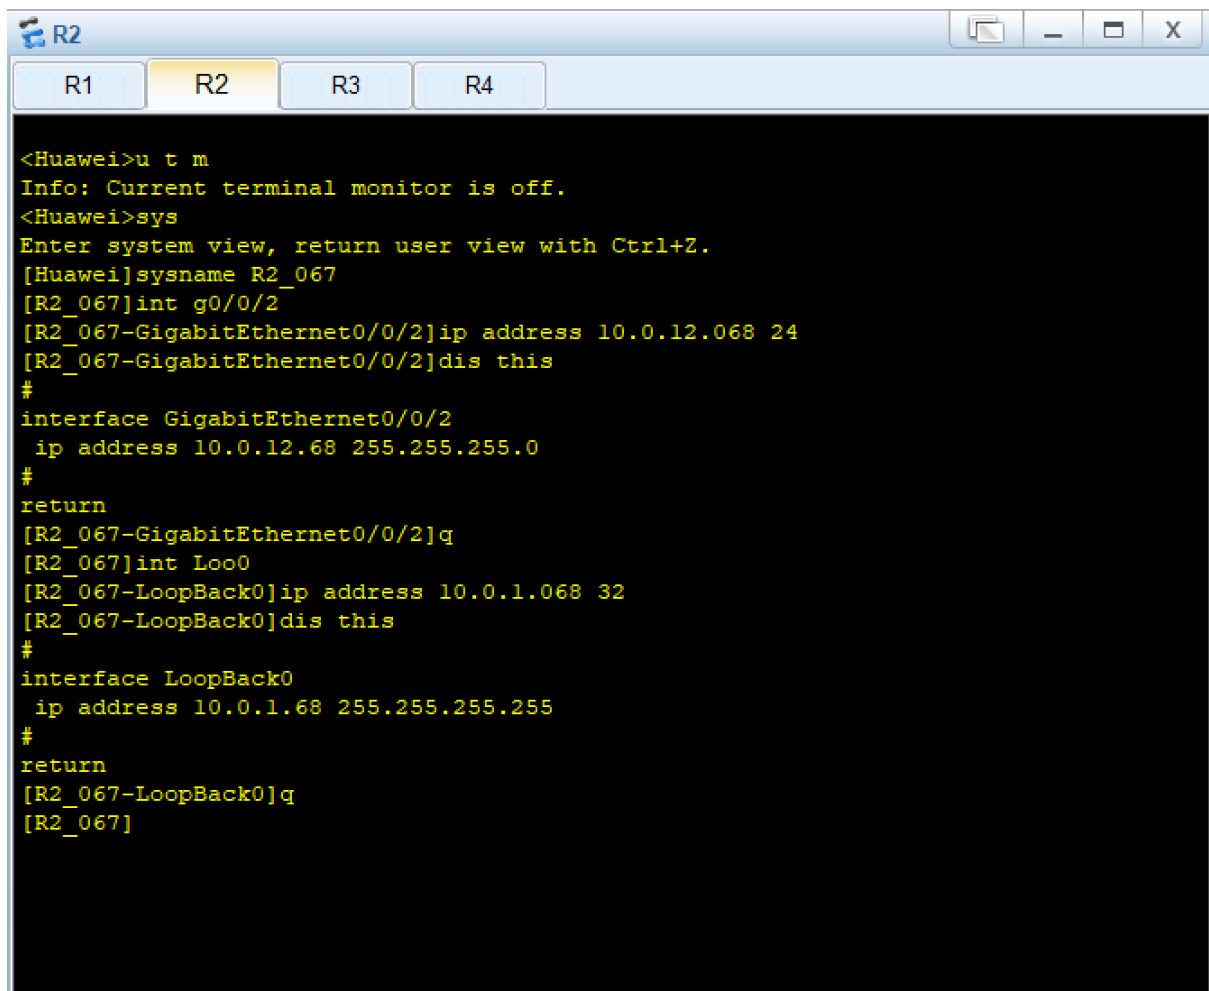


```
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>sys
Enter system view, return user view with Ctrl+Z.
[Huawei]sysname R2_067
[R2_067]int g0/0/2
[R2_067-GigabitEthernet0/0/2]ip address 10.0.12.68 24
[R2_067-GigabitEthernet0/0/2]dis this
#
interface GigabitEthernet0/0/2
  ip address 10.0.12.68 255.255.255.0
#
return
[R2_067-GigabitEthernet0/0/2]q
[R2_067]int Loo0
[R2_067-LoopBack0]ip address 10.0.1.68 32
[R2_067-LoopBack0]dis this
#
interface LoopBack0
  ip address 10.0.1.68 255.255.255.255
#
return
[R2_067-LoopBack0]q
[R2_067]
```

```
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>sys
Enter system view, return user view with Ctrl+Z.
[Huawei]sysname R3_067
[R3_067]int g0/0/0
[R3_067-GigabitEthernet0/0/0]ip address 10.0.17.067 24
[R3_067-GigabitEthernet0/0/0]dis this
#
interface GigabitEthernet0/0/0
  ip address 10.0.17.67 255.255.255.0
#
return
[R3_067-GigabitEthernet0/0/0]q
[R3_067]int g0/0/3
[R3_067-GigabitEthernet0/0/3]ip address 10.0.13.068 24
[R3_067-GigabitEthernet0/0/3]dis this
#
interface GigabitEthernet0/0/3
  ip address 10.0.13.68 255.255.255.0
#
return
[R3_067-GigabitEthernet0/0/3]q
[R3_067]
```

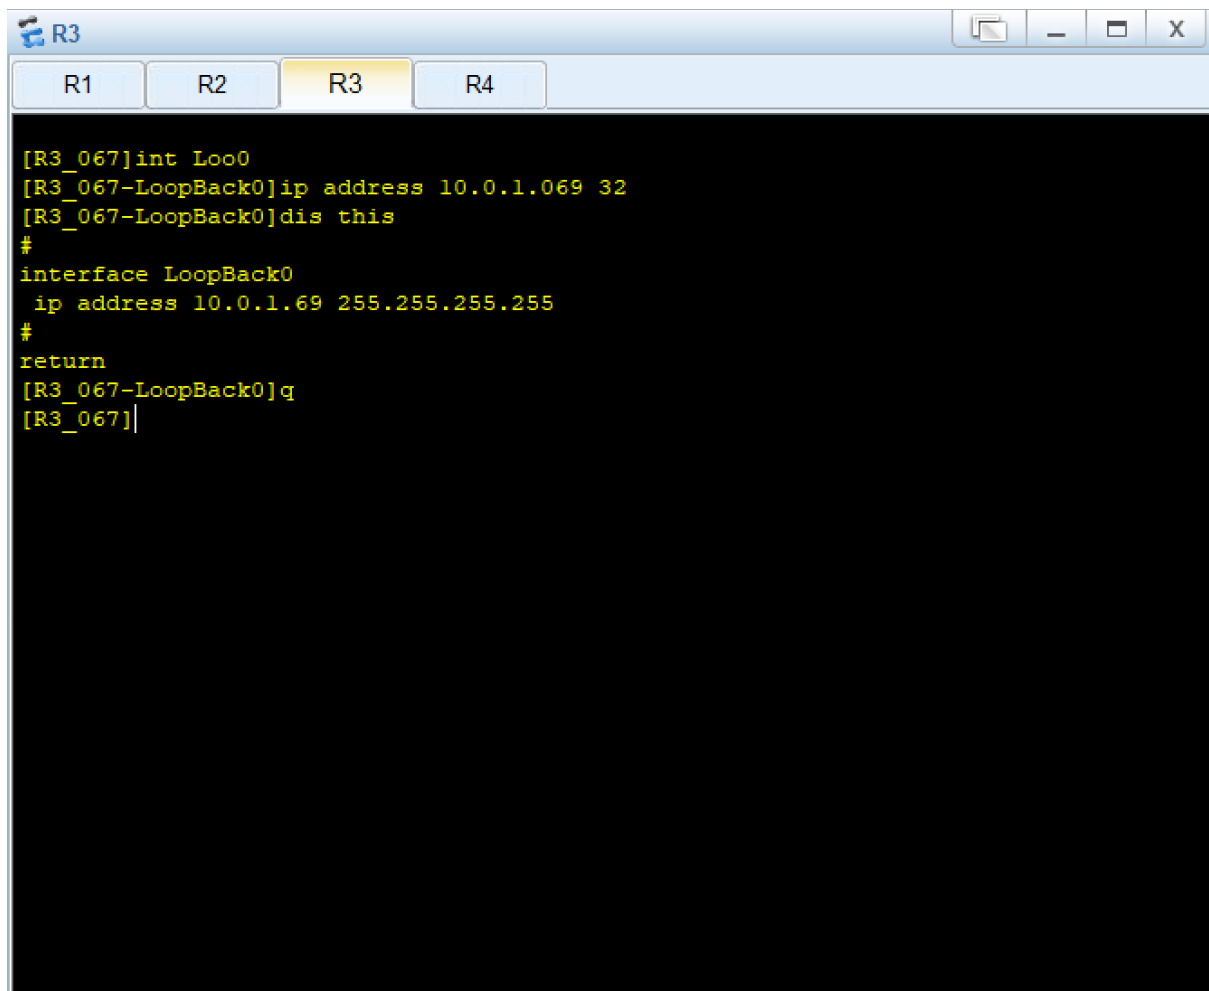


```
[R3_067]int Loo0
[R3_067-LoopBack0]ip address 10.0.1.069 32
[R3_067-LoopBack0]dis this
#
interface LoopBack0
  ip address 10.0.1.69 255.255.255.255
#
return
[R3_067-LoopBack0]q
[R3_067]|
```

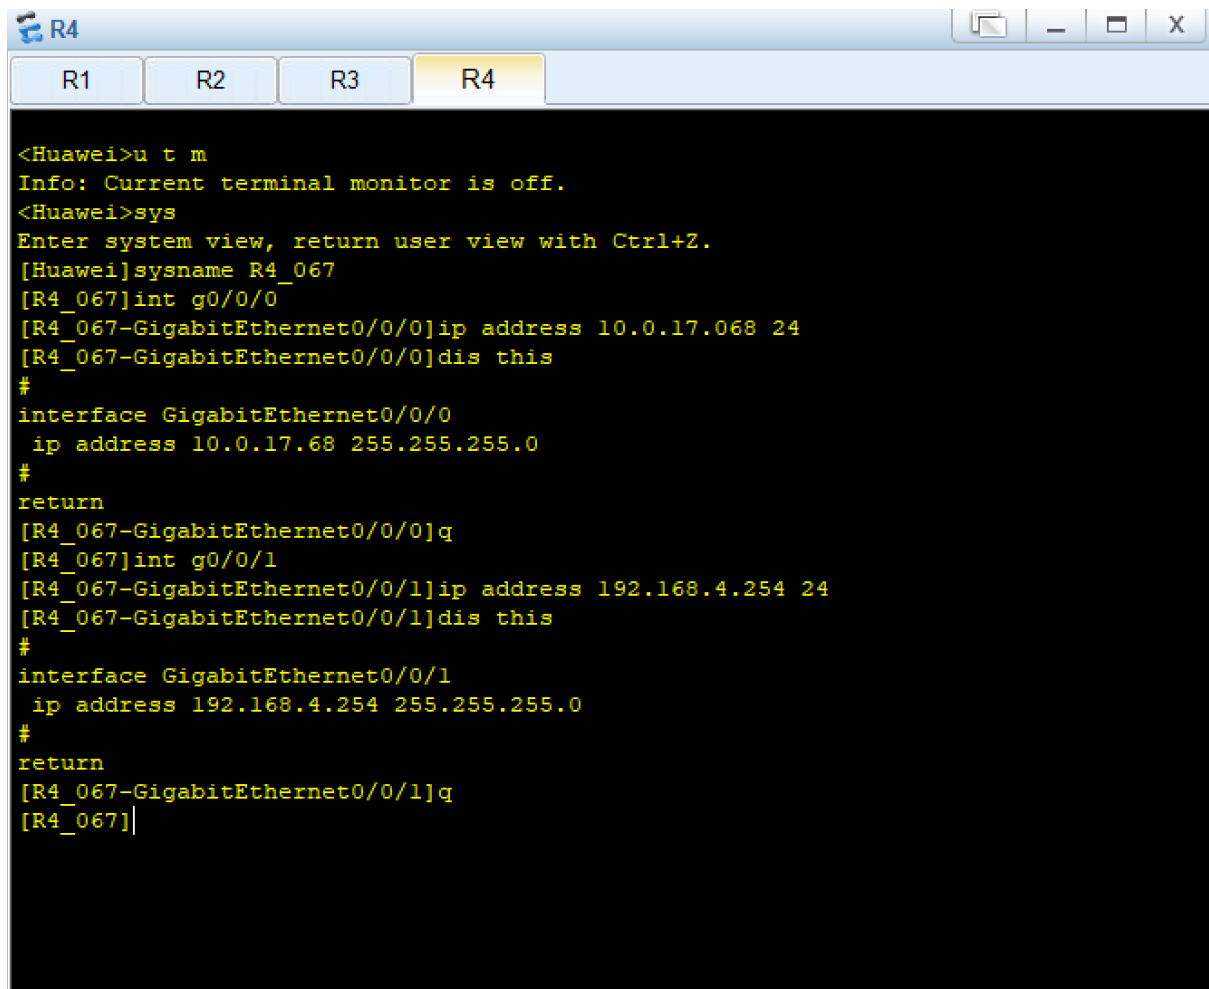

The image shows a terminal window titled 'R4' with tabs for R1, R2, R3, and R4. The R4 tab is active. The terminal displays the following commands and output:

```
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>sys
Enter system view, return user view with Ctrl+Z.
[Huawei]sysname R4_067
[R4_067]int g0/0/0
[R4_067-GigabitEthernet0/0/0]ip address 10.0.17.068 24
[R4_067-GigabitEthernet0/0/0]dis this
#
interface GigabitEthernet0/0/0
  ip address 10.0.17.68 255.255.255.0
#
return
[R4_067-GigabitEthernet0/0/0]q
[R4_067]int g0/0/1
[R4_067-GigabitEthernet0/0/1]ip address 192.168.4.254 24
[R4_067-GigabitEthernet0/0/1]dis this
#
interface GigabitEthernet0/0/1
  ip address 192.168.4.254 255.255.255.0
#
return
[R4_067-GigabitEthernet0/0/1]q
[R4_067]|
```

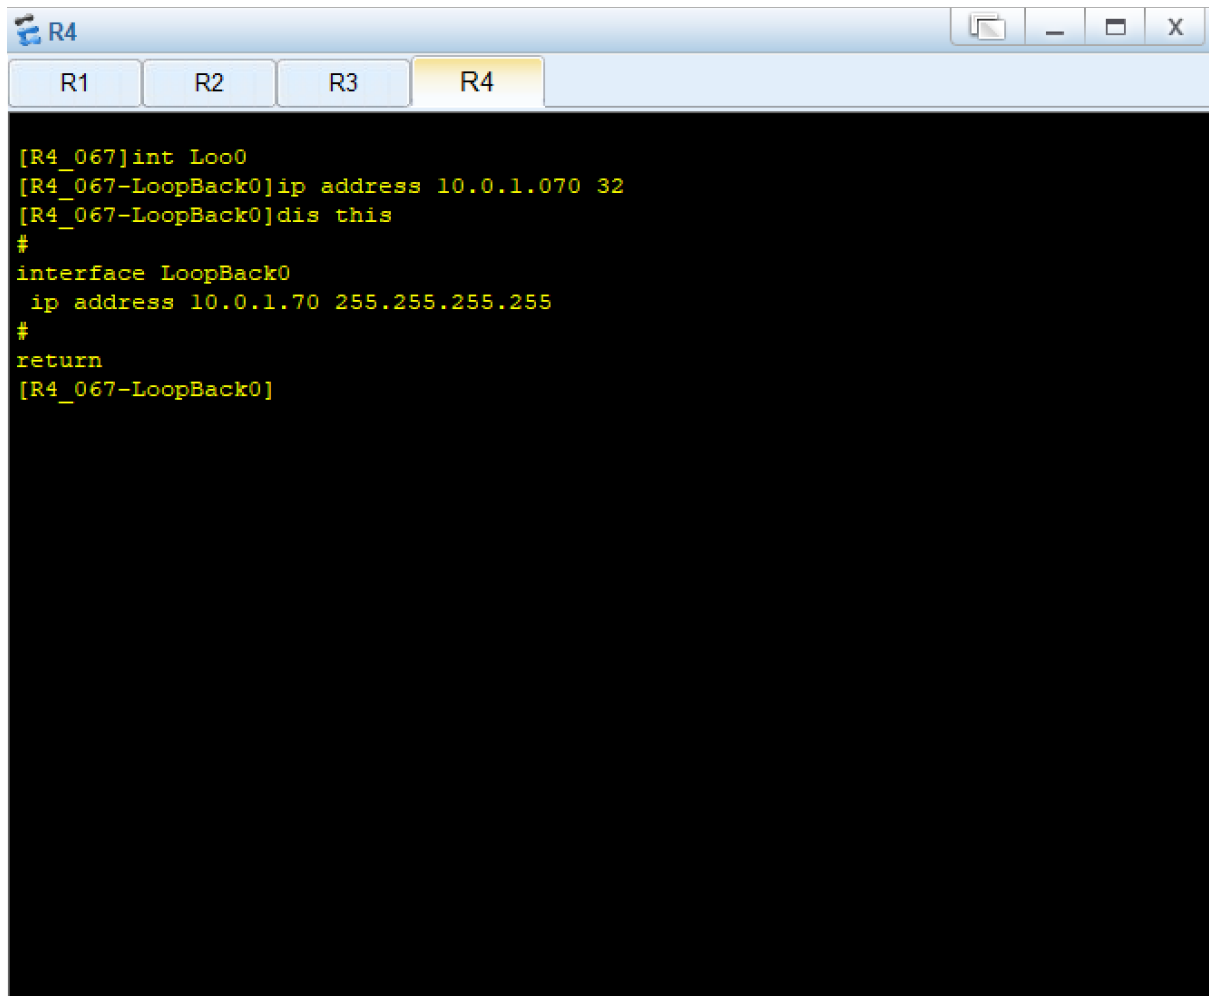

```
[R4_067]int Loo0
[R4_067-LoopBack0]ip address 10.0.1.070 32
[R4_067-LoopBack0]dis this
#
interface LoopBack0
 ip address 10.0.1.70 255.255.255.255
#
return
[R4_067-LoopBack0]
```

4. Soal 4

Konfigurasi pengalamatan ip statis pada PC1 dan PC2. PC1 diberikan ip addressnya 192.168.1.067 dengan subnet mask 255.255.255.0 (/24), serta ip gateway 192.168.1.254 yang merupakan alamat IP dari antarmuka R1 yang mengarah ke PC1. Sementara itu, PC2 diatur dengan ip address 192.168.4.067 dengan subnet mask 255.255.255.0 (/24), serta ip gateway 192.168.4.254 yang merupakan alamat antarmuka R4 yang mengarah ke PC2.

PC1

Basic Config Command MCPacket UdpPacket Console

Host Name: PC1

MAC Address: 54-89-98-1A-39-3E

IPv4 Configuration

☒ Static ☐ DHCP ☐ Obtain DNS server address automatically

IP Address: 192 . 168 . 1 . 067 DNS1: 0 . 0 . 0 . 0

Subnet Mask: 255 . 255 . 255 . 0 DNS2: 0 . 0 . 0 . 0

Gateway: 192 . 168 . 1 . 254

IPv6 Configuration

☒ Static ☐ DHCPv6

IPv6 Address: ::

Prefix Length: 128

IPv6 Gateway: ::

Apply

PC2

Basic Config Command MCPacket UdpPacket Console

Host Name: PC2

MAC Address: 54-89-98-68-28-52

IPv4 Configuration

☒ Static ☐ DHCP ☐ Obtain DNS server address automatically

IP Address: 192 . 168 . 4 . 067 DNS1: 0 . 0 . 0 . 0

Subnet Mask: 255 . 255 . 255 . 0 DNS2: 0 . 0 . 0 . 0

Gateway: 192 . 168 . 4 . 254

IPv6 Configuration

☒ Static ☐ DHCPv6

IPv6 Address: ::


Prefix Length: 128

IPv6 Gateway: ::

Apply


5. Soal 5

Untuk memudahkan identifikasi dan pemecahan masalah, dilakukan pelabelan pengalaman ip berbasis teks pada visualisasi topologi jaringannya. Label berlatar belakang hijau menandakan ip address dan prefiks untuk masing-masing interface perangkat. Sedangkan label berlatar belakang pink menandakan ip loopback pada setiap router.

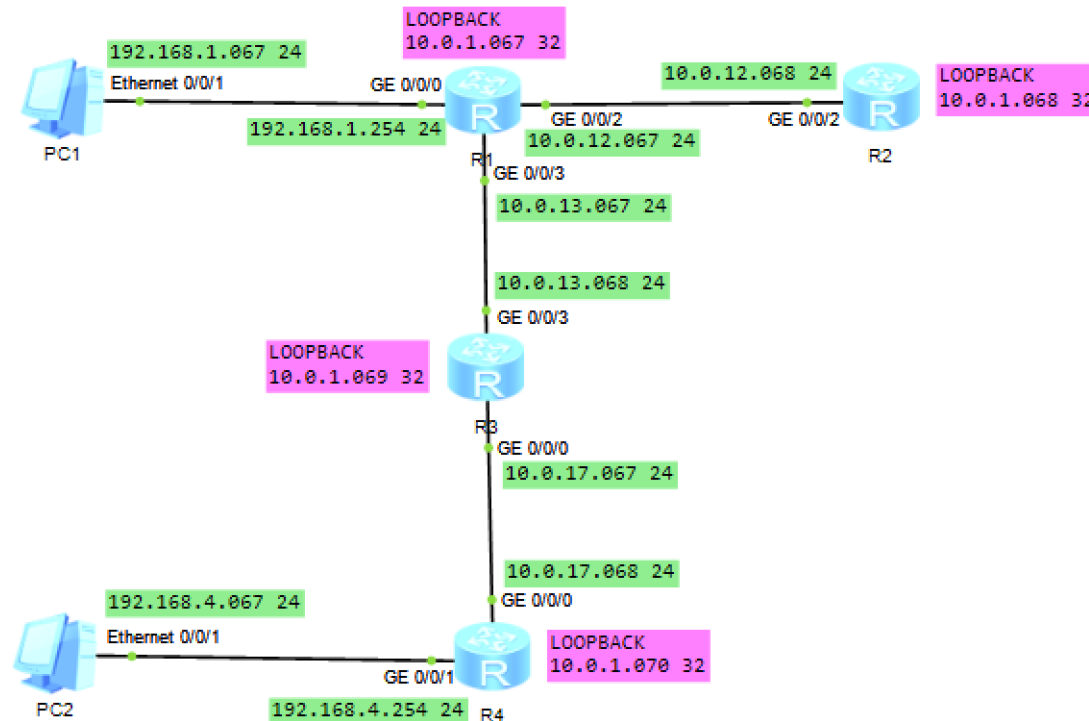

6. Soal 6


Implementasi routing dinamis OSPF dilakukan pada perangkat R1, R3, dan R4 di dalam OSPF 1 dan area 0. Pada masing-masing router tersebut, setiap network id dan jaringan yang terhubung langsung, termasuk network loopback, didaftarkan parameter wild card (0.0.0.255 / 0.0.0.0). Keberhasilan implementasi OSPF terlihat melalui perintah display ospf peer yang menunjukkan Full, serta display ip routing-table protocol ospf yang memperlihatkan rute-rute yang sudah tersedia dan ditampilkan dalam tabel routing.

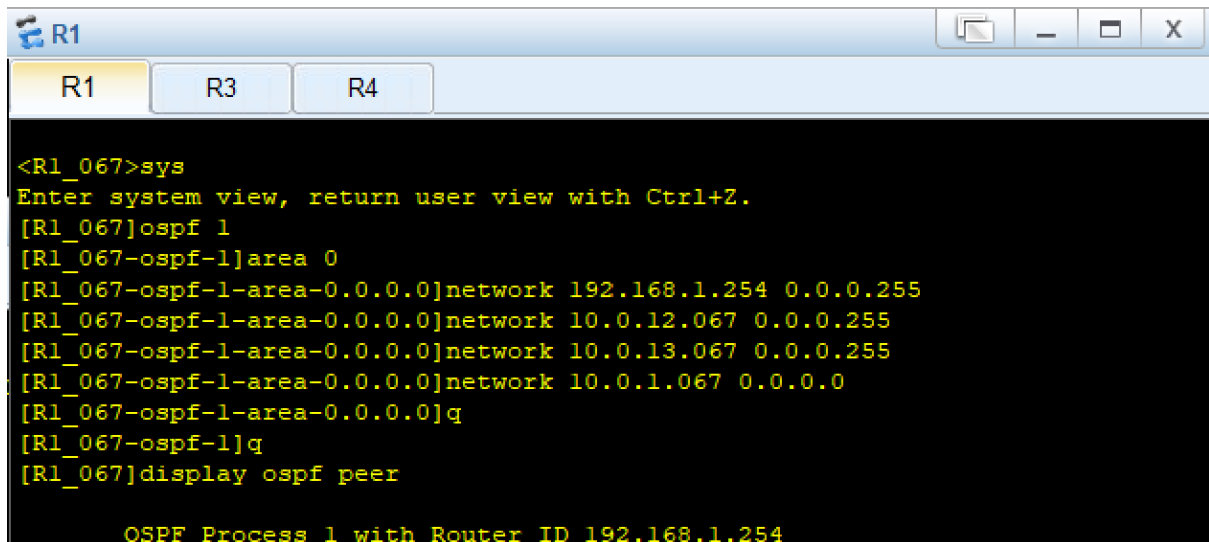

The screenshot shows a terminal window titled 'R1' with tabs for R1, R3, and R4. The R1 tab is active. The terminal displays the following commands and output:

```
<R1_067>sys
Enter system view, return user view with Ctrl+Z.
[R1_067]ospf 1
[R1_067-ospf-1]area 0
[R1_067-ospf-1-area-0.0.0.0]network 192.168.1.254 0.0.0.255
[R1_067-ospf-1-area-0.0.0.0]network 10.0.12.067 0.0.0.255
[R1_067-ospf-1-area-0.0.0.0]network 10.0.13.067 0.0.0.255
[R1_067-ospf-1-area-0.0.0.0]network 10.0.1.067 0.0.0.0
[R1_067-ospf-1-area-0.0.0.0]q
[R1_067-ospf-1]q
[R1_067]display ospf peer

    OSPF Process 1 with Router ID 192.168.1.254
```

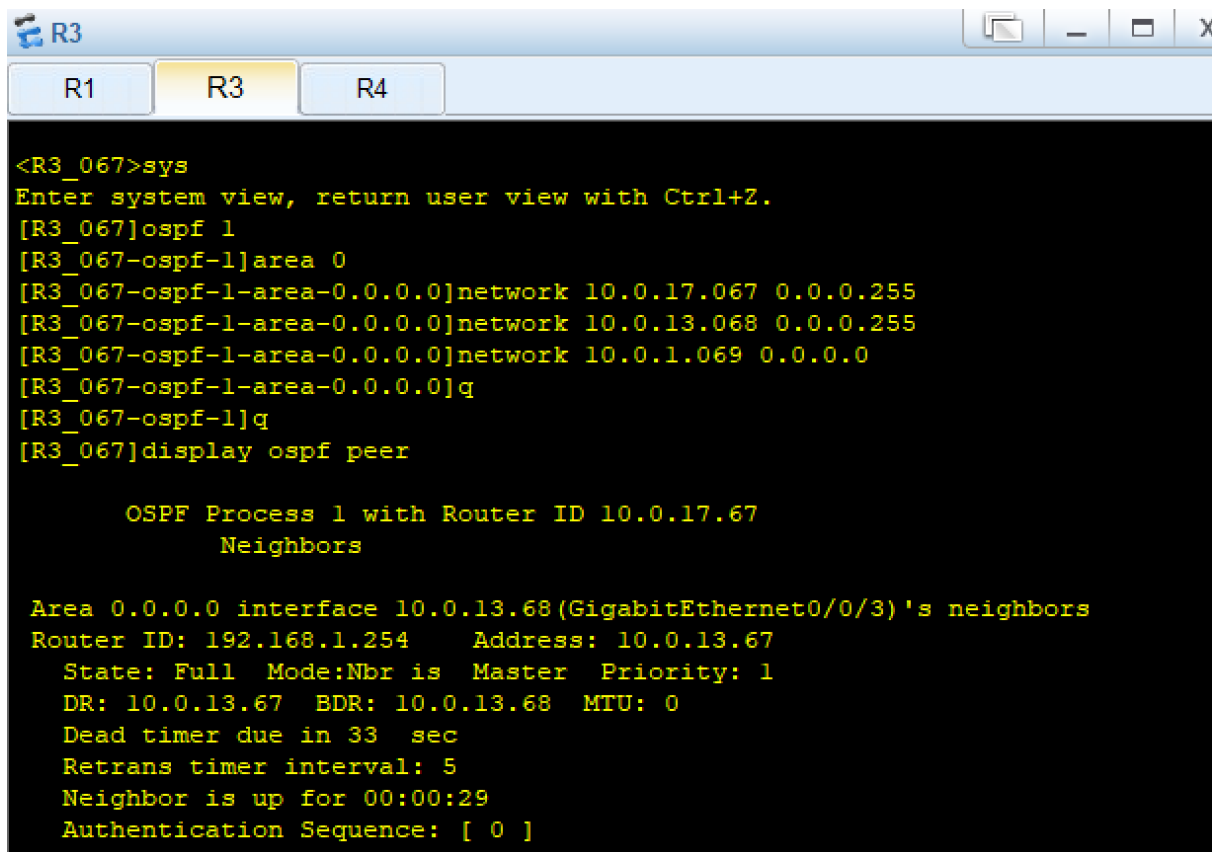

The screenshot shows a terminal window titled 'R3' with tabs for R1, R3, and R4. The R3 tab is active. The terminal displays the following commands and output:

```
<R3_067>sys
Enter system view, return user view with Ctrl+Z.
[R3_067]ospf 1
[R3_067-ospf-1]area 0
[R3_067-ospf-1-area-0.0.0.0]network 10.0.17.067 0.0.0.255
[R3_067-ospf-1-area-0.0.0.0]network 10.0.13.068 0.0.0.255
[R3_067-ospf-1-area-0.0.0.0]network 10.0.1.069 0.0.0.0
[R3_067-ospf-1-area-0.0.0.0]q
[R3_067-ospf-1]q
[R3_067]display ospf peer

    OSPF Process 1 with Router ID 10.0.17.67
      Neighbors

Area 0.0.0.0 interface 10.0.13.68(GigabitEthernet0/0/3)'s neighbors
Router ID: 192.168.1.254    Address: 10.0.13.67
  State: Full  Mode:Nbr is Master  Priority: 1
  DR: 10.0.13.67  BDR: 10.0.13.68  MTU: 0
  Dead timer due in 33  sec
  Retrans timer interval: 5
  Neighbor is up for 00:00:29
  Authentication Sequence: [ 0 ]
```

```

R4

[R4_067]sys
Enter system view, return user view with Ctrl+Z.
[R4_067]ospf 1
[R4_067-ospf-1]area 0
[R4_067-ospf-1-area-0.0.0.0]network 10.0.17.068 0.0.0.255
[R4_067-ospf-1-area-0.0.0.0]network 192.168.4.254 0.0.0.255
[R4_067-ospf-1-area-0.0.0.0]network 10.0.1.070 0.0.0.0
[R4_067-ospf-1-area-0.0.0.0]q
[R4_067-ospf-1]q
[R4_067]display ospf peer

      OSPF Process 1 with Router ID 10.0.17.68
      Neighbors

Area 0.0.0.0 interface 10.0.17.68(GigabitEthernet0/0/0)'s neighbors
Router ID: 10.0.17.67      Address: 10.0.17.67
  State: Full  Mode:Nbr is Slave  Priority: 1
  DR: 10.0.17.67  BDR: 10.0.17.68  MTU: 0
  Dead timer due in 34 sec
  Retrans timer interval: 5
  Neighbor is up for 00:01:07
  Authentication Sequence: [ 0 ]

```

```

R1

display ip routing-table protocol ospf
Route Flags: R - relay, D - download to fib
-----
Public routing table : OSPF
      Destinations : 4      Routes : 4

OSPF routing table status : <Active>
      Destinations : 4      Routes : 4

Destination/Mask    Proto    Pre  Cost      Flags NextHop      Interface
-----
10.0.1.69/32        OSPF     10   1          D    10.0.13.68    GigabitEthernet0/0/3
10.0.1.70/32        OSPF     10   2          D    10.0.13.68    GigabitEthernet0/0/3
10.0.17.0/24        OSPF     10   2          D    10.0.13.68    GigabitEthernet0/0/3
192.168.4.0/24      OSPF     10   3          D    10.0.13.68    GigabitEthernet0/0/3

OSPF routing table status : <Inactive>
      Destinations : 0      Routes : 0

<R1_067>

```

```
R3
R1  R3  R4
<R3_067>display ip routing-table protocol ospf
Route Flags: R - relay, D - download to fib
-----
Public routing table : OSPF
      Destinations : 5      Routes : 5

OSPF routing table status : <Active>
      Destinations : 5      Routes : 5

Destination/Mask    Proto    Pre  Cost      Flags NextHop      Interface
-----
10.0.1.67/32        OSPF     10   1          D    10.0.13.67    GigabitEthernet0/0/3
10.0.1.70/32        OSPF     10   1          D    10.0.17.68    GigabitEthernet0/0/0
10.0.12.0/24        OSPF     10   2          D    10.0.13.67    GigabitEthernet0/0/3
192.168.1.0/24      OSPF     10   2          D    10.0.13.67    GigabitEthernet0/0/3
192.168.4.0/24      OSPF     10   2          D    10.0.17.68    GigabitEthernet0/0/0

OSPF routing table status : <Inactive>
      Destinations : 0      Routes : 0

<R3_067>|
```

```
R4
R1 R3 R4
[R4_067]display ip routing-table protocol ospf
Route Flags: R - relay, D - download to fib
-----
Public routing table : OSPF
      Destinations : 5      Routes : 5

OSPF routing table status : <Active>
      Destinations : 5      Routes : 5

Destination/Mask    Proto   Pre  Cost      Flags NextHop         Interface
-----
10.0.1.67/32        OSPF    10   2          D   10.0.17.67        GigabitEthernet
0/0/0
10.0.1.69/32        OSPF    10   1          D   10.0.17.67        GigabitEthernet
0/0/0
10.0.12.0/24        OSPF    10   3          D   10.0.17.67        GigabitEthernet
0/0/0
10.0.13.0/24        OSPF    10   2          D   10.0.17.67        GigabitEthernet
0/0/0
192.168.1.0/24      OSPF    10   3          D   10.0.17.67        GigabitEthernet
0/0/0

OSPF routing table status : <Inactive>
      Destinations : 0      Routes : 0

[R4_067]
```

7. Soal 7

Pembuatan static routing untuk menghubungkan R1 dan R2 dilakukan dengan perintah ip route-static 10.0.1.068 (ip loopback tujuan = R2) 32 10.0.12.068 (ip pada interface R2 yang terhubung dengan R1). Setelah lakukan perintah yang sama kepada R2 dengan menggunakan ip loopback R1 dan ip pada interface R1 yang terhubung dengan R2. Pengujian konektivitas spesifik dilakukan menggunakan perintah ping -a 10.0.1.067 (ip loopback R1) 10.0.1.068 (ip loopback R2) di R1, yang membuktikan paket terkirim sukses 100%. Lakukan juga pada R2 dengan ip loopback berkebalikan jika ingin menguji lagi.

```
R1
R1 R2
<R1_067>sys
Enter system view, return user view with Ctrl+Z.
[R1_067]ip route-static 10.0.1.068 32 10.0.12.068
[R1_067]
```

```
R2
R1 R2
<R2_067>sys
Enter system view, return user view with Ctrl+Z.
[R2_067]ip route-static 10.0.1.067 32 10.0.12.067
[R2_067]
```

```
R1
R1 R2
[R1_067]ping -a 10.0.1.067 10.0.1.068
PING 10.0.1.068: 56 data bytes, press CTRL_C to break
  Reply from 10.0.1.68: bytes=56 Sequence=1 ttl=255 time=80 ms
  Reply from 10.0.1.68: bytes=56 Sequence=2 ttl=255 time=20 ms
  Reply from 10.0.1.68: bytes=56 Sequence=3 ttl=255 time=10 ms
  Reply from 10.0.1.68: bytes=56 Sequence=4 ttl=255 time=50 ms
  Reply from 10.0.1.68: bytes=56 Sequence=5 ttl=255 time=30 ms

--- 10.0.1.068 ping statistics ---
  5 packet(s) transmitted
  5 packet(s) received
  0.00% packet loss
  round-trip min/avg/max = 10/38/80 ms

[R1_067]
```

```
R2
R1 R2
[R2_067]ping -a 10.0.1.068 10.0.1.067
PING 10.0.1.067: 56 data bytes, press CTRL_C to break
  Reply from 10.0.1.67: bytes=56 Sequence=1 ttl=255 time=50 ms
  Reply from 10.0.1.67: bytes=56 Sequence=2 ttl=255 time=10 ms
  Reply from 10.0.1.67: bytes=56 Sequence=3 ttl=255 time=20 ms
  Reply from 10.0.1.67: bytes=56 Sequence=4 ttl=255 time=50 ms
  Reply from 10.0.1.67: bytes=56 Sequence=5 ttl=255 time=50 ms


--- 10.0.1.067 ping statistics ---
  5 packet(s) transmitted
  5 packet(s) received
  0.00% packet loss
  round-trip min/avg/max = 10/36/50 ms

[R2_067]
```

8. Soal 8

Uji konektivitas End-to-End dilakukan dengan mengeksekusi perintah ping dari PC1 (192.168.1.067) menuju PC2 (192.168.4.067), dan sebaliknya dari PC2 ke PC1. Output

command prompt pada kedua PC menampilkan balasan secara stabil dengan tingkat keberhasilan sempurna (0.00% packet loss). Hal ini mengonfirmasi bahwa seluruh konfigurasi, terutama routing OSPF, telah bekerja optimal sehingga data dari ujung ke ujung topologi dapat ditransmisikan tanpa putus.

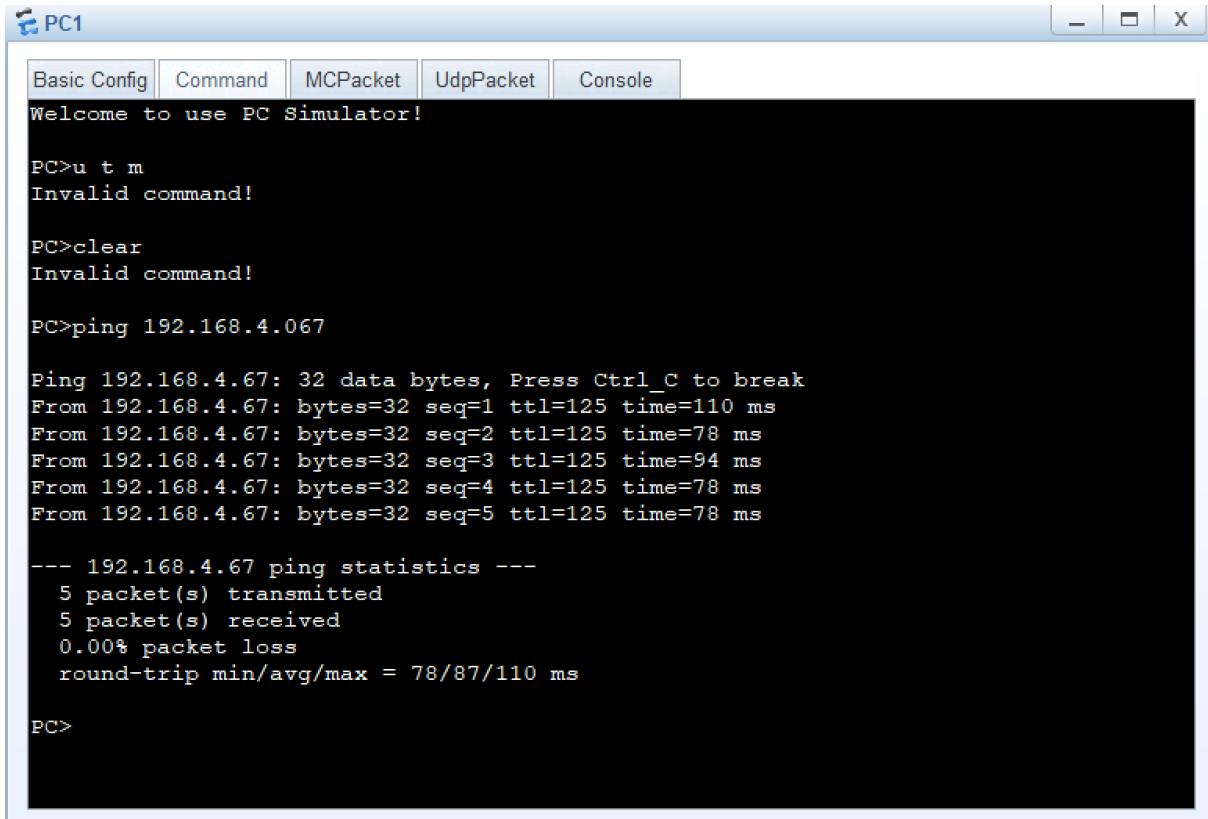

```
PC1
Basic Config Command MCPacket UdpPacket Console
Welcome to use PC Simulator!

PC>u t m
Invalid command!


PC>clear
Invalid command!

PC>ping 192.168.4.067

Ping 192.168.4.67: 32 data bytes, Press Ctrl_C to break
From 192.168.4.67: bytes=32 seq=1 ttl=125 time=110 ms
From 192.168.4.67: bytes=32 seq=2 ttl=125 time=78 ms
From 192.168.4.67: bytes=32 seq=3 ttl=125 time=94 ms
From 192.168.4.67: bytes=32 seq=4 ttl=125 time=78 ms
From 192.168.4.67: bytes=32 seq=5 ttl=125 time=78 ms

--- 192.168.4.67 ping statistics ---
 5 packet(s) transmitted
 5 packet(s) received
 0.00% packet loss
 round-trip min/avg/max = 78/87/110 ms

PC>
```

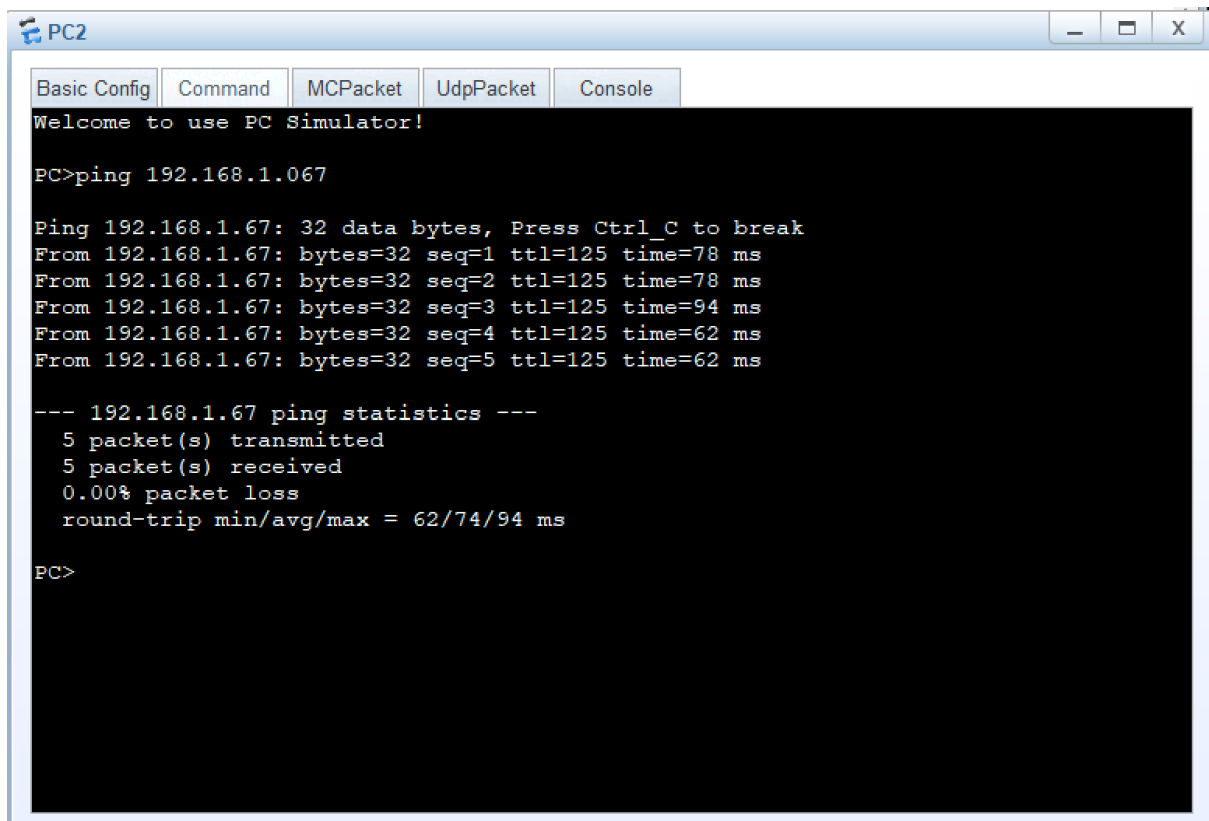

The screenshot shows a window titled "PC2" with a menu bar containing "Basic Config", "Command", "MCPacket", "UdpPacket", and "Console". The "Console" tab is active, displaying a black background with white text. The text shows a welcome message, a ping command being executed, the results of five ping attempts, and the final statistics.

```
PC2
Basic Config | Command | MCPacket | UdpPacket | Console
Welcome to use PC Simulator!

PC>ping 192.168.1.067

Ping 192.168.1.67: 32 data bytes, Press Ctrl_C to break
From 192.168.1.67: bytes=32 seq=1 ttl=125 time=78 ms
From 192.168.1.67: bytes=32 seq=2 ttl=125 time=78 ms
From 192.168.1.67: bytes=32 seq=3 ttl=125 time=94 ms
From 192.168.1.67: bytes=32 seq=4 ttl=125 time=62 ms
From 192.168.1.67: bytes=32 seq=5 ttl=125 time=62 ms

--- 192.168.1.67 ping statistics ---
  5 packet(s) transmitted
  5 packet(s) received
  0.00% packet loss
 round-trip min/avg/max = 62/74/94 ms

PC>
```

9. Soal 9

Langkah terakhir yaitu menyimpan semua konfigurasi router pada sebuah file zip. Ketik save R1_067.zip pada R1 untuk menyimpan file konfigurasinya. Ketik y, lalu setelah selesai menyimpan, pastikan untuk mengecek apakah file konfigurasi sudah tersimpan dengan perintah dir. Terlihat file R1_067.zip ada pada output command prompt yang berarti file konfigurasi sudah berhasil disimpan pada direktori flash:/. Lakukan hal yang sama untuk setiap router.

```
R1
R1 R2 R3 R4
<R1_067>save R1_067.zip
Are you sure to save the configuration to flash:/R1_067.zip?[Y/N]:y
Now saving the current configuration to the slot 17.
Save the configuration successfully.
<R1_067>dir
Directory of flash:/

  Idx  Attr      Size(Byte)  Date       Time       FileName
  ---  ---
0 drw-          - Aug 07 2015 13:51:14 src
1 drw-          - Sep 25 2026 10:05:16 pmdata
2 drw-          - Sep 25 2026 10:05:23 dhcp
3 -rw-        621 Sep 25 2026 16:48:43 private-data.txt
4 drw-          - Sep 25 2026 10:20:27 mplstpam
5 -rw-      47,448 Sep 25 2026 11:25:38 rbsaveddata.txt
6 -rw-        485 Sep 25 2026 11:24:09 vrpcfg.zip
7 -rw-        562 Sep 25 2026 17:57:12 R1_067.zip

32,004 KB total (31,944 KB free)

<R1_067>
```

```
R2
R1 R2 R3 R4
<R2_067>save R2_067.zip
Are you sure to save the configuration to flash:/R2_067.zip?[Y/N]:y
Now saving the current configuration to the slot 17.
Save the configuration successfully.
<R2_067>dir
Directory of flash:/

  Idx  Attr      Size(Byte)  Date       Time       FileName
  ---  ---
0 drw-          - Aug 07 2015 13:51:14 src
1 drw-          - Sep 25 2026 10:05:17 pmdata
2 drw-          - Sep 25 2026 10:05:23 dhcp
3 -rw-        621 Sep 25 2026 16:49:09 private-data.txt
4 drw-          - Sep 25 2026 10:20:28 mplstpam
5 -rw-      44,560 Sep 25 2026 11:26:37 rbsaveddata.txt
6 -rw-        466 Sep 25 2026 11:26:33 vrpcfg.zip
7 -rw-        491 Sep 25 2026 17:58:49 R2_067.zip

32,004 KB total (31,947 KB free)

<R2_067>
```

```
R3
R1 R2 R3 R4

<R3_067>save R3_067.zip
Are you sure to save the configuration to flash:/R3_067.zip?[Y/N]:y
Now saving the current configuration to the slot 17.
Save the configuration successfully.
<R3_067>dir
Directory of flash:/

  Idx  Attr      Size(Byte)  Date       Time       FileName
  ---  ---
  0  drw-          -   Aug 07 2015 13:51:14   src
  1  drw-          -   Sep 25 2026 10:05:16  pmdata
  2  drw-          -   Sep 25 2026 10:05:23  dhcp
  3  -rw-        621   Sep 25 2026 16:49:08  private-data.txt
  4  drw-          -   Sep 25 2026 10:20:28  mplstpoom
  5  -rw-       45,267   Sep 25 2026 11:28:03  rbsaveddata.txt
  6  -rw-        476   Sep 25 2026 11:28:00  vrpcfg.zip
  7  -rw-        523   Sep 25 2026 18:07:55  R3_067.zip

32,004 KB total (31,946 KB free)

<R3_067>
```

```
R4
R1 R2 R3 R4

<R4_067>save R4_067.zip
Are you sure to save the configuration to flash:/R4_067.zip?[Y/N]:y
Now saving the current configuration to the slot 17.
Save the configuration successfully.
<R4_067>dir
Directory of flash:/

  Idx  Attr      Size(Byte)  Date       Time       FileName
  ---  ---
  0  drw-          -   Aug 07 2015 13:51:14   src
  1  drw-          -   Sep 25 2026 10:05:17  pmdata
  2  drw-          -   Sep 25 2026 10:05:24  dhcp
  3  -rw-        621   Sep 25 2026 16:49:09  private-data.txt
  4  drw-          -   Sep 25 2026 10:20:28  mplstpoom
  5  -rw-       45,287   Sep 25 2026 11:29:22  rbsaveddata.txt
  6  -rw-        481   Sep 25 2026 11:29:19  vrpcfg.zip
  7  -rw-        528   Sep 25 2026 18:09:14  R4_067.zip

32,004 KB total (31,946 KB free)

<R4_067>|
```