

LAPORAN PRAKTIKUM
POSTTEST 4
JARINGAN KOMPUTER




Disusun oleh:
Mahdi Sarwan Abdullah (067)
Kelas (B '25)

PROGRAM STUDI INFORMATIKA
UNIVERSITAS MULAWARMAN
SAMARINDA
2026

1. Soal 1

Langkah pertama adalah membangun topologi fisik yang terdiri dari 3 buah router, 3 buah switch, serta 6 buah PC. Pengelompokan dilakukan menggunakan label warna untuk merepresentasikan tiga segmen jaringan logis yang berbeda, VLAN 10 (Media), VLAN 20 (Keuangan), dan VLAN 30 (Marketing). Secara fisik perangkat ini saling terhubung, tetapi tanpa konfigurasi lebih lanjut, data akan bercampur atau tidak terarah dengan benar. Mulai topologi jaringan dengan menekan tombol start di bagian atas fitur pada ensp.

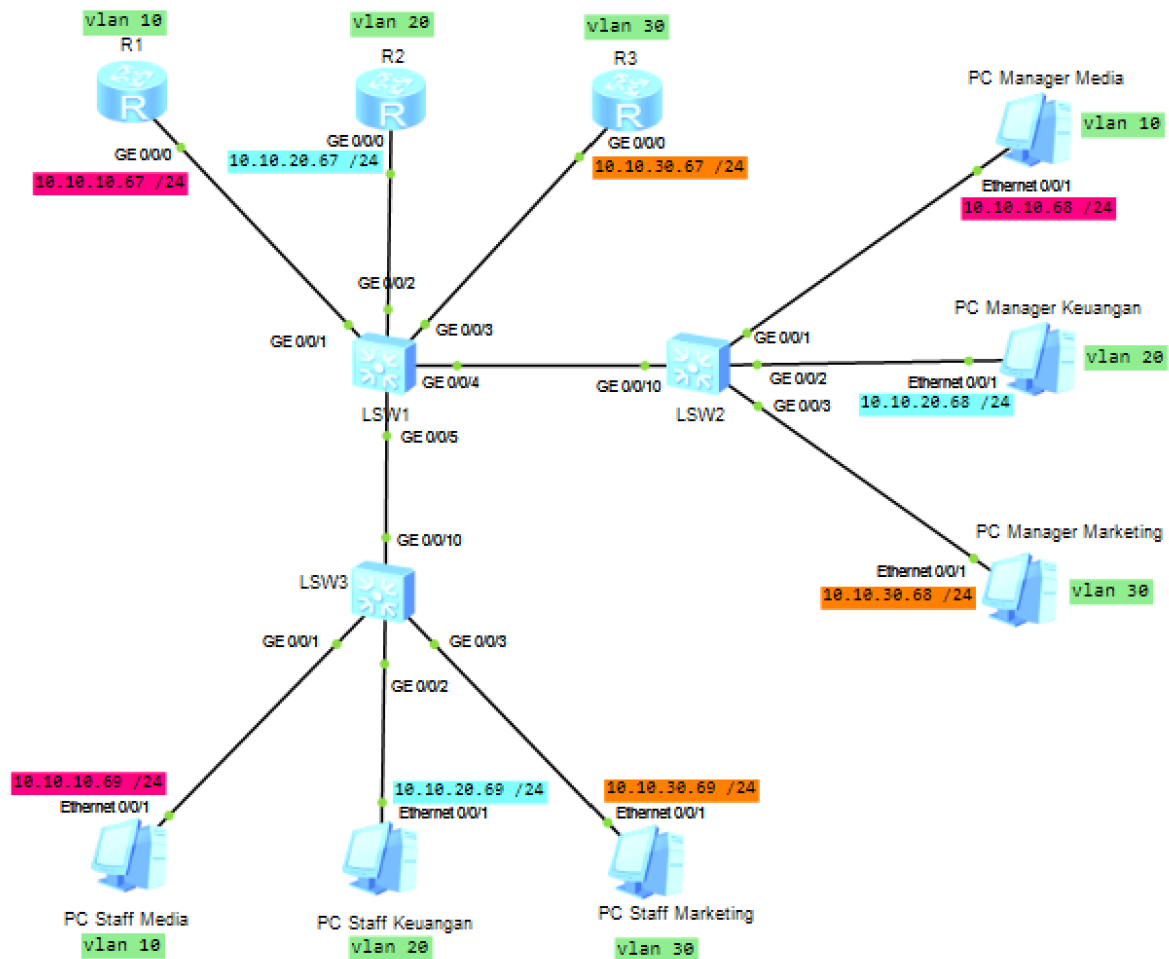

2. Soal 2

Ketik u t m untuk menghilangkan log panjang yang akan muncul seiring melakukan konfigurasi. Lakukan hal ini untuk setiap router dan switch (R1, R2, R3, LSW1, LSW2, dan LSW3).

```
R1
R1 R2 R3 LSW1 LSW2 LSW3
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>
```

```
R2
R1 R2 R3 LSW1 LSW2 LSW3
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>
```

```
R3
R1 R2 R3 LSW1 LSW2 LSW3
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>
```

```
LSW1
R1 R2 R3 LSW1 LSW2 LSW3
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>
```

```
LSW2
R1 R2 R3 LSW1 LSW2 LSW3
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>
```

```
LSW3
R1 R2 R3 LSW1 LSW2 LSW3
<Huawei>u t m
Info: Current terminal monitor is off.
<Huawei>
```

3. Soal 3

Untuk mengganti nama router dan PC sesuai ketentuan pada tabel soal di classroom, konfigurasi dilakukan melalui CLI pada masing-masing router dan switch. Ketik system-view, lalu sysname R1_067 (R1_nim). Setelah nama diubah, masuk ke interface port g0/0/0 dan

tambahkan ip address 10.10.10.67 dengan prefiks 24. Konfigurasi ip sudah berhasil terlihat dari output setelah kita ketik di this. Lalu ctrl + z masuk ke user view. Lakukan hal yang sama ke semua router sesuai ketentuan hostname dan ip addressnya. Untuk PC, masukkan ip address sesuai yang ada pada tabel di classroom. Subnet mask nya masukkan 255.255.255.0 untuk setiap PC karena semua PC menggunakan prefiks 24. Untuk gateway-nya, masukkan ip routernya yang memiliki VLAN yang sama (cth: PC Manager media gateway-nya 10.10.10.67 (R1) karena berada pada VLAN yang sama, yaitu VLAN 10)



The screenshot shows the configuration window for router R1. The window has a title bar with 'R1' and standard window controls. Below the title bar is a tab bar with 'R1', 'R2', 'R3', 'LSW1', 'LSW2', and 'LSW3'. The 'R1' tab is selected. The main area is a black terminal window with yellow text showing the following commands and output:

```
<Huawei>sys
Enter system view, return user view with Ctrl+Z.
[Huawei]sysname R1_067
[R1_067]int g0/0/0
[R1_067-GigabitEthernet0/0/0]ip address 10.10.10.67 24
[R1_067-GigabitEthernet0/0/0]dis this
#
interface GigabitEthernet0/0/0
 ip address 10.10.10.67 255.255.255.0
#
return
[R1_067-GigabitEthernet0/0/0]
<R1_067>
```



The screenshot shows the configuration window for router R2. The window has a title bar with 'R2' and standard window controls. Below the title bar is a tab bar with 'R1', 'R2', 'R3', 'LSW1', 'LSW2', and 'LSW3'. The 'R2' tab is selected. The main area is a black terminal window with yellow text showing the following commands and output:

```
<Huawei>sys
Enter system view, return user view with Ctrl+Z.
[Huawei]sysname R2_067
[R2_067]int g0/0/0
[R2_067-GigabitEthernet0/0/0]ip address 10.10.20.67 24
[R2_067-GigabitEthernet0/0/0]dis this
#
interface GigabitEthernet0/0/0
 ip address 10.10.20.67 255.255.255.0
#
return
[R2_067-GigabitEthernet0/0/0]
<R2_067>
```

```
<Huawei>sys
Enter system view, return user view with Ctrl+Z.
[Huawei]sysname R3_067
[R3_067]int g0/0/0
[R3_067-GigabitEthernet0/0/0]ip address 10.10.30.67 24
[R3_067-GigabitEthernet0/0/0]dis this
#
interface GigabitEthernet0/0/0
 ip address 10.10.30.67 255.255.255.0
#
return
[R3_067-GigabitEthernet0/0/0]
<R3_067>
```

Host Name: PC Manager Media

MAC Address: 54-89-98-66-33-A6

IPv4 Configuration

☒ Static ☐ DHCP ☐ Obtain DNS server address automatically

IP Address: 10 . 10 . 10 . 68 DNS1: 0 . 0 . 0 . 0

Subnet Mask: 255 . 255 . 255 . 0 DNS2: 0 . 0 . 0 . 0

Gateway: 10 . 10 . 10 . 67

IPv6 Configuration

☒ Static ☐ DHCPv6

IPv6 Address: ::

Prefix Length: 128

IPv6 Gateway: ::

Apply

PC Manager Keuangan

Basic Config
Command
MCPacket
UdpPacket
Console

Host Name: PC Manager Keuangan

MAC Address: 54-89-98-1B-38-3F

IPv4 Configuration

☒ Static
☐ DHCP
☐ Obtain DNS server address automatically

IP Address: 10 . 10 . 20 . 68
DNS1: 0 . 0 . 0 . 0

Subnet Mask: 255 . 255 . 255 . 0
DNS2: 0 . 0 . 0 . 0

Gateway: 10 . 10 . 20 . 67

IPv6 Configuration

☒ Static
☐ DHCPv6

IPv6 Address: ::

Prefix Length: 128

IPv6 Gateway: ::

Apply

PC Manager Marketing

Basic Config
Command
MCPacket
UdpPacket
Console

Host Name: PC Manager Marketing

MAC Address: 54-89-98-1A-05-9B

IPv4 Configuration

☒ Static
☐ DHCP
☐ Obtain DNS server address automatically

IP Address: 10 . 10 . 30 . 68
DNS1: 0 . 0 . 0 . 0

Subnet Mask: 255 . 255 . 255 . 0
DNS2: 0 . 0 . 0 . 0

Gateway: 10 . 10 . 30 . 67

IPv6 Configuration

☒ Static
☐ DHCPv6

IPv6 Address: ::

Prefix Length: 128

IPv6 Gateway: ::

Apply

PC Staff Media

Basic Config
Command
MCPacket
UdpPacket
Console

Host Name: PC Staff Media

MAC Address: 54-89-98-8A-67-A8

IPv4 Configuration

☒ Static
☐ DHCP
☐ Obtain DNS server address automatically

IP Address: 10 . 10 . 10 . 69
DNS1: 0 . 0 . 0 . 0

Subnet Mask: 255 . 255 . 255 . 0
DNS2: 0 . 0 . 0 . 0

Gateway: 10 . 10 . 10 . 67

IPv6 Configuration

☒ Static
☐ DHCPv6

IPv6 Address: ::

Prefix Length: 128

IPv6 Gateway: ::

Apply

PC Staff Keuangan

Basic Config
Command
MCPacket
UdpPacket
Console

Host Name: PC Staff Keuangan

MAC Address: 54-89-98-DE-1F-07

IPv4 Configuration

☒ Static
☐ DHCP
☐ Obtain DNS server address automatically

IP Address: 10 . 10 . 20 . 69
DNS1: 0 . 0 . 0 . 0

Subnet Mask: 255 . 255 . 255 . 0
DNS2: 0 . 0 . 0 . 0

Gateway: 10 . 10 . 20 . 67

IPv6 Configuration

☒ Static
☐ DHCPv6

IPv6 Address: ::

Prefix Length: 128

IPv6 Gateway: ::

Apply


The screenshot shows a configuration window titled "PC Staff Marketing" with a standard Windows-style title bar (minimize, maximize, close buttons). The window contains several tabs: "Basic Config", "Command", "MCPacket", "UdpPacket", and "Console". The "Basic Config" tab is active and displays the following fields:

- Host Name:** PC Staff Marketing
- MAC Address:** 54-89-98-35-42-6B
- IPv4 Configuration:**
 - ☒ Static (selected), ☐ DHCP
 - ☐ Obtain DNS server address automatically
 - IP Address:** 10 . 10 . 30 . 69
 - DNS1:** 0 . 0 . 0 . 0
 - Subnet Mask:** 255 . 255 . 255 . 0
 - DNS2:** 0 . 0 . 0 . 0
 - Gateway:** 10 . 10 . 30 . 67
- IPv6 Configuration:**
 - ☒ Static (selected), ☐ DHCPv6
 - IPv6 Address:** ::
 - Prefix Length:** 128
 - IPv6 Gateway:** ::

An "Apply" button is located at the bottom right of the configuration area.

4. Soal 4


Pada switch 1 (LSW1), VLAN 10, 20, dan 30 dibuat sekaligus menggunakan perintah vlan batch. Interface yang terhubung langsung ke router (G0/0/1, G0/0/2, G0/0/3) diatur sebagai port access yang hanya menjadi default satu VLAN spesifik tiap port. Sebaliknya, port G0/0/4 dan G0/0/5 yang menuju switch lain di bawahnya diatur sebagai port trunk agar mampu membawa paket data dari banyak VLAN sekaligus melalui satu kabel fisik penghubung.

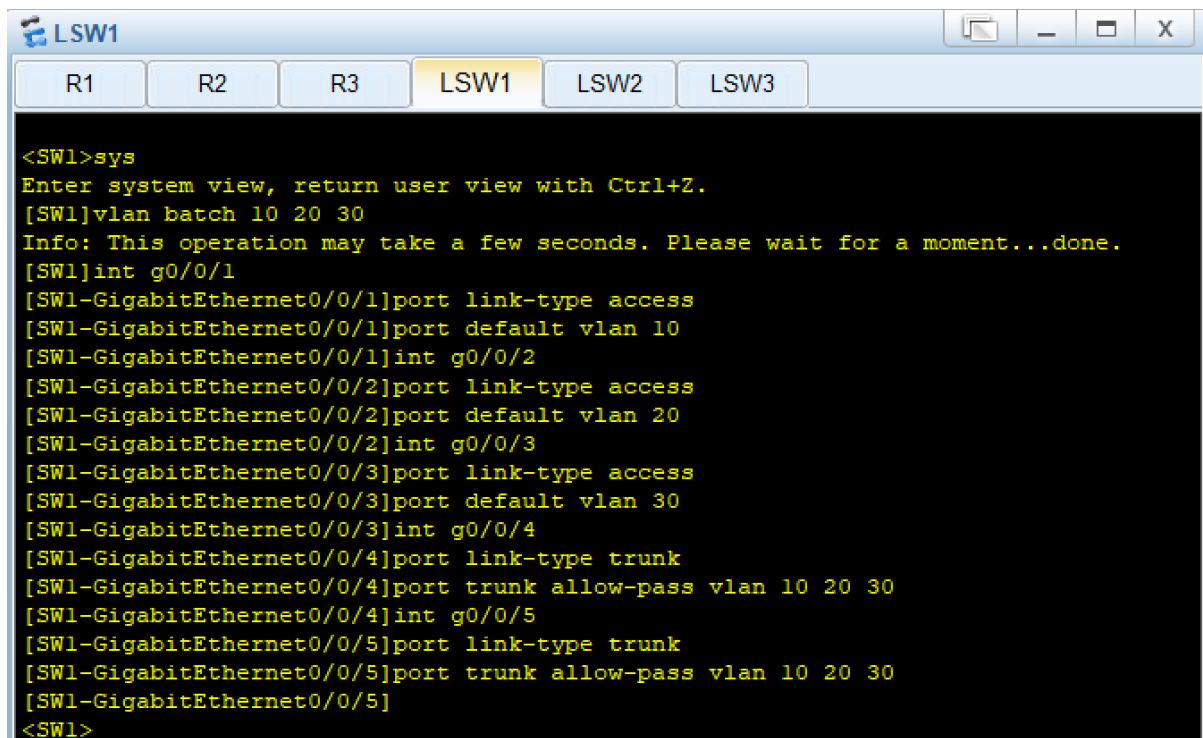The screenshot shows a network configuration window for LSW1. At the top, there are tabs for R1, R2, R3, LSW1 (selected), LSW2, and LSW3. The main area is a black terminal window with yellow text showing the configuration process. The user enters system view, creates VLANs 10, 20, and 30 in batch, and then configures five ports (G0/0/1 to G0/0/5). Ports 1-3 are set as access ports for VLANs 10, 20, and 30 respectively. Ports 4 and 5 are set as trunk ports allowing all three VLANs.

```
<SW1>sys
Enter system view, return user view with Ctrl+Z.
[SW1]vlan batch 10 20 30
Info: This operation may take a few seconds. Please wait for a moment...done.
[SW1]int g0/0/1
[SW1-GigabitEthernet0/0/1]port link-type access
[SW1-GigabitEthernet0/0/1]port default vlan 10
[SW1-GigabitEthernet0/0/1]int g0/0/2
[SW1-GigabitEthernet0/0/2]port link-type access
[SW1-GigabitEthernet0/0/2]port default vlan 20
[SW1-GigabitEthernet0/0/2]int g0/0/3
[SW1-GigabitEthernet0/0/3]port link-type access
[SW1-GigabitEthernet0/0/3]port default vlan 30
[SW1-GigabitEthernet0/0/3]int g0/0/4
[SW1-GigabitEthernet0/0/4]port link-type trunk
[SW1-GigabitEthernet0/0/4]port trunk allow-pass vlan 10 20 30
[SW1-GigabitEthernet0/0/4]int g0/0/5
[SW1-GigabitEthernet0/0/5]port link-type trunk
[SW1-GigabitEthernet0/0/5]port trunk allow-pass vlan 10 20 30
[SW1-GigabitEthernet0/0/5]
<SW1>
```

5. Soal 5


Sama seperti LSW1, VLAN 10, 20, dan 30 didaftarkan ke dalam sistem LSW2. Port-port yang mengarah langsung ke masing-masing PC Manager (G0/0/1, G0/0/2, G0/0/3) dikonfigurasi sebagai port access dan dimasukkan ke VLAN yang sesuai (10, 20, dan 30). Sementara port G0/0/10 yang mengarah kembali naik ke LSW1 disetel menjadi trunk agar stiker identitas VLAN dari PC Manager bisa disalurkan ke switch pusat.

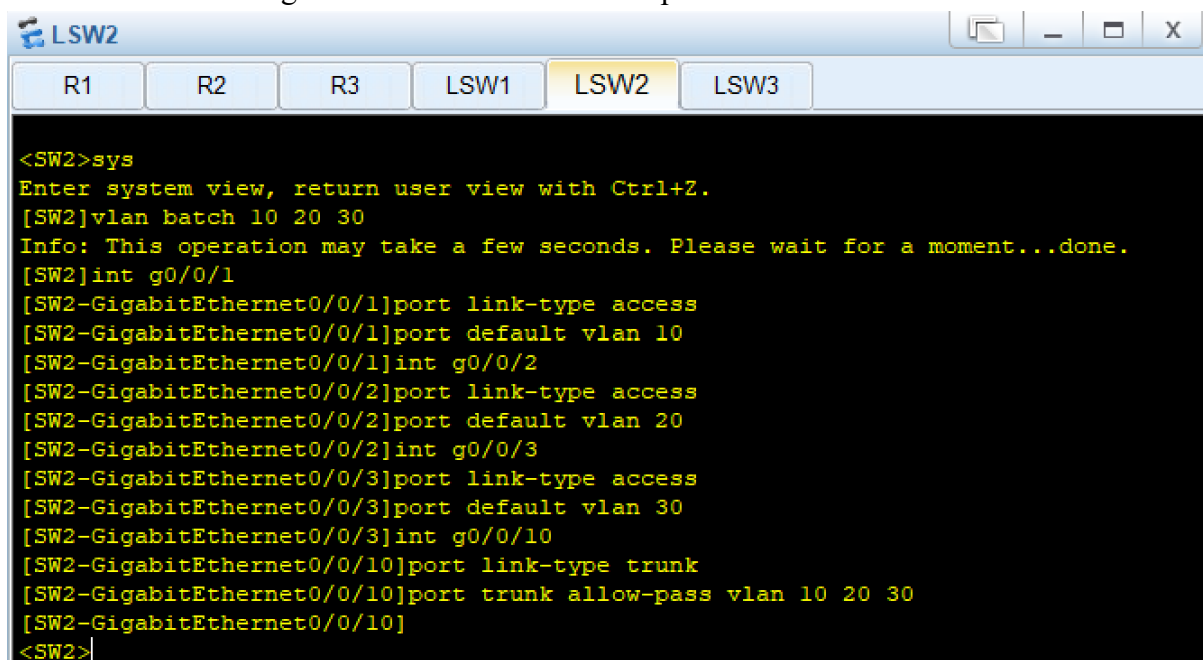The screenshot shows a network configuration window for LSW2. At the top, there are tabs for R1, R2, R3, LSW1, LSW2 (selected), and LSW3. The main area is a black terminal window with yellow text showing the configuration process. The user enters system view, creates VLANs 10, 20, and 30 in batch, and then configures five ports (G0/0/1 to G0/0/10). Ports 1-3 are set as access ports for VLANs 10, 20, and 30 respectively. Port 10 is set as a trunk port allowing all three VLANs.

```
<SW2>sys
Enter system view, return user view with Ctrl+Z.
[SW2]vlan batch 10 20 30
Info: This operation may take a few seconds. Please wait for a moment...done.
[SW2]int g0/0/1
[SW2-GigabitEthernet0/0/1]port link-type access
[SW2-GigabitEthernet0/0/1]port default vlan 10
[SW2-GigabitEthernet0/0/1]int g0/0/2
[SW2-GigabitEthernet0/0/2]port link-type access
[SW2-GigabitEthernet0/0/2]port default vlan 20
[SW2-GigabitEthernet0/0/2]int g0/0/3
[SW2-GigabitEthernet0/0/3]port link-type access
[SW2-GigabitEthernet0/0/3]port default vlan 30
[SW2-GigabitEthernet0/0/3]int g0/0/10
[SW2-GigabitEthernet0/0/10]port link-type trunk
[SW2-GigabitEthernet0/0/10]port trunk allow-pass vlan 10 20 30
[SW2-GigabitEthernet0/0/10]
<SW2>
```

6. Soal 6


Sama seperti LSW2, VLAN 10, 20, dan 30 didaftarkan ke dalam sistem LSW3. Port-port yang mengarah langsung ke masing-masing PC Staff (G0/0/1, G0/0/2, G0/0/3) dikonfigurasi sebagai port access dan dimasukkan ke VLAN yang sesuai (10, 20, dan 30). Sementara port G0/0/10 yang mengarah kembali naik ke LSW1 disetel menjadi trunk agar stiker identitas VLAN dari PC Staff bisa disalurkan ke switch pusat.

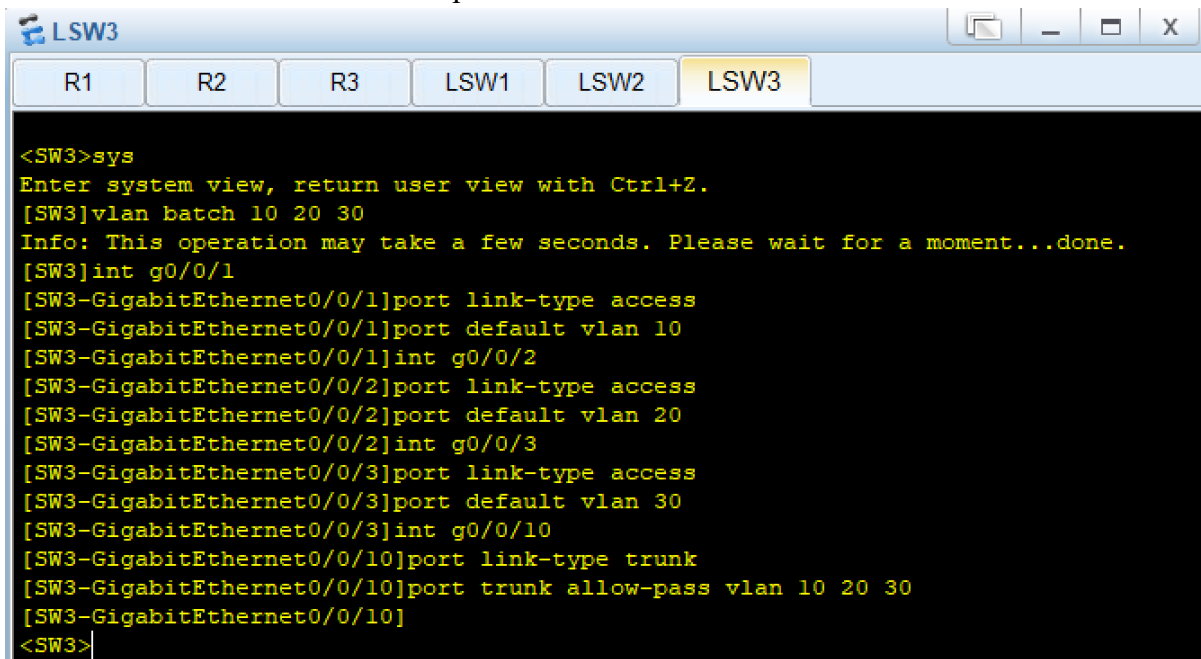

```
<SW3>sys
Enter system view, return user view with Ctrl+Z.
[SW3]vlan batch 10 20 30
Info: This operation may take a few seconds. Please wait for a moment...done.
[SW3]int g0/0/1
[SW3-GigabitEthernet0/0/1]port link-type access
[SW3-GigabitEthernet0/0/1]port default vlan 10
[SW3-GigabitEthernet0/0/1]int g0/0/2
[SW3-GigabitEthernet0/0/2]port link-type access
[SW3-GigabitEthernet0/0/2]port default vlan 20
[SW3-GigabitEthernet0/0/2]int g0/0/3
[SW3-GigabitEthernet0/0/3]port link-type access
[SW3-GigabitEthernet0/0/3]port default vlan 30
[SW3-GigabitEthernet0/0/3]int g0/0/10
[SW3-GigabitEthernet0/0/10]port link-type trunk
[SW3-GigabitEthernet0/0/10]port trunk allow-pass vlan 10 20 30
[SW3-GigabitEthernet0/0/10]
<SW3>
```

7. Soal 7

Pengujian dilakukan dengan mengirim paket ping dari router ke PC Manager di vlan yang sama (misal R1 ke PC Manager Media di VLAN 10). Hasil capture wireshark pada port trunk G0/0/4 LSW1 menangkap lalu lintas tersebut dan membuktikan keberadaan Header IEEE 802.1Q yang disisipkan pada frame ethernet. Header ini memperlihatkan nilai ID: 10, 20, atau 30 (sesuai pengujian). Ini membuktikan bahwa port trunk berfungsi normal dalam memberi stiker identitas VLAN pada paket agar switch seberang tahu ke divisi mana paket itu harus diteruskan.

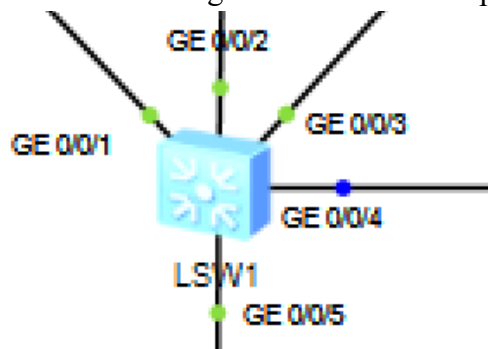

```

R1
R1_067>ping 10.10.10.68
PING 10.10.10.68: 56 data bytes, press CTRL C to break
  Reply from 10.10.10.68: bytes=56 Sequence=1 ttl=128 time=140 ms
  Reply from 10.10.10.68: bytes=56 Sequence=2 ttl=128 time=90 ms
  Reply from 10.10.10.68: bytes=56 Sequence=3 ttl=128 time=60 ms
  Reply from 10.10.10.68: bytes=56 Sequence=4 ttl=128 time=60 ms
  Reply from 10.10.10.68: bytes=56 Sequence=5 ttl=128 time=90 ms

--- 10.10.10.68 ping statistics ---
  5 packet(s) transmitted
  5 packet(s) received
  0.00% packet loss
  round-trip min/avg/max = 60/88/140 ms

<R1_067>

```

Wireshark · Packet 215 · -

- > Frame 215: 102 bytes on wire (816 bits), 102 bytes captured (816 bits) on interface
- > Ethernet II, Src: HuaweiTe_54:7d:6a (54:89:98:54:7d:6a), Dst: HuaweiTe_66:33:33 (66:33:33:66:33:33)
- > 802.1Q Virtual LAN, PRI: 0, DEI: 0, ID: 10
- > Internet Protocol Version 4, Src: 10.10.10.67, Dst: 10.10.10.68
- > Internet Control Message Protocol

0000	54 89 98 66 33 a6	54 89 98 54 7d 6a	81 00 00 0a	T · f3 · T · Tj ·
0010	08 00 45 00 00 54	00 00 00 00 ff 01	93 0e 0a 0a	· E · T ·
0020	0a 43 0a 0a 0a 44	08 00 f8 dd cd ab	01 00 c6 12	· C · D ·
0030	27 00 06 21 13 00	00 01 02 03 04 05	06 07 08 09	' · ! ·
0040	0a 0b 0c 0d 0e 0f	10 11 12 13 14 15	16 17 18 19	· · · · ·
0050	1a 1b 1c 1d 1e 1f	20 21 22 23 24 25	26 27 28 29	· · · · · ! " # \$ % & ' ()
0060	2a 2b 2c 2d 2e 2f			* + , - . /

Close Help

```
R2
R1  R2  R3  LSW1  LSW2  LSW3

<R2_067>ping 10.10.20.68
PING 10.10.20.68: 56 data bytes, press CTRL_C to break
  Reply from 10.10.20.68: bytes=56 Sequence=1 ttl=128 time=160 ms
  Reply from 10.10.20.68: bytes=56 Sequence=2 ttl=128 time=80 ms
  Reply from 10.10.20.68: bytes=56 Sequence=3 ttl=128 time=100 ms
  Reply from 10.10.20.68: bytes=56 Sequence=4 ttl=128 time=60 ms
  Reply from 10.10.20.68: bytes=56 Sequence=5 ttl=128 time=100 ms

--- 10.10.20.68 ping statistics ---
  5 packet(s) transmitted
  5 packet(s) received
  0.00% packet loss
  round-trip min/avg/max = 60/100/160 ms

<R2_067>
```

Wireshark · Packet 301 · -

> Frame 301: 102 bytes on wire (816 bits), 102 bytes captured (816 bits) on interface
> Ethernet II, Src: HuaweiTe_6f:42:3b (54:89:98:6f:42:3b), Dst: HuaweiTe_1b:38:
> 802.1Q Virtual LAN, PRI: 0, DEI: 0, ID: 20
> Internet Protocol Version 4, Src: 10.10.20.67, Dst: 10.10.20.68
> Internet Control Message Protocol

0000	54 89 98 1b 38 3f 54 89	98 6f 42 3b 81 00 00 14	T...8?T. .oB;....
0010	08 00 45 00 00 54 00 00	00 00 ff 01 7f 0e 0a 0a	..E..T..
0020	14 43 0a 0a 14 44 08 00	5d 4e cd ab 01 00 6e 9f	.C...D..]N...n.
0030	29 00 06 24 04 00 00 01	02 03 04 05 06 07 08 09	)..\$.
0040	0a 0b 0c 0d 0e 0f 10 11	12 13 14 15 16 17 18 19	
0050	1a 1b 1c 1d 1e 1f 20 21	22 23 24 25 26 27 28 29	 ! "#\$%&'()
0060	2a 2b 2c 2d 2e 2f		*+,-./

No.: 301 · Time: 641.829000 · Source: 10.10.20.67 · Destination: 10....o: Echo (ping) request id=0xcdab, seq=256/1, ttl=255 (reply in 302)

Close Help

The image shows a network simulation interface with a router configuration window and a packet capture window.

Router Configuration Window (R3):

```

<R3_067>ping 10.10.30.68
PING 10.10.30.68: 56 data bytes, press CTRL_C to break
  Reply from 10.10.30.68: bytes=56 Sequence=1 ttl=128 time=140 ms
  Reply from 10.10.30.68: bytes=56 Sequence=2 ttl=128 time=80 ms
  Reply from 10.10.30.68: bytes=56 Sequence=3 ttl=128 time=100 ms
  Reply from 10.10.30.68: bytes=56 Sequence=4 ttl=128 time=80 ms
  Reply from 10.10.30.68: bytes=56 Sequence=5 ttl=128 time=70 ms

--- 10.10.30.68 ping statistics ---
  5 packet(s) transmitted
  5 packet(s) received
  0.00% packet loss
  round-trip min/avg/max = 70/94/140 ms

<R3_067>
  
```

Wireshark Packet Capture Window (Packet 368):

- > Frame 368: 102 bytes on wire (816 bits), 102 bytes captured (816 bits) on interface
- > Ethernet II, Src: HuaweiTe_28:10:d7 (54:89:98:28:10:d7), Dst: HuaweiTe_1a:05:00 (54:89:98:1a:05:00)
- > 802.1Q Virtual LAN, PRI: 0, DEI: 0, ID: 30
- > Internet Protocol Version 4, Src: 10.10.30.67, Dst: 10.10.30.68
- > Internet Control Message Protocol

Packet Details:

Offset	Hex	ASCII
0000	54 89 98 1a 05 9b 54 89 98 28 10 d7 81 00 00 1e	T.....T. .(.....
0010	08 00 45 00 00 54 00 00 00 00 ff 01 6b 0e 0a 0a	..E..T..k...
0020	1e 43 0a 0a 1e 44 08 00 80 74 cd ab 01 00 34 78	.C...D... .t....4x
0030	2b 00 06 25 19 00 00 01 02 03 04 05 06 07 08 09	+...%.....
0040	0a 0b 0c 0d 0e 0f 10 11 12 13 14 15 16 17 18 19	
0050	1a 1b 1c 1d 1e 1f 20 21 22 23 24 25 26 27 28 29	 ! " # \$ % & ' ()
0060	2a 2b 2c 2d 2e 2f	*+, - . /


Packet Info: No.: 368 · Time: 764.375000 · Source: 10.10.30.67 · Destination: 10....o: Echo (ping) request id=0xcdab, seq=256/1, ttl=255 (reply in 369)

Buttons: Close, Help

8. Soal 8

Pengujian dilakukan dengan mengirim paket ping dari router ke PC Staff di vlan yang sama (misal R1 ke PC Staff Media di VLAN 10). Hasil capture wireshark pada port trunk G0/0/5 LSW1 menangkap lalu lintas tersebut dan membuktikan keberadaan Header IEEE 802.1Q yang disisipkan pada frame ethernet. Header ini memperlihatkan nilai ID: 10, 20, atau 30 (sesuai

pengujian). Ini membuktikan bahwa port trunk berfungsi normal dalam memberi stiker identitas VLAN pada paket agar switch seberang tahu ke divisi mana paket itu harus diteruskan.

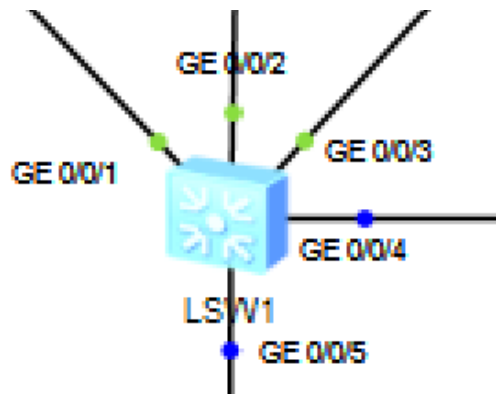

```
R1
R1  R2  R3  LSW1  LSW2  LSW3
<R1_067>ping 10.10.10.69
PING 10.10.10.69: 56 data bytes, press CTRL_C to break
  Reply from 10.10.10.69: bytes=56 Sequence=1 ttl=128 time=160 ms
  Reply from 10.10.10.69: bytes=56 Sequence=2 ttl=128 time=70 ms
  Reply from 10.10.10.69: bytes=56 Sequence=3 ttl=128 time=60 ms
  Reply from 10.10.10.69: bytes=56 Sequence=4 ttl=128 time=100 ms
  Reply from 10.10.10.69: bytes=56 Sequence=5 ttl=128 time=60 ms

--- 10.10.10.69 ping statistics ---
  5 packet(s) transmitted
  5 packet(s) received
  0.00% packet loss
  round-trip min/avg/max = 60/90/160 ms

<R1_067>
```


Wireshark · Packet 47 · -

- > Frame 47: 102 bytes on wire (816 bits), 102 bytes captured (816 bits) on inte
- > Ethernet II, Src: HuaweiTe_6f:42:3b (54:89:98:6f:42:3b), Dst: HuaweiTe_de:1f:
- > 802.1Q Virtual LAN, PRI: 0, DEI: 0, ID: 20
- > Internet Protocol Version 4, Src: 10.10.20.67, Dst: 10.10.20.69
- > Internet Control Message Protocol

0000	54 89 98 de 1f 07 54 89 98 6f 42 3b 81 00 00 14	T.....T. .oB;....
0010	08 00 45 00 00 54 00 05 00 00 ff 01 7f 08 0a 0a	..E..T..
0020	14 43 0a 0a 14 45 08 00 43 87 ce ab 01 00 74 66	.C...E.. C.....tf
0030	2f 00 06 24 11 00 00 01 02 03 04 05 06 07 08 09	/..\$.
0040	0a 0b 0c 0d 0e 0f 10 11 12 13 14 15 16 17 18 19	
0050	1a 1b 1c 1d 1e 1f 20 21 22 23 24 25 26 27 28 29	 ! "#\$%&'()
0060	2a 2b 2c 2d 2e 2f	*+, -./

No.: 47 · Time: 71.828000 · Source: 10.10.20.67 · Destination: 10.10....nfo: Echo (ping) request id=0xceab, seq=256/1, ttl=255 (reply in 48)

Close

Help

R3

R1

R2

R3

LSW1

LSW2

LSW3

```

<R3_067>ping 10.10.30.69
PING 10.10.30.69: 56 data bytes, press CTRL_C to break
  Reply from 10.10.30.69: bytes=56 Sequence=1 ttl=128 time=120 ms
  Reply from 10.10.30.69: bytes=56 Sequence=2 ttl=128 time=80 ms
  Reply from 10.10.30.69: bytes=56 Sequence=3 ttl=128 time=100 ms
  Reply from 10.10.30.69: bytes=56 Sequence=4 ttl=128 time=60 ms
  Reply from 10.10.30.69: bytes=56 Sequence=5 ttl=128 time=100 ms

--- 10.10.30.69 ping statistics ---
  5 packet(s) transmitted
  5 packet(s) received
  0.00% packet loss
  round-trip min/avg/max = 60/92/120 ms

<R3_067>

```

