



Installing the PDF Print Driver for use with PPS

Skywire Software, L.L.C.
3000 Internet Boulevard
Suite 200
Frisco, Texas 75034
www.skywiresoftware.com

Phone: (U. S.) 972.377.1110
(EMEA) +44 (0) 1372 366 200
FAX: (U. S.) 972.377.1109
(EMEA) +44 (0) 1372 366 201
Support: (U. S.) 866.4SKYWIRE
(EMEA) +44 (0) 1372 366 222

support@skywiresoftware.com

PUBLICATION COPYRIGHT NOTICE

Copyright © 2008 Skywire Software, L.L.C. All rights reserved.

Printed in the United States of America.

This publication contains proprietary information which is the property of Skywire Software or its subsidiaries. This publication may also be protected under the copyright and trade secret laws of other countries.

TRADEMARKS

Skywire® is a registered trademark of Skywire Software, L.L.C.

Docucorp®, its products (Docucreate™, Documaker™, Docupresentment™, Docusave®, Documanager™, Poweroffice®, Docutoolbox™, and Transall™), and its logo are trademarks or registered trademarks of Skywire Software or its subsidiaries.

The Docucorp product modules (Commcommander™, Docuflex®, Documerge®, Docugraph™, Docusolve®, Docuword™, Dynacomp®, DWSD™, DBL™, Freeform®, Grafxc commander™, Imagecreate™, I.R.I.S.™, MARS/NT™, Powermapping™, Printcommander®, Rulecommander™, Shuttle™, VLAM®, Virtual Library Access Method™, Template Technology™, and X/HP™) are trademarks of Skywire Software or its subsidiaries.

Skywire Software (or its subsidiaries) and Mynd Corporation are joint owners of the DAP™ and Document Automation Platform™ product trademarks.

Docuflex is based in part on the work of Jean-loup Gailly and Mark Adler.

Docuflex is based in part on the work of Sam Leffler and Silicon Graphic, Inc.

Copyright © 1988-1997 Sam Leffler.

Copyright © 1991-1997 Silicon Graphics, Inc.

Docuflex is based in part on the work of the Independent JPEG Group.

The Graphic Interchange Format® is the Copyright property of CompuServe Incorporated. GIF® is a Service Mark property of CompuServe Incorporated.

Docuflex is based in part on the work of Graphics Server Technologies, L.P.

Copyright © 1988-2002 Graphics Server Technologies, L.P.

All other trademarks, registered trademarks, and service marks mentioned within this publication or its associated software are property of their respective owners.

SOFTWARE COPYRIGHT NOTICE AND COPY LIMITATIONS

Your license agreement with Skywire Software or its subsidiaries, authorizes the number of copies that can be made, if any, and the computer systems on which the software may be used. Any duplication or use of any Skywire Software (or its subsidiaries) software in whole or in part, other than as authorized in the license agreement, must be authorized in writing by an officer of Skywire Software or its subsidiaries.

PUBLICATION COPY LIMITATIONS

Licensed users of the Skywire Software (or its subsidiaries) software described in this publication are authorized to make additional hard copies of this publication, for internal use only, as long as the total number of copies does not exceed the total number of seats or licenses of the software purchased, and the licensee or customer complies with the terms and conditions of the License Agreement in effect for the software. Otherwise, no part of this publication may be copied, distributed, transmitted, transcribed, stored in a retrieval system, or translated into any human or computer language, in any form or by any means, electronic, mechanical, manual, or otherwise, without permission in writing by an officer of Skywire Software or its subsidiaries.

DISCLAIMER

The contents of this publication and the computer software it represents are subject to change without notice. Publication of this manual is not a commitment by Skywire Software or its subsidiaries to provide the features described. Neither Skywire Software nor its subsidiaries assume responsibility or liability for errors that may appear herein. Skywire Software and its subsidiaries reserve the right to revise this publication and to make changes in it from time to time without obligation of Skywire Software or its subsidiaries to notify any person or organization of such revision or changes.

The screens and other illustrations in this publication are meant to be representative, not exact duplicates, of those that appear on your monitor or printer.

Contents

Installing the PDF Print Driver for PPS

- 2 Implementation Steps
- 4 Setting Up the PDF Print Driver
- 5 Emailing PDF Files
 - 6 Configuring Outlook
 - 6 Configuring Lotus Notes
 - 6 Configuring cc:Mail
- 7 Printing Output to Multiple Recipients
 - 8 Selecting PDF for multiple recipients
 - 9 Example DAL script

Installing the PDF Print Driver for PPS

Thank you for choosing Docucorp's PDF Print Driver.

With the Docucorp's PDF Print Driver you can print policies or transactions to PDF files.

You currently have the ability to use the system to send a policy in RTF format via email to a recipient. With the Docucorp PDF Print Driver, you can now also send a policy to a recipient in PDF format via email.

Additionally, you can also now concurrently print one policy for many recipients in a variety of formats, including PDF.


This document will tell you how to install the PDF Print Driver and configure your INI files to handle these options.

First, you will find a step by step Implementation Checklist to help you get started. Later, you will find more detailed reference material to explain the options.

NOTE You can use the PDF Print Driver with PPS, Documaker Workstation, Docucreate, Documaker Server, and Docupresentment (IDS). Some licensing restrictions apply. Check with your sales representative for more information.

IMPLEMENTATION STEPS

This illustration shows the various steps involved in setting up the PDF Print Driver, setting up your system to email PDF files, and configuring various email systems. It also shows how to set up the PDF Print Driver and then configure your system to send recipient output to multiple printers.

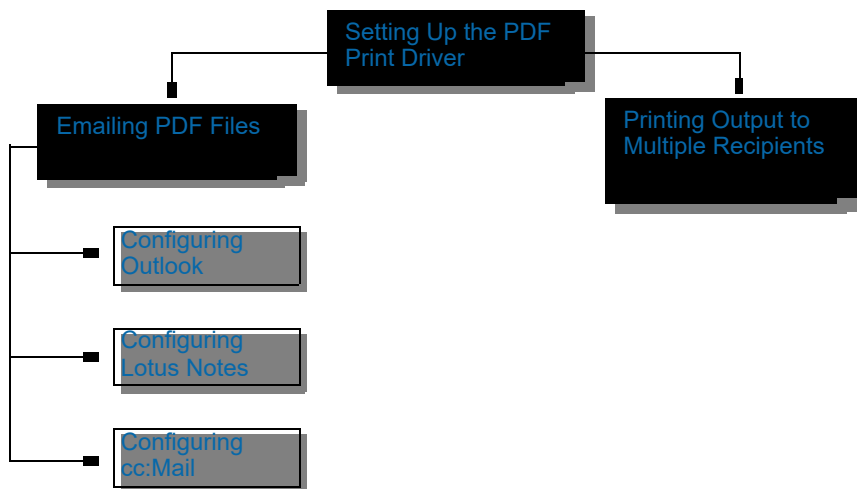

This table shows your options:

For information on See		You must perform this task
Installing and configuring the PDF Print Driver	Setting Up the PDF Print Driver on page 4	Before you can email PDF files or print recipient output to multiple devices
Emailing PDF files	Emailing PDF Files on page 5	After setting up the PDF Print Driver
Configuring Microsoft Outlook	Configuring Outlook on page 6	After setting up the PDF Print Driver and setting up your system to email PDF files
Configuring Lotus Notes	Configuring Lotus Notes on page 6	After setting up the PDF Print Driver and setting up your system to email PDF files.
Configuring cc:Mail	Configuring cc:Mail on page 6	After setting up the PDF Print Driver and setting up your system to email PDF files
Printing recipient output to multiple devices	Printing Output to Multiple Recipients on page 7	After setting up the PDF Print Driver

In addition, you can find examples of a sample DAL script [page 9](#).

NOTE See [Using the PDF Print Driver](#) for additional information on the PDF Print Driver. This book includes additional setup information and information on customizing PDF output, adding security, and working with fonts.

SETTING UP THE PDF PRINT DRIVER

To install the PDF Print Driver, insert the PDF for PPS CD into your CD-ROM drive and run the SETUPEX.EXE program to add the PDFW32.DLL file to your installed system, which would typically be located in the \ppswin\dll directory.

To use the PDF Print Driver, you have to install the software and make changes to the FSIUSER.INI and FSISYS.INI files located in each company's library. You will typically find these INI files in the \ppswin\mstres\company\ directory.

NOTE Before making any changes to these files, back up your INI files.

- 1 Open the FSISYS.INI file with a text editor and add these options:

```
< Printers >
    PrtType          = PDF
< Control >
    LoadPrintOnly = Yes
```

- 2 Open the FSIUSER.INI file with a text editor and add these options:

```
< PrtType:PDF >
    Device          = F:\PDF\~KEYID ~DATE ; [%I-%M %p];.PDF
    Module           = PDFW32
    PrintFunc        = PDFPrint
    OutputFunc       = PRTStdOutputFunc
    OutputMod        = PRTW32
< PrtType:PCL >
    SuppressDlg      = Yes
```

The device option is where you specify the path and file name for the PDF file. Be sure to include the spaces and characters as noted. In this example, the system will write a file to the \PDF directory on the F: drive. The file name will include the policy number (KeyID), the time the file was created, and it will have an extension of *PDF*. For example, the file written to disk would have a name similar to:

```
F:\PDF\A100[3-47PM].PDF
```

Your system can now use the PDF Print Driver to print a policy or transaction to disk as a PDF file.

EMAILING PDF FILES

Once you set up the PDF Print Driver, make the following changes in your INI files to set up your system to email files.

NOTE You can find additional information on email support in the [Documaker Workstation Supervisor Guide](#)

Your INI files should have these settings:

```
< Printers >
  PrtType      = EPT
< PrtType:EPT >
  FileName = F:\PDF\~KEYID ~DATE ; [%I-%M %p];.PDF
  InitFunc = EPTInit
  KeepFile = Yes
  Message   = PDF File attached...
  Message that will appear in the body of the email with the attached
  pdf. You can customize this message)
  Module     = EPTW32
  PrintFunc = EPTPrint
  PrtType    = PDF
  RecipFunc = CSTSetMailRecip
  RecipMod = CSTW32
  Subject    = PDF File from PPS
  Subject of the email you are sending. You can customize this message
  TermFunc = EPTTerm
```

The FileName option is where you specify the path and file name for the PDF file. Be sure to include the spaces and characters as noted.

In this example, the system writes a file to the \PDF directory on the F: drive. The file name includes the policy number (KeyID), the time the file was created, and an extension of *PDF*.

For example, the file written to disk might look like the one shown here:

```
F:\PDF\A100[3-47PM].PDF
```

When you finish with these changes, you can then perform one of the following tasks to configure your email system.

- [Configuring Outlook on page 6](#)
- [Configuring Lotus Notes on page 6](#)
- [Configuring cc:Mail on page 6](#)

CONFIGURING OUTLOOK

Once you set up the PDF Print Driver, configure your system to email PDF files, and follow the steps below, you can use the system to create a PDF file of a form set and then email that file via Outlook to a recipient.

Add these settings to your FSIUSER.INI file using a text editor:

```
<[ Mail >
    MailType = MSM
< MailType:MSM >
    MailFunc = MSMMail
    Module    = MSMW32
    Name      = MSMail
    Password  = (Intentionally left blank)
    UserID    = (User ID to access Mail, check your control panel
for mail setting or with your Administrator for this setting)
```

CONFIGURING LOTUS NOTES

Once you set up the PDF Print Driver, configure your system to email PDF files, and follow the steps below, you can use the system to create a PDF file of a form set and then email that file via Lotus Notes to a recipient.

Add these settings to your FSIUSER.INI file using a text editor:

```
< Mail >
    MailType = VIM
< MailType:VIM >
    MailFunc = VMMail
    Module    = VIMW32
    Name      = Notes (Name of the Notes Server)
    Password  =
    UserID    =
```

CONFIGURING CCMAIL

Once you set up the PDF Print Driver, configure your system to email PDF files, and follow the steps below, you can use the system to create a PDF file of a form set and then email that file via cc:Mail to a recipient.

Add these settings to your FSIUSER.INI file using a text editor:

```
< Mail >
    MailType = CCM
< MailType:CCM >
    MailFunc = VMMail
    Module    = VIMW32
    Name      = CCMail (Name of the mail server)
    Password  =
    UserID    =
    DataPath  = V:\ccdata      (Default path for the email system)
```

PRINTING OUTPUT TO MULTIPLE RECIPIENTS

Once you set up the PDF Print Driver and follow the steps below, you can have the system create recipient output for multiple print devices by using the Multiple Driver Router (MDR) feature.

NOTE This feature is available with version 10.2 or higher. This feature does not currently work with the email feature (EPTLIB).

For instance, the MDR feature lets you print one recipient's output to one device and other recipient output to other devices. Here is an example:

This recipient	Gets a copy of the form set in this format:
Home Office	PDF
Insured	PCL
Agent	PCL

Add this option to your FSISYS.INI file using a text editor:

```
< Printers >
  PrtType      = MDR
```

Add these settings to your FSIUSER.INI file using a text editor:

```
< PrtType:MDR >
  Default      = PCL
  Device       = lpt1
  Module       = MDRW32
  PageNumbers= No
  PrintFunc    = MDRPrint
  Recip:Home Office= PDF
```

Option	Description
Device	You must specify a default print device, such as a network printer, to use when not otherwise specified by another driver.
PageNumbers	Required if you want page numbering on or off. You may already specify this on the other printer drivers, but it will be necessary to specify it here so that it can carry through to the other drivers during printing.
Default	Use to specify the normal print driver if one is not declared for a given recipient, typically PCL (standard print output to your printer).
Recip:Home Office	The recipient defined on the Forms Selection window (or FORM.DAT) Must match the exact name of the recipient.

In this example, Insured and Agent receive the standard PCL output (sent to a PCL printer). Home Office receives a PDF file. The name of the PDF file is defined in the PrtType:PDF control group.

Keep in mind:

- *Recip:Home Office=PDF1* is just an example of how to specify a driver for a recipient. You can have as many such options as you need. You only need to specify the recipients you want sent to a driver other than the default driver.
- You specify *Recip* and the standard name of the recipient, such as *Insured* or *Home Office*. This name must match the name in your master resource library (MRL). The other side of the equal sign is the name of the printer driver to route to, same as the group specified in your INI file. For this example above, the assumption is that there is a *PrtType:PDF* control group in the INI file.

Selecting PDF for multiple recipients

To specify PDF as the format for more than one recipient you have to change this entry:

```
< PrtType:PDF >
Device = F:\PDF\~KEYID ~DATE ; [%I-%M %p];.PDF
```

There are several ways to do this:

- Set up an INI control group to handle PDF print settings for each recipient. You can leave the above INI file setting alone and simply add these INI settings:

```
< Printer >
PrtType      = PDF1
PrtType      = PDF2
< Printers >
PrtType      = PDF1
PrtType      = PDF2
< PrtType:MDR >
Recip:Agent  = PDF1
Recip:Insured= PDF2
< PrtType:PDF1 >
Device       = c:\pdf\agent~KEYID ~DATE ; [%I-%M %p];.PDF
Module       = PDFW32
PrintFunc    = PDFPrint
PrintType    = PDF
< PrtType:PDF2 >
Device       = c:\pdf\insured~KEYID ~DATE ; [%I-%M %p];.PDF
Module       = PDFW32
PrintFunc    = PDFPrint
PrintType    = PDF
```

In this example, when you print using the MDR feature, you receive two PDF files in the c:\pdf directory, one for the agent and one for the insured. The files may look like:

```
c:\pdf\agentA100[3-47PM].PDF
c:\pdf\insuredA100[3-47PM].PDF
```

- Another way is to replace the right side of the equation with the name of a DAL script. The DAL script lets you specify unique names for each recipient. Here is an example:

```
< PrtType:PDF >
Device = ~DALRUN MDR.DAL
```

Example DAL script

Here is an illustration of the MDR.DAL script:


```
path_name = path_name

If path_name = "" Then
    path_name = Input("Please enter the drive/path name for
this output. Example: c:\pdf", "Path Name for Output" )
End

output_to_whom = path_name & "\" & #cnt & "_" & Date("8-2") & "_" &
Time("1b") & ".pdf"

Return(output_to_whom)
```

After the system runs the DAL script, it displays a message similar to the one shown here:

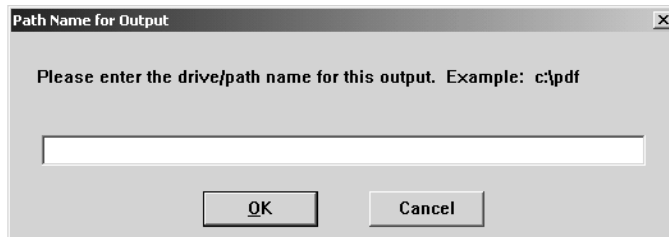

Use this window to enter the path for the output.

