

```

    airline.slice()
    airline.indexOf()
  
```

these should
be objects
then only we
can use dot operator
on them and call
methods

JS knows


```

    array = {
      slice: function
      splice: function
      sort: function
      ...
    }
  
```

object

```

    (array).slice()
    (array).splice()
  
```

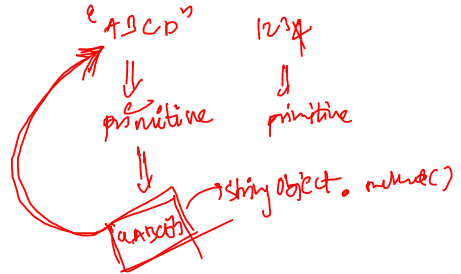

* WKT, string is a primitive, so how can you call methods
on a primitive datatype? here airline is a string but how
methods are being executed? (Autoboxing)

⇒ JS automatically converts string primitive to string object
and then it executes methods, after execution it changes back
string object to string primitive