

# ANSI escape code

**ANSI escape sequences** are a standard for in-band signaling to control cursor location, color, font styling, and other options on video text terminals and terminal emulators. Certain sequences of bytes, most starting with an ASCII escape character and a bracket character, are embedded into text. The terminal interprets these sequences as commands, rather than text to display verbatim.

ANSI sequences were introduced in the 1970s to replace vendor-specific sequences and became widespread in the computer equipment market by the early 1980s. They are used in development, scientific, commercial text-based applications as well as bulletin board systems to offer standardized functionality.

Although hardware text terminals have become increasingly rare in the 21st century, the relevance of the ANSI standard persists because a great majority of terminal emulators and command consoles interpret at least a portion of the ANSI standard.

Contents

History

Platform support

Unix-like systems

DOS, OS/2, and Windows

Atari ST

AmigaOS

VMS / OpenVMS

Description

Control characters

Fe Escape sequences

CSI (Control Sequence Introducer) sequences

SGR (Select Graphic Rendition) parameters

Colors

3-bit and 4-bit

8-bit

24-bit

OSC (Operating System Command) sequences

Fs Escape sequences

Fp Escape sequences

nF Escape sequences

Examples

In shell scripting

In C

Terminal input sequences


See also

Notes

References

External links

ANSI X3.64 (ISO 6429)



Output of the system-monitor httpd, an ncurses-application (which uses SGR and other ANSI/ISO control sequences).

Standard

ECMA-48

ISO/IEC 6429

FIPS 86

ANSI X3.64

JIS X 0211

Classification

ISO/IEC 2022 based control code and control sequence set

Other related encoding(s)

Other control function standards: ITU T.101, JIS X 0207, ISO 6630, DIN 31626, ETS 300 706

## History

Almost all manufacturers of video terminals added vendor-specific escape sequences to perform operations such as placing the cursor at arbitrary positions on the screen. One example is the VT52 terminal, which allowed the cursor to be placed at an x,y location on the screen by sending the ESC character, a Y character, and then two characters representing with numerical values equal to the x,y location plus 32 (thus starting at the ASCII space character and avoiding the control characters). The Hazeltine 1500 had a similar feature, invoked using ~, DC1 and then the X and Y positions separated with a comma. While the two terminals had identical functionality in this regard, different control sequences had to be used to invoke them.

As these sequences were different for different terminals, elaborate libraries such as termcap ("terminal capabilities") and utilities such as tput had to be created so programs could use the same API to work with any terminal. In addition, many of these terminals required sending numbers (such as row and column) as the binary values of the characters; for some programming languages, and for systems that did not use ASCII internally, it was often difficult to turn a number into the correct character.

The ANSI standard attempted to address these problems by making a command set that all terminals would use and requiring all numeric information to be transmitted as ASCII numbers. The first standard in the series was ECMA-48, adopted in 1976.<sup>[1]</sup> It was a continuation of a series of character coding standards, the first one being ECMA-6 from 1965, a 7-bit standard from which ISO 646 originates. The name "ANSI escape sequence" dates from 1979 when ANSI adopted ANSI X3.64. The ANSI X3L2 committee collaborated with the ECMA committee TC 1 to produce nearly identical standards. These two standards were merged into an international standard, ISO 6429.<sup>[1]</sup> In 1994, ANSI withdrew its standard in favor of the international standard.

The first popular video terminal to support these sequences was the [Digital VT100](#), introduced in 1978.<sup>[2]</sup> This model was very successful in the market, which sparked a variety of VT100 clones, among the earliest and most popular of which was the much more affordable [Zenith Z-19](#) in 1979.<sup>[3]</sup> Others included the [Qume QVT-108](#), [Televideo TVI-970](#), [Wyse WY-99GT](#) as well as optional "VT100" or "VT103" or "ANSI" modes with varying degrees of compatibility on many other brands. The popularity of these gradually led to more and more software (especially bulletin board systems and other [online services](#)) assuming the escape sequences worked, leading to almost all new terminals and emulator programs supporting them.

In 1981, ANSI X3.64 was adopted for use in the US government by FIPS publication 86. Later, the US government stopped duplicating industry standards, so FIPS pub. 86 was withdrawn.<sup>[4]</sup>

ECMA-48 has been updated several times and is currently at its 5th edition, from 1991. It is also adopted by [ISO](#) and [IEC](#) as standard [ISO/IEC 6429](#).<sup>[5]</sup> A version is adopted as a [Japanese Industrial Standard](#), as [JIS X 0211](#).

Related standards include [ITU T.61](#), the [Teletex](#) standard, and the [ISO/IEC 8613](#), the [Open Document Architecture](#) standard (mainly [ISO/IEC 8613-6](#) or [ITU T.416](#)). The two systems share many escape codes with the ANSI system, with extensions that are not necessarily meaningful to computer terminals. Both systems quickly fell into disuse, but ECMA-48 does mark the extensions used in them as reserved.

## Platform support

### Unix-like systems

Although [termcap](#)/[terminfo](#)-style libraries were primarily developed on and for Unix, by the mid-1980s programs running on [Unix-like](#) operating systems could almost always assume they were using a terminal or emulator that supported ANSI sequences; this led to widespread use of ANSI by programs running on those platforms. For instance, many games and shell scripts, and utilities such as color directory listings, directly write the ANSI sequences and thus cannot be used on a terminal that does not interpret them. Many programs, including [text editors](#) such as [vi](#) and [GNU Emacs](#), use [termcap](#) or [terminfo](#), or use libraries such as [curses](#) that use [termcap](#) or [terminfo](#), and thus in theory support non-ANSI terminals, but this is so rarely tested nowadays that they are [unlikely to work](#) with those terminals.

[Terminal emulators](#) for communicating with local programs as well as remote machines and the [text system console](#) almost always support ANSI escape codes. This includes terminal emulators such as [xterm](#), [rxvt](#), [GNOME Terminal](#), and [Konsole](#) on systems with [X11](#)-based or [Wayland](#)-based window systems, and [Terminal.app](#) and third-party terminal emulators such as [iTerm2](#) on [macOS](#).

### DOS, OS/2, and Windows

MS-DOS 1.x did not support the ANSI or any other escape sequences. Only a few control characters (BEL, CR, LF, BS) were interpreted by the underlying BIOS, making it almost<sup>[a]</sup> impossible to do any kind of full-screen application. Any display effects had to be done with BIOS calls, which were notoriously slow, or by directly manipulating the IBM PC hardware.

DOS 2.0 introduced the ability to add a [device driver](#) for the ANSI escape sequences – the *de facto* standard being [ANSI.SYS](#), but others like [ANSI.COM](#),<sup>[6]</sup> [NANSI.SYS](#)<sup>[7]</sup> and [ANSIPLUS.EXE](#) are used as well (these are considerably faster as they bypass the BIOS). Slowness and the fact that it was not installed by default made software rarely take advantage of it; instead, applications continued to directly manipulate the hardware to get the text display needed. ANSI.SYS and similar drivers continued to work in [Windows 9x](#) up to [Windows Me](#), and in NT-derived systems for 16-bit legacy programs executing under the [NTVDM](#).

Many clones of DOS were able to interpret the sequences and do not require a separate ANSI driver to be loaded. [PTS-DOS](#)<sup>[8][9]</sup> as well as [Concurrent DOS](#), [Multiuser DOS](#)<sup>[10]</sup> and [REAL/32](#) have built-in support (plus a number of extensions). [OS/2](#) had an [ANSI](#) command that enabled the sequences.

The Windows Console did not support ANSI escape sequences, nor did Microsoft provide any method to enable them. Some replacements or additions for the console window such as JP Software's [TCC](#) (formerly 4NT), Michael J. Mefford's [ANSI.COM](#), Jason Hood's [ANSICON](#)<sup>[11]</sup> and Maximus5's [ConEmu](#) interpreted ANSI escape sequences printed by programs. A Python package<sup>[12]</sup> internally interpreted ANSI escape sequences in text being printed, translating them to calls to manipulate the color and cursor position, to make it easier to port Python code using ANSI to Windows. [Cygwin](#) performs similar translation to all output written to the console using [Cygwin](#) file descriptors, the filtering is done by the output functions of [cygwin1.dll](#), to allow porting of POSIX C code to Windows.

In 2016, Microsoft released the Windows 10 version 1511 update which unexpectedly implemented support for ANSI escape sequences, over two decades after the debut of Windows NT.<sup>[13]</sup> This was done alongside [Windows Subsystem for Linux](#), allowing Unix-like terminal-based software to use the sequences in Windows Console. Unfortunately this defaults to off, but Windows PowerShell 5.1 enabled it. PowerShell 6 made it possible to embed the necessary ESC character into a string with ``e``.<sup>[14]</sup> [Windows Terminal](#), introduced in 2019, supports the sequences by default, and Microsoft intends to replace the Windows Console with Windows Terminal.<sup>[15]</sup>

### Atari ST


The [Atari ST](#) used the command system adapted from the [VT52](#) with some expansions for color support,<sup>[16]</sup> rather than supporting ANSI escape codes.

### AmigaOS

AmigaOS not only interprets ANSI code sequences for text output to the screen, the AmigaOS printer driver also interprets them (with extensions proprietary to AmigaOS) and translates them into the codes required for the particular printer that is actually attached.<sup>[17]</sup>



The DEC VT100 video display terminal.



The Xterm terminal emulator.

Amiga CLI (shell) window style control ssequences

	Effect
ESC [ n u	Sets maximum length of lines in window to n.
ESC [ n t	Sets maximum number of lines in window to n.
ESC [ n x	Starts text n pixels from left edge of window.
ESC [ n y	Starts text n pixels from top edge of window.

VMS / OpenVMS

VMS was designed to be managed interactively using Digital's text-based video terminals such as the aforementioned [VT100](#); later with graphical terminal emulators such as the VWS Terminal, DECTerm, and xterm.<sup>[18]</sup>

Description

Control characters

Though not technically part of the standard, almost all users assume some functions of some single-byte characters. This is used to shorten the amount of data transmitted, or to perform some functions that are unavailable from escape sequences:

Popular control characters (not an exhaustive list)

<div><div><div>^</div><div>_</div></div></div>	C0	Abbr	Name	Effect
^G	7	BEL	Bell	Makes an audible noise.
^H	8	BS	Backspace	Moves the cursor left (but may "backwards wrap" if cursor is at start of line).
^I	9	HT	Tab	Moves the cursor right to next multiple of 8.
^J	0x0A	LF	Line Feed	Moves to next line, scrolls the display up if at bottom of the screen. Usually does not move horizontally, though programs should not rely on this.
^L	0x0C	FF	Form Feed	Move a printer to top of next page. Usually does not move horizontally, though programs should not rely on this. Effect on video terminals varies.
^M	0x0D	CR	Carriage Return	Moves the cursor to column zero.
^[	0x1B	ESC	Escape	Starts all the escape sequences

Escape sequences vary in length. The general format for an ANSI-compliant escape sequence is defined by ANSI X3.41 (equivalent to ECMA-35 or ISO/IEC 2022).<sup>[19]:13.1</sup> The escape sequences consist only of bytes in the range 0x20–0x7F (all the non-control ASCII characters), and can be parsed without looking ahead. The behavior when a control character, a byte with the high bit set, or a byte that is not part of any valid sequence, is encountered before the end is undefined.

Fe Escape sequences

If the [ESC](#) is followed by a byte in the range 0x40 to 0x5F it is of this type. Delegated to the applicable [C1 control code](#) standard.<sup>[19]:13.2.1</sup> Accordingly, all escape sequences corresponding to C1 control codes from ANSI X3.64 / ECMA-48 follow this format.<sup>[5]:5.3.a</sup>

The standard says that, in 8-bit environments, the control functions corresponding to type [Fe](#) escape sequences (those from the set of [C1 control codes](#)) can be represented as single bytes in the 0x80–0x9F range.<sup>[5]:5.3.b</sup> However, on modern devices those codes are often used for other purposes, such as parts of UTF-8 or for [CP-1252](#) characters, so only the 2-byte sequence is typically used. In the case of UTF-8 a C1 control code can be encoded as two bytes (e.g. 0xC2 , 0x8E for U+008E), but no space is saved this way.

Some type Fe (C1 set element) ANSI escape sequences (not an exhaustive list)

	C1	Abbr	Name	Effect
ESC N	0x8E	SS2	Single Shift Two	Select a single character from one of the <a href="#">alternative character sets</a> . SS2 selects the G2 character set, and SS3 selects the G3 character set. <sup>[20]</sup> In a 7-bit environment, this is followed by one or more GL bytes (0x20–0x7F) specifying a character from that set. <sup>[19]:9.4</sup> In an 8-bit environment, these may instead be GR bytes (0xA0–0xFF). <sup>[19]:8.4</sup>
ESC O	0x8F	SS3	Single Shift Three	
ESC P	0x90	DCS	Device Control String	Terminated by ST. <sup>[5]:5.6</sup> Xterm's uses of this sequence include defining User-Defined Keys, and requesting or setting Termcap/Terminfo data. <sup>[20]</sup>
ESC [	0x9B	CSI	<a href="#">Control Sequence Introducer</a>	Starts most of the useful sequences, terminated by a byte in the range 0x40 through 0x7E. <sup>[5]:5.4</sup>
ESC \	0x9C	ST	String Terminator	Terminates strings in other controls. <sup>[5]:8.3.143</sup>
ESC ]	0x9D	OSC	<a href="#">Operating System Command</a>	Starts a control string for the operating system to use, terminated by ST. <sup>[5]:8.3.89</sup>
ESC X	0x98	SOS	Start of String	Takes an argument of a string of text, terminated by ST. <sup>[5]:5.6</sup> The uses for these string control sequences are defined by the application <sup>[5]:8.3.2,8.3.128</sup> or privacy discipline. <sup>[5]:8.3.94</sup> These functions are rarely implemented and the arguments are ignored by xterm. <sup>[20]</sup> Some Kermit clients allow the server to automatically execute Kermit commands on the client by embedding them in APC sequences; this is a potential security risk if the server is untrusted. <sup>[21]</sup>
ESC ^	0x9E	PM	Privacy Message	
ESC _	0x9F	APC	Application Program Command	

CSI (Control Sequence Introducer) sequences

For Control Sequence Introducer, or CSI, commands, the ESC [ is followed by any number (including none) of "parameter bytes" in the range 0x30–0x3F (ASCII 0–9 ; <=>?), then by any number of "intermediate bytes" in the range 0x20–0x2F (ASCII space and ! " # \$ % & ' ( ) \* + , - . /), then finally by a single "final byte" in the range 0x40–0x7E (ASCII @–Z [ \ ] ^ \_ ` a–z { | } ~).<sup>[5]:5.4</sup>

All common sequences just use the parameters as a series of semicolon-separated numbers such as 1;2;3. Missing numbers are treated as 0 (1; ;3 acts like the middle number is 0, and no parameters at all in ESC[m acts like a 0 reset code). Some sequences (such as CUU) treat 0 as 1 in order to make missing parameters useful.<sup>[5]:F.4.2</sup>

A subset of arrangements was declared "private" so that terminal manufacturers could insert their own sequences without conflicting with the standard. Sequences containing the parameter bytes <=>? or the final bytes 0x70–0x7E (p–z { | } ~) are private.

The behavior of the terminal is undefined in the case where a CSI sequence contains any character outside of the range 0x20–0x7E. These illegal characters are either Co control characters (the range 0–0x1F), DEL (0x7F), or bytes with the high bit set. Possible responses are to ignore the byte, to process it immediately, and furthermore whether to continue with the CSI sequence, to abort it immediately, or to ignore the rest of it.

Some ANSI control sequences (not an exhaustive list)

	Abbr	Name	Effect
CSI n A	CUU	Cursor Up	Moves the cursor <i>n</i> (default 1) cells in the given direction. If the cursor is already at the edge of the screen, this has no effect.
CSI n B	CUD	Cursor Down	
CSI n C	CUF	Cursor Forward	
CSI n D	CUB	Cursor Back	
CSI n E	CNL	Cursor Next Line	Moves cursor to beginning of the line <i>n</i> (default 1) lines down. (not ANSI.SYS)
CSI n F	CPL	Cursor Previous Line	Moves cursor to beginning of the line <i>n</i> (default 1) lines up. (not ANSI.SYS)
CSI n G	CHA	Cursor Horizontal Absolute	Moves the cursor to column <i>n</i> (default 1). (not ANSI.SYS)
CSI n ; m H	CUP	Cursor Position	Moves the cursor to row <i>n</i> , column <i>m</i> . The values are 1-based, and default to 1 (top left corner) if omitted. A sequence such as CSI ;5H is a synonym for CSI 1;5H as well as CSI 17;H is the same as CSI 17H and CSI 17;1H
CSI n J	ED	Erase in Display	Clears part of the screen. If <i>n</i> is 0 (or missing), clear from cursor to end of screen. If <i>n</i> is 1, clear from cursor to beginning of the screen. If <i>n</i> is 2, clear entire screen (and moves cursor to upper left on DOS ANSI.SYS). If <i>n</i> is 3, clear entire screen and delete all lines saved in the scrollback buffer (this feature was added for <i>xterm</i> and is supported by other terminal applications).
CSI n K	EL	Erase in Line	Erases part of the line. If <i>n</i> is 0 (or missing), clear from cursor to the end of the line. If <i>n</i> is 1, clear from cursor to beginning of the line. If <i>n</i> is 2, clear entire line. Cursor position does not change.
CSI n S	SU	Scroll Up	Scroll whole page up by <i>n</i> (default 1) lines. New lines are added at the bottom. (not ANSI.SYS)
CSI n T	SD	Scroll Down	Scroll whole page down by <i>n</i> (default 1) lines. New lines are added at the top. (not ANSI.SYS)
CSI n ; m f	HVP	Horizontal Vertical Position	Same as CUP, but counts as a format effector function (like CR or LF) rather than an editor function (like CUD or CNL). This can lead to different handling in certain terminal modes. <sup>[5]:Annex A</sup>
CSI n m	SGR	Select Graphic Rendition	Sets colors and style of the characters following this code
CSI 5i		AUX Port On	Enable aux serial port usually for local serial printer
CSI 4i		AUX Port Off	Disable aux serial port usually for local serial printer
CSI 6n	DSR	Device Status Report	Reports the cursor position (CPR) by transmitting ESC[n;mR, where <i>n</i> is the row and <i>m</i> is the column.)

Some popular private sequences

	Abbr	Name	Effect
CSI s	SCP, SCOSC	Save Current Cursor Position	Saves the cursor position/state in SCO console mode. <sup>[22]</sup> In vertical split screen mode, instead used to set (as CSI n ; n s) or reset left and right margins. <sup>[23]</sup>
CSI u	RCP, SCORC	Restore Saved Cursor Position	Restores the cursor position/state in SCO console mode. <sup>[24]</sup>
CSI ? 25 h	DECTCEM		Shows the cursor, from the VT220.
CSI ? 25 l	DECTCEM		Hides the cursor.
CSI ? 1049 h			Enable alternative screen buffer, from xterm
CSI ? 1049 l			Disable alternative screen buffer, from xterm
CSI ? 2004 h			Turn on bracketed paste mode. <sup>[25]</sup> In bracketed paste mode, text pasted into the terminal will be surrounded by ESC [200~ and ESC [201~; programs running in the terminal should not treat characters bracketed by those sequences as commands ( <i>Vim</i> , for example, does not treat them as commands). <sup>[26]</sup> From xterm <sup>[27]</sup>
CSI ? 2004 l			Turn off bracketed paste mode.

SGR (Select Graphic Rendition) parameters

Select Graphic Rendition (SGR) sets display attributes. Several attributes can be set in the same sequence, separated by semicolons.<sup>[28]</sup> Each display attribute remains in effect until a following occurrence of SGR resets it.<sup>[5]</sup> If no codes are given, CSI m is treated as CSI 0 m (reset / normal).

	Name	Note
0	Reset or normal	All attributes off
1	Bold or increased intensity	As with faint, the color change is a PC (SCO / CGA) invention. <sup>[29]</sup>
2	Faint, decreased intensity, or dim	May be implemented as a light font weight like bold. <sup>[30]</sup>
3	Italic	Not widely supported. Sometimes treated as inverse or blink. <sup>[29]</sup>
4	Underline	Style extensions exist for Kitty, VTE, mintty and iTerm2. <sup>[31][32]</sup>
5	Slow blink	Sets blinking to less than 150 times per minute
6	Rapid blink	MS-DOS ANSI.SYS, 150+ per minute; not widely supported
7	Reverse video or invert	Swap foreground and background colors; inconsistent emulation <sup>[33]</sup>
8	Conceal or hide	Not widely supported.
9	Crossed-out, or strike	Characters legible but marked as if for deletion. Not supported in Terminal.app
10	Primary (default) font	
11–19	Alternative font	Select alternative font <i>n</i> − 10
20	Fraktur (Gothic)	Rarely supported
21	Doubly underlined; or: not bold	Double-underline per ECMA-48, <sup>[5]:8.3.117</sup> but instead disables bold intensity on several terminals, including in the <a href="#">Linux kernel's console</a> before version 4.17. <sup>[34]</sup>
22	Normal intensity	Neither bold nor faint; color changes where intensity is implemented as such.
23	Neither italic, nor blackletter	
24	Not underlined	Neither singly nor doubly underlined
25	Not blinking	Turn blinking off
26	Proportional spacing	ITU T.61 and T.416, not known to be used on terminals
27	Not reversed	
28	Reveal	Not concealed
29	Not crossed out	
30–37	Set foreground color	
38	Set foreground color	Next arguments are <i>S</i> ; <i>n</i> or <i>2</i> ; <i>r</i> ; <i>g</i> ; <i>b</i>
39	Default foreground color	Implementation defined (according to standard)
40–47	Set background color	
48	Set background color	Next arguments are <i>S</i> ; <i>n</i> or <i>2</i> ; <i>r</i> ; <i>g</i> ; <i>b</i>
49	Default background color	Implementation defined (according to standard)
50	Disable proportional spacing	T.61 and T.416
51	Framed	Implemented as "emoji variation selector" in mintty. <sup>[35]</sup>
52	Encircled	
53	Overlined	Not supported in Terminal.app
54	Neither framed nor encircled	
55	Not overlined	
58	Set underline color	Not in standard; implemented in Kitty, VTE, mintty, and iTerm2. <sup>[31][32]</sup> Next arguments are <i>S</i> ; <i>n</i> or <i>2</i> ; <i>r</i> ; <i>g</i> ; <i>b</i> .
59	Default underline color	Not in standard; implemented in Kitty, VTE, mintty, and iTerm2. <sup>[31][32]</sup>
60	Ideogram underline or right side line	Rarely supported
61	Ideogram double underline, or double line on the right side	
62	Ideogram overline or left side line	
63	Ideogram double overline, or double line on the left side	
64	Ideogram stress marking	
65	No ideogram attributes	Reset the effects of all of 60–64
73	Superscript	Implemented only in mintty <sup>[35]</sup>
74	Subscript	
75	Neither superscript nor subscript	
90–97	Set bright foreground color	Not in standard; originally implemented by aixterm <sup>[20]</sup>
100–107	Set bright background color	

## Colors

### 3-bit and 4-bit

The original specification only had 8 colors, and just gave them names. The SGR parameters 30–37 selected the foreground color, while 40–47 selected the background. Quite a few terminals implemented "bold" (SGR code 1) as a brighter color rather than a different font, thus providing 8 additional foreground colors. Usually you could not get these as background colors, though sometimes inverse video (SGR code 7) would allow that. Examples: to get black letters on white background use ESC[30;47m, to get red use ESC[31m, to get bright red use ESC[1;31m. To reset colors to their defaults, use ESC[39;49m (not supported on some terminals), or reset all attributes with ESC[0m. Later terminals added the ability to directly specify the "bright" colors with 90–97 and 100–107.

When hardware started using 8-bit digital-to-analog converters (DACs) several pieces of software assigned 24-bit color numbers to these names. The chart below shows the default values sent to the DAC for some common hardware and software; in most cases they are configurable.

FG	BG	Name	VGA <sup>[b]</sup>	Windows XP Console <sup>[c]</sup>	Windows PowerShell <sup>[d]</sup>	Visual Studio Code <sup>[e]</sup>	Windows 10 Console <sup>[f]</sup>	Terminal.app	PuTTY	mIRC	xterm	
30	40	Black	0, 0, 0				12, 12, 12	0, 0, 0				1,
31	41	Red	170, 0, 0	128, 0, 0		205, 49, 49	197, 15, 31	194, 54, 33	187, 0, 0	127, 0, 0	205, 0, 0	2,
32	42	Green	0, 170, 0	0, 128, 0		13, 188, 121	19, 161, 14	37, 188, 36	0, 187, 0	0, 147, 0	0, 205, 0	5,
33	43	Yellow	170, 85, 0 <sup>[h]</sup>	128, 128, 0	238, 237, 240	229, 229, 16	193, 156, 0	173, 173, 39	187, 187, 0	252, 127, 0	205, 205, 0	2,
34	44	Blue	0, 0, 170	0, 0, 128		36, 114, 200	0, 55, 218	73, 46, 225	0, 0, 187	0, 0, 127	0, 0, 238 <sup>[36]</sup>	0,
35	45	Magenta	170, 0, 170	128, 0, 128	1, 36, 86	188, 63, 188	136, 23, 152	211, 56, 211	187, 0, 187	156, 0, 156	205, 0, 205	1,
36	46	Cyan	0, 170, 170	0, 128, 128		17, 168, 205	58, 150, 221	51, 187, 200	0, 187, 187	0, 147, 147	0, 205, 205	4,
37	47	White	170, 170, 170	192, 192, 192		229, 229, 229	204, 204, 204	203, 204, 205	187, 187, 187	210, 210, 210	229, 229, 229	2,
90	100	Bright Black (Gray)	85, 85, 85	128, 128, 128		102, 102, 102	118, 118, 118	129, 131, 131	85, 85, 85	127, 127, 127	127, 127, 127	1,
91	101	Bright Red	255, 85, 85	255, 0, 0		241, 76, 76	231, 72, 86	252, 57, 31	255, 85, 85	255, 0, 0		
92	102	Bright Green	85, 255, 85	0, 255, 0		35, 209, 139	22, 198, 12	49, 231, 34	85, 255, 85	0, 252, 0	0, 255, 0	
93	103	Bright Yellow	255, 255, 85	255, 255, 0		245, 245, 67	249, 241, 165	234, 236, 35	255, 255, 85	255, 255, 0		
94	104	Bright Blue	85, 85, 255	0, 0, 255		59, 142, 234	59, 120, 255	88, 51, 255	85, 85, 255	0, 0, 252	92, 92, 255 <sup>[37]</sup>	0,
95	105	Bright Magenta	255, 85, 255	255, 0, 255		214, 112, 214	180, 0, 158	249, 53, 248	255, 85, 255	255, 0, 255		
96	106	Bright Cyan	85, 255, 255	0, 255, 255		41, 184, 219	97, 214, 214	20, 240, 240	85, 255, 255	0, 255, 255		
97	107	Bright White	255, 255, 255			229, 229, 229	242, 242, 242	233, 235, 235	255, 255, 255			

8-bit

As 256-color lookup tables became common on graphic cards, escape sequences were added to select from a pre-defined set of 256 colors:

```
ESC[38;5;(n)m Select foreground color
ESC[48;5;(n)m Select background color
  0- 7: standard colors (as in ESC [ 30–37 m)
  8- 15: high intensity colors (as in ESC [ 90–97 m)
16-231: 6 × 6 × 6 cube (216 colors): 16 + 36 × r + 6 × g + b (0 ≤ r, g, b ≤ 5)
232-255: grayscale from black to white in 24 steps
```

The ITU's T.416 Information technology - Open Document Architecture (ODA) and interchange format: Character content architectures<sup>[38]</sup> uses ':' as separator characters instead:

ESC[38;5;(n)m Select foreground color      where n is a number from the table below  
ESC[48;5;(n)m Select background color

256-color mode — foreground: ESC[38;5;#m    background: ESC[48;5;#m

Standard colors																High-intensity colors													
0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15														
216 colors																													
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45
46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	
105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	
134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	
163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	
192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	
221	222	223	224	225	226	227	228	229	230	231	Grayscale colors																		
232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255						

There has also been a similar but incompatible 88-color encoding using the same escape sequence, seen in rxvt and xterm-88color. Not much is known about the scheme besides the color codes. It uses a 4×4×4 color cube.

24-bit

As "true color" graphic cards with 16 to 24 bits of color became common, applications began to support 24-bit colors. Terminal emulators supporting setting 24-bit foreground and background colors with escape sequences include Xterm,<sup>[20]</sup> KDE's Konsole,<sup>[39][40]</sup> and iTerm, as well as all libvt based terminals,<sup>[41]</sup> including GNOME Terminal.

```
ESC[ 38;2;(r);(g);(b) m Select RGB foreground color
ESC[ 48;2;(r);(g);(b) m Select RGB background color
```

The ITU's T.416 Information technology - Open Document Architecture (ODA) and interchange format: Character content architectures<sup>[38]</sup> which was adopted as ISO/IEC International Standard 8613-6 gives an alternative version that seems to be less supported. The parameters after the '2', i.e. even the r,g,b are optional. Note that this is not just the above sequence with semicolon replaced by colon, there is a leading "colorspace ID" (this fact was missed by many terminal emulators, this omission seems to have come from KDE Konsole).<sup>[20]</sup> The definition of the colorspace ID is not included in that document so it may be blank to represent the unspecified default. As well as the '2' value to specify a Red-Green-Blue format (and the '5' above for a 0-255 indexed color) there are alternatives of 'o' for implementation defined and '1' for transparent - neither of what have any further parameters; '3' specifies colors using a Cyan-Magenta-Yellow scheme, and '4' for a Cyan-Magenta-Yellow-Black one, the latter using the position marked as "unused" for the Black component:

ESC[ 38:2:(Color-Space-ID):(r):(g):(b):(unused):(CS tolerance):(Color-Space associated with tolerance: 0 for "CIELUV"; 1 for "CIELAB") m Select RGB foreground color

ESC[ 48:2:(Color-Space-ID):(r):(g):(b):(unused):(CS tolerance):(Color-Space associated with tolerance: 0 for "CIELUV"; 1 for "CIELAB") m Select RGB background color

OSC (Operating System Command) sequences

Mostly these were defined by Xterm. For historical reasons xterm can end the command with BEL as well as ST.<sup>[20]</sup>

Xterm allows the window title to be set by ESC ]0;this is the window title BEL.

A non-xterm extension is the hyperlink, ESC ]8;;link ST from 2017, used by VTE,<sup>[42]</sup> iTerm2,<sup>[42]</sup> and mintty.<sup>[43]</sup>

The Linux console uses ESC ] P n rr gg bb to change the palette, which, if hard-coded into an application, may hang other terminals.<sup>[44]</sup> However, appending ST will be ignored by Linux and form a proper, ignorable sequence for other terminals.

Fs Escape sequences

If the ESC is followed by a byte in the range 0x60–0x7E it is of this type. Used for control functions individually registered with the ISO-IR registry and, consequently, available even in contexts where a different C1 control code set is used. Specifically, they correspond to single control functions approved by ISO/IEC JTC 1/SC 2 and standardized by ISO or an ISO-recognised body.<sup>[19]:6.5.1</sup> Some of these are specified in ECMA-35 (ISO 2022 / ANSI X3.41), others in ECMA-48 (ISO 6429 / ANSI X3.64).<sup>[19]:6.5.4</sup> ECMA-48 refers to these as "independent control functions".<sup>[5]:5.5</sup>

Some type Fs (independent function) ANSI escape sequences recognised by terminals

	Abbr	Name	Effect
ESC c	RIS	Reset to Initial State	Triggers a full reset of the terminal to its original state. <sup>[20]</sup> This may include (if applicable): reset graphic rendition, clear tabulation stops, reset to default font, and more. <sup>[45]</sup>

Fp Escape sequences

If the ESC is followed by a byte in the range 0x30–0x3F it is of this type. Set apart for private-use control functions.<sup>[19]:6.5.3</sup>

Some type Fp (private-use) escape sequences recognised by the VT100, its successors, and/or terminal emulators such as xterm

	Abbr	Name	Effect
ESC 7	DECS	DEC Save Cursor	Saves the cursor position, encoding shift state and formatting attributes. <sup>[46][20]</sup>
ESC 8	DECR	DEC Restore Cursor	Restores the cursor position, encoding shift state and formatting attributes from the previous DECS if any, otherwise resets these all to their defaults. <sup>[46][20]</sup>

nF Escape sequences

If the ESC is followed by a byte in the range 0x20–0x2F it is of this type. Followed by any number of additional bytes in this range, and then a byte in the range 0x30-0x7E. They are further subcategorised by the low four bits of the first byte, e.g. "type 2F" for sequences where the first byte is 0x22; and by whether the final byte is in the private use range 0x30–0x3F (e.g. "type 2Fp") or not (e.g. "type 2Ft").<sup>[19]:13.2.1</sup> They are mostly used for ANSI/ISO code-switching mechanisms such as those used by ISO-2022-JP, except for type 3F sequences (those where the first intermediate byte is 0x23), which are used for individual control functions. Type 3Ft sequences are reserved for additional ISO-IR registered individual control functions,<sup>[19]:6.5.2</sup> while type 3Fp sequences are available for private-use control functions.<sup>[19]:6.5.3</sup>

Some type 0Ft (announcement) ANSI escape sequences recognised by terminals (not an exhaustive list)

	Abbr	Name	Effect
ESC SP F	ACS6 S7C1T	Announce Code Structure 6 Send 7-bit C1 Control Character to the Host	Defined in ECMA-35 (ANSI X3.41 / ISO 2022). <sup>[19]:15.2</sup> Makes the function keys send ESC + letter instead of C1 codes. <sup>[20]</sup>
ESC SP G	ACS7 S8C1T	Announce Code Structure 7 Send 8-bit C1 Control Character to the Host	Defined in ECMA-35. <sup>[19]:15.2</sup> Makes the function keys send C1 codes. <sup>[20]</sup>

Some type 3Fp (private-use) escape sequences recognised by the VT100, its successors, and/or terminal emulators such as xterm

	Abbr	Name	Effect
ESC # 3	DECdHL	DEC Double-Height Letters, Top Half	Makes the current line use characters twice as tall. This code is for the top half. <sup>[47]</sup>
ESC # 4	DECdHL	DEC Double-Height Letters, Bottom Half	Makes the current line use characters twice as tall. This code is for the bottom half. <sup>[47]</sup>
ESC # 5	DECSWL	DEC Single-Width Line	Makes the current line use single-width characters, per the default behaviour. <sup>[48][20]</sup>
ESC # 6	DECDWL	DEC Double-Width Line	Makes the current line use double-width characters, discarding any characters in the second half of the line. <sup>[49][20]</sup>

Examples

CSI 2 J — This clears the screen and, on some devices, locates the cursor to the y,x position 1,1 (upper left corner).

CSI 32 m — This makes text green. The green may be a dark, dull green, so you may wish to enable Bold with the sequence CSI 1 m which would make it bright green, or combined as CSI 32 ; 1 m. Some implementations use the Bold state to make the character Bright.

CSI 0 ; 6 8 ; "DIR" ; 13 p — This reassigns the key F10 to send to the keyboard buffer the string "DIR" and ENTER, which in the DOS command line would display the contents of the current directory. (MS-DOS ANSI.SYS only) This was sometimes used for ANSI bombs. This is a private-use code (as indicated by the letter p), using a non-standard extension to include a string-valued parameter. Following the letter of the standard would consider the sequence to end at the letter D.

CSI s — This saves the cursor position. Using the sequence CSI u will restore it to the position. Say the current cursor position is 7(y) and 10(x). The sequence CSI s will save those two numbers. Now you can move to a different cursor position, such as 20(y) and 3(x), using the sequence CSI 20 ; 3 H or CSI 20 ; 3 f. Now if you use the sequence CSI u the cursor position will return to 7(y) and 10(x). Some terminals require the DEC sequences ESC 7 / ESC 8 instead which is more widely supported.

In shell scripting

ANSI escape codes are often used in UNIX and UNIX-like terminals to provide syntax highlighting. For example, on compatible terminals, the following `list` command color-codes file and directory names by type.

```
ls --color
```

Users can employ escape codes in their scripts by including them as part of *standard output* or *standard error*. For example, the following GNU `sed` command embellishes the output of the `make` command by displaying lines containing words starting with "WARN" in reverse video and words starting with "ERR" in bright yellow on a dark red background (letter case is ignored). The representations of the codes are highlighted.<sup>[50]</sup>

```
make 2>&1 | sed -e 's/.*\bWARN.*/\x1b[7m\x1b[0m/i' -e 's/.*\bERR.*/\x1b[93;41m\x1b[0m/i'
```

The following `Bash` function flashes the terminal (by alternately sending reverse and normal video mode codes) until the user presses a key.<sup>[51]</sup>

```
flasher () { while true; do printf "\e[?5b"; sleep 0.1; printf "\e[?5l"; read -s -n1 -t1 && break; done; }
```


This can be used to alert a programmer when a lengthy command terminates, such as with `make ; flasher`.<sup>[52]</sup>

```
printf "\033c
```

This will reset the console, similar to the command `reset` on modern Linux systems; however it should work even on older Linux systems and on other (non-Linux) UNIX variants.

In C

```
1 #include <stdio.h>
2
3 int main(void)
4 {
5     int i, j, n;
6
7     for (i = 0; i < 11; i++) {
8         for (j = 0; j < 10; j++) {
9             n = 10 * i + j;
10            if (n > 107) break;
11            printf("\033[4m %3d\033[m", n, n);
12        }
13        printf("\n");
14    }
15    return 0;
16 }
```

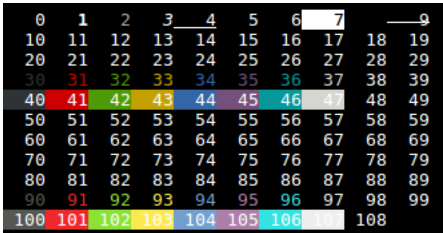

Terminal input sequences

Pressing special keys on the keyboard, as well as outputting many xterm CSI, DCS, or OSC sequences, often produces a CSI, DCS, or OSC sequence, sent from the terminal to the computer as though the user typed it.



When typing input on a terminal keypresses outside the normal main alphanumeric keyboard area can be sent to the host as ANSI sequences. For keys that have an equivalent output function, such as the cursor keys, these often mirror the output sequences. However, for most keypresses there isn't an equivalent output sequence to use.

There are several encoding schemes, and unfortunately most terminals mix sequences from different schemes, so host software has to be able to deal with input sequences using any scheme. To complicate the matter, the VT terminals themselves have two schemes of input, *normal mode* and *application mode* that can be switched by the application.

(draft section)

```
<char>          -> char
<esc> <nochar>  -> esc
<esc> <esc>      -> esc
<esc> <char>     -> Alt-keypress or keycode sequence
<esc> '[' <nochar> -> Alt-[
<esc> '[' <num> '(' <num> ')' -> keycode sequence, <num> defaults to 1
```

If the terminating character is '~', the first number must be present and is a keycode number, the second number is an optional modifier value. If the terminating character is a letter, the letter is the keycode value, and the optional number is the modifier value.

The modifier value defaults to 1, and after subtracting 1 is a bitmap of modifier keys being pressed: Meta-Ctrl-Alt-Shift. So, for example, <esc>[4;2~ is Shift-End, <esc>[20~ is function key 9, <esc>[5C is Ctrl-Right.

```
vt sequences:
<esc>[1~ - Home      <esc>[16~ -      <esc>[31~ - F17
<esc>[2~ - Insert    <esc>[17~ - F6      <esc>[32~ - F18
<esc>[3~ - Delete    <esc>[18~ - F7      <esc>[33~ - F19
<esc>[4~ - End        <esc>[19~ - F8      <esc>[34~ - F20
<esc>[5~ - PgUp      <esc>[20~ - F9      <esc>[35~ -
<esc>[6~ - PgDn      <esc>[21~ - F10
<esc>[7~ - Home      <esc>[22~ -
<esc>[8~ - End        <esc>[23~ - F11
<esc>[9~ -            <esc>[24~ - F12
<esc>[10~ - F0        <esc>[25~ - F13
<esc>[11~ - F1        <esc>[26~ - F14
<esc>[12~ - F2        <esc>[27~ -
<esc>[13~ - F3        <esc>[28~ - F15
<esc>[14~ - F4        <esc>[29~ - F16
<esc>[15~ - F5        <esc>[30~ -

xterm sequences:
<esc>[A - Up        <esc>[K -      <esc>[U -
<esc>[B - Down      <esc>[L -      <esc>[V -
<esc>[C - Right     <esc>[M -      <esc>[W -
<esc>[D - Left      <esc>[N -      <esc>[X -
<esc>[E -           <esc>[O -      <esc>[Y -
<esc>[F - End       <esc>[1P - F1    <esc>[Z -
<esc>[G - Keypad 5  <esc>[1Q - F2
<esc>[H - Home      <esc>[1R - F3
<esc>[I -           <esc>[1S - F4
<esc>[J -           <esc>[T -
```

<esc>[A to <esc>[D are the same as the ANSI output sequences. The <num> is normally omitted if no modifier keys are pressed, but most implementations always emit the <num> for F1-F4. (draft section)

Xterm has a comprehensive documentation page on the various function-key and mouse input sequence schemes from DEC's VT terminals and various other terminals it emulates.<sup>[20]</sup> Thomas Dickey has added a lot of support to it over time;<sup>[53]</sup> he also maintains a list of default keys used by other terminal emulators for comparison.<sup>[54]</sup>

- On the Linux console, certain function keys generate sequences of the form CSI [ *char*. The CSI sequence should terminate on the [.
- Old versions of *Terminator* generate SS3 1; *modifiers char* when F1–F4 are pressed with modifiers. The faulty behavior was copied from *GNOME Terminal*.
- xterm replies CSI *row* ; *column* R if asked for cursor position and CSI 1 ; *modifiers* R if the F3 key is pressed with modifiers, which collide in the case of *row* == 1. This can be avoided by using the ? private modifier as CSI ? 6 n, which will be reflected in the response as CSI ? *row* ; *column* R.
- many terminals prepend ESC to any character that is typed with the alt key down. This creates ambiguity for uppercase letters and symbols @[ \ ^ \_ , which would form C1 codes.
- Konsole* generates SS3 *modifiers char* when F1–F4 are pressed with modifiers.

## See also

- ANSI art
- Control character
- Advanced Video Attribute Terminal Assembler and Recreator (AVATAR)
- ISO/IEC JTC 1/SC 2
- C0 and C1 control codes

## Notes

- The screen display could be replaced by drawing the entire new screen's contents at the bottom, scrolling the previous screen up sufficiently to erase all the old text. The user would see the scrolling, and the hardware *cursor* would be left at the very bottom. Some early *batch files* achieved rudimentary "full screen" displays in this way.

- b. Typical colors that are used when booting PCs and leaving them in text mode, which used a 16-entry color table. The colors are different in the EGA/VGA graphic modes.
- c. Seen in Windows XP through Windows 8.1
- d. Until PowerShell 6
- e. Debug console, "Dark+" theme
- f. Campbell theme, used as of Windows 10 version 1709. Also used by PowerShell 6.
- g. For virtual terminals, from /etc/vtrgb.
- h. On terminals based on **CGA** compatible hardware, such as ANSI.SYS running on DOS, this normal intensity foreground color is rendered as Orange. CGA RGBI monitors contained hardware to modify the dark yellow color to an orange/brown color by reducing the green component. See this [ansi art](http://sixteencolors.net/pack/ciapak26/DH-JNS11.CIA) (<http://sixteencolors.net/pack/ciapak26/DH-JNS11.CIA>) Archived (<https://web.archive.org/web/20110725014401/http://sixteencolors.net/pack/ciapak26/DH-JNS11.CIA>) 25 July 2011 at the [Wayback Machine](https://web.archive.org/web/20110725014401/http://sixteencolors.net/pack/ciapak26/DH-JNS11.CIA) as an example.

## References

1. "Standard ECMA-48: Control Functions for Character-Imaging I/O Devices" ([https://www.ecma-international.org/wp-content/uploads/ECMA-A-48\\_2nd\\_edition\\_august\\_1979.pdf](https://www.ecma-international.org/wp-content/uploads/ECMA-A-48_2nd_edition_august_1979.pdf)) (PDF) (Second ed.). Ecma International. August 1979. Brief History.
2. Williams, Paul (2006). "Digital's Video Terminals" ([https://vt100.net/dec/vt\\_history](https://vt100.net/dec/vt_history)). VT100.net. Retrieved 17 August 2011.
3. Heathkit Company (1979). "Heathkit Catalog 1979" ([https://web.archive.org/web/20120113230301/http://www.pestingers.net/Computer\\_history/Computers\\_79.htm](https://web.archive.org/web/20120113230301/http://www.pestingers.net/Computer_history/Computers_79.htm)). Heathkit Company. Archived from the original ([http://www.pestingers.net/Computer\\_history/Computers\\_79.htm](http://www.pestingers.net/Computer_history/Computers_79.htm)) on 13 January 2012. Retrieved 4 November 2011.
4. "Withdrawn FIPS Listed by Number" ([https://www.nist.gov/system/files/documents/2016/12/15/withdrawn\\_fips\\_by\\_numerical\\_order\\_index.pdf](https://www.nist.gov/system/files/documents/2016/12/15/withdrawn_fips_by_numerical_order_index.pdf)) (PDF). *National Institute of Standards and Technology*. 15 December 2016. Retrieved 2 January 2022.
5. "Standard ECMA-48: Control Functions for Coded Character Sets" ([https://www.ecma-international.org/wp-content/uploads/ECMA-48\\_5th\\_edition\\_june\\_1991.pdf](https://www.ecma-international.org/wp-content/uploads/ECMA-48_5th_edition_june_1991.pdf)) (PDF) (Fifth ed.). Ecma International. June 1991.
6. Mefford, Michael (7 February 1989). "ANSI.com: Download It Here" (<https://www.pcmag.com/article2/0,2817,5343,00.asp>). *PC Magazine*. Retrieved 10 August 2011.
7. Kegel, Dan; Auer, Eric (28 February 1999). "Nansi and NNansi – ANSI Drivers for MS-DOS" (<http://www.kegel.com/nansi/>). Dan Kegel's Web Hostel. Retrieved 10 August 2011.
8. "PTS-DOS 2000 Pro User Manual" ([http://download.paragon-software.com/doc/manual\\_dos\\_eng.pdf](http://download.paragon-software.com/doc/manual_dos_eng.pdf)) (PDF). Buggingen, Germany: Paragon Technology GmbH. 1999. Archived ([https://web.archive.org/web/20180512094512/http://download.paragon-software.com/doc/manual\\_dos\\_eng.pdf](https://web.archive.org/web/20180512094512/http://download.paragon-software.com/doc/manual_dos_eng.pdf)) (PDF) from the original on 12 May 2018. Retrieved 12 May 2018.
9. Günther, Jens; Ernst, Tobias (25 April 2004) [1996]. Ellsäßer, Wolfgang (ed.). "Inoffizielle deutschsprachige PTS-DOS-FAQ (PTS/FAQD)" (<http://almnet.de/ptsdos/ptsfaqd.html#absIV1>) [Inofficial German PTS-DOS FAQ] (in German). Retrieved 2 October 2018.
10. *CCI Multiuser DOS 7.22 GOLD Online Documentation*. Concurrent Controls, Inc. (CCI). 10 February 1997. HELP.HLP.
11. Hood, Jason (2005). "Process ANSI escape sequences for Windows console programs" (<https://github.com/adoxa/ansicon>). Jason Hood's Home page. Retrieved 9 May 2013.
12. "colorama 0.2.5" (<https://pypi.python.org/pypi/colorama>). *Python Package Index*. Retrieved 17 August 2013.
13. bitcrazed. "Console Virtual Terminal Sequences - Windows Console" (<https://docs.microsoft.com/en-us/windows/console/console-virtual-terminal-sequences>). *docs.microsoft.com*. Retrieved 30 May 2018.
14. "PowerShell Help: About Special Characters" ([https://docs.microsoft.com/en-us/powershell/module/microsoft.powershell.core/about/about\\_special\\_characters?view=powershell-6](https://docs.microsoft.com/en-us/powershell/module/microsoft.powershell.core/about/about_special_characters?view=powershell-6)).
15. "Windows Console and Terminal Ecosystem Roadmap" (<https://docs.microsoft.com/en-us/windows/console/ecosystem-roadmap#roadmap-for-the-future>). Microsoft. 2018. Retrieved 13 March 2021. "this includes retiring the classic console host user interface from its default position in favor of Windows Terminal, ConPTY, and virtual terminal sequences."
16. "Printer and terminal escape codes" ([http://www.bighole.nl/pub/mirror/homepage.ntlworld.com/kryten\\_droid/Atari/ST/spg/st\\_prog\\_guide\\_c.htm](http://www.bighole.nl/pub/mirror/homepage.ntlworld.com/kryten_droid/Atari/ST/spg/st_prog_guide_c.htm)). *Concise Atari ST 68000 Programming Guide*. Archived ([https://web.archive.org/web/20160920103258/http://www.bighole.nl/pub/mirror/homepage.ntlworld.com/kryten\\_droid/Atari/ST/spg/st\\_prog\\_guide\\_c.htm](https://web.archive.org/web/20160920103258/http://www.bighole.nl/pub/mirror/homepage.ntlworld.com/kryten_droid/Atari/ST/spg/st_prog_guide_c.htm)) from the original on 20 September 2016. Retrieved 22 June 2020.
17. "Amiga Printer Command Definitions" ([http://wiki.amigaos.net/wiki/Printer\\_Device#Printer\\_Command\\_Definitions](http://wiki.amigaos.net/wiki/Printer_Device#Printer_Command_Definitions)). Commodore. Retrieved 10 July 2013.
18. "Escape Sequence - OpenVMS Wiki" ([https://wiki.vmssoftware.com/Escape\\_Sequence](https://wiki.vmssoftware.com/Escape_Sequence)).
19. "Standard ECMA-35: Character Code Structure and Extension Techniques" ([https://www.ecma-international.org/wp-content/uploads/ECMA-35\\_6th\\_edition\\_december\\_1994.pdf](https://www.ecma-international.org/wp-content/uploads/ECMA-35_6th_edition_december_1994.pdf)) (PDF) (Sixth ed.). Ecma International. 1994.
20. Moy, Edward; Gildea, Stephen; Dickey, Thomas (2019). "XTerm Control Sequences (ctlseqs)" (<https://invisible-island.net/xterm/ctlseqs/ctlseqs.html>). *Invisible Island*.
21. Frank da Cruz; Christine Gianone (1997). *Using C-Kermit* (<https://books.google.com/books?id=QuYQPc-c67MC&pg=PA278>). Digital Press. p. 278. ISBN 978-1-55558-164-0.
22. "SCOSC—Save Current Cursor Position" (<https://vt100.net/docs/vt510-rm/SCOSC.html>). *VT510 Video Terminal Programmer Information*. DEC.
23. "DECSLRM—Set Left and Right Margins" (<https://vt100.net/docs/vt510-rm/DECSLRM.html>). *VT510 Video Terminal Programmer Information*. DEC.
24. "SCORC—Restore Saved Cursor Position" (<https://vt100.net/docs/vt510-rm/SCORC.html>). *VT510 Video Terminal Programmer Information*. DEC.
25. Moy, Edward; Gildea, Stephen; Dickey, Thomas. "XTerm Control Sequences" ([https://invisible-island.net/xterm/ctlseqs/ctlseqs.html#h3-Functions-using-CSI-ordered-by-the-final-character\\_s](https://invisible-island.net/xterm/ctlseqs/ctlseqs.html#h3-Functions-using-CSI-ordered-by-the-final-character_s)). Functions using CSI, ordered by the final character(s). Retrieved 4 February 2022.
26. Conrad Irwin (April 2013). "bracketed paste mode" (<https://cirw.in/blog/bracketed-paste>). *cirw.in*.
27. Moy, Edward; Gildea, Stephen; Dickey, Thomas. "XTerm Control Sequences" (<https://invisible-island.net/xterm/ctlseqs/ctlseqs.html#h2-Bracketed-Paste-Mode>). Bracketed Paste Mode. Retrieved 4 February 2022.
28. "console\_codes(4) - Linux manual page" ([http://man7.org/linux/man-pages/man4/console\\_codes.4.html](http://man7.org/linux/man-pages/man4/console_codes.4.html)). *man7.org*. Retrieved 23 March 2018.
29. "screen(HW)" (<http://osr507doc.sco.com/man/html/HW/screen.HW.html>). *SCO OpenServer Release 5.0.7 Manual*. 11 February 2003.
30. "Bug 791596 – Thoughts about faint (SGR 2)" ([https://bugzilla.gnome.org/show\\_bug.cgi?id=791596](https://bugzilla.gnome.org/show_bug.cgi?id=791596)). *bugzilla.gnome.org*.
31. "Curly and colored underlines (#6382) · Issues · George Nachman / item2" (<https://gitlab.com/gnachman/item2/-issues/6382>). *GitLab*.
32. "Extensions to the xterm protocol" (<https://sw.kovidgoyal.net/kitty/protocol-extensions.html#colored-and-styled-underlines>). *kitty documentation*. Retrieved 1 July 2020.
33. "console-termio-realizer" (<http://jdebpu.uk/Softwares/nosh/guide/commands/console-termio-realizer.xml>). *jdebpu.uk*.
34. "console\_codes(4)" ([https://man7.org/linux/man-pages/man4/console\\_codes.4.html](https://man7.org/linux/man-pages/man4/console_codes.4.html)). *Linux Programmer's Manual*. 5.10. Linux man-pages project.
35. "mintty/mintty: Text attributes and rendering" (<https://github.com/mintty/mintty/wiki/Tips#text-attributes-and-rendering>). *GitHub*.
36. Changed from 0, 0, 205 in July 2004 "Patch #192 – 2004/7/12 – XFree86 4.4.99.9" ([http://invisible-island.net/xterm/xterm.log.html#xterm\\_192](http://invisible-island.net/xterm/xterm.log.html#xterm_192)).
37. Changed from 0, 0, 255 in July 2004 "Patch #192 – 2004/7/12 – XFree86 4.4.99.9" ([http://invisible-island.net/xterm/xterm.log.html#xterm\\_192](http://invisible-island.net/xterm/xterm.log.html#xterm_192)).

38. "T.416 Information technology - Open Document Architecture (ODA) and interchange format: Character content architectures" ([https://www.itu.int/rec/dologin\\_pub.asp?lang=e&id=T-REC-T.416-199303-I!!PDF-E&type=items](https://www.itu.int/rec/dologin_pub.asp?lang=e&id=T-REC-T.416-199303-I!!PDF-E&type=items)).
39. "color-spaces.pl (a copy of 256colors2.pl from xterm dated 1999-07-11)" (<https://quickgit.kde.org/?p=konsole.git&a=blob&f=tests%2Fcolor-space.s.pl>). KDE. 6 December 2006.
40. "README.moreColors" (<https://invent.kde.org/personalizedrefrigerator/konsole/-/blob/master/doc/user/README.moreColors>). KDE. 22 April 2010.
41. "libvte's bug report and patches: Support for 16 million colors" ([https://bugzilla.gnome.org/show\\_bug.cgi?id=704449](https://bugzilla.gnome.org/show_bug.cgi?id=704449)). GNOME Bugzilla. 4 April 2014. Retrieved 5 June 2016.
42. Koblinger, Egmont. "Hyperlinks (a.k.a. HTML-like anchors) in terminal emulators" (<https://gist.github.com/egmontkob/eb114294efbcd5adb1944c9f3cb5feda>). *GitHub Gists*.
43. "mintty/mintty: Control Sequences" (<https://github.com/mintty/mintty/wiki/CtrlSeqs#hyperlinks>). *GitHub*.
44. "console\_codes — Linux console escape and control sequences" ([http://man7.org/linux/man-pages/man4/console\\_codes.4.html](http://man7.org/linux/man-pages/man4/console_codes.4.html)). *Linux Programmer's Manual*.
45. ISO/TC 97/SC 2 (30 December 1976). *Reset to Initial State (RIS)* (<https://web.archive.org/web/20201001045756/https://www.itscj.ipsj.or.jp/iso-ir/035.pdf>) (PDF). ITSCJ/IPSJ. ISO-IR-35. Archived from the original (<https://www.itscj.ipsj.or.jp/iso-ir/035.pdf>) (PDF) on 1 October 2020. Retrieved 17 January 2020.
46. Digital. "DECSC—Save Cursor" (<https://vt100.net/docs/vt510-rm/DECS C.html>). *VT510 Video Terminal Programmer Information*.
47. *ANSI Escape sequences - VT100 / VT52* (<https://web.archive.org/web/20090227051140/http://ascii-table.com/ansi-escape-sequences-vt-100.php>), archived from the original (<http://ascii-table.com/ansi-escape-sequences-vt-100.php>) on 27 February 2009, retrieved 21 August 2020
48. Digital. "DECSWL—Single-Width, Single-Height Line" (<https://vt100.net/docs/vt510-rm/DECSWL.html>). *VT510 Video Terminal Programmer Information*.
49. Digital. "DECDWL—Double-Width, Single-Height Line" (<https://vt100.net/docs/vt510-rm/DECDWL.html>). *VT510 Video Terminal Programmer Information*.
50. "Chapter 9. System tips" ([http://www.debian.org/doc/manuals/debian-reference/ch09.en.html#\\_colorized\\_shell\\_echo](http://www.debian.org/doc/manuals/debian-reference/ch09.en.html#_colorized_shell_echo)). *debian.org*.
51. "VT100.net: Digital VT100 User Guide" (<http://vt100.net/docs/vt100-ug/chapter3.html>). Retrieved 19 January 2015.
52. "bash – How to get a notification when my commands are done – Ask Different" (<http://apple.stackexchange.com/questions/9412/how-to-get-a-notification-when-my-commands-are-done>). Retrieved 19 January 2015.
53. Dickey, Thomas. "XTerm FAQ: Comparing versions, by counting controls" ([https://invisible-island.net/xterm/xterm.faq.html#compare\\_versions](https://invisible-island.net/xterm/xterm.faq.html#compare_versions)). *Invisible Island*. Retrieved 25 January 2020.
54. Dickey, Thomas (2016). "Table of function-keys for XTerm and other Terminal Emulators" (<https://invisible-island.net/xterm/xterm-function-keys.html>). *Invisible Island*. Retrieved 25 January 2020.

## External links

- Standard ECMA-48, Control Functions For Coded Character Sets (<https://www.ecma-international.org/publications-and-standards/standards/ecma-48/>). (*5th edition, June 1991*), European Computer Manufacturers Association, Geneva 1991 (also published by ISO and IEC as standard ISO/IEC 6429)
- vt100.net DEC Documents (<http://vt100.net/docs/>)
- "ANSI.SYS -- ansi terminal emulation escape sequences" (<https://web.archive.org/web/20060206022229/http://enterprise.aacc.cc.md.us/~rhs/ansi.html>). Archived from the original (<http://enterprise.aacc.cc.md.us/~rhs/ansi.html>) on 6 February 2006. Retrieved 22 February 2007.
- Xterm / Escape Sequences (<http://invisible-island.net/xterm/ctlseqs/ctlseqs.html>)
- AIXterm / Escape Sequences ([https://www.ibm.com/support/knowledgecenter/en/ssw\\_aix\\_72/a\\_commands/aixterm.html](https://www.ibm.com/support/knowledgecenter/en/ssw_aix_72/a_commands/aixterm.html))
- A collection of escape sequences for terminals that are vaguely compliant with ECMA-48 and friends. (<http://bjh21.me.uk/all-escapes/all-escapes.txt>)
- "ANSI Escape Sequences" (<https://web.archive.org/web/20110525032501/http://ascii-table.com/ansi-escape-sequences.php>). Archived from the original (<http://ascii-table.com/ansi-escape-sequences.php>) on 25 May 2011.
- ITU-T Rec. T.416 (03/93) Information technology – Open Document Architecture (ODA) and interchange format: Character content architectures ([https://www.itu.int/rec/dologin\\_pub.asp?lang=e&id=T-REC-T.416-199303-I!!PDF-E&type=items](https://www.itu.int/rec/dologin_pub.asp?lang=e&id=T-REC-T.416-199303-I!!PDF-E&type=items))

Retrieved from "[https://en.wikipedia.org/w/index.php?title=ANSI\\_escape\\_code&oldid=1069948182](https://en.wikipedia.org/w/index.php?title=ANSI_escape_code&oldid=1069948182)"

**This page was last edited on 4 February 2022, at 22:14 (UTC).**

Text is available under the Creative Commons Attribution-ShareAlike License; additional terms may apply. By using this site, you agree to the Terms of Use and Privacy Policy. Wikipedia® is a registered trademark of the Wikimedia Foundation, Inc., a non-profit organization.