


Tasks


1. Declare variables for a Flipkart product: productName (as a string), price (float), and rating (double). Assign sample values and print each variable with its data type.

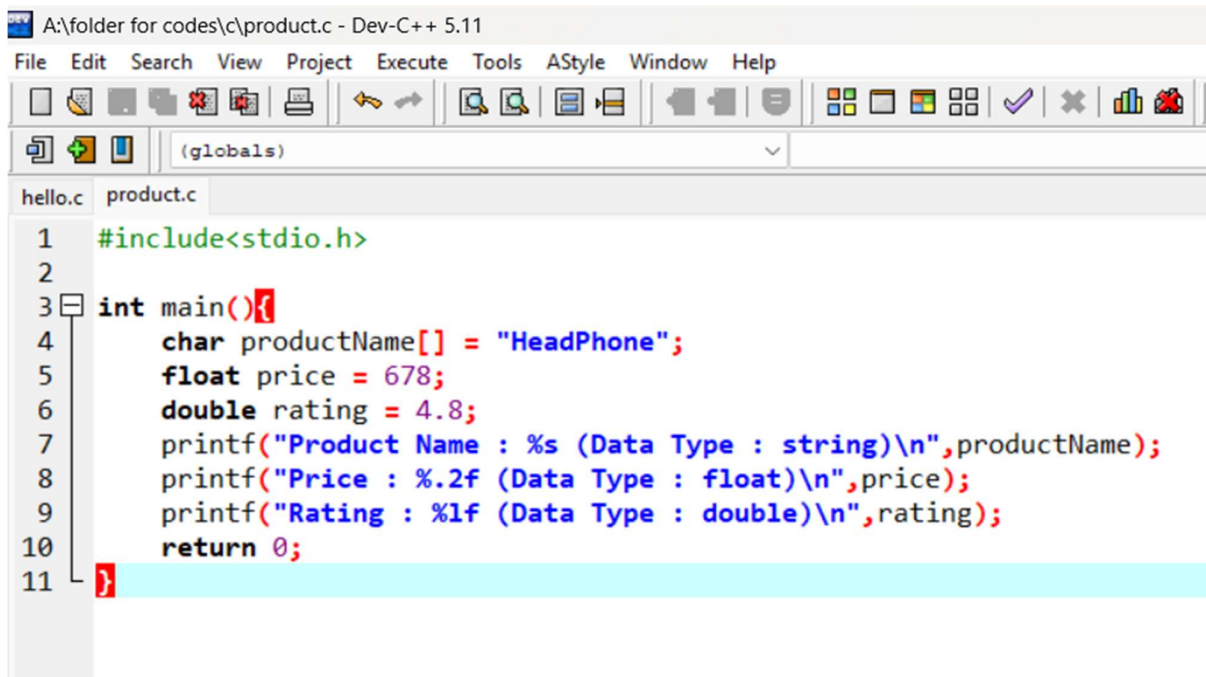

The screenshot shows the Dev-C++ 5.11 IDE with a file named 'product.c' open. The code declares three variables: 'productName' as a string, 'price' as a float, and 'rating' as a double. It then prints each variable with its data type using printf. The code is as follows:

```
1 #include<stdio.h>
2
3 int main()
4 {
5     char productName[] = "HeadPhone";
6     float price = 678;
7     double rating = 4.8;
8     printf("Product Name : %s (Data Type : string)\n",productName);
9     printf("Price : %.2f (Data Type : float)\n",price);
10    printf("Rating : %lf (Data Type : double)\n",rating);
11    return 0;
}
```


2. Create a constant variable to store the GST rate (for example, 18%) and use it to calculate the final price of a Zomato order with a given base price.
Constraint: The GST rate must not be changeable after its initial assignment.

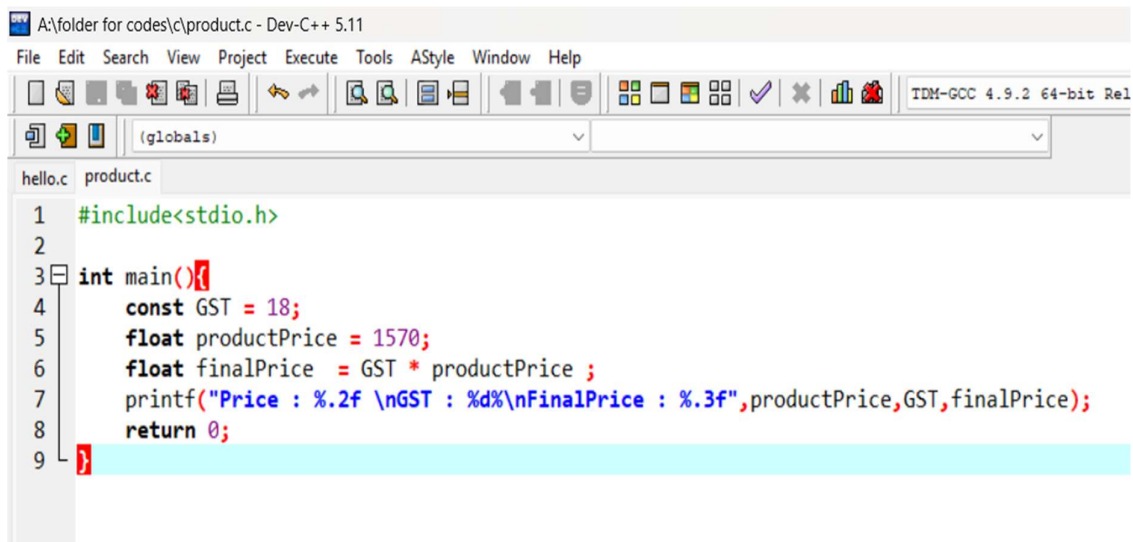

The screenshot shows the Dev-C++ 5.11 IDE with a file named 'product.c' open. The code declares a constant variable 'GST' with a value of 18, a float variable 'productPrice' with a value of 1570, and a float variable 'finalPrice' calculated as 'GST * productPrice'. It then prints the values of 'productPrice', 'GST', and 'finalPrice' using printf. The code is as follows:

```
1 #include<stdio.h>
2
3 int main()
4 {
5     const GST = 18;
6     float productPrice = 1570;
7     float finalPrice = GST * productPrice ;
8     printf("Price : %.2f \nGST : %d\nFinalPrice : %.3f",productPrice,GST,finalPrice);
9     return 0;
}
```

3. Write a program that stores your favorite Spotify playlist's name (string), total number of songs (int), and average song duration in minutes (float). Print all values in a single formatted sentence.

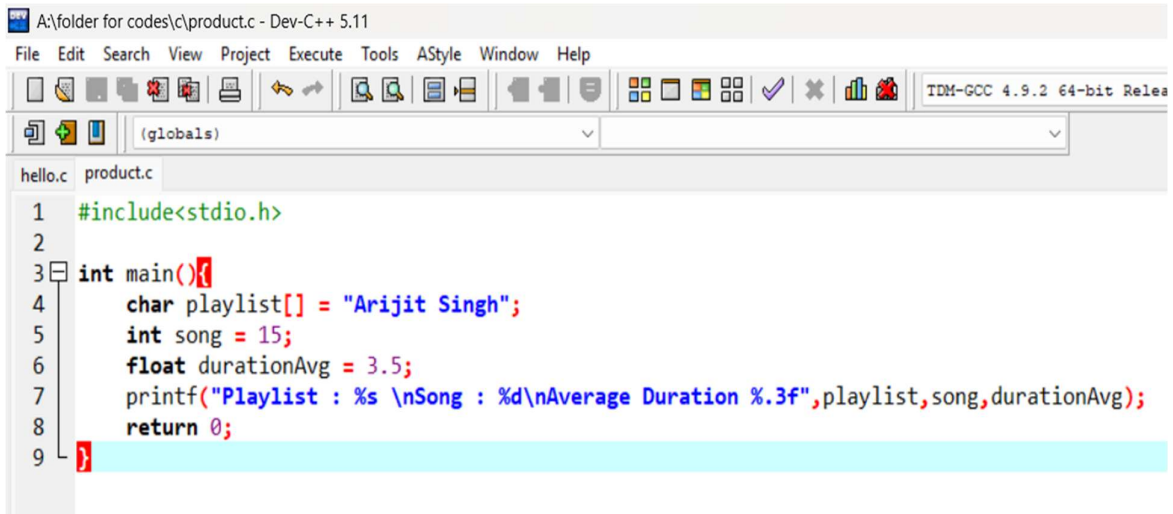

```
A:\folder for codes\c\product.c - Dev-C++ 5.11
File Edit Search View Project Execute Tools AStyle Window Help
(globals)
hello.c product.c
1 #include<stdio.h>
2
3 int main()
4     char playlist[] = "Arijit Singh";
5     int song = 15;
6     float durationAvg = 3.5;
7     printf("Playlist : %s \nSong : %d\nAverage Duration %.3f",playlist,song,durationAvg);
8     return 0;
9
```

4. Identify and correct the invalid variable names from this list: 1stPlayer, player_age, \$score, total-marks, userName.

Hint: Apply standard variable naming rules for your programming language.

1stPlayer	Invalid	firstPlayer
player_age	Valid	
\$score	Invalid	score
total-marks	Invalid	total_marks
userName	valid	