



Department of Computer Science
Faculty of Computing
UNIVERSITI TEKNOLOGI MALAYSIA

SUBJECT NAME: COMPUTER ORGANIZATION AND ARCHITECTURE

SUBJECT CODE: SECR 1033

SEMESTER: 2 - 2024/25

LAB TITLE: Programming 1: Assembly Language Fundamentals

INSTRUCTION: Student is required to have instructor's signature before proceed from each lab work.

STUDENT INFO :

Name:

Nasraie Bin Noriskamar

Metric No:

A25C50118

Section:

02

Email:

nasraie@graduate.utm.my

SUBMITTED DATE:

COMMENTS:



Department of Computer Science
Faculty of Computing
UNIVERSITI TEKNOLOGI MALAYSIA

SUBJECT NAME: COMPUTER ORGANIZATION AND ARCHITECTURE

SUBJECT CODE: SECR 1033

SEMESTER: 2 - 2024/25

LAB TITLE: Programming 1: Assembly Language Fundamentals

INSTRUCTION: Student is required to have instructor's signature before proceed from each lab work.

STUDENT INFO : Name: Muhammad Fairuz Bin Herman

Metric No: A26650267

Section: 02

Email: fairuz06@graduate.utm.my

SUBMITTED DATE: _____

COMMENTS:

youtube link:

<https://youtube.com/watch?v=I3yaPOOWNgk&si=69IaM6um8yXm5Jys>

https://youtu.be/tX_OGAz7MUK?si=sKF4F7fwLK391Qva

Lab # 1

Simple program to familiarize with Program Code, Rebuild & Start Without Debugging

Execute the programs below:

PART 1:

i. Part A: Adding and Subtracting Integers

```
TITLE Add and Subtract (AddSub.asm)

; This program adds and subtracts 32-bit integers
; Authors:
; Date:
; Revision:

INCLUDE Irvine32.inc

.data
TOTAL dword 0 ; a variable named TOTAL (declared as DWORD)

.code

main PROC

    mov eax, 123400h ; Set EAX with the value of 123400h
    add eax, 567800h ; Add the content of EAX with 567800h
    sub eax, 77700h ; Subtract content of EAX with 77700h
    mov TOTAL, eax ; Store content of EAX to TOTAL

    call DumpRegs

    exit
main ENDP

END main
```

Experimental Results:

a) Rebuild & Start Without Debugging



Completed *Fully* *Partially* : Checked by: _____

Screenshot Result:

```
Microsoft Visual Studio Debug Console

EAX=00613500 EBX=003E8000 ECX=004010AA EDX=004010AA
ESI=004010AA EDI=004010AA EBP=001AFF84 ESP=001AFF78
EIP=00403679 EFL=00000206 CF=0 SF=0 ZF=0 OF=0 AF=0 PF=1

C:\coa\template_VS2026\Debug\Project.exe (process 20780) exited with code 0.
Press any key to close this window . . .
```

ii. Part B: Adding Variables

```
TITLE Add and Subtract, Version 2 (AddSub2.asm)

; This program adds and subtracts 32-bit unsigned
; integers and stores the sum in a variable.
; Authors:
; Date:
; Revision:

INCLUDE Irvine32.inc
.data
val1 DWORD 10000h
val2 DWORD 40000h
val3 DWORD 20000h
finalVal DWORD ?
.code

main PROC
mov eax, val1      ; start with 10000h
add eax, val2      ; add 40000h
sub eax, val3      ; subtract 20000h
mov finalVal, eax  ; store the result (30000h)

call DumpRegs     ; display the registers

exit

main ENDP
END main
```

Experimental Results:

a) Rebuild & Start Without Debugging



Completed *Fully* *Partially* : Checked by: _____

Screenshot Result:

```
Microsoft Visual Studio Debug Console

EAX=00030000 EBX=003E6000 ECX=004010AA EDX=004010AA
ESI=004010AA EDI=004010AA EBP=001AFF84 ESP=001AFF78
EIP=0040367B EFL=00000206 CF=0 SF=0 ZF=0 OF=0 AF=0 PF=1

C:\coa\template_VS2026 - Part B\Debug\Project.exe (process 19620) exited with code 0.
Press any key to close this window . . .
```

iii. Part C: Add and Subtract 8 and 16-Bit Version

```
TITLE Add and Subtract, Version 3
; This program adds and subtracts 8 and 16 bit
; unsigned integers and stores the sum in a variable.
; Authors:
; Date:
; Revision:

INCLUDE Irvine32.inc

.data
valw1 WORD 1000h
valw2 WORD 4000h
valw3 WORD 2000h
finalValw WORD ?

valb1 BYTE 10h
valb2 BYTE 40h
valb3 BYTE 20h
finalValb BYTE ?

.code
main PROC
mov ax,valw1; start with 10000h
add ax,valw2      ; add 40000h
sub ax,valw3      ; subtract 20000h
mov finalValw,ax  ; store the result (30000h)
call DumpRegs    ; display the registers

mov ah,valb1; start with 10000h
add ah,valb2      ; add 40000h
sub ah,valb3      ; subtract 20000h
mov finalValb,ah  ; store the result (30000h)
call DumpRegs    ; display the registers

exit
main ENDP
END main
```

Experimental Results:

a) Rebuild & Start Without Debugging



Completed *Fully* *Partially* : Checked by: _____

Screenshot Result:

```
Microsoft Visual Studio Debug Console

EAX=001A3000 EBX=00215000 ECX=004010AA EDX=004010AA
ESI=004010AA EDI=004010AA EBP=001AFF84 ESP=001AFF78
EIP=0040367F EFL=00000206 CF=0 SF=0 ZF=0 OF=0 AF=0 PF=1

EAX=001A3000 EBX=00215000 ECX=004010AA EDX=004010AA
ESI=004010AA EDI=004010AA EBP=001AFF84 ESP=001AFF78
EIP=0040369C EFL=00000206 CF=0 SF=0 ZF=0 OF=0 AF=0 PF=1


C:\coa\template_VS2026 - Part C\Debug\Project.exe (process 21020) exited with code 0.
Press any key to close this window . . .
```

Detail Debugging Process

PART 2:



Run Debugging Process for Part B, Part C and Capture Video

1. Press F10 for step by step debugging.

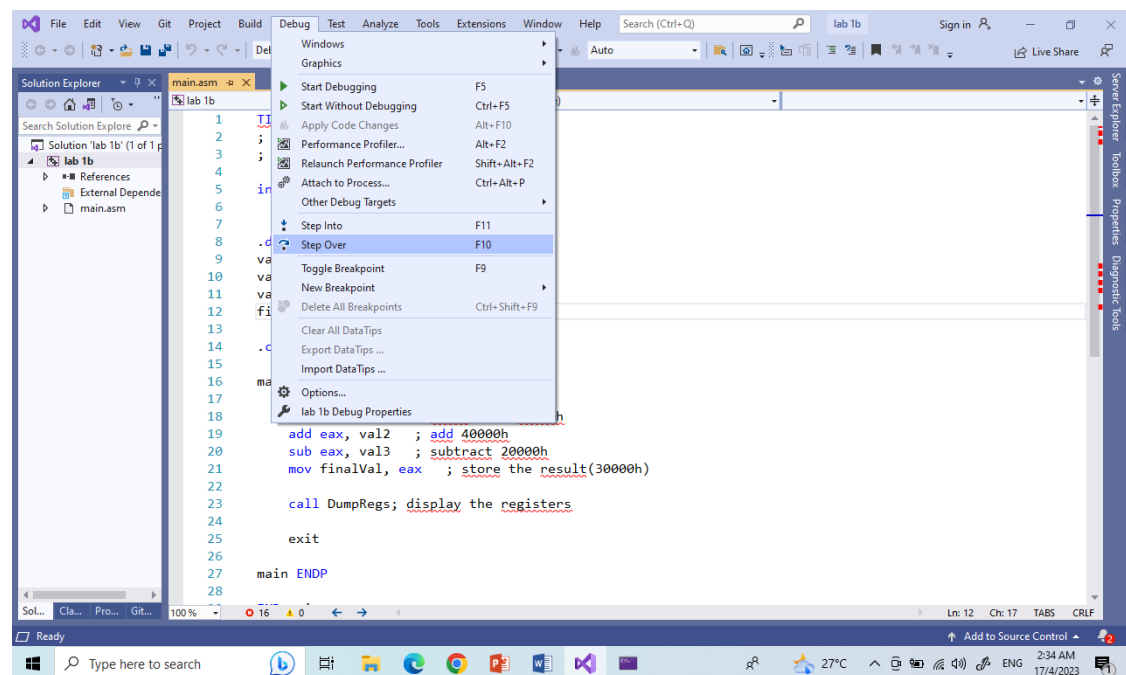


3. Open 5 windows:

- Watch
- Autos
- Memory
- Registers
- Disassembly

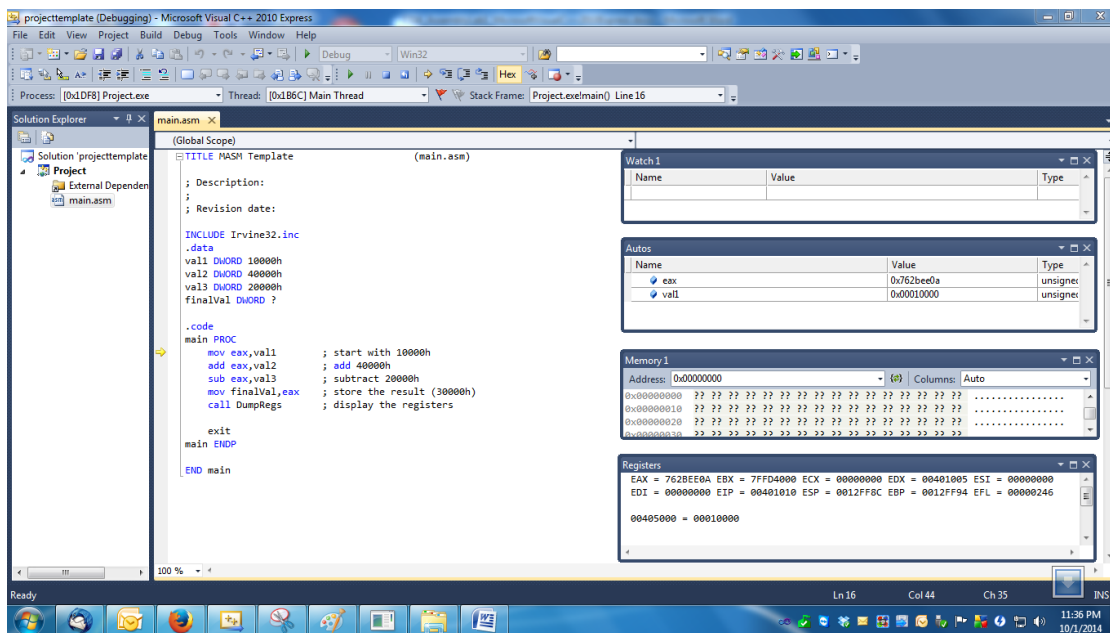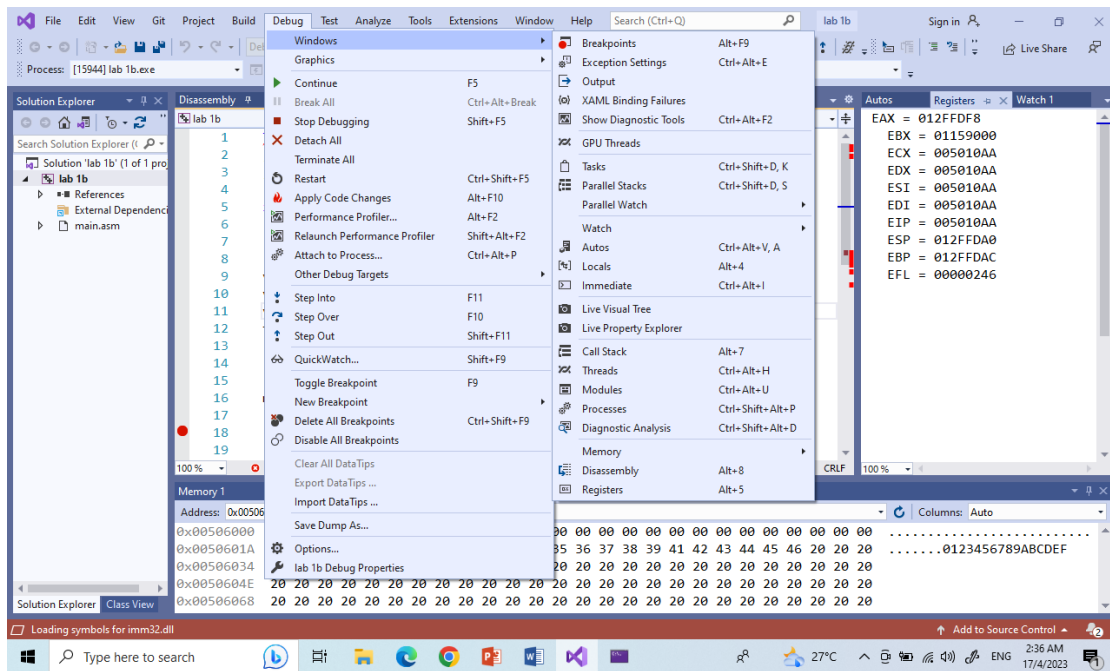

4. Default memory data segment value is at first variable: &val1 or 0x00405000 (depend on memory used).

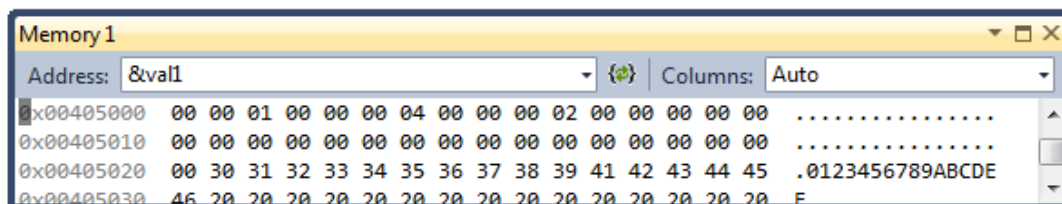

5. Add variables val1, val2, val3 and finalval to Watch

Watch 1		
Name	Value	Type
val1	0x00010000	unsigned long
val2	0x00040000	unsigned long
val3	0x00020000	unsigned long
finalVal	0x00000000	unsigned long

6. F10 to trace/step the assembly program line by line.

7. Please debug by looking at value changes at Watch, Memory, Autos and Registers windows.

8. Disassembly window can show the following optional information:

- Memory address where each instruction is located. For native applications, it is the actual memory address. For Visual Basic or C#, it's an offset from the beginning of the function.
- Source code from which the assembly code derives.
- Code bytes, that is, the byte representations of the actual machine or MSIL instructions.
- Symbol names for the memory addresses.
- Line numbers corresponding to the source code.

What is Byte Code (or Machine Code) for the following assembly instructions:

```

mov ax, valw1 ; start with 10000h
add ax, valw2 ; add 40000h
sub ax, valw3 ; subtract 20000h
mov finalValw, ax ; store the result (30000h)

```

```

Disassembly
Address: main(void)
Viewing Options
--- C:\coa\template_V52026 - Part C\main.asm -----
mov ax, valw1 ; start with 10000h
00403660 66 A1 00 60 40 00  mov     ax, word ptr [valw1 (0406000h)]
add ax, valw2 ; add 40000h
00403666 66 03 05 02 60 40 00  add     ax, word ptr [valw2 (0406002h)]
sub ax, valw3 ; subtract 20000h
0040366D 66 2B 05 04 60 40 00  sub     ax, word ptr [valw3 (0406004h)]
mov finalValw, ax ; store the result (30000h)
00403674 66 A3 06 60 40 00  mov     word ptr [finalValw (0406006h)], ax
call DumpRegs ; display the registers
0040367A E8 62 DA FF FF  call     _DumpRegs@0 (04010E1h)

mov ah, valb1 ; start with 10000h
0040367F 8A 25 08 60 40 00  mov     ah, byte ptr [valb1 (0406008h)]
add ah, valb2 ; add 40000h
00403685 02 25 09 60 40 00  add     ah, byte ptr [valb2 (0406009h)]
sub ah, valb3 ; subtract 20000h
0040368B 2A 25 0A 60 40 00  sub     ah, byte ptr [valb3 (040600Ah)]
mov finalValb, ah ; store the result (30000h)
00403691 8B 25 08 60 40 00  mov     byte ptr [finalValb (040600Bh)], ah
call DumpRegs ; display the registers
00403697 E8 45 DA FF FF  call     _DumpRegs@0 (04010E1h)

exit

```

a) Rebuild & Start Debugging

CamStudio:



Completed Fully Partially : Checked by: _____

Lab 1 Submission

Due: 4 May 2024 (Saturday: 23.59pm)

This is considering as a group submission. Each group requires ONLY 1 submission.

1. Screen capture results part 1(a), (b), (c) - Start Without Debugging. In part 2, complete all activities and answer all questions in Lab 1 manual sheet. Please submit the completed lab 1 activities in pdf file format.

2. Code Submission

i) Zip both your exercise folders;

- [Lab 1a]
- [Lab 1b]
- [Lab 1c]

ii) Combine into ONE (1) zip file name "Lab1.zip".

iii) Upload "Lab1.zip" file to e-learning under [Labs Submission] section

2. Prepare a video demo for debugging process Lab 1(b) and Lab 1(c) – Start Debugging. If your group consists of 3 students, must do Lab 1(a). Each student should explain one debugging process.

Requirement for the video:

- Video duration is about 10 to 15 minutes
- You MUST explain verbally on how you execute this Lab 1 in the video (... show your face in recording, please 😊)
- The video can be recorded in any tools that you're comfortable
 - Example; you may use any online meeting tool like Zoom, Google Meet, MS Teams to record your lab demo.

3. Video Submission

Demo video can be submitted in two options:

a) as an .mp4 video file (to be uploaded to e-learning) – this is not preferable if the size is big.

OR

b) Upload your video to your YouTube account and share the YouTube video link in the submission option. Set your YouTube video unlisted video (i.e. only person who has the link can see the video)

- Upload OR share the YT video link to e-learning under [Lab Submission] section.

Method (b) is the most preferable.