

VERSION 0.6

Guidelines on Connecting a Gear S2 Device Using Wi-Fi



Copyright

Copyright © 2014 Samsung Electronics Co. Ltd. All Rights Reserved.

Though every care has been taken to ensure the accuracy of this document, Samsung Electronics Co., Ltd. cannot accept responsibility for any errors or omissions or for any loss occurred to any person, whether legal or natural, from acting, or refraining from action, as a result of the information contained herein. Information in this document is subject to change at any time without obligation to notify any person of such changes.

Samsung Electronics Co. Ltd. may have patents or patent pending applications, trademarks copyrights or other intellectual property rights covering subject matter in this document. The furnishing of this document does not give the recipient or reader any license to these patents, trademarks copyrights or other intellectual property rights.

No part of this document may be communicated, distributed, reproduced or transmitted in any form or by any means, electronic or mechanical or otherwise, for any purpose, without the prior written permission of Samsung Electronics Co. Ltd.

The document is subject to revision without further notice.

All brand names and product names mentioned in this document are trademarks or registered trademarks of their respective owners.

For more information, please visit <http://www.tizen.org/>

License

Except as noted, this content - excluding the Code Examples - is licensed under Creative Commons Attribution 3.0 and all of the Code Examples contained herein are licensed under BSD-3-Clause.

For details, see the Content License.



Table of Contents

Overview 4

Instructions 5

 1. Setting up the Host PC..... 5

 2. Setting up the Gear S2 device 5

 3. Wi-Fi connection between the Wireless Access Point and Gear S2 6

 4. Connecting sdb shell 7

 5. Installing the app 7

Troubleshooting 8



Overview

This document describes how to connect a Gear S2 device to a Host PC via Wi-Fi.

To connect a Gear S2 device to a Host PC, a wireless access point is needed.

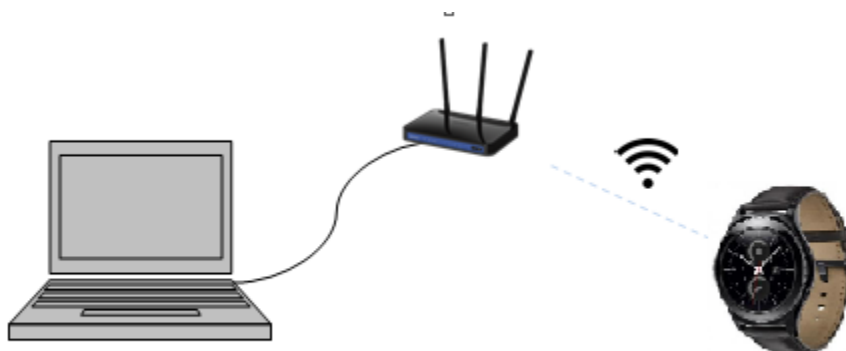



Figure 1 Connect via Wi-Fi



Instructions

1. Setting up the Host PC


- a. Connect the Host PC to the Wireless Access Point via UTP cable or Wi-Fi.

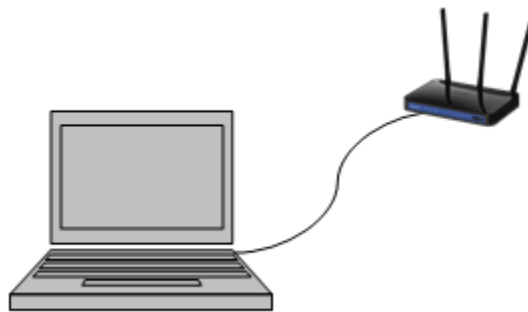

2. Setting up the Gear S2 device


- a. Turn on the Wi-Fi.
- b. Turn on debugging mode.
Select Settings > Gear Info > Debugging
- c. Reboot the device.



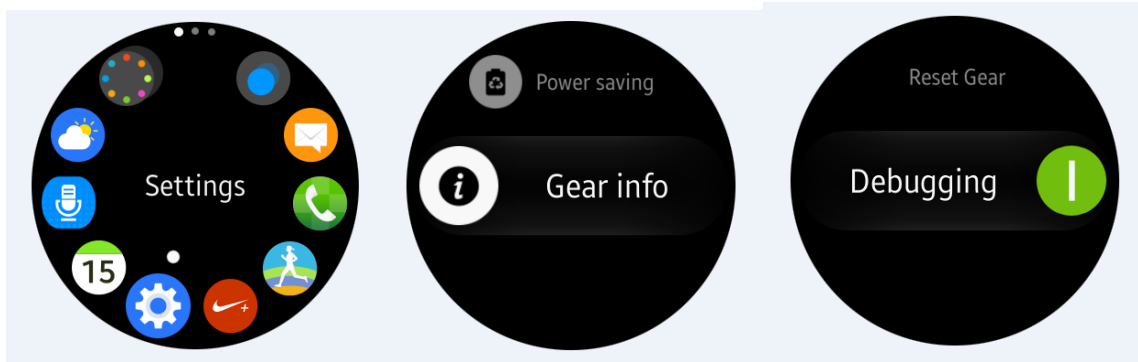


3. Connecting the Gear S2 to the Wireless Access Point through Wi-Fi

From the Wi-Fi menu of the Gear S2 device, find the Wireless Access Point and connect to it.

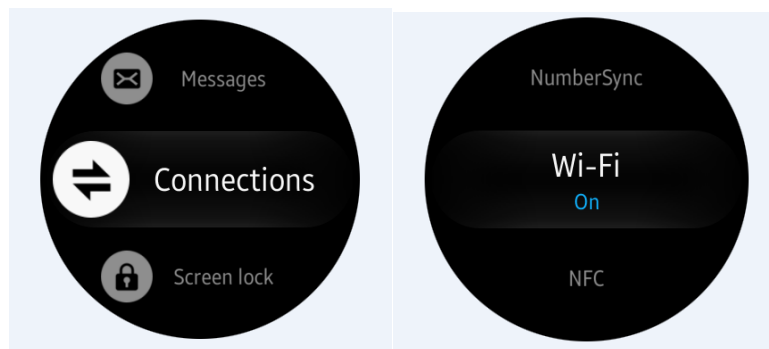

Once connected, find the IP address that the Gear S2 device received from the Access Point via DHCP. This IP address will be used during the sdb connection.

You can get this IP address by checking the information of the access point the Gear S2 device is currently connected to.

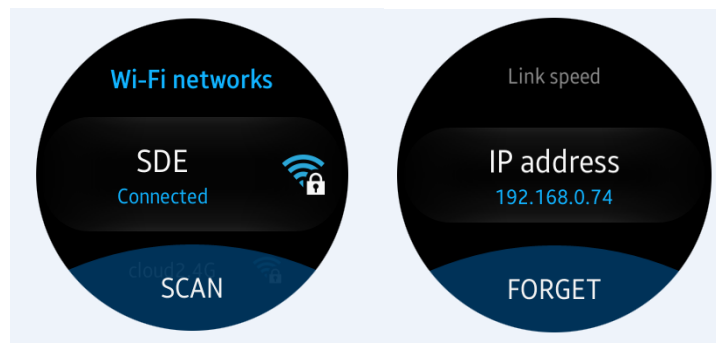

Now you are ready to use sdb shell and gdb.

4. Connecting sdb shell

Open the terminal in the Host PC and use the following **connect** command.

```
$ sdb connect [Gear S2 IP address]:26101
```

Ex)

```
$ sdb connect 192.168.0.130:26101
```

5. Installing the app

Open the terminal in the Host PC and use the following **install** command.

```
$ sdb install [path_to_tpk]
```

Ex)

```
$ sdb install /home/tizen/org.example.test-1.0.0-i386.tpk
```

Once the connection is completed, you can use the sdb command similar to the USB connected case.

Please refer to the link below for more details regarding sdb commands.

<https://developer.tizen.org/development/tools/common-tools/smart-development-bridge>



Troubleshooting

- Confirm that the sdb version is 2.2.67 or later.

```
$ sdb version
```

- Try the kill-server command when a version warning message is shown.

```
$ sdb kill-server
```

- Turn off Bluetooth to reduce interference with Wi-Fi.
- Move away from charging dock to reduce interference with Wi-Fi.

* NOTE

Bluetooth and Wi-Fi cannot be turned on at the same time on the Gear S2 with its initial firmware. However, the latest firmware fixes this issue. To turn on both Bluetooth and Wi-Fi at the same time; the Debugging mode is switched ON with the recent firmware. (Firmware for US and Japan 3G models soon will be available).

To update the firmware, check the Gear Software Upgrade in the Samsung Gear application on your paired mobile device.

