

PRD — CP10: CAB Approval Verification

POC Specification

Overview

Confirms whether a Change Request has received CAB (Change Advisory Board) approval from the correct, pre-configured authorized approver — checked via a Jira gate first, then a Mail gate, following the same two-source pattern as CP38. Positive-case scope for this POC pass, matching how CP38 was scoped.

1. Setup (one-time, before the demo)

Jira ticket

- **Space:** POC_PITARMOUR
- **Ticket:** POC-3
- **Type:** Task (no native "Change Request" type available in this Jira instance — using Task, optionally prefixed [CR] in the summary for human readability only; this has no effect on the system logic)
- **Summary:** [CR] Production configuration change — payment gateway timeout
- **Status:** Pending CAB Approval
- **Custom field — CAB Approver:** set to the authorized approver's account (for this POC, your own account, same simplification used for CP38's Business Owner)

Description:

Change: Update payment gateway timeout configuration from 30s to 60s
Reason: Reduce transaction failures observed during peak load hours.
Impact: Payment gateway service (PIT-Arnour). No downtime expected.
Requires: CAB approval prior to production deployment.
CAB Approver: [your email]
Approval to be sent via email to: audit-poc@acmecapital-demo.com

Shared inbox

Same mailbox already used for CP38 — **audit-poc@acmecapital-demo.com**.


Jira access

Via RoVo MCP (<https://mcp.atlassian.com/v2/mcp>), OAuth 2.1, connected under your own Atlassian account — same connection already set up for CP38's Jira gate.

Dummy email to prepare

One email from the authorized CAB approver's address, subject referencing POC-3 or "PIT-Arnour CAB Approval," body containing clear approval language (e.g. "Approved for implementation.").

2. The flow — Jira gate, then Mail gate

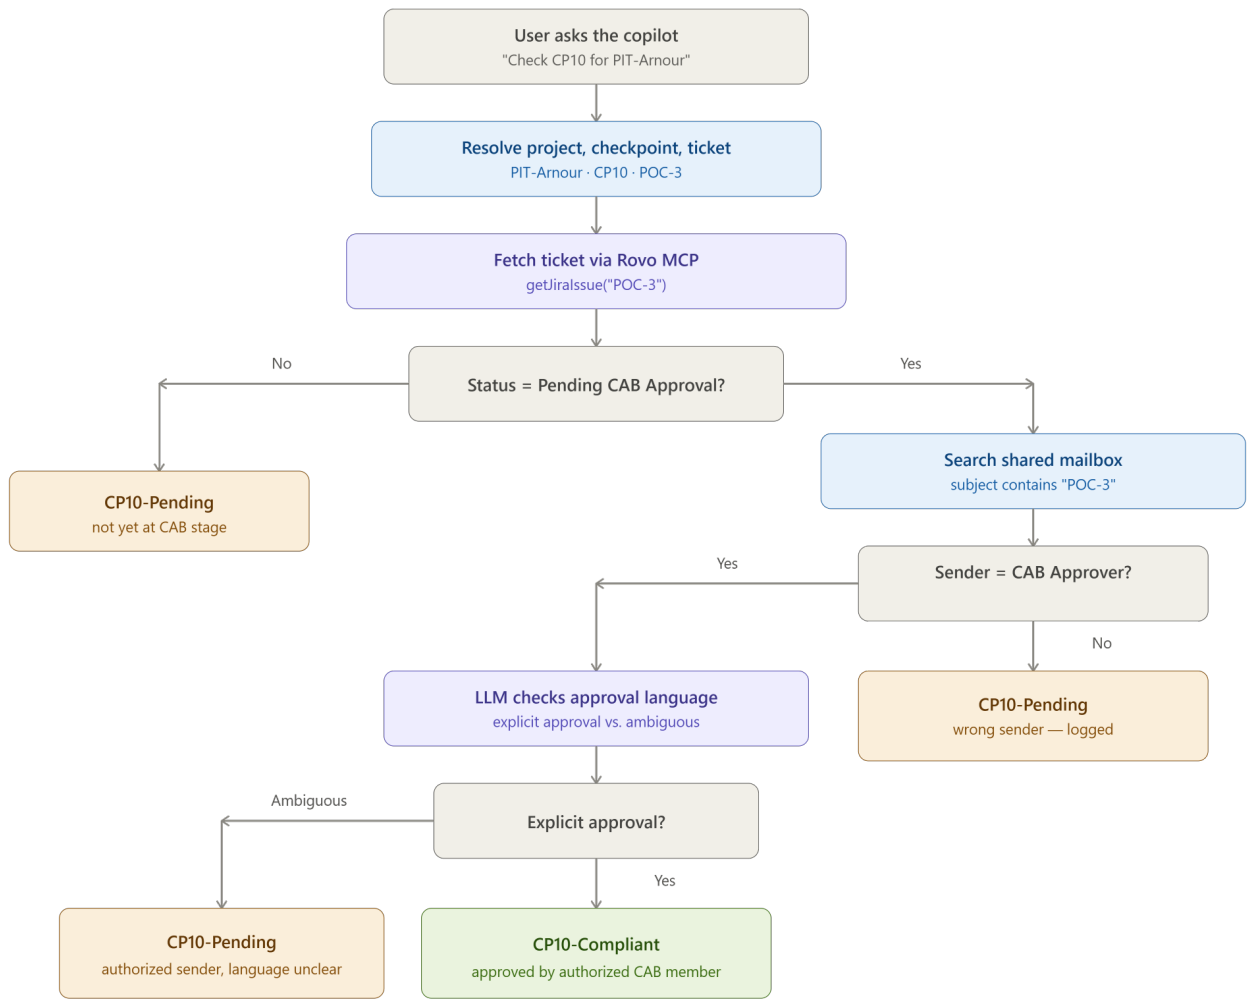

Step 1 — User asks the copilot

"What's the CAB approval status for POC-3?" or "Check CP10 for PIT-Arnour."

Step 2 — Agent resolves the request

project = PIT-Arnour

checkpoint = CP10

jira_ticket = POC-3

Step 3 — Agent fetches the Jira ticket via Rovo MCP — direct key lookup

Rovo MCP → getJiraIssue("POC-3")

Step 4 — Jira gate check

ticket.status == "Pending CAB Approval" ?

- If not yet at that status → stop here. Result: **CP10-Pending**, reason: "change not yet at CAB approval stage — current status: {actual status}"
- If at the right status → read the CAB Approver custom field, proceed to Step 5

Step 5 — Agent searches the shared mailbox — only runs if the Jira gate passed

search_mail(subject contains "POC-3" or "PIT-Arnour CAB Approval")

Step 6 — Mail gate: sender check (deterministic, runs before any LLM call)

actual_sender == configured_CAB_approver_email ?

- No match → **CP10-Pending**, reason: "wrong sender: {actual sender} — expected {configured approver}"
- Match → proceed to Step 7

Step 7 — LLM checks approval language (only runs if sender already matched)

{ "is_approval": true, "confidence": 95, "reasoning": "..." }

Step 8 — Decision

Jira gate passed AND sender matches AND explicit approval → **CP10-Compliant**
anything else → **CP10-Pending** (with the specific reason attached)

Step 9 — Result written to backend

POST /api/checkpoints/CP10/result

```
{
  project_id: "PIT-Arnour",
  jira_ticket: "POC-3",
  outcome_id: "CP10-C" | "CP10-Pending",
  pending_reason: null | "not_ready" | "wrong_sender" | "ambiguous",
  approver_actor: "[approver email]" | null,
  confidence: 95,
  evidence_ref: "poc-3-cab-approval-email.eml",
  timestamp: "..."
}
```

Step 10 — Dashboard reflects it automatically

same read path as every other checkpoint.

Step 11 — Copilot replies in plain language

Compliant:

CP10 — CAB Approval: **Compliant**

POC-3 was approved by [approver name], the authorized CAB approver for PIT-Arnour. Confidence: 95%.

Pending — not yet at CAB stage:

CP10 — CAB Approval: **Pending**

POC-3 has not yet reached CAB approval stage.

Pending — wrong sender:

CP10 — CAB Approval: **Pending**

An email was received, but from [wrong email] — this is not the authorized CAB approver for PIT-Armour.

3. Why this matches the CP38 pattern deliberately

- Same two-gate structure — Jira status/authorization checked first, Mail checked second, cheap check gates the expensive one
- Same principle: the LLM never touches identity or authorization, only language classification, and only runs once the sender is already confirmed correct
- Same Pending-only model for this POC pass — no Non-Compliant state yet, consistent with the same reasoning applied to CP38
- Reuses the same Rovo MCP connection, same shared inbox, same Role Authorization concept — no new infrastructure needed beyond what CP38 already required
- Include a Vertical Up-DOWN Vertical Progress Bar with UNDO feature in the Frontend.
- The Process is Defined in Change Management in the PIT Armour Section