

API Testing with Postman

1 GET Request (PokéAPI)

This GET request fetches information about Pikachu from the PokéAPI. The screenshot below shows the response with Pikachu's name, abilities, base experience, and forms.

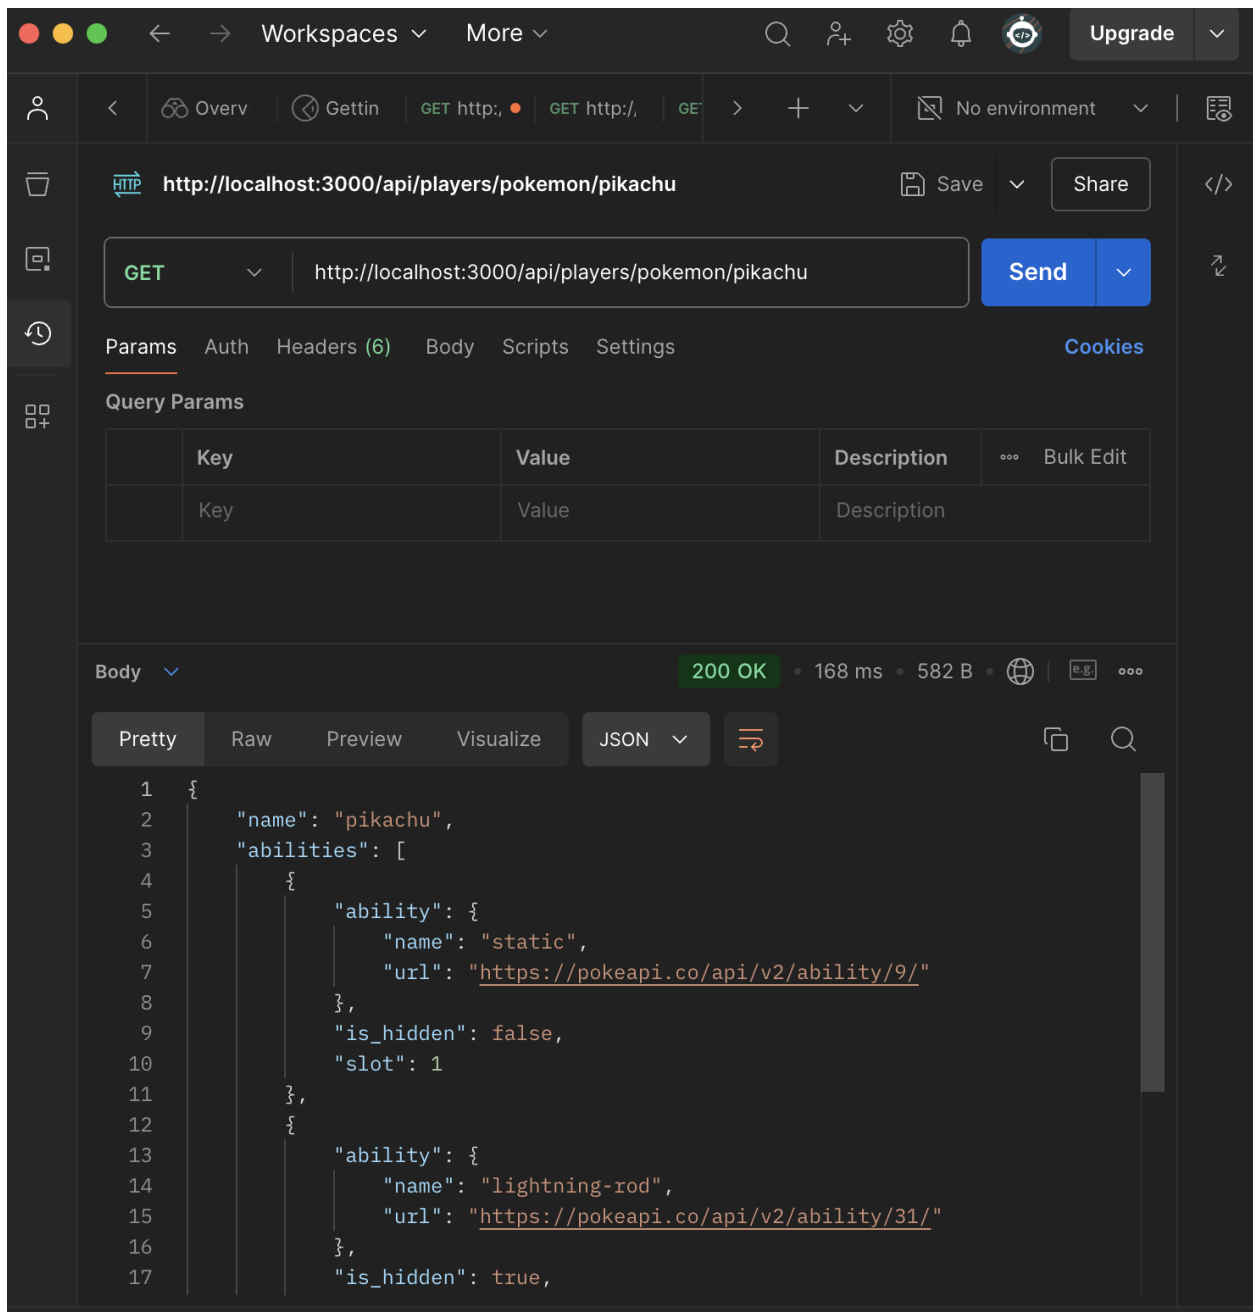


Figure 1: GET Request to PokéAPI

2 POST Request

This POST request creates a new player named "Jane Doe" with the number 7 and position "Midfielder." The screenshot below shows the successful creation of the player.

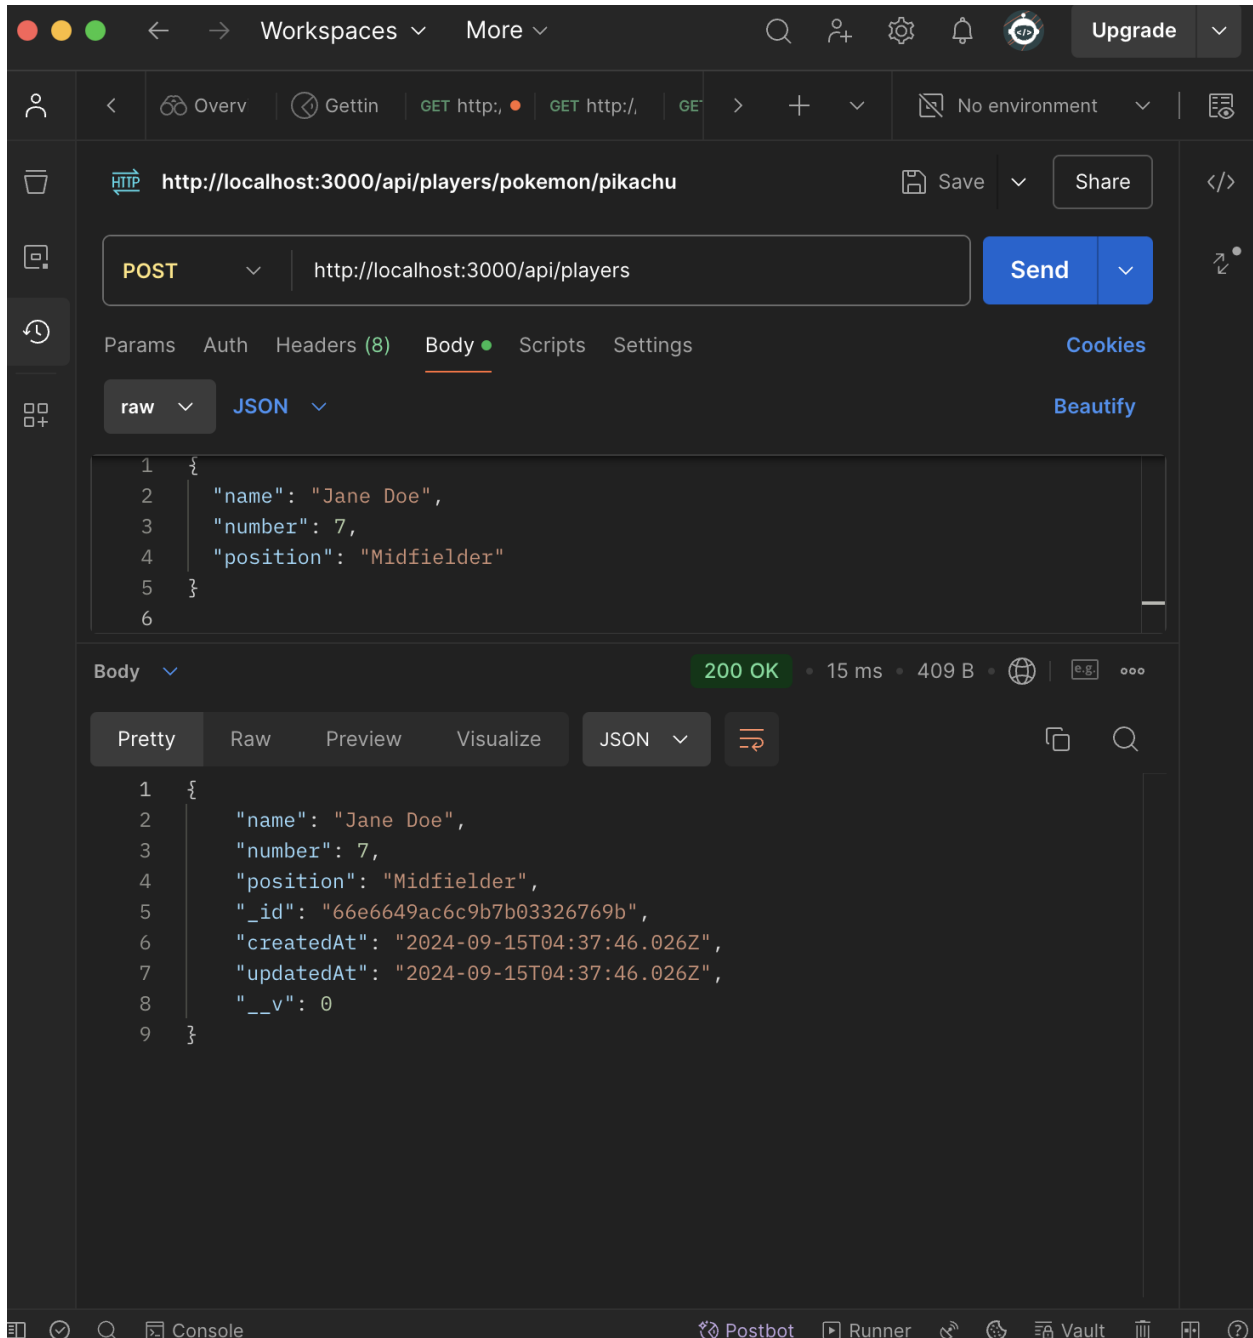


Figure 2: POST Request - Creating a Player

3 PATCH Request

The PATCH request updates the player's name to "Kin Doe" while keeping the number and position the same. The response shows that the update was successful.

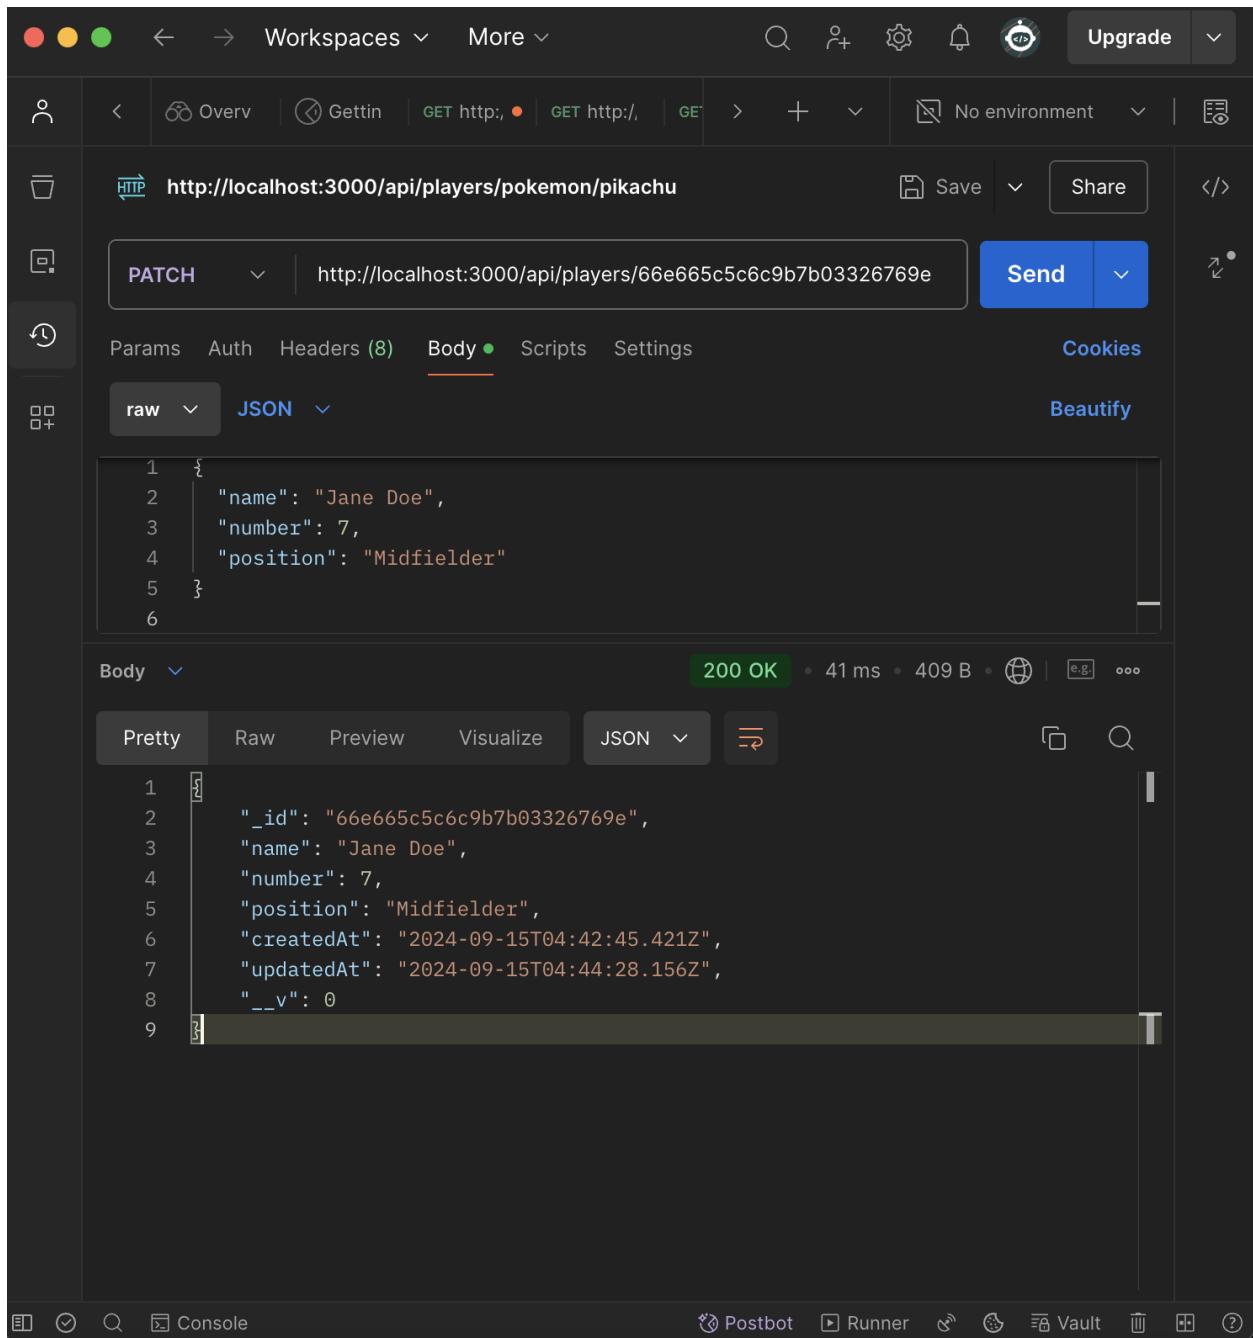


Figure 3: PATCH Request - Updating a Player

4 PATCH Request with Another Update

This PATCH request further updates the player's name to "Jane Doe." The update was successful and the response reflects the new information.

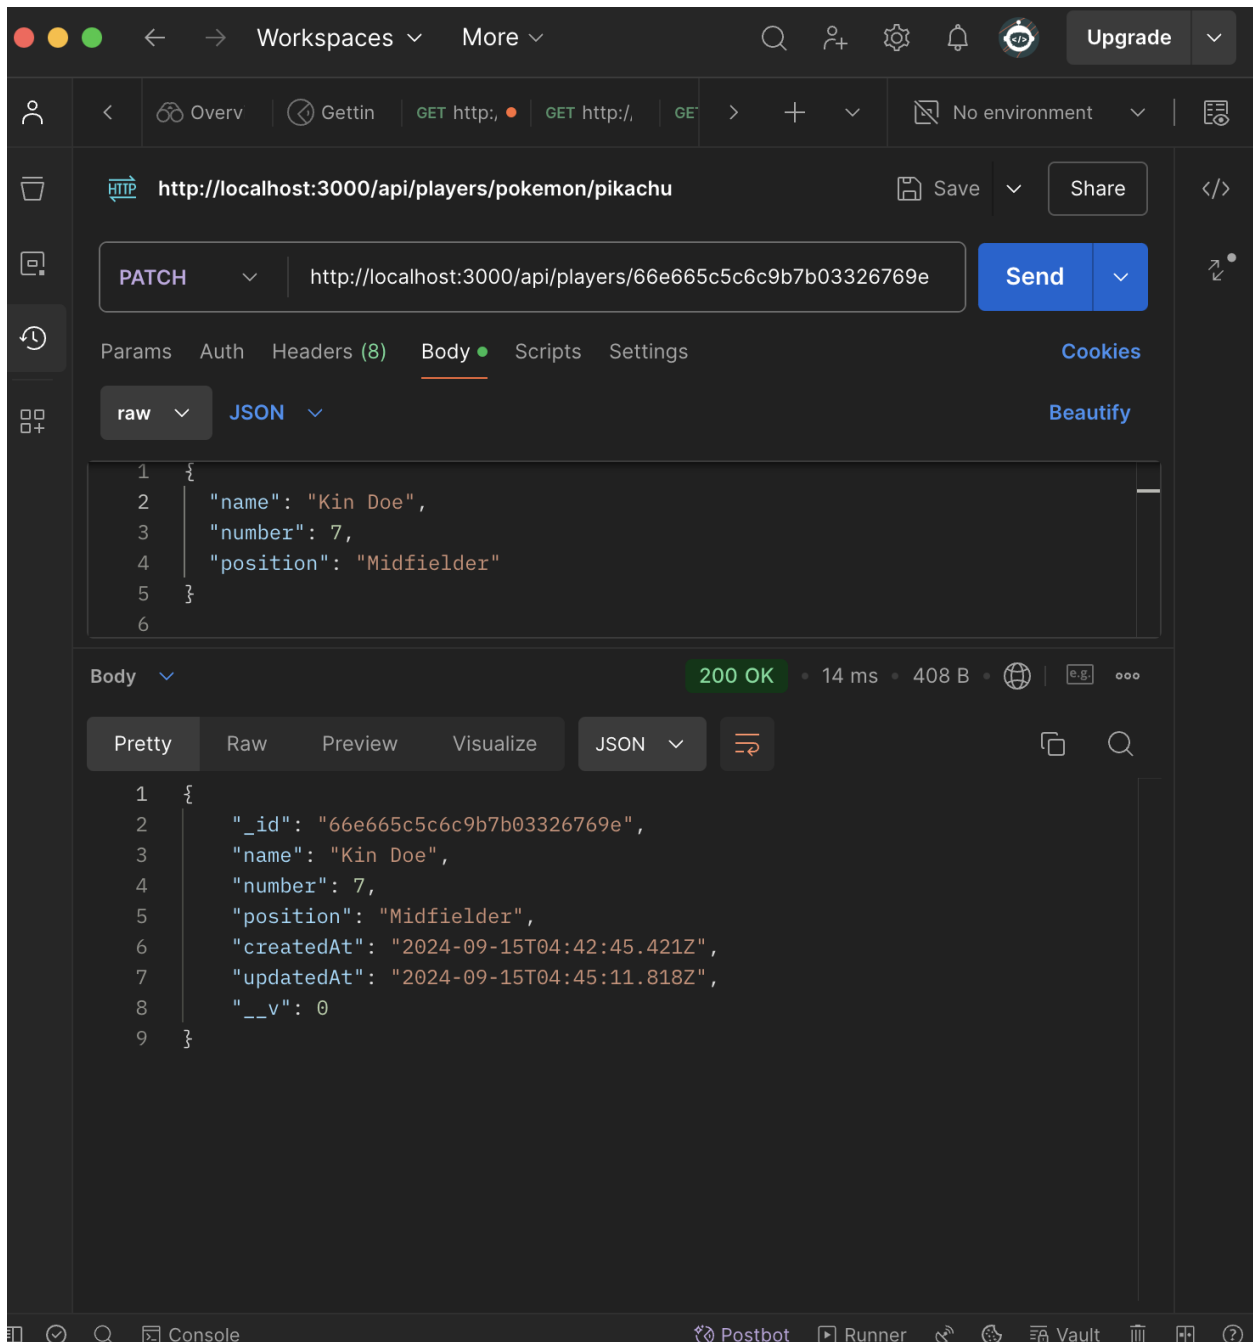


Figure 4: PATCH Request - Updating a Player Again

5 DELETE Request

Finally, this DELETE request attempts to delete the player with the specified ID. However, the player does not exist, and the response shows a 404 error indicating the player was not found.

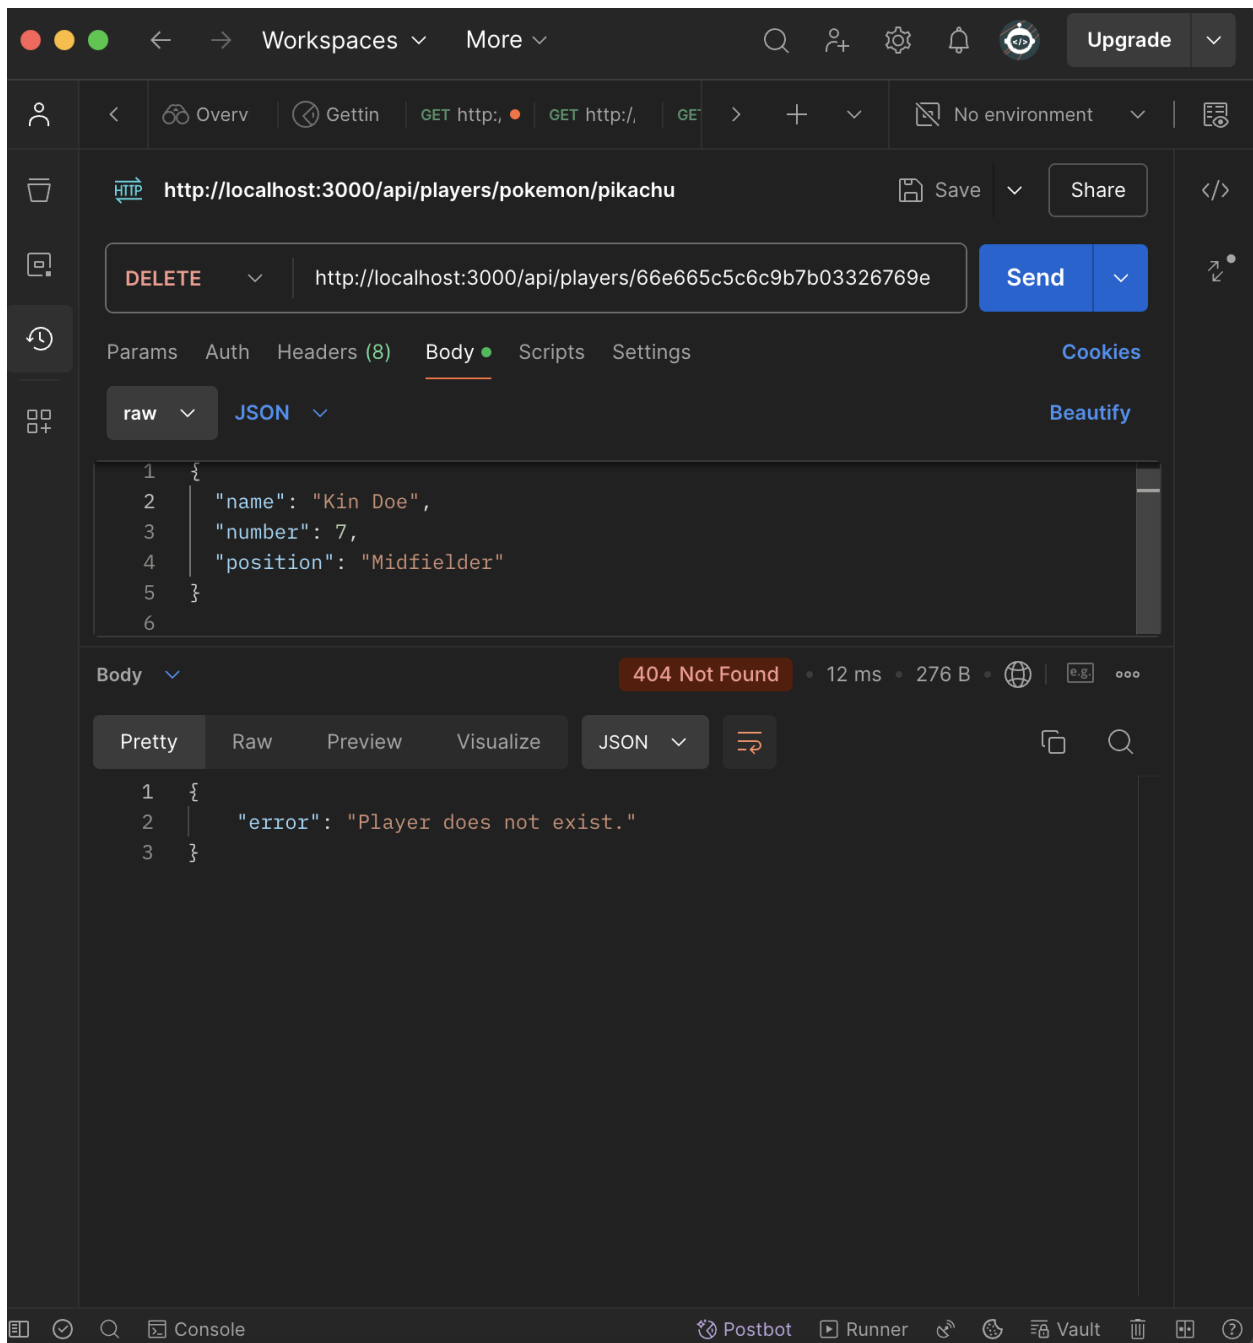


Figure 5: DELETE Request - Player Not Found