CoreOS

RIBKA RUFAEL1,*

¹ School of Informatics and Computing, Bloomington, IN 47408, U.S.A.

paper-001, February 25, 2017

CoreOS is a minimal Linux operating system that allows application to run on containers. CoreOS Linux is an operating system designed for container cluster frameworks.

© 2017 https://creativecommons.org/licenses/. The authors verify that the text is not plagiarized.

Keywords: CoreOS, Container, cloud, Linux

https://github.com/cloudmesh/sp17-i524/blob/master/paper1/S17-IO-3016/report.pdf

This review document is provided for you to achieve your best. We have listed a number of obvious opportunities for improvement. When improving it, please keep this copy untouched and instead focus on improving report.tex. The review does not include all possible improvement suggestions and for each comment you may want to check if it applies elsewhere in the document.

Abstract: It is too short and doesn't give a good idea what your paper covers. The second sentence just repeats the first.

Abstract: There is no reason to use the *newline* command in the abstract.

In general: You are not using citations properly. A citation goes after the statement it supports, but before any periods and other punctuation.

In general: In several places you need to give more context and explain how a particular CoreOS feature differs in other OSs, or what the motivation for its existence is. Listing different keywords would only confuse a reader who is not familiar with CoreOS.

In general: Please, use a spell checker to avoid simple errors.

In general: Quoting verbatim from a source should be very rare and used when the specific wording is important to understanding. The sections of papers you've quoted in this paper are better paraphrased.

Assessment: Revisions required. Please address the review comments by end of March.

INTRODUCTION

CoreOS [1] is a light weight

Linux needs to be capitalized

linux operating system that is designed to be used for container infrastructure. CoreOS allows applications to run on containers so that there is abstraction layer between applications and the operating system. The separation of applications and operating system allows

Grammar

to avoid dependencies. CoreOS can be run on clouds, virtual or physical servers. CoreOS allows the ability for automatic software updates inorder

Spelling

to make sure containers in cluster are secure and reliable. It also makes managing large cluster environments easier. One of the differences between CoreOS Linux and traditional Linux distribution is that, in the case of traditional Linux distribution operating system, utilities and software are

Grammar

puts together but in the case of CoreOS Linux only operating system and utilities are bundled together

Not entirely clear what the difference between utilities and software is here. Please, provide some examples, since this is supposed to be a significant difference with other Linux flavors.

. In CoreOS Linux applications and software are run on containers. Figure 1 shows the CoreOS Linux layout:

The company that

What company is that? You haven't mentioned before.

provides CoreOS Linux also provides open source tools like etcd, rkt and flannel. CoreOS also has commercial products Kubernetes and CoreOS stack. In CoreOS linux service discovery is achieved by etcd, applications are run on Docker and process management is achieved by fleet.

^{*}Corresponding authors: rrufael@umail.iu.edu HID: S17-IO-3016

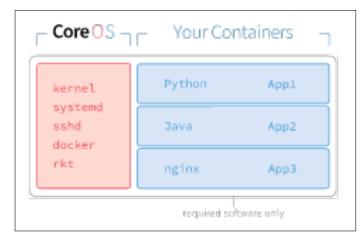


Fig. 1. CoreOS container layout. [1]

Citation

Scope: How do these other techs relate to CoreOS itself? Furthermore, if someone reading your paper doesn't already know what Docker, etcd, rkt, etc are, this paragraph makes little sense. You should give more context on why using these tools in CoreOS achieves for the user.

Big data projects in science or business involve processing of large amount of data. These big data projects are hosted on bare metal servers

What are bare metal servers?

or on clouds. Big data projects in science and in business sector can benefit from container frameworks that provide flexibility, ease of deployment, adding or removing container clusters based on demand. [2] Since CoreOS Linux is designed to be used in container frameworks, it makes it one of the candidates to be included into big data projects software stack that has container cluster infrastructure.

Like before, you need to provide a little context. If someone doesn't know what container frameworks are or why they're useful, this paragraph is not very useful. In addition, start the paragraph with that last sentence. Otherwise it's not initially clear why you're talking about big data.

COREOS ARCHITECTURE AND INSTALLATION

CoreOS linux is a minimal operating system where the OS and utilities are one unit and applications are run on containers.

This sentence belongs in the introduction. We already know what CoreOS is, now you need to talk about more specific things.

CoreOS has 9 disk partitions. The disk partions are: 1) EFI-SYSTEM which contains the bootloader and the partition type is VFAT. 2) BIOS-BOOT, ROOT-C and the 7th partion these partions have no partion format and are reserved for future use. 3) USR-A and USR-B are the active and passive partions that container linux sits on. Only one of them can be active at a time and partion type is EXT4 depending on which one is active. 4) OEM has EXT4 as partition type and this is where OEM platform related configurations like custom networking and running an agent are stored. 5) OEM-CONFIG serves as an alternative place for an OEM. 6) ROOT may have EXT4, BTRFS, or XFS as partion

type and it is used for keeping data which is persistent and this partion is stateful. [1]

Citation

Paragraph could use some more context: how is this structure different for other Linux flavors? What is the motivation for having this disk structure?

CoreOS Linux comes bundled with etcd, Fleet and Docker. Service discovery in CoreOS Linux is achieved by etcd. Key value store

Again, need more context. What is a key value store and why is ther one in CoreOS?

on etcd is distributed and stored on all machines that run CoreOS Linux. This service discovery capability makes it easy to add or remove machines. There is a command line interface that comes preinstalled on CoreOS linux called etcdctl that can be used to change and get key value data from etcd using etcdctl set and etcdctl get respectively. Another command that can be used for setting and reading key value is curl.

Container management in CoreOS linux is made possible by Docker. All applications run on Docker. Containers can be launched using docker run command line interface.

Grammar

Fleet is the third component of CoreOS and it is used for management of containers with Docker installed. Fleet is init system

What does that mean?

and fleetctl command line interface can be used to check the status of containers, start and stop containers.[3]

Based on the information in this book [4]

Citation

, there is no package manager for installing, upgrading, configuring softwares in CoreOS . Softwares

(Term

are installed as containers in CoreOS operating system. Inorder

Spelling

to apply updates, CoreOS makes use of two root partitions one is active and the other is passive. First the updates to CoreOS are applied to passive partion and upon reboot all the updates are applied to the active partition.

CoreOS can be installed on clouds from EC2, Rackspace, GCE or virtual machines such as Vagrant, VMware, OpenStack or on physical servers such as PXE, iPXE, ISO. [3]

Citation

Based on the information provided on CoreOS site [5], CoreOS container can be setup using Vagrant. Vagrant, virtual machine manager, can be used to run CoreOS on a single machine with Windows, OS X or Linux operating systems. It is recommened to have Vagrant version 1.6.3 or latest. Virtual machines by VirtualBox or VMware are both supported by Vagrant.

LICENSING

CoreOS Container Linux is an open source operating system . It is comprised of other programs and documents developed by other individuals and companies. All original components that are part of CoreOS Container Linux are licensed under Apache

2.0. The latest version of CoreOS Container Linux is 1325.1.0. [1]

Citation

In a paper like this, it doesn't make sense to say "the latest version," since you don't know when someone will read it. Better say, "at the time of writing, ..."

PERFORMANCE

In a study done by Purdue University [2], performance tests between CoreOS 899.5.0 on Docker and Red Hat Enterprise Linux 6.5 were performed. In their study, the tests were run on 24-core AMD Opteron systems, with 2.1 GHz processors, 48 GB memory and 10Gbps Ethernet connection. For HPL performance tests the results were "The native RHEL 6.5 system showed an average performance of 7.839 GFLOPS, versus 7.811 GFLOPS in a containerized environment (approximately a 0.4% slowdown).

You need to paraphrase this using your own words

The netwrok throughput iperf was used and the results were: "final upload throughput was 8.43 Gbps under Docker (versus 8.26 Gbps in RHEL 6.5), with a download throughput of 9.37 Gbps (versus 9.38 Gbps in RHEL 6.5). "

Please, paraphrase using your own words.

Network File System throughput was done using iozone and results are shown in Figure 2:

Don't include a colon after "Figure 2" assuming the figure will be positioned right after the text. You should write the paper not assuming where certain figures are going to be located on the page. This is common practice, since figure formatting can be different based on the specific conference or journal where it's published, and your figures may be placed elsewhere to comply with the specific format.

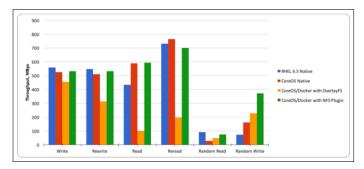


Fig. 2. File Server throughput. [2]

Citation

In another study done in Institute of Informatics – Federal University of Rio Grande do Sul [6], performance analysis of ClickOS, CoreOS and OS^v was performed. "NFV is a new networking paradigm where functions (e.g., firewalls, DNS, IDS), traditionally performed by dedicated physical devices, are virtualized and deployed on commodity hardware."

Please paraphrase

In their paper comarision of ClickOS, CoreOS and OS^v as NFV based tools was performed. They comapred

Spelling

boot time, response time and memory consumption for the three virtualization technologies. As per their evaluation result, ClickOS has the lowest boot time and response time followed by CoreOS and with regards to memory cosumption, CoreOS has the smallest memory usage followed by ClickOS. Based on the result OS $^{\rm v}$ has the slowest boot time and response time as compared to CoreOS and ClickOS. Also for memory consumption, OS $^{\rm v}$ has the highest cosumption as compared to the other two technologies used.

USE CASES

In this section use cases from big data and other areas where CoreOS Linux is used are discused

Spelling

Use Cases for Big Data

According to [7]

Citation

, Metagenomics RAST server(MG-RAST) is free access portal that can be used by researchers for accessing and analyzing metagenomics data. "Random community genomes (metagenomes) are now commonly used to study microbes in different environments."

Not relevant for this paper, and should be paraphrased if it was.

As described on [8], CoreOS and fleet

(Term

are used on MG-RAST container application servers. Researchers can input data into MG-RAST portal through script, web site or REST API.

Other Use Cases

According to the paper [9]

Citation

, CoreOS container linux

Term

on Amazon EC2 cloud was used to implement the project Two-stage Stochastic Programming Resource Allocator (2SPRA). The language used to implement was Python. In this project, they try

Avoid switching the tense between sentences.

to address the problem that exist in most datacenters

Spelling

of over provisioning resources in order to achieve performance service level objective. 2SPRA is a resource allocation scheme and it is able to optimize resource allocation for containerized web services based on varying workloads. 2SPRA analyses the relationship between change in workload, resource allocation and response latency inorder to calculate the the number of containers needed. In this experimental work, CoreOS was used inorder

Spelling

to simulate real word scenarios of n tier application servers running on containers. The test architecture has client Java based emulator which creates multiple user sessions at the same time,

web hosting platform with where RUBis benchmark is installed on Virtual machine with CoreOS version stable r717.3.0 and the third component is 2SPRA implemented in Python running on Virtual machine.

EDUCATIONAL MATERIAL

CoreOS website [3]

Grammar

has detailed documentation and materials for anyone who is interested in setting up CoreOS Container linux on clouds, virtual or physical servers. Users who are interested can contribute to the CoreOS open source projects through github [10].

This book [4] also has information about CoreOS overview and its installation.

CONCLUSION

CoreOS Linux is a light weight Linux based operating system that is designed for containers. It provides abstraction by separating the operating system from application and softwares. Operating system updates to CoreOS are automatic without a need for user interaction. CoreOS can be installed on clouds from EC2, Rackspace, GCE or virtual machines such as Vagrant, VMware, OpenStack or on physical servers such as PXE, iPXE, ISO.

CoreOS Linux makes applications and microservices running on containers secure, easy to deploy

"easy to deploy" is subjective; you can say that it *aims to provide* easy to deploy applications and microservices, but the paper doesn't support that, so it ends up sounding like an advertisement

and portable. Big data projects can leverage these benefits that comes with CoreOS Linux by adding it to their infrastructure

As previous performance results has shown [6], CoreOS Linux has the lowest memory usage compared to other operating systems namely ClickOS and OS^v.

ACKNOWLEDGEMENTS

The author would like to thank Professor Gregor von Laszewski and associate instructors for their help and guidance.

REFERENCES

- [1] CoreOS, "Why CoreOS," Web Page, Jan. 2017, accessed: 2017-01-23. [Online]. Available: https://coreos.com/why/
- [2] S. Julian, M. Shuey, and S. Cook, "Containers in Research: Initial Experiences with Lightweight Infrastructure," in *Proceedings of the* XSEDE16 Conference on Diversity, Big Data, and Science at Scale, ser. XSEDE16. New York, NY, USA: ACM, 2016, pp. 25:1–25:6. [Online]. Available: http://doi.acm.org.proxyiub.uits.iu.edu/10.1145/ 2949550.2949562
- [3] CoreOS, "CoreOS Quick Start," Web Page, Feb. 2017, accessed: 2017-02-17. [Online]. Available: https://coreos.com/os/docs/latest/ quickstart.html
- [4] R. Mocevicius, CoreOS Essentials. Packt Publishing Ltd, Jun. 2015.
- [5] CoreOS, "Vagrant," Web Page, Feb. 2017, accessed: 2017-02-17. [Online]. Available: https://coreos.com/os/docs/latest/booting-on-vagrant. html
- [6] L. Bondan, C. R. P. dos Santos, and L. Z. Granville, "Comparing virtualization solutions for NFV deployment: A network management perspective," in 2016 IEEE Symposium on Computers and Communication (ISCC), Jun. 2016, pp. 669–674.

- [7] F. Meyer, D. Paarmann, M. D'Souza, R. Olson, E. M. Glass, M. Kubal, T. Paczian, A. Rodriguez, R. Stevens, A. Wilke et al., "The metagenomics RAST server—a public resource for the automatic phylogenetic and functional analysis of metagenomes," BMC Bioinformatics, vol. 9, no. 1, p. 386, 2008. [Online]. Available: http://dx.doi.org/10.1186/1471-2105-9-386
- [8] A. Wilke, J. Bischof, W. Gerlach, E. Glass, T. Harrison, K. P. Keegan, T. Paczian, W. L. Trimble, S. Bagchi, A. Grama, S. Chaterji, and F. Meyer, "The MG-RAST metagenomics database and portal in 2015," vol. 44, no. D1, pp. D590–D594, 2016. [Online]. Available: http://dx.doi.org/10.1093/nar/gkv1322
- [9] O. Adam, Y. C. Lee, and A. Zomaya, "Stochastic Resource Provisioning for Containerized Multi-Tier Web Services in Clouds," *IEEE Transactions* on Parallel and Distributed Systems, vol. PP, no. 99, pp. 1–1, 2016.
- [10] CoreOS, "CoreOS," Web Page, Jan. 2017, accessed: 2017-02-26. [Online]. Available: https://github.com/coreos/