

LAB OF R/C AND MASONRY STRUCTURES
SCHOOL OF CIVIL ENGINEERING
ARISTOTLE UNIVERSITY OF THESSALONIKI
GREECE

DesignSafe – GiD+OpenSees User Manual

Papageorgiou Georgios
Tsetas Athanasios

July 18, 2017

CONTENTS

1	Running Analysis Properly	1
2	Processing Necessary Files	1
3	Uploading Folder in Design-Safe Website	3
4	Submitting Analysis	5
5	Downloading Output Files	8
6	Postprocessing	11

1 RUNNING ANALYSIS PROPERLY

Firstly, the user should make sure that Analysis, on GiD+OpenSees Interface, runs without errors (Figure 1.1). If analysis starts normally (especially in huge models), user should stop the analysis and proceed to the following steps.


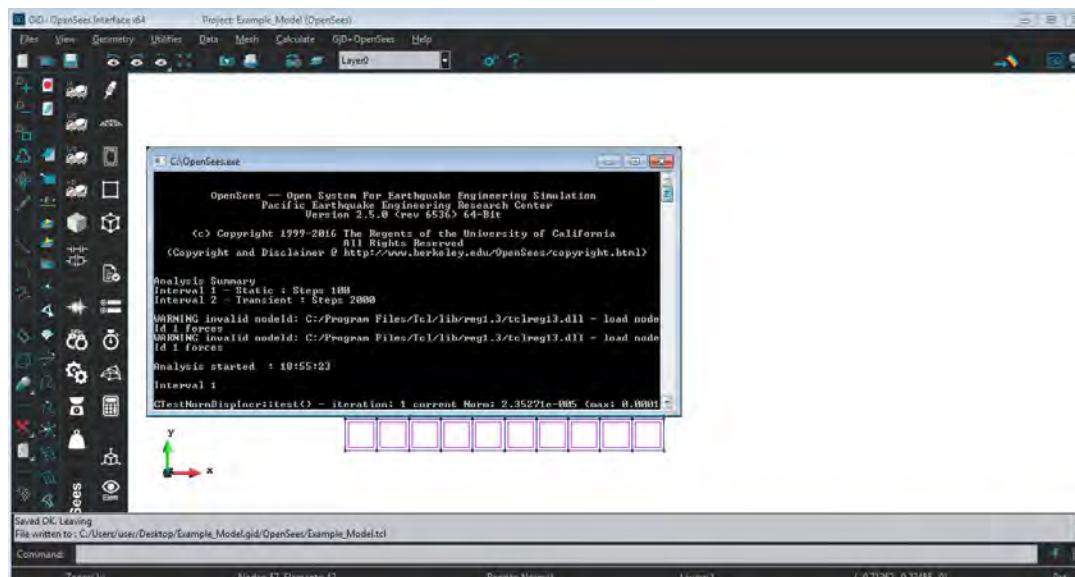


Figure 1.1: Analysis started without Errors


2 PROCESSING NECESSARY FILES

The model of this example is named Example_Model and is located in the Example_Model.gid folder. Two subfolders reside in that folder, the first one named OpenSees and the second one named Records (Figure 2.1a, 2.1c). As it is depicted in Figure 2.1b, 2.1d, the user copies the .tcl and .dat files, Example_Model.tcl and Example_Motion.dat respectively. Afterwards, the user creates a new folder (in that case the folder is named Example_Model_Folder) and pastes these two files in the new folder (Figure 2.2).

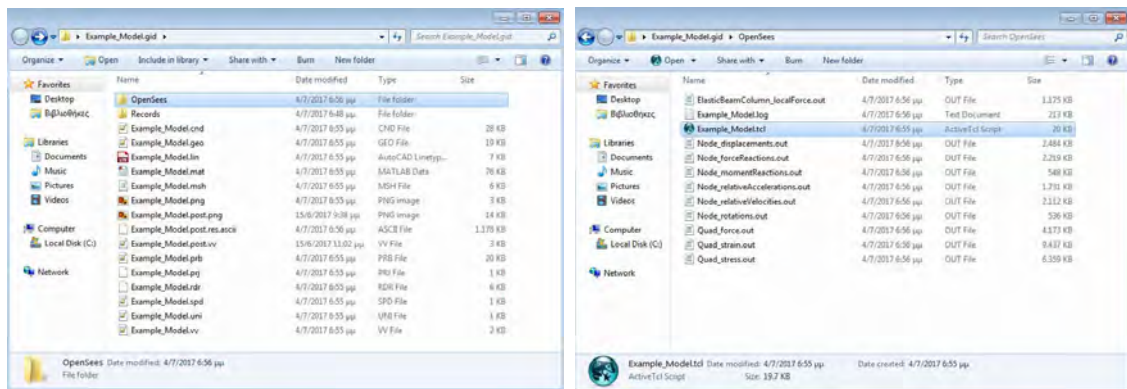

a

b

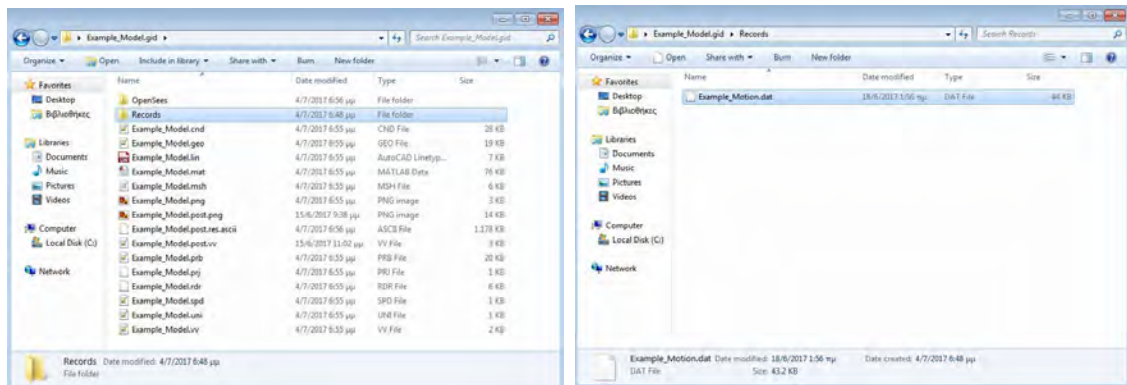

c

d

Figure 2.1: Locating and Copying Necessary Files

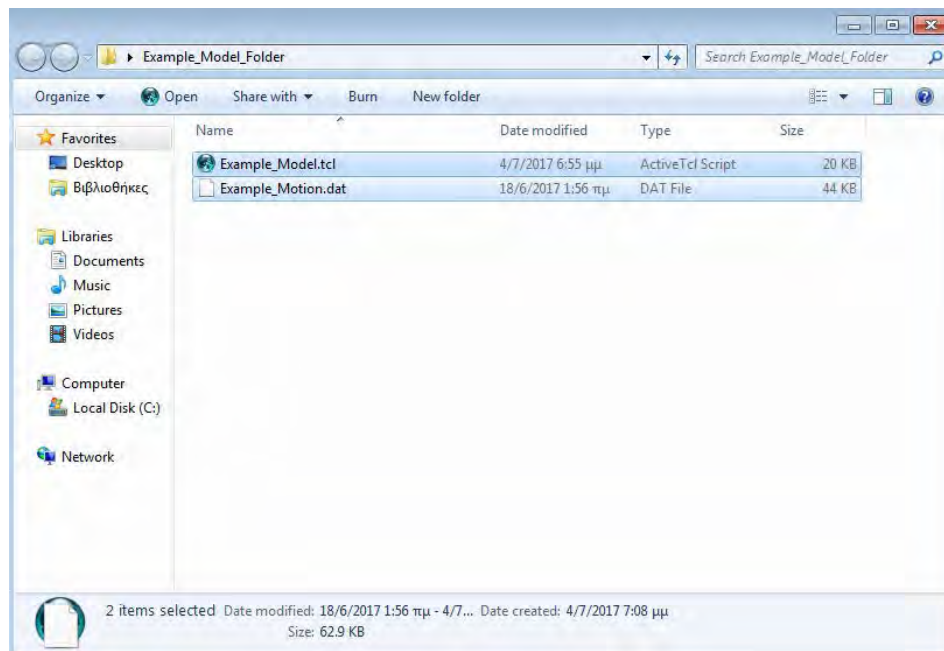


Figure 2.2: Pasting Files in the new Folder

The aforementioned folder will be uploaded to Design-Safe website, after the following modifications. The Example_Model.tcl file should be modified, as shown in Figure 2.3. The user should replace the path of the Record in that file. More specifically, the "/Records" part, from the "../Records/Example_Motion.dat" path is deleted, so that the "../Example_Motion.dat" path remains and the modified .tcl file is saved.

```

231
232 # -----
233 #
234 # I N T E R V A L 2
235 #
236 # -----
237
238 puts "Interval 2"
239 puts ""
240
241 # Loads
242
243
244 # Update PKN materials to Stage 2 - Plastic response
245
246 updateMaterialStage -material 12 -stage 2
247
248 # recording the initial status
249
250 record:
251
252 # Analysis options
253
254 system BandGeneral
255 numberer RCM
256 constraints Transformation
257 integrator Newmark 0.5 0.25
258 test NormDispIncr 0.001 100 2
259 algorithm Newton
260 analysis Transient
261
262 set GMDirection 1
263 set DtAnalysis 0.01
264 set TransAnalysis 20
265 set infile "../Example_Motion.dat"
266
267 proc LoadRecordTimeandValues {filename recordValues recordTimes} {
268     set currentTimeline 0
  
```

Figure 2.3: Modifying .tcl File

3 UPLOADING FOLDER IN DESIGN-SAFE WEBSITE

After visiting <http://www.designsafe-ci.org/>, the user should initially create a new account. As illustrated in Figure 3.1, the "Data Depot" option should be chosen from the "Research Workbench" tab.

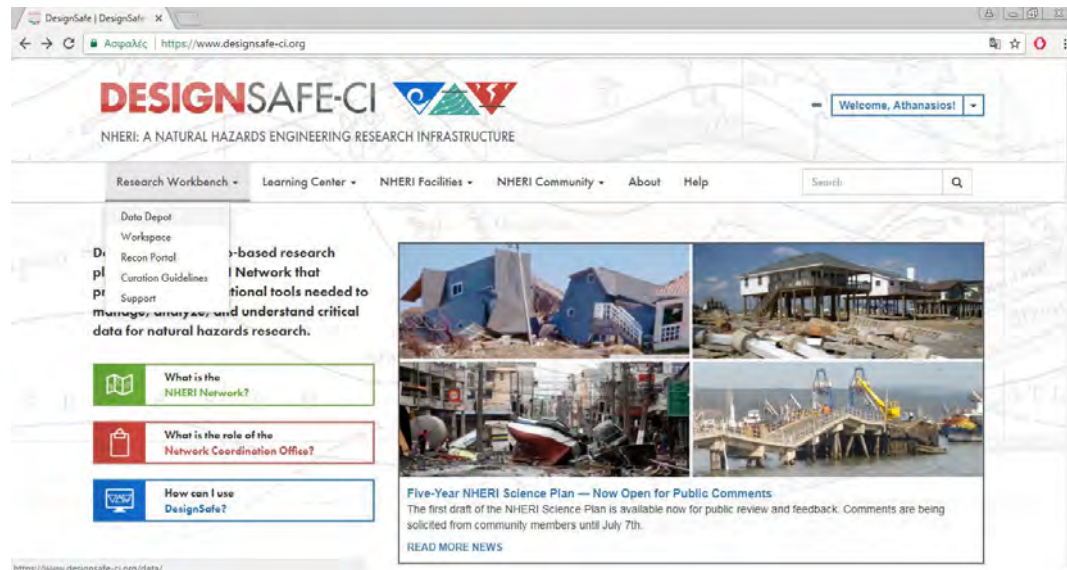


Figure 3.1: Data Depot Option

The user should now upload the Example_Model_Folder by clicking "Add" and selecting the "Folder upload" option (Figure 3.2). After the folder selection, a window appears, which should display the files contained in the uploaded folder (Figure 3.3). If these files are the desired ones, the user can proceed to the "Begin upload" option.

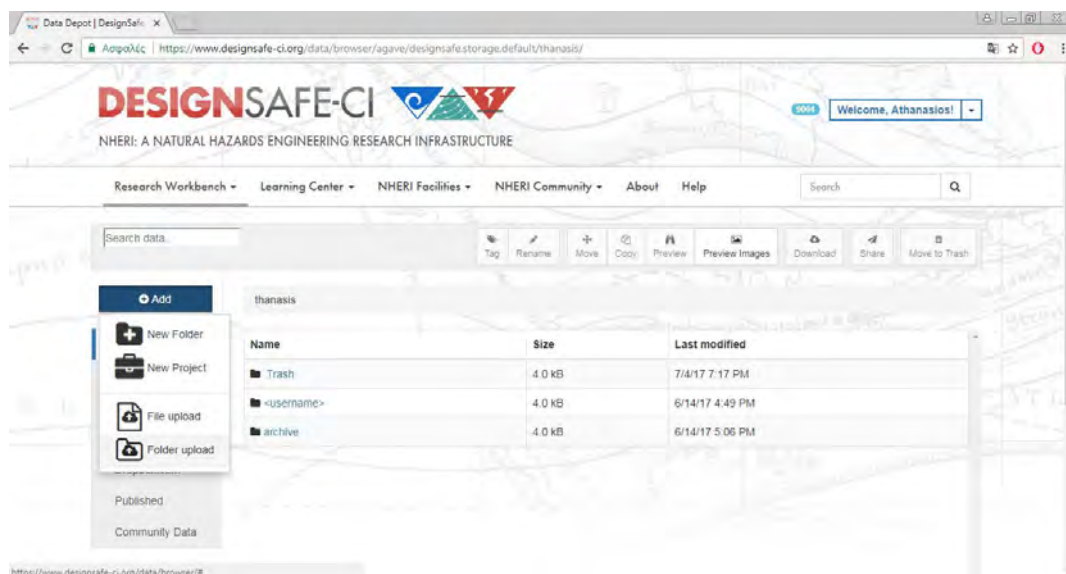


Figure 3.2: Folder Upload

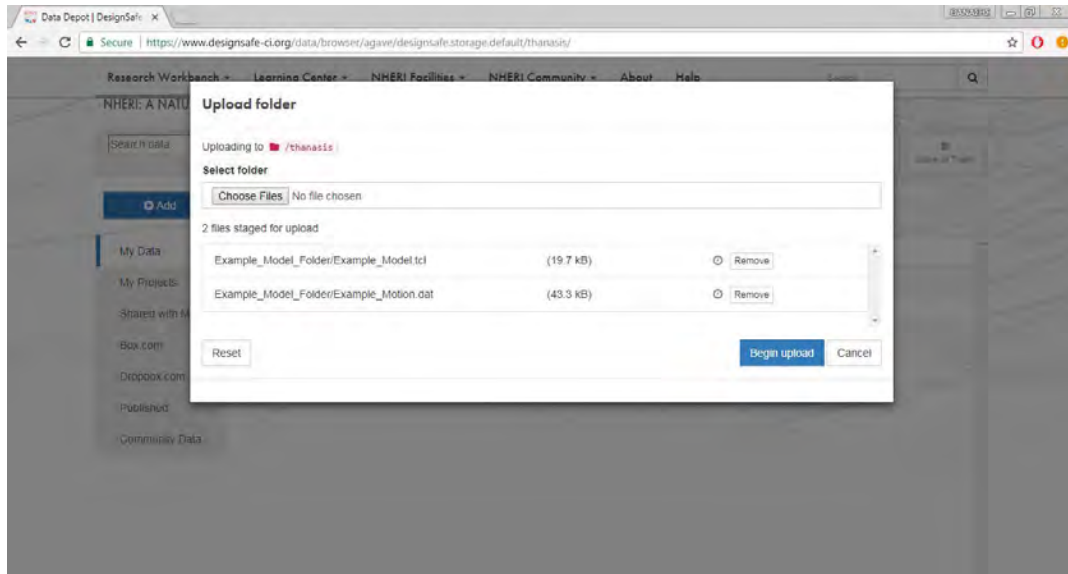


Figure 3.3: Specified Files Upload

4 SUBMITTING ANALYSIS

Provided that the files are uploaded successfully the user should now proceed to the next step. As shown in Figure 4.1, the "Workspace" option should now be chosen from the "Research Workbench" tab.

Regarding OpenSees, three choices are available:

- OpenSeesSP: For Performing analysis of very large models.
- OpenSeesMP: For Performing parameter studies or analysis of large models with user defined partitions
- OpenSees-EXPRESS:

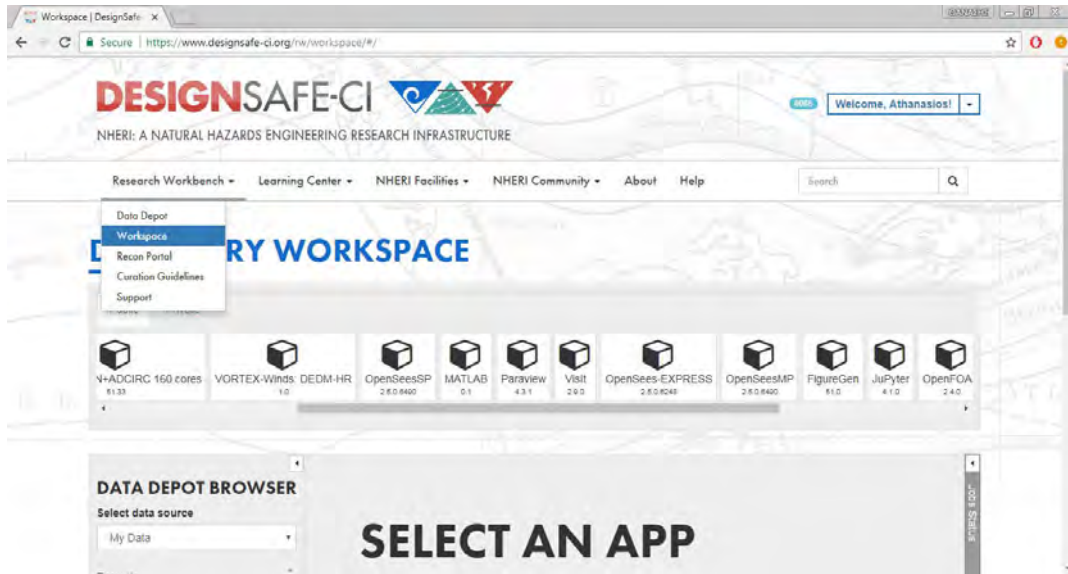


Figure 4.1: Workspace Option

In that case the OpenSeesSP option is chosen (Figure 4.2).

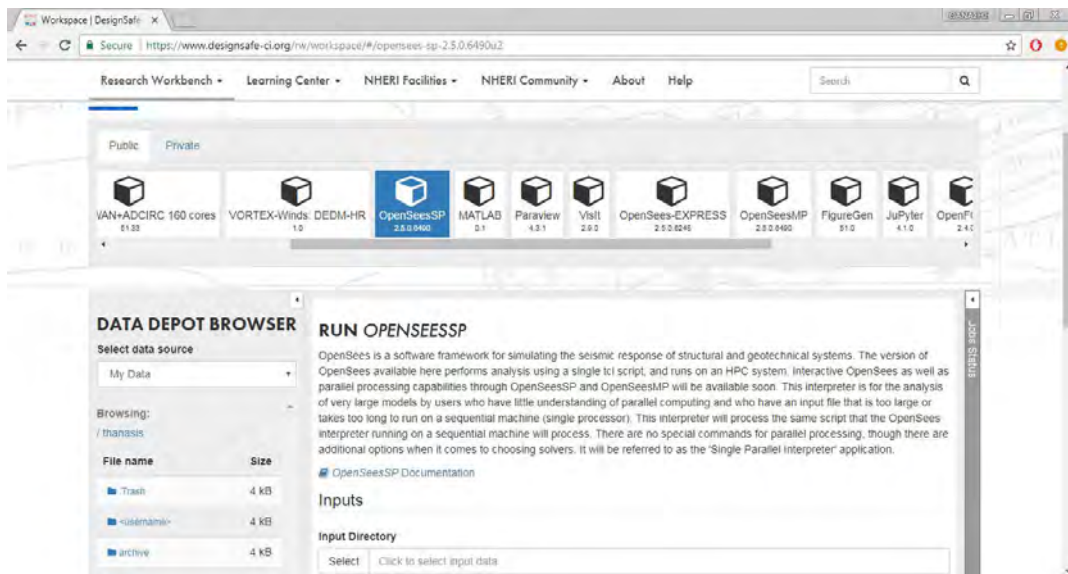


Figure 4.2: OpenSeesSP Option

In order to submit the necessary files for the analysis, the user should complete five fields. Firstly, the desired file is selected for the "Input Directory" field (Figure 4.3). Secondly, the filename only of the OpenSees .tcl script is filled in the "TCL Script" field.

Afterwards, the user should provide the "Maximum job runtime" of the analysis. If the user is unaware of the expected runtime, it is recommended to use the limit of 48 hours. If the analysis runtime **exceeds** the provided one, the analysis will **stop**. The last two fields are user defined, in order to be easily recognized (Figure 4.4)

Workspace | DesignSafe

Secure | https://www.designsafe-ci.org/rw/workspace/#/opensees-sp-2.5.0.6490u2

Research Workbench

Learning Center

NHERI Facilities

NHERI Community

About

Help

Search

Q

Select file for Input Directory

More info

Browsing:

/ thanasis

File name	Size
Select Trash	4 kB
Select Recycle Bin	4 kB
Select archive	4 kB
Select Example_Model_Folder	4 kB

that is too large or takes too long to run on a sequential machine (single processor). This interpreter will process the same script that the OpenSees interpreter running on a sequential machine will process. There are no special commands for parallel processing, though there are additional options when it comes to choosing solvers. It will be referred to as the 'Single Parallel Interpreter application.'

[OpenSeesSP Documentation](#)

Inputs

Input Directory

Select

agate:/designsafe.storage.default/thanasis/Example_Model_Folder

✓

Cancel

The directory containing your OpenSees input files as well as your OpenSees TCL script. You can drag the link for the directory from the Data Browser on the left, or click the 'Select input' button and then select the directory. To try out sample data copy and paste 'agate:/designsafe.storage.default/mock/examples/opensees/FreeFieldAnalysisEffective' above.

TCL Script

The filename only of the OpenSees TCL script to execute. This file should reside in the Input Directory specified. To try this out copy and paste in 'FreeFieldEffective.tcl'.

Job details

Maximum job runtime

01:00:00

In HH:MM:SS format. The maximum time you expect this job to run for. After this amount of time your job will be killed by the job scheduler. Shorter run times result in shorter queue wait times. Maximum possible time is 48:00:00 (48 hours).

Figure 4.3: Completion of Job Fields (a)

Workspace | DesignSafe

Secure | https://www.designsafe-ci.org/nw/workspace/#/

Research Workbench • Learning Center • NHERI Facilities • NHERI Community • About Help

Search

New Job

paste 'ageve:/designsafe/storage/default/mock/examples/opensees/FreefieldAnalysisEffective' above:

TCL Script

Example_Model.tcl

The filename only of the OpenSees TCL script to execute. This file should reside in the Input Directory specified. To try this out copy and paste in 'FreefieldEffective.tcl'.

Job details

Maximum job runtime

48:00:00

In HH:MM:SS format. The maximum time you expect this job to run for. After this amount of time your job will be killed by the job scheduler. Shorter run times result in shorter queue wait times. Maximum possible time is 48:00:00 (48 hours).

Job name

Example_Model

A recognizable name for this job

Job output archive location (optional)

Select <username>/archive/jobs/\${YYYY-MM-DD}/\${JOB_NAME}-\${JOB_ID}

Specify a location where the job output should be archived. By default, job output will be archived at: <username>/archive/jobs/\${YYYY-MM-DD}/\${JOB_NAME}-\${JOB_ID}.

Run Close

Submitting job...

Figure 4.4: Completion of Job Fields (b)

Following the completion of the fields, the user should click "Run" and shortly after, an up-

date regarding the status of the analysis will appear, as portrayed in Figure 4.5.

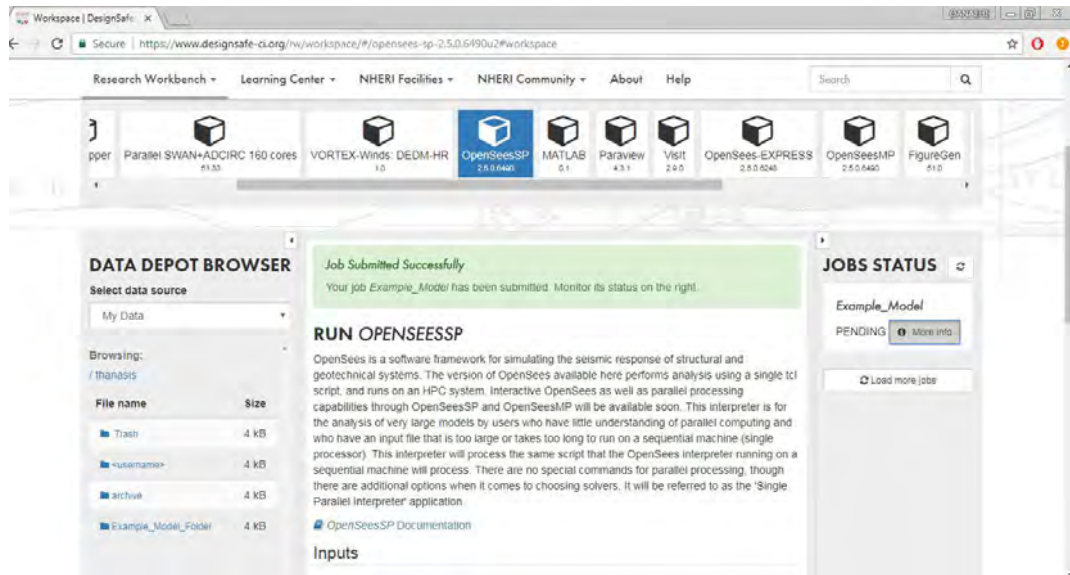


Figure 4.5: Job Submission

5 DOWNLOADING OUTPUT FILES

By clicking on "More info", when the "JOB STATUS" is "FINISHED", the user should choose to "View" the output in the window that appeared (Figure 5.1). In the directory that appears (Figure 5.2), the user chooses the desired folder (in that case Example_Model_Folder).

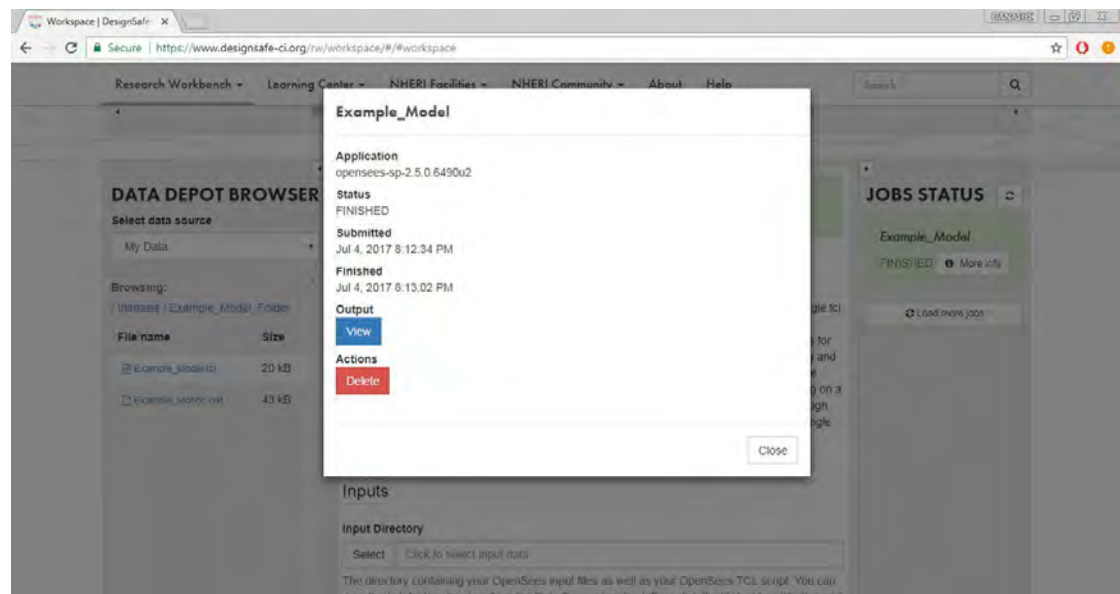


Figure 5.1: Job Finished

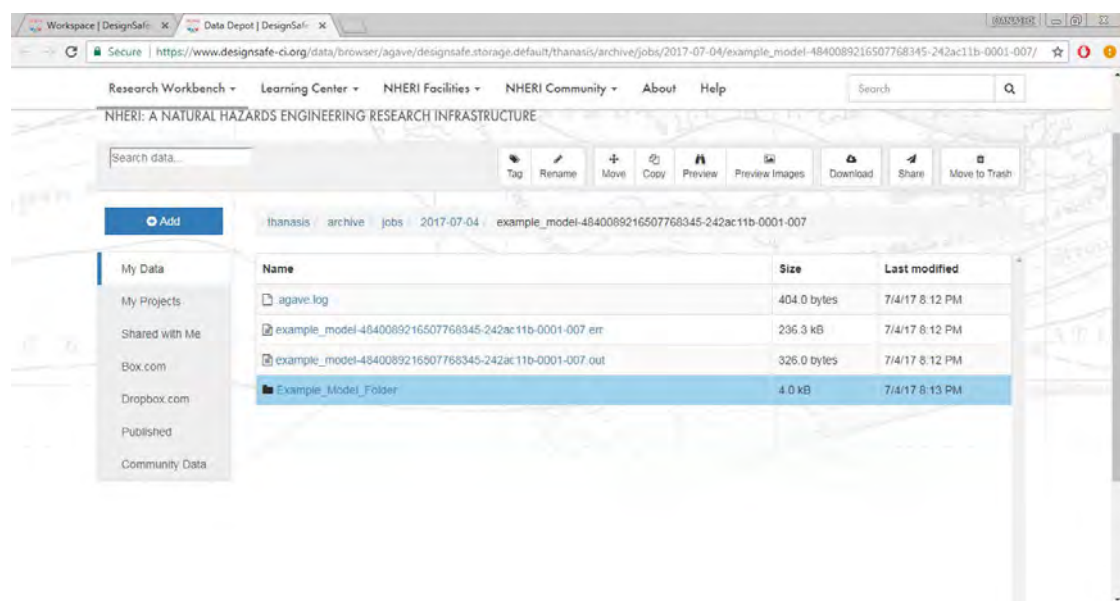


Figure 5.2: Jobs Directory

Consequently, the user should save the generated files, which are the .out files and the .log file (Figure 5.3).

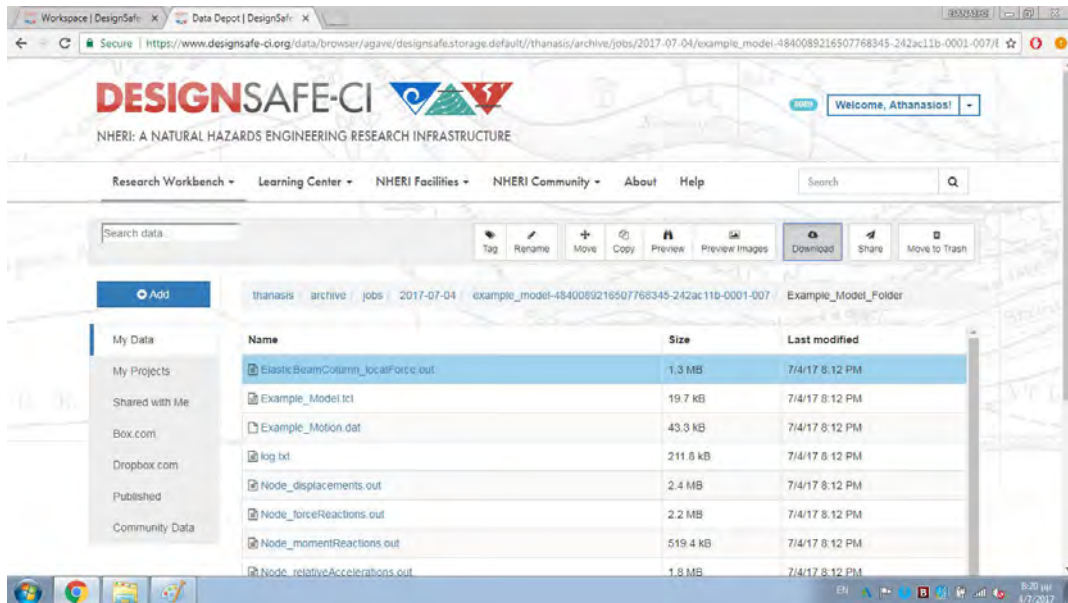


Figure 5.3: Analysis Generated Files

As depicted in Figure 5.4, these files should be saved in the .gid folder (in that example Example_Model.gid) and more specifically, in the OpenSees subfolder residing in the .gid folder (Figure 5.5).

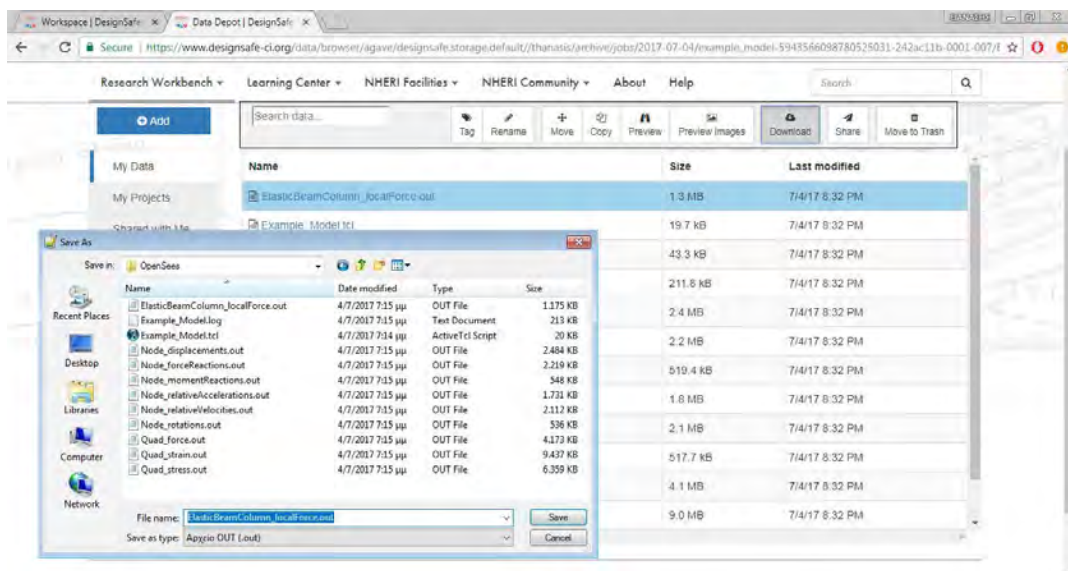


Figure 5.4: Saving Generated Files

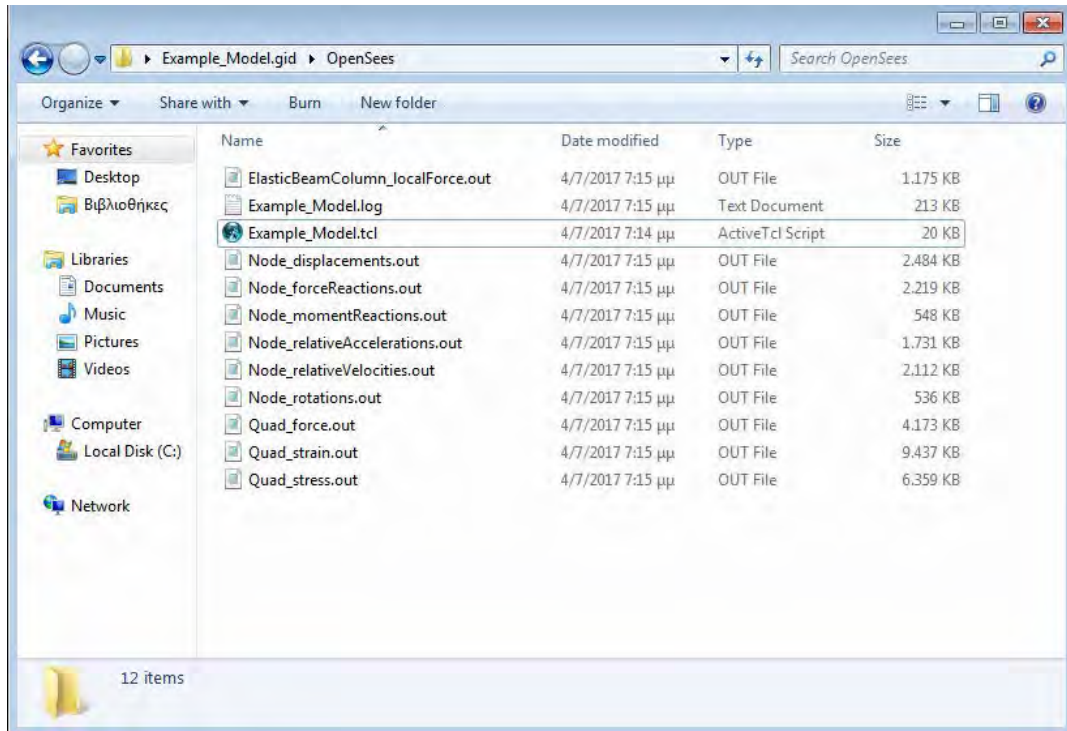


Figure 5.5: Final .gid Folder Status

6 POSTPROCESSING

In the final stage, it is now feasible to proceed to postprocess in the GiD graphical environment. Specifically, from the "GiD+OpenSees" tab the "Postprocess only" option should be selected (Figure 6.1).

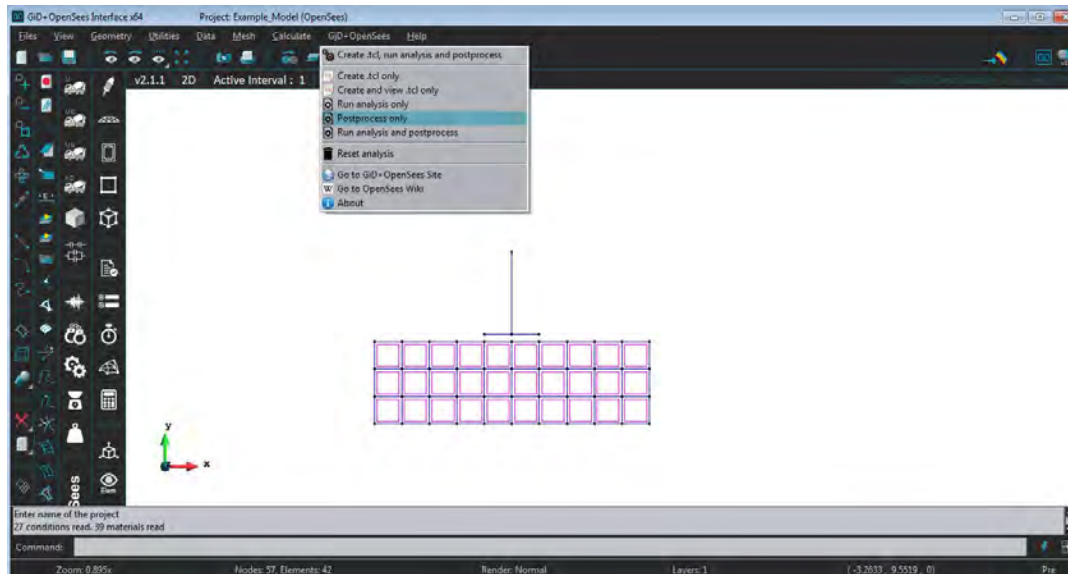


Figure 6.1: Postprocess Only Option

Finally, results of the Example_Model, which were generated following the aforementioned procedure, are demonstrated in the following Figures.

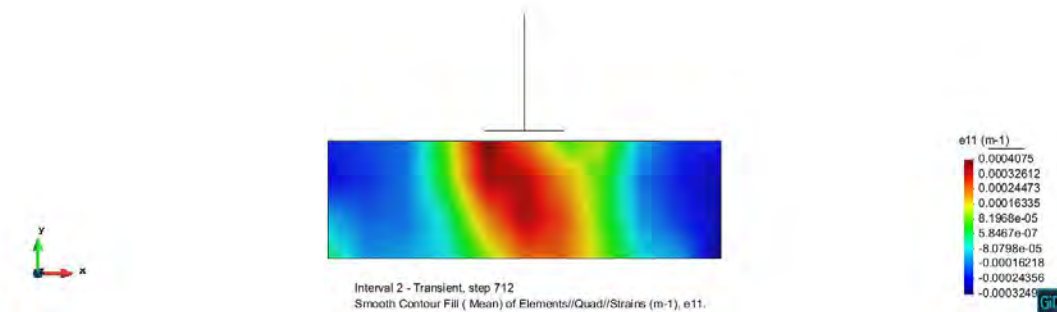


Figure 6.2: Smooth Contour Fill of Quad Strains

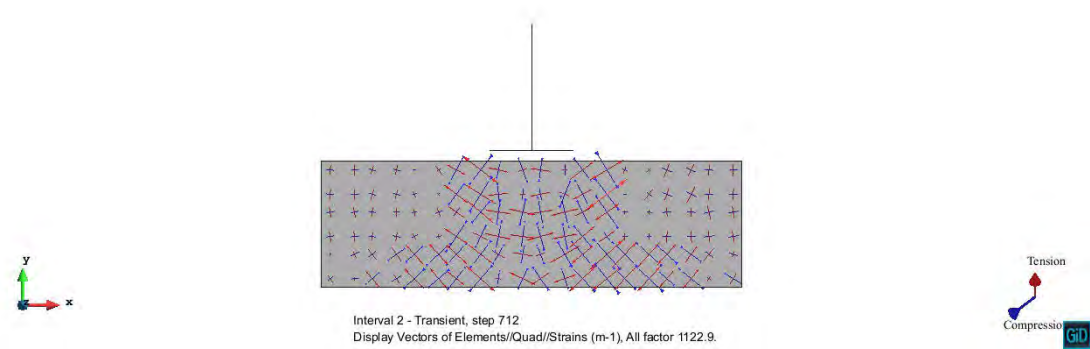


Figure 6.3: Vectors of Quad Strains

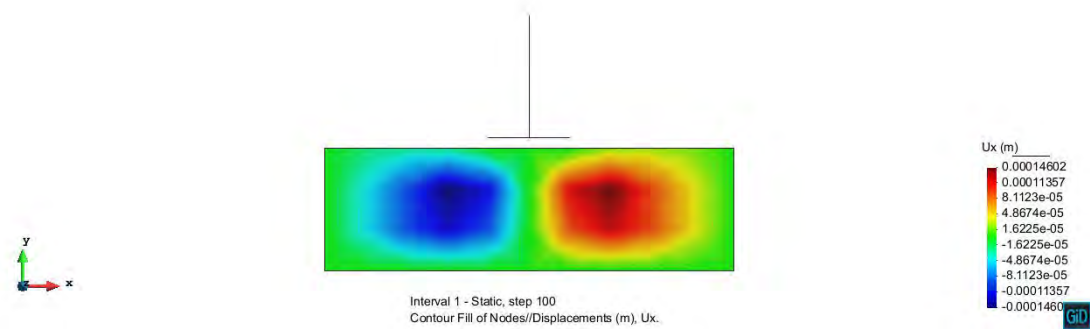


Figure 6.4: Contour Fill of Horizontal Displacements

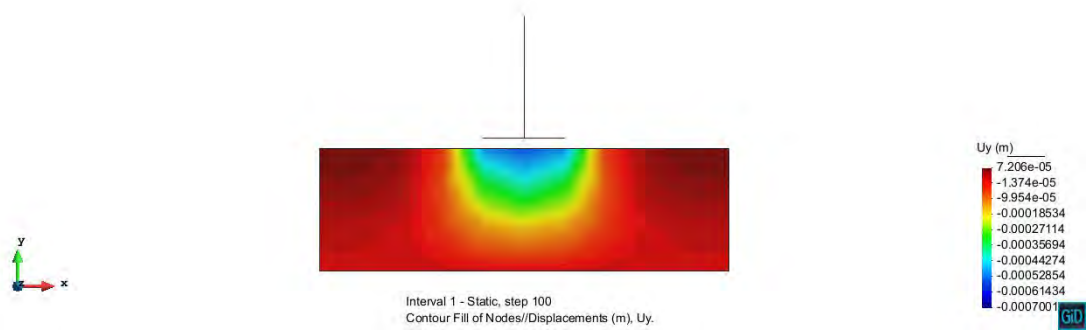


Figure 6.5: Contour Fill of Vertical Displacements