

Tasca 1: Configuració de l'Entorn de Desenvolupament i Fonaments PHP

M613-B1

Programació web en entorn servidor

INS Lacetània

16/09/2026

Toni Canal

Index

Part 1: Configuració de l'Entorn (20% de la nota).....	3
Lliurament.....	3
1.1 Instal·lació de l'entorn de desenvolupament.....	3
1.2 Configuració bàsica.....	6

Part 1: Configuració de l'Entorn (20% de la nota)

Lliurament

Crea un document PDF amb:

- Captures de pantalla del procés d'instal·lació
- Versió dels components instal·lats
- Ubicació del directori web
- Problemes trobats i solucions aplicades

1.1 Instal·lació de l'entorn de desenvolupament

Escull i instal·la UN dels següents entorns:

- LAMP natiu

Requisits mínims de la instal·lació:

- Apache 2.4 o superior
- PHP 8.0 o superior
- MySQL 8.0 o superior

```
toni@toni-Ubuntu:~$ php --version
PHP 8.5.4 (cli) (built: Sep  2 2026 14:42:18) (NTS)
Copyright (c) The PHP Group
Built by Ubuntu
Zend Engine v4.5.4, Copyright (c) Zend Technologies
    with Zend OPcache v8.5.4, Copyright (c), by Zend Technologies
toni@toni-Ubuntu:~$
```

Versió del php.

```
toni@toni-Ubuntu:~$ /usr/sbin/apache2ctl -t -D DUMP_MODULES
AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using 127.0.1.1. Set the 'ServerName' directive globally to suppress this message
Loaded Modules:
  core_module (static)
  so_module (static)
  watchdog_module (static)
  http_module (static)
  log_config_module (static)
  logio_module (static)
  version_module (static)
  unixd_module (static)
  systemd_module (static)
  access_compat_module (shared)
  alias_module (shared)
  auth_basic_module (shared)
  authn_core_module (shared)
  authn_file_module (shared)
  authz_core_module (shared)
  authz_host_module (shared)
  authz_user_module (shared)
  autoindex_module (shared)
  deflate_module (shared)
  dir_module (shared)
  env_module (shared)
  filter_module (shared)
  mime_module (shared)
  mpm_event_module (shared)
  negotiation_module (shared)
  reqtimeout_module (shared)
  setenvif_module (shared)
  status_module (shared)
```

Els moduls del apache.



Ubuntu

Apache2 Default Page

It works!

This is the default welcome page used to test the correct operation of the Apache2 server after installation on Ubuntu systems. It is based on the equivalent page on Debian, from which the Ubuntu Apache packaging is derived. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should **replace this file** (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.

Configuration Overview


Ubuntu's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Ubuntu tools. The configuration system is **fully documented in `/usr/share/doc/apache2/README.Debian.gz`**. Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the **manual** if the `apache2-doc` package was installed on this server.

The configuration layout for an Apache2 web server installation on Ubuntu systems is as follows:

```
/etc/apache2/
|-- apache2.conf
|   |-- ports.conf
|-- mods-enabled
|   |-- *.load
|   |-- *.conf
|-- conf-enabled
|   |-- *.conf
|-- sites-enabled
|   |-- *.conf
```

- `apache2.conf` is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.
- `ports.conf` is always included from the main configuration file. It is used to determine the listening ports for incoming connections, and this file can be customized anytime.
- Configuration files in the `mods-enabled/`, `conf-enabled/` and `sites-enabled/` directories contain particular configuration snippets which manage modules, global configuration fragments, or virtual host configurations, respectively.
- They are activated by symlinking available configuration files from their respective `*-available/` counterparts. These should be managed by using our helpers `a2enmod`, `a2dismod`, `a2ensite`, `a2dissite`, and `a2enconf`, `a2disconf`. See their respective man pages for detailed information.
- The binary is called `apache2` and is managed using `systemd`, so to start/stop the service use `systemctl start apache2` and `systemctl stop apache2`, and use `systemctl status apache2` and `journalctl -u apache2` to check status. `system` and `apache2ctl` can also be used for service management if desired. **Calling `/usr/bin/apache2` directly will not work** with the default configuration.

El apache funciona.

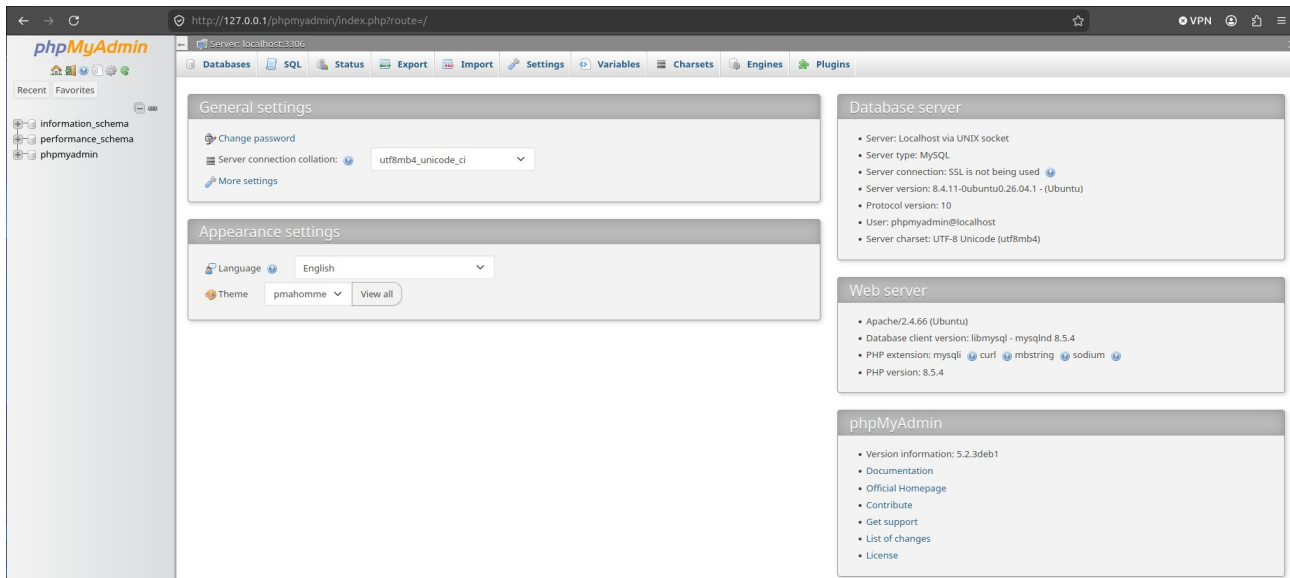

El phpMyAdmin funciona.

```
root@toni-Ubuntu:/var/www/html# chmod 777 MP0613/
root@toni-Ubuntu:/var/www/html# chmod 777 MP0613/Bloc1/
root@toni-Ubuntu:/var/www/html# ls -la
total 24
drwxr-xr-x 3 root root 4096 Sep 16 19:48 .
drwxr-xr-x 3 root root 4096 Sep 16 19:35 ..
drwxrwxrwx 3 root root 4096 Sep 16 19:49 MP0613
-rw-r--r-- 1 root root 10672 Sep 16 19:35 index.html
root@toni-Ubuntu:/var/www/html# ls -la MP0613/
total 12
drwxrwxrwx 3 root root 4096 Sep 16 19:49 .
drwxr-xr-x 3 root root 4096 Sep 16 19:48 ..
drwxrwxrwx 2 root root 4096 Sep 16 19:49 Bloc1
root@toni-Ubuntu:/var/www/html#
```

A /var/www/html he fet una estructura de directoris per a guardar els arxius.

1.2 Configuració bàsica

- Configura el directori d'arxius web
- Verifica el funcionament del servidor Apache
- Comprova la versió de PHP instal·lada
- Verifica l'accés a MySQL