


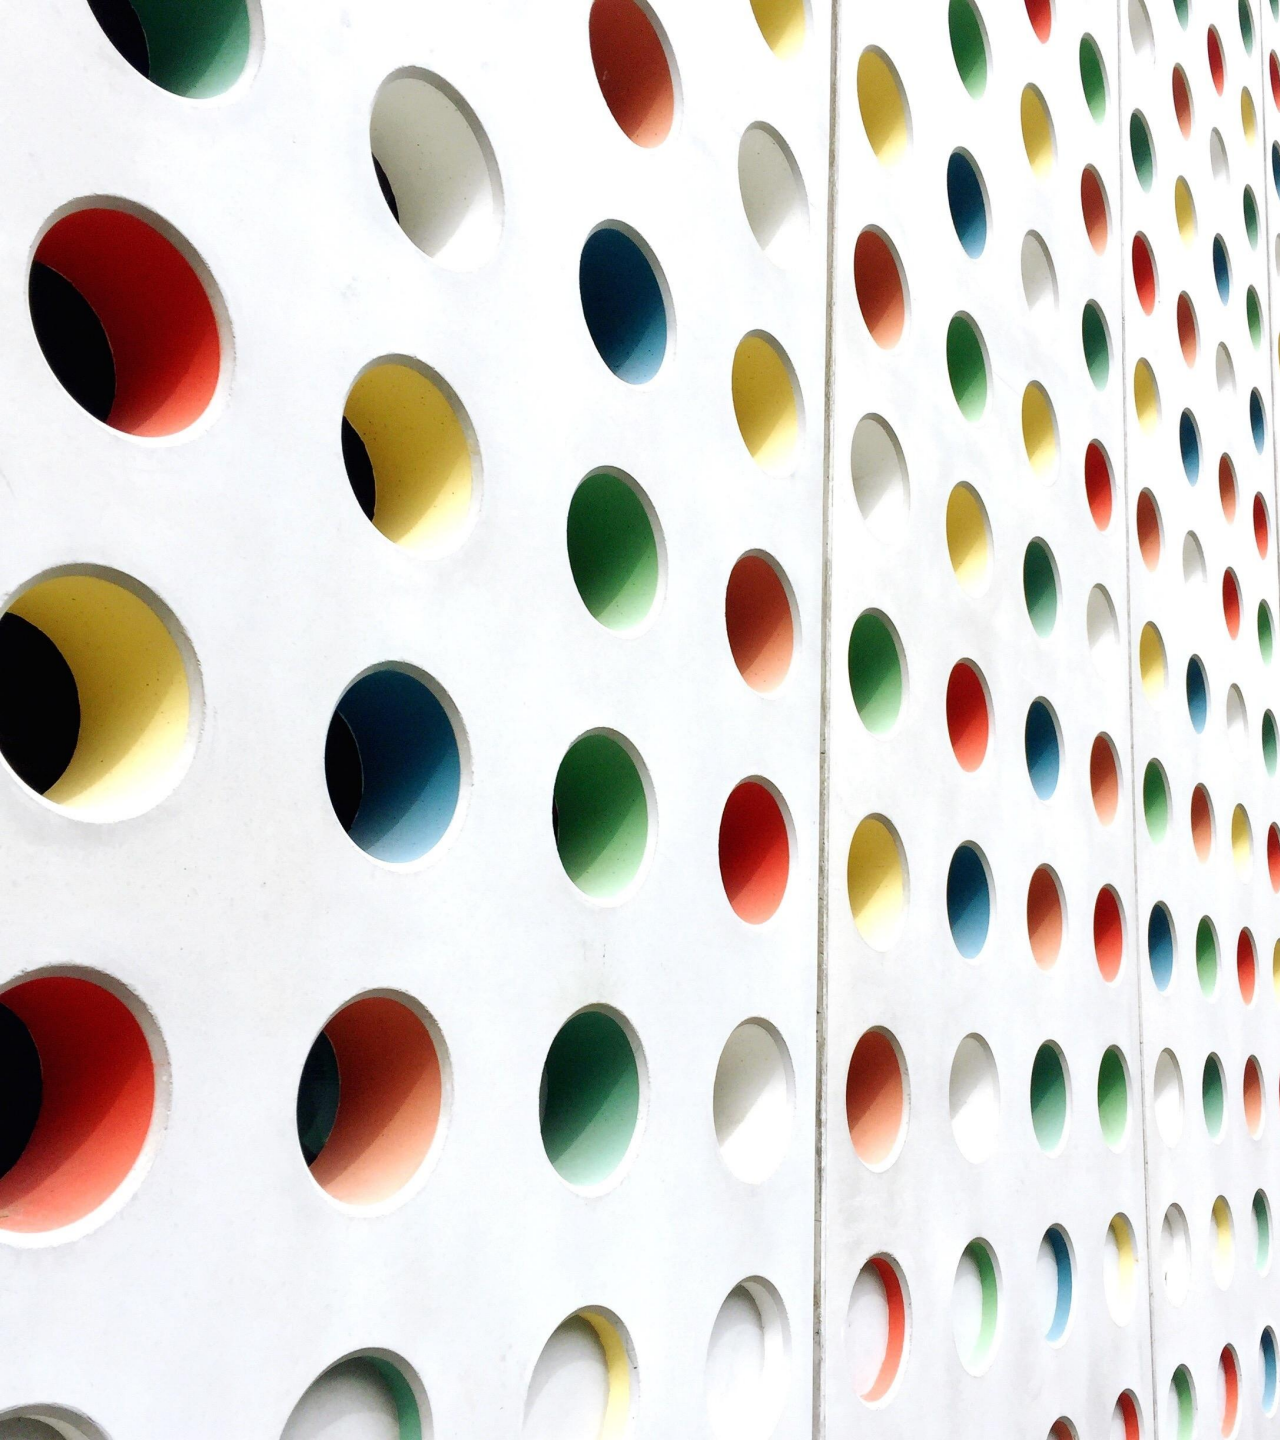


RDFa Microformat S


BY

SANA RIZWAN

Linked Data Publishing Tenants

- When a "User Agent" requests (X)HTML, make a "best effort" to expose associated RDF data via any of the following:
 - Use the <head/> section's <link/> tag to expose RDF Data Source Names
 - Use simple RDFa or eRDF statements to embed RDF Data Source Names within the (X)HTML via the <head/> section's <profile/> tag for eRDF or RDFa use declaration and <link/> tag to expose RDF Data Source Names
 - If XHTML, use GRDDL to glean RDF from the source document via a combination of the GRDDL use declaration in the <head/> section's <profile/> tag and an XSLT stylesheet exposed via the <link/> tag
- When a "User Agent" requests XML
 - Use GRDDL to Identity Transformation Stylesheet

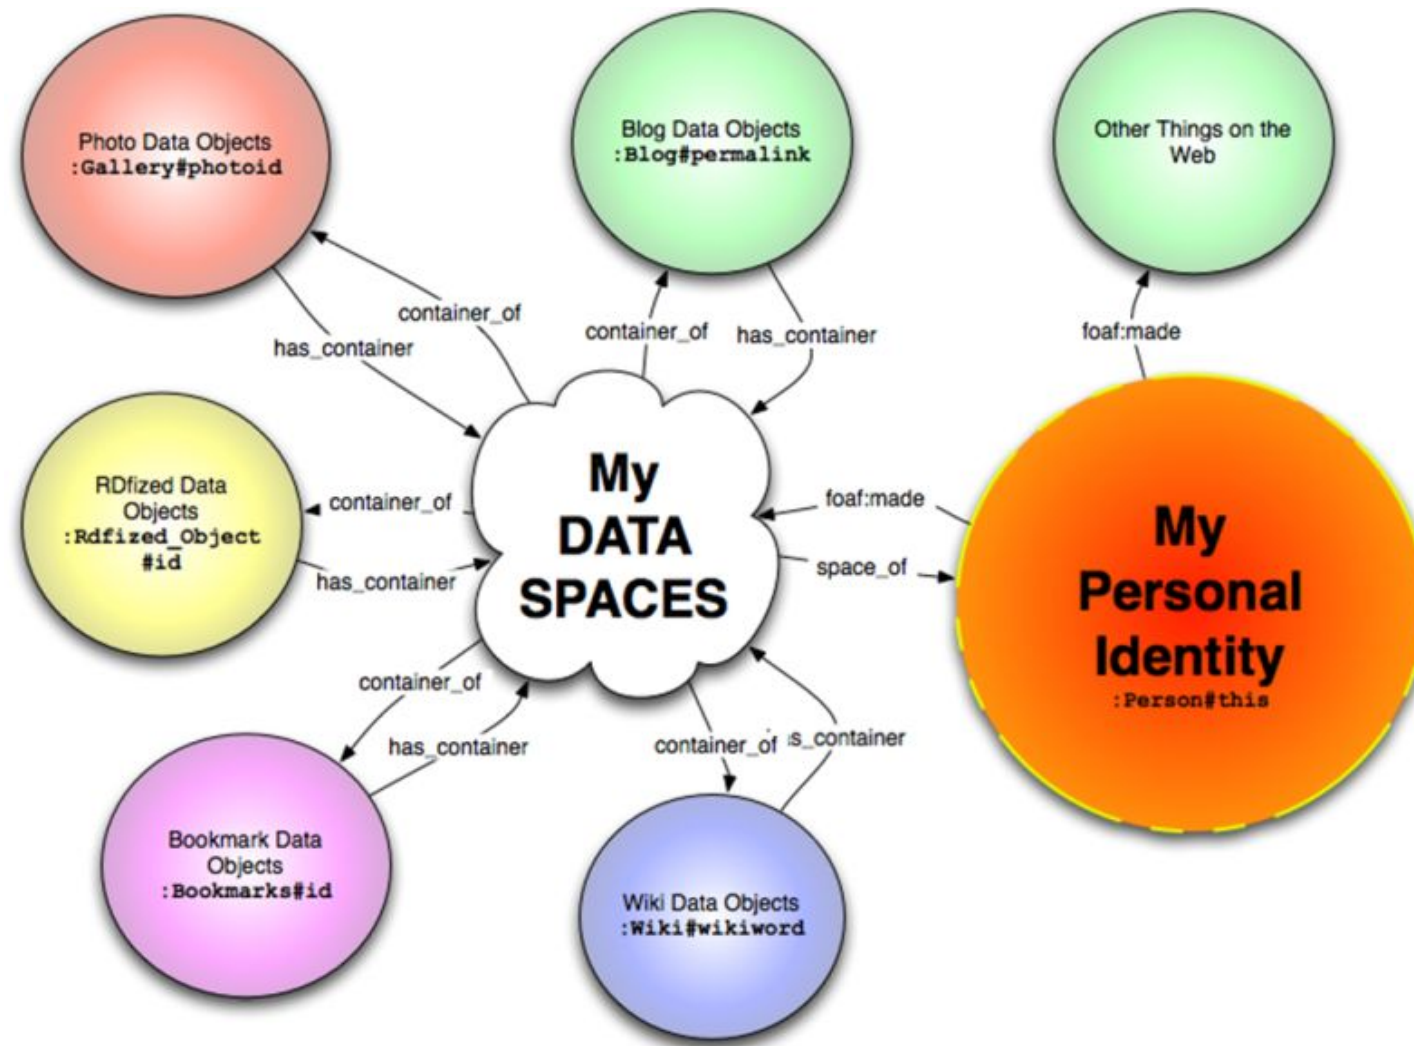

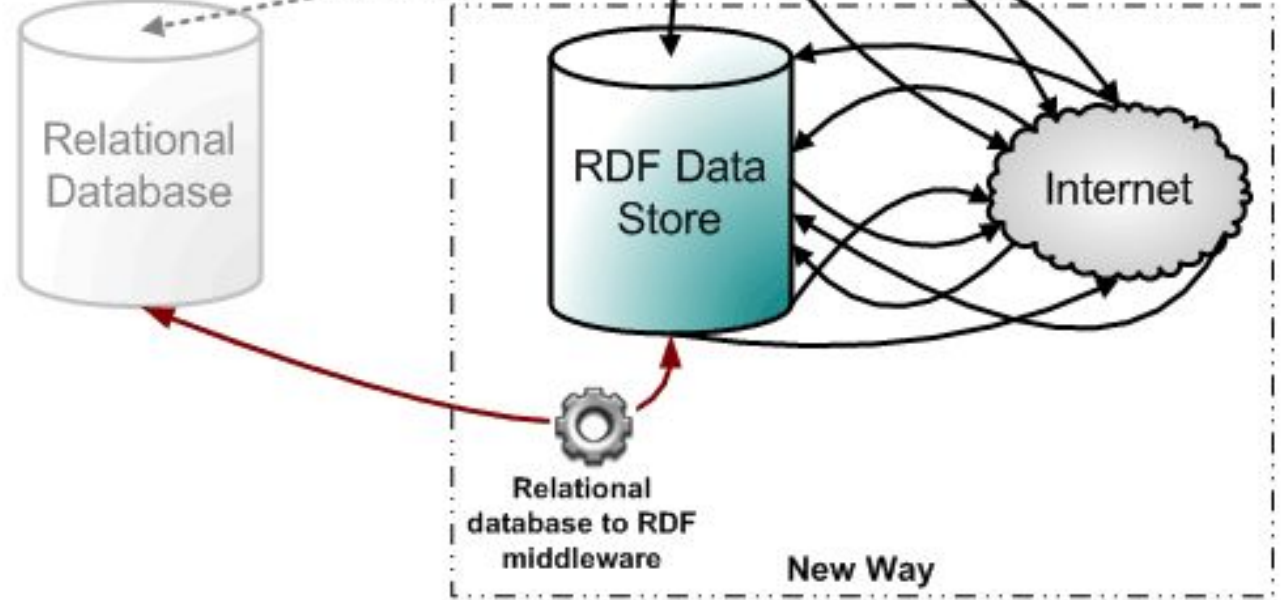

Example RDFa + HTML

```
<HTML>
<head><title>An RDFa sample</title></head>
<body>
  <p>The author of <b>UML Distilled</b>
  is <i>Martin Fowler</i></html>
</p>
</body>
</html>
```

Validate it:

<http://rdfa.info/play/>

https://www.w3.org/2012/pyRdfa/Validator.html#distill_by_uri

Metadata in Web-pages and RDFa provides a generic way to do this by building on features already in HTML. Code shows how to enrich the HTML code using RDFa technology

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML+RDFa 1.0//EN"
"http://www.w3.org/Markup/DTD/xhtml-rdfa-1.dtd">
<html xmlns="http://www.w3.org/1999/xhtml"
  xmlns:ex="http://example.org/" version="XHTML+RDFa 1.0" xml:lang="en">
  <head><title>An RDFa sample</title></head>
  <body>
    <p><div typeof="ex:Book" about="http://example.org/uml" >
      The author of <b><span property="ex:title">UML Distilled</span></b>
      is <div typeof="ex:Person" about="http://example.org/mfowler">
        <i><span property="ex:name">Martin</span>
        <span property="ex:surname">Fowler</span></div></i>
      </div></p>
    </body>
  </html>
```



```
<html xmlns="http://www.w3.org/1999/xhtml" xmlns:ex="http://example.org/" version="XHTML+RDFa 1.0"
xml:lang="en">
<head>
<title>An RDFa sample</title>
</head>
<body>
<p>
<div typeof="ex:Book" about="http://example.org/umld"> The author of <b><span property="ex:title">UML
Distilled</span></b> is
<div typeof="ex:Person" about="http://example.org/mfowler">
<i>
<span property="ex:name">Martin</span>
<span property="ex:surname">Fowler</span>
</div>
</i>
</div>
</p>
</body>
</html>
```

WARNING: This is beta software, there are [bugs](#). This tool is not yet ready for production use. That said, it's pretty useful already out soon.

Examples:

Person

Social Network

Event


Place

Product

SVG

```
<html xmlns="http://www.w3.org/1999/xhtml" xmlns:ex="http://example.org/"
<head>
  <title>An RDFa sample</title>
</head>
<body>
  <p>
    <div typeof="ex:Book" about="http://example.org/uml"> The author of
      <b>
        <span property="ex:title">UML Distilled</span>
      </b> is
    <div typeof="ex:Person" about="http://example.org/mfowler">
      <i>
        <span property="ex:name">Martin</span>
        <span property="ex:surname">Fowler</span>
      </i>
    </div>
  </p>
</body>
</html>
```

The author of UML Distilled is
Martin Fowler

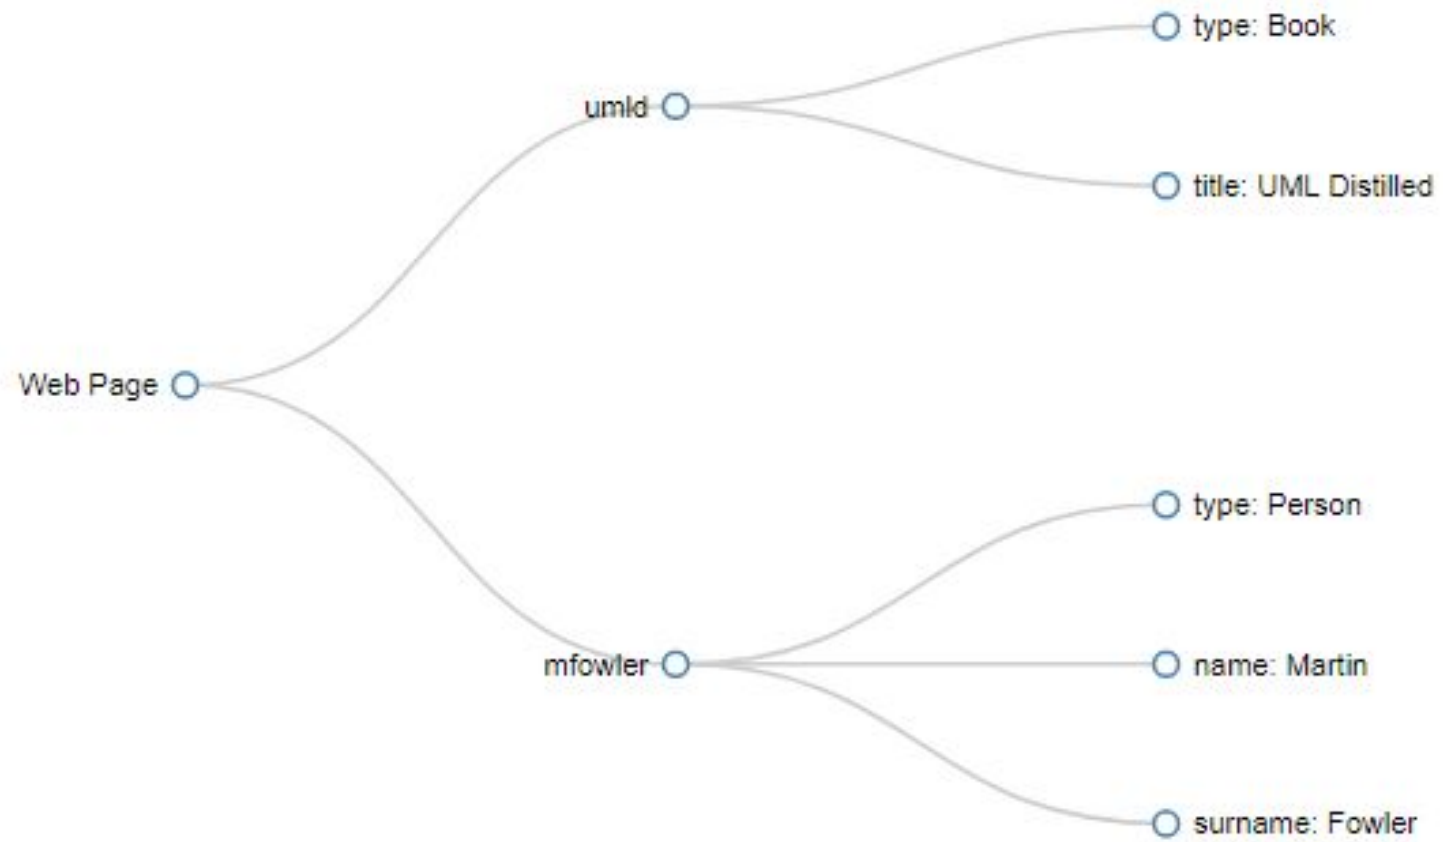

RDFa Validator

This validator is meant to validate *RDFa content* in an HTML or an XML file. The validator does *not* analyze the HTML/XML content itself. It is advised to use, e.g., the separate [u](#) for that purpose. By default, the validator considers RDFa 1.1, but RDFa 1.0 is also recognized if the `@version` attribute is set in the source

Validate by **URI**

Validate by **File Upload**

Validate by **Direct Text Input**

Distill by direct input

Enter the Markup to distill :

```
<html xmlns="http://www.w3.org/1999/xhtml" xmlns:ex="http://example.org/" version="XHTML+RDFa 1.0" xml:lang="en">
  <head><title>An RDFa sample</title></head> <body> <p><div typeof="ex:Book" about="http://example.org/umld"> The
author of <b><span property="ex:title">UML Distilled</span></b> is
  <div typeof="ex:Person" about="http://example.org/mfowler"> <i><span property="ex:name">Martin</span> <span
property="ex:surname">Fowler</span></div></i> </div></p>
</body></html>
```

Host Language:

HTML5+RDFa ▼

Generate warnings for non RDFa 1.1 Lite usage:

No ▼



RDFa Validation results

Validator messages

Congratulations, your RDFa source is valid; however there is one informational message in your RDFa content that you might want to check

(Checked RDFa 1.0, with HTML5+RDFa as host language.)

Informational messages

Info: Input Host Language:HTML5+RDFa, RDFa version:1.0, base:

Generated RDF content in Turtle format

```
@prefix ex: <http://example.org/> .
@prefix rdf: <http://www.w3.org/1999/02/22-rdf-syntax-ns#> .
@prefix rdfs: <http://www.w3.org/2000/01/rdf-schema#> .
@prefix xml: <http://www.w3.org/XML/1998/namespace> .
@prefix xsd: <http://www.w3.org/2001/XMLSchema#> .

ex:mfowler a ex:Person ;
  ex:name "Martin"@en ;
  ex:surname "Fowler"@en .

ex:uml1 a ex:Book ;
  ex:title "UML Distilled"@en .
```

XHTML familiar with using **meta** and **link** to add additional information

```
<html xmlns="http://www.w3.org/1999/xhtml">
  <head>
    <title>Page 7</title>
    <meta name="author" content="Mark Birbeck" />
    <link rel="prev" href="page6.html" />
    <link rel="next" href="page8.html" />
  </head>
  <body>...</body>
</html>
```

RDFa impose

```
<html
  xmlns="http://www.w3.org/1999/xhtml"
  xmlns:foaf="http://xmlns.com/foaf/0.1/"
  xmlns:dc="http://purl.org/dc/elements/1.1/"
>
  <head>
    <title>My home-page</title>
    <meta property="dc:creator" content="Mark Birbeck" />
    <link rel="foaf:topic" href="http://www.formsPlayer.com/#us" />
  </head>
  <body>...</body>
</html>
```

XHTML supports the use
of *@rel* and *@rev*

```
This document is licensed under a  
<a xmlns:cc="http://creativecommons.org/ns#"  
  rel="cc:license"  
  href="http://creativecommons.org/licenses/by-nc-nd/3.0/">  
  Creative Commons License  
</a>.
```

```

<html
  xmlns="http://www.w3.org/1999/xhtml"
  xmlns:cal="http://www.w3.org/2002/12/cal/ical#"
>
<head><title>Jo's Friends and Family Blog</title></head>
<body>
  <p>
    I'm holding
    <span property="cal:summary">
      one last summer Barbecue
    </span>,
    on September 16th at 4pm.
  </p>
</body>
</html>

```

```

<html
  xmlns="http://www.w3.org/1999/xhtml"
  xmlns:cal="http://www.w3.org/2002/12/cal/ical#"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
>
<head><title>Jo's Friends and Family Blog</title></head>
<body>
  <p>
    I'm holding
    <span property="cal:summary">
      one last summer Barbecue
    </span>,
    on
    <span property="cal:dtstart" content="2007-09-16T16:00:00-05:00"
      datatype="xsd:dateTime">
      September 16th at 4pm
    </span>.
  </p>
</body>
</html>

```

If some displayed text is different to the actual 'value' it represents, more precise values can be added

Re-used to provide metadata

```

<html
  xmlns="http://www.w3.org/1999/xhtml"
  xmlns:cal="http://www.w3.org/2002/12/cal/ical#"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
>
<head><title>Jo's Friends and Family Blog</title></head>
<body>
  <p typeof="cal:Vevent">
    I'm holding
    <span property="cal:summary">
      one last summer Barbecue
    </span>,
    on
    <span property="cal:dtstart" content="2007-09-16T16:00:00"
      datatype="xsd:dateTime">
      September 16th at 4pm
    </span>.
  </p>
</body>
</html>

```

```

<html
  xmlns="http://www.w3.org/1999/xhtml"
  xmlns:biblio="http://example.org/"
  xmlns:dc="http://purl.org/dc/elements/1.1/"
>
<head>
  <title>Books by Marco Pierre White</title>
</head>
<body>
  I think White's book
  ' <span about="urn:ISBN:0091808189" typeof="biblio:book"
    property="dc:title">
      Canteen Cuisine
    </span>'
  is well worth getting since although it's quite advanced stuff, he
  makes it pretty easy to follow. You might also like
  <span about="urn:ISBN:1596913614" typeof="biblio:book"
    property="dc:description">
      White's autobiography
    </span>.
</body>
</html>

```

RDFa+HTML
