FreeRTOS eZ80F91 Acclaim! Port - Copyright (C) 2016-2021 by NadiSoft All rights reserved

This file is part of the FreeRTOS port for ZiLOG's EZ80F91 Module.
Copyright (C) 2016 by Juergen Sievers <JSievers@NadiSoft.de>

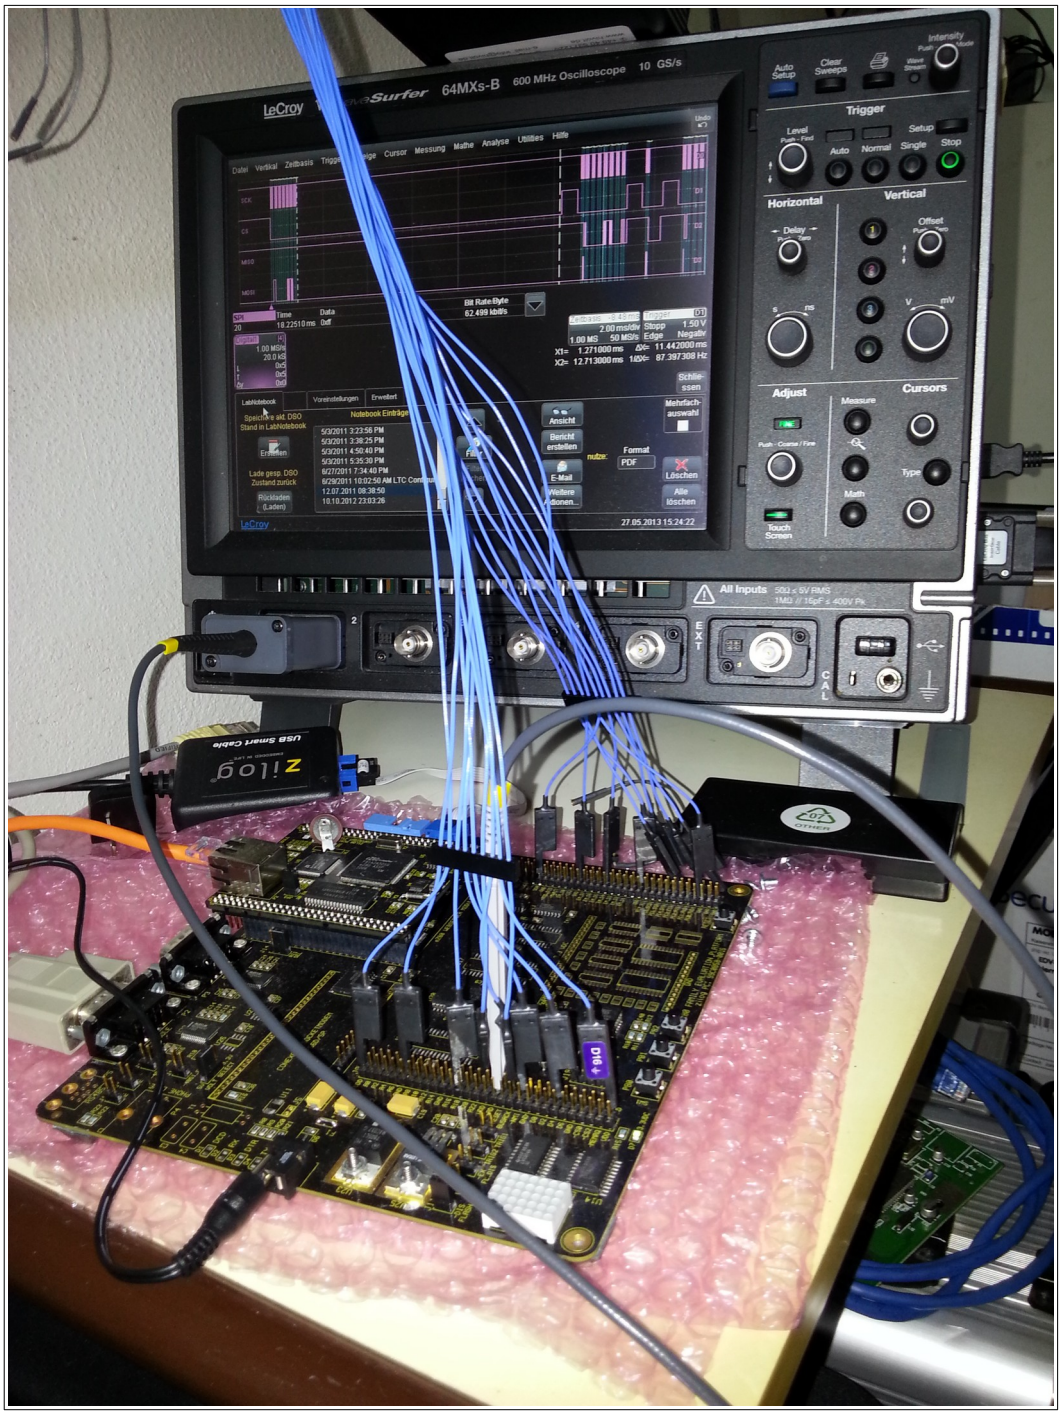

The Port was made and rudimentary tested on ZiLOG's EZ80F910300ZCOG Developer Kit using ZDSII Acclaim 5.3.4 Developer

Environment and comes WITHOUT ANY WARRANTY to you!

Developer:

SIE Juergen Sievers <JSievers@NadiSoft.de>

Repository directories:

- CPM CP/M 2.2 source and environment.
- doc some documantation.
- FreeRTOS the modified FreeRTOS real time kernel source code.
- FreeRTOSCLI the FreeRTOS-Plus-CLI command line interface source code.
- FreeRTOSTCP the modified FreeRTOS-Plus-TCP TCP/IP source code.
- Inc The Demo’s header files.
- monitor Z80 machine monitor. (not usable yet)
- src The Demo’s source files.

.

See http://www.freertos.org.html for full details of the FreeRTOS directory structure and information on locating the files you require.

My Build- and Test-environment:

I use a Fedora Linux Workstation as host system for a Windows 10 as guest under QEMU. On Windows I mount a samba share as drive Z: with at least the following directories.

1. **Z:\ZDSII_eZ80Acclaim!_5.3.4**
   ZiLOG Developer Studio II—eZ80Acclaim!® installation.
   Free download from www.zilog.com.

2. **Z:\workspace**

The Target is connected over a its Serial and Ethernet port on the Linux-PC

The Debug-output uses serial-port 0 115200,8,1,n,RTS/CTS. I use PuTTY on the Linux-PC to display such information.

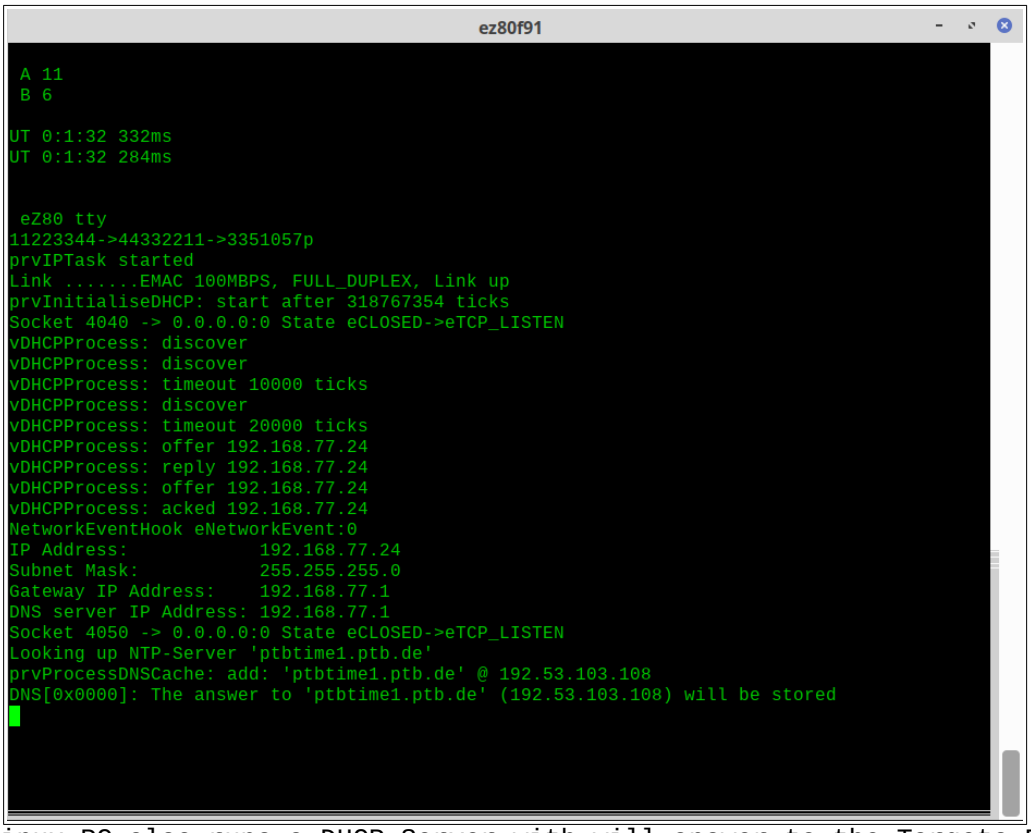

On the Linux-PC also runs a DHCP-Server with will answer to the Targets DHCP Requests.

At last the ZiLOG USBSmartCable is connect between the target and Lunux-PC. This USB -Device is routed to the Windows guest. It will be used by the Developer

Studio for download, flashing and debugging.

Changing to directory Z:\workspace and clone the project
https://github.com/notwendig/FreeRTOS-eZ80f91.git

On the Windows-guest run the ZiLOG Developer Studio. Open the Project-file Z:\workspace\FreeRTOS-eZ8091\ez80FreeROS.zdsproj, and build it.

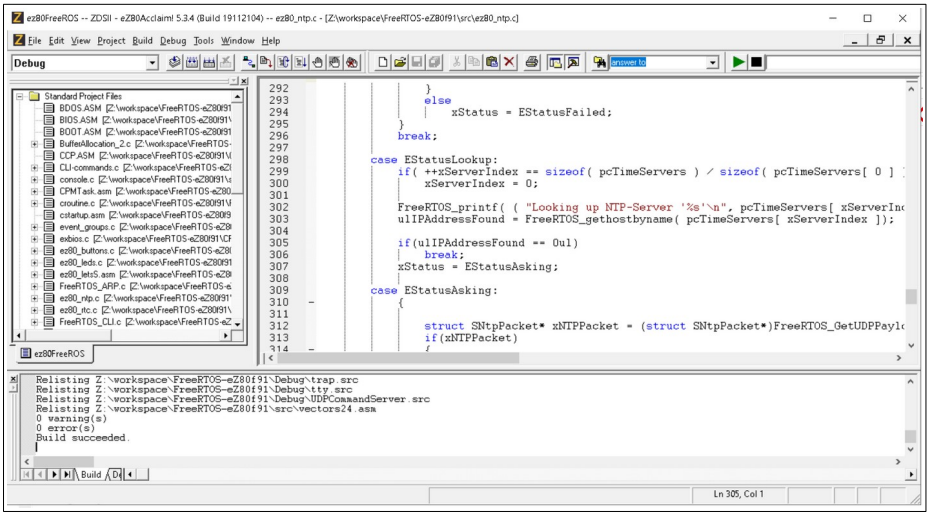

Before you download and run the Demo on the Target a terminal (PuTTY) should be running on the targets serial-port connection.

After the target has gotten the IP you may start several other connection to the target.

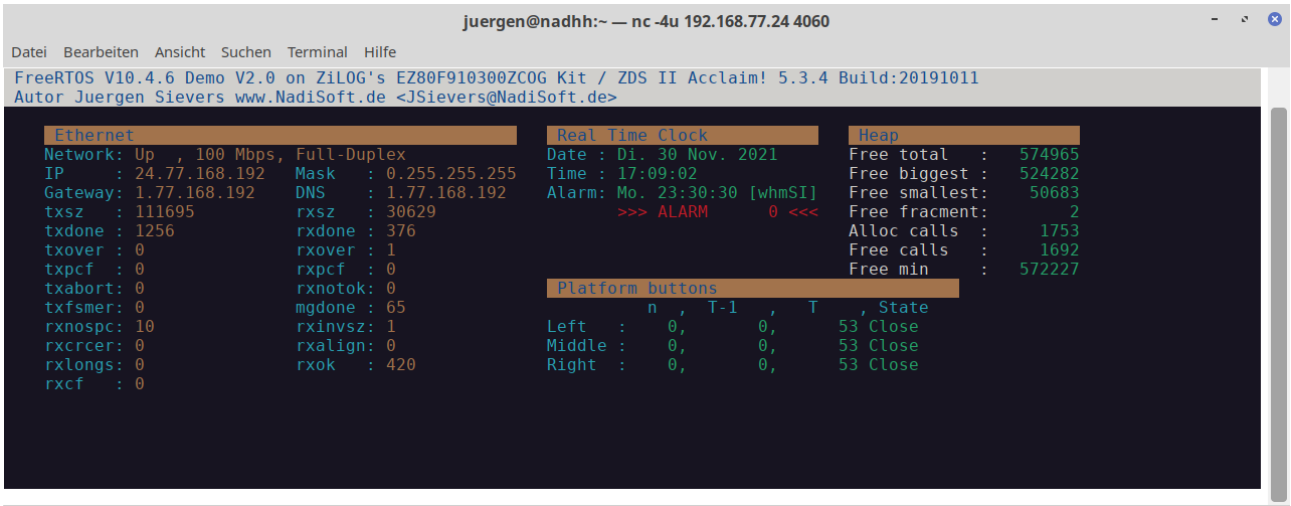

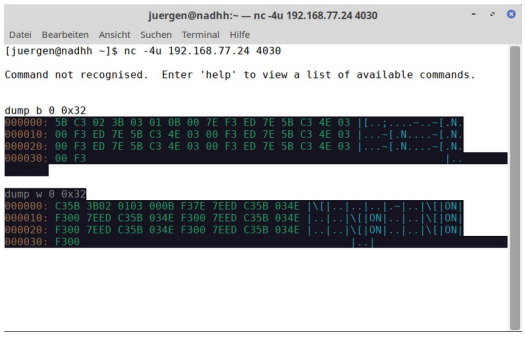

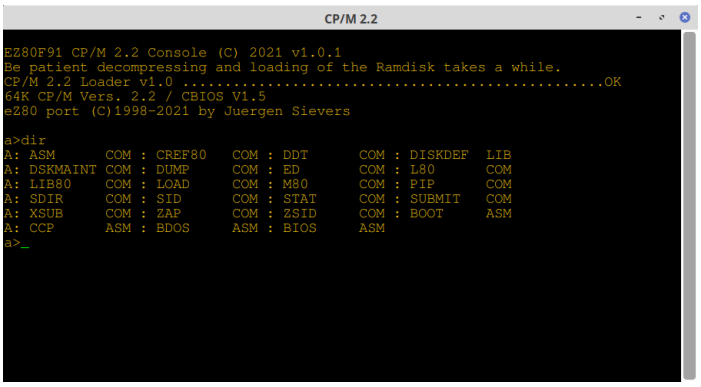

Regards

Jürgen