


Name: Aparna Kholia

Roll no. 19BCS116

1. Creating hospital database

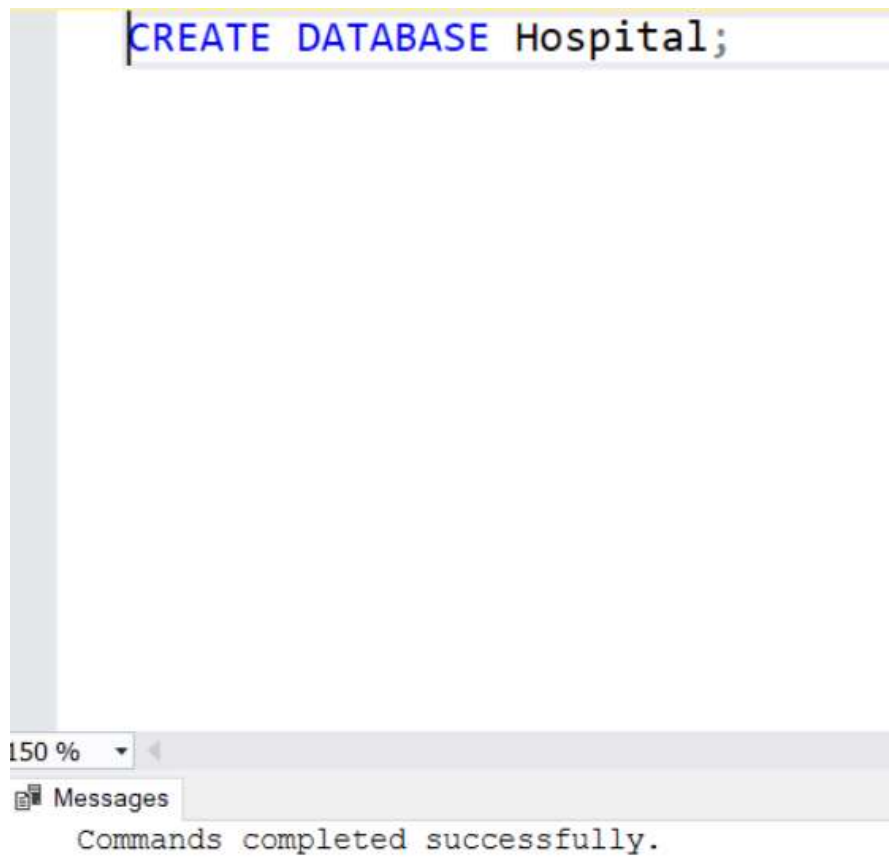

```
CREATE DATABASE Hospital;
```

150 %

Messages

Commands completed successfully.

Dropping database


```
DROP DATABASE Hospital;
```

% ▾

Messages

Commands completed successfully.

1. .Database

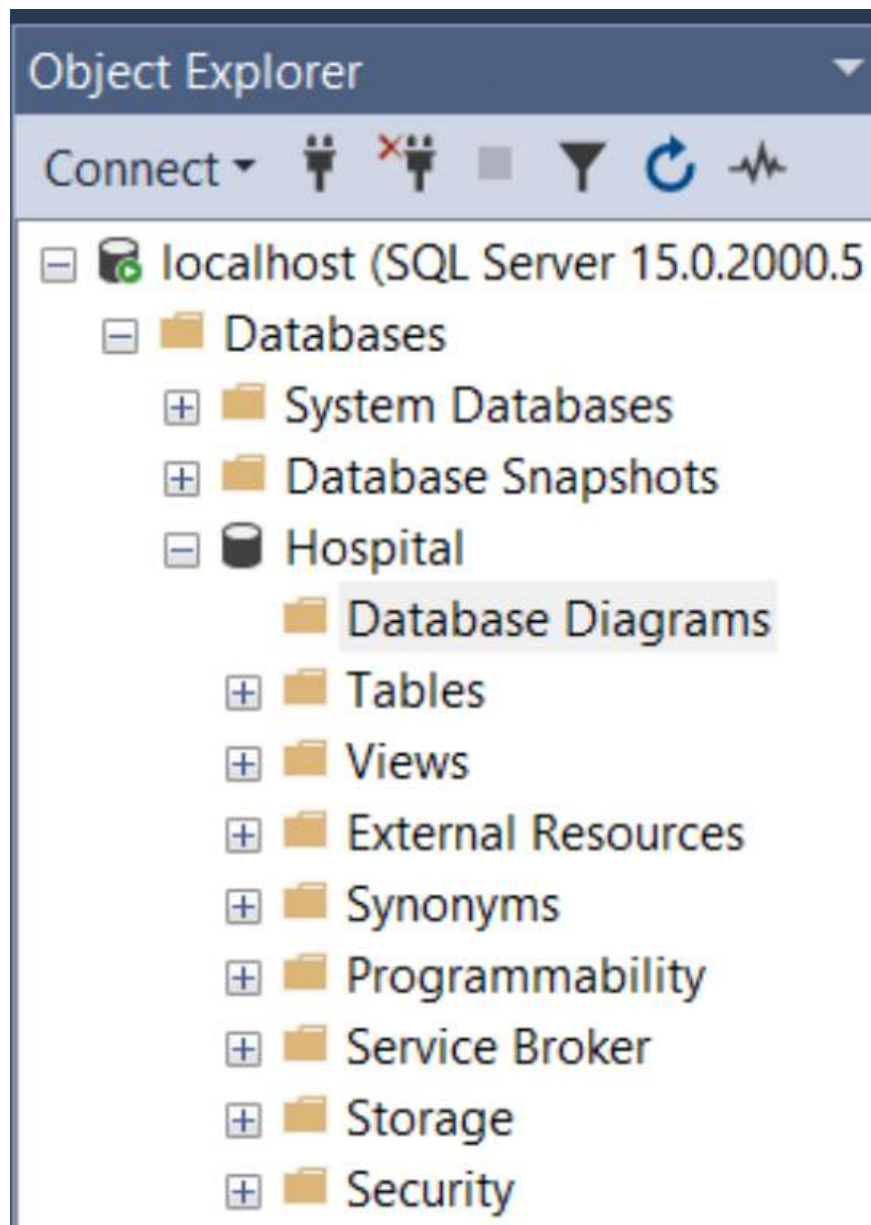

2. Create table


```
CREATE TABLE [T1_Room] (  
    [room_id] INT,  
    [room_no] INT,  
    [room_type] VARCHAR(30),  
    [patient_id] INT,  
    [doctor_id] INT,  
    PRIMARY KEY ([room_id])  
);
```

50 %

Messages

Commands completed successfully.


3. Drop table

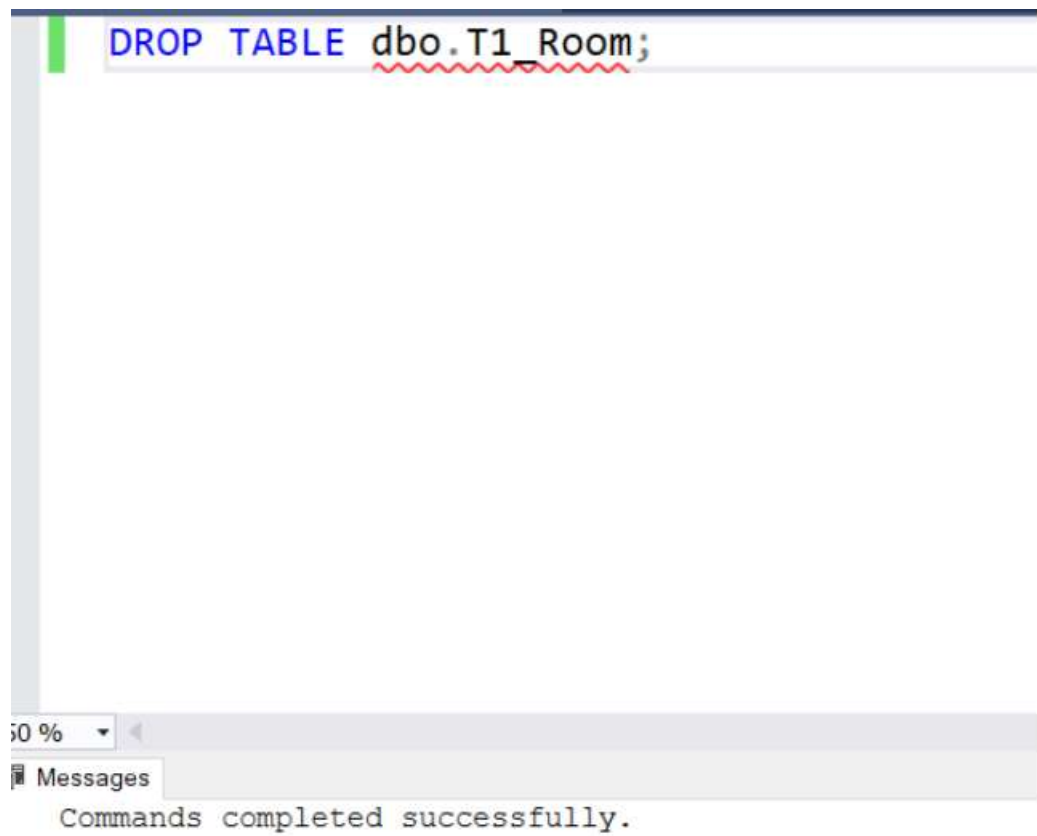

4. Show schema

```
SELECT *  
FROM dbo.T1_ROOM;
```

0 % ▾

Results  Messages

room_id	room_no	room_type	patient_id	doctor_id
---------	---------	-----------	------------	-----------

5. Show all tables

The screenshot shows a SQL query editor with the following text:

```
SELECT  
    *  
FROM  
    INFORMATION_SCHEMA.TABLES;
```

Below the editor, the 'Results' pane is active, displaying a table with the following data:

	TABLE_CATALOG	TABLE_SCHEMA	TABLE_NAME	TABLE_TYPE
1	Hospital	dbo	T1_Room	BASE TABLE