

User Manual

Field	Value
Document ID	UAIL-ITDASH-UM-001
Version	1.2
Status	Active baseline
Classification	Internal
Owner	Tech-Unit IT
Last Updated	2026-07-24
Audience	Operators, admins, support users

1. Purpose


Provide practical usage guidance for the operator wallboard and the admin console, including login, interpretation, filters, recovery actions, and use of the documentation Help area.

2. Access

Surface	URL Pattern	Intended User
Operator	http://<server>:21060/login	Operations viewers
Admin	http://<server>:21061/login	Administrators

The operator page asks only for the operator password.
The admin page asks only for the admin password.


3. Operator Login

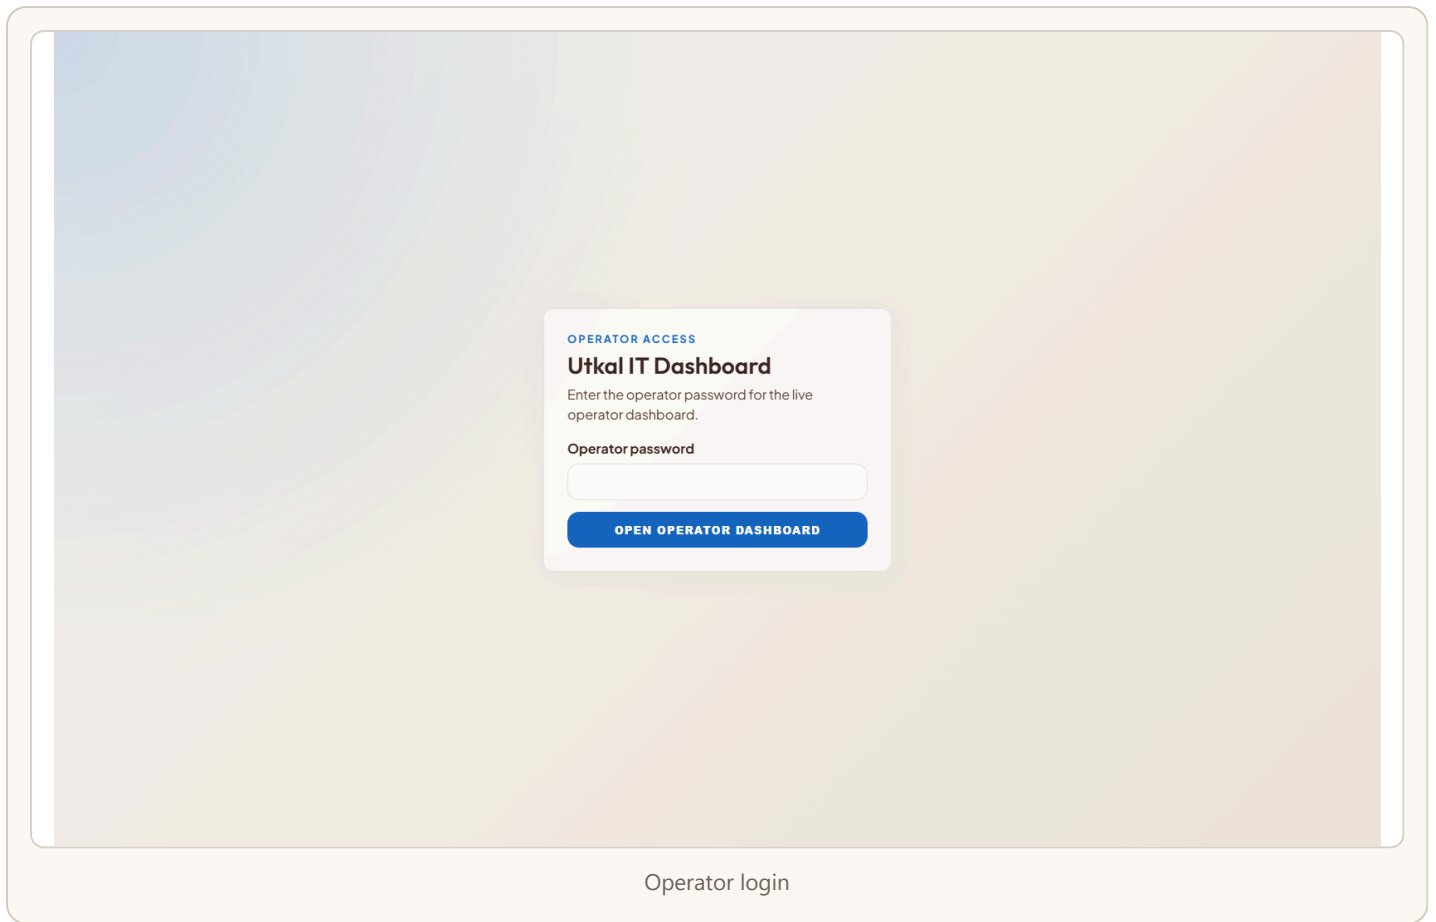

Steps:

1. Open the operator surface in a browser.
2. Enter the operator password.
3. Confirm that the wallboard loads with live cards and the filter bar.

4. Operator Dashboard

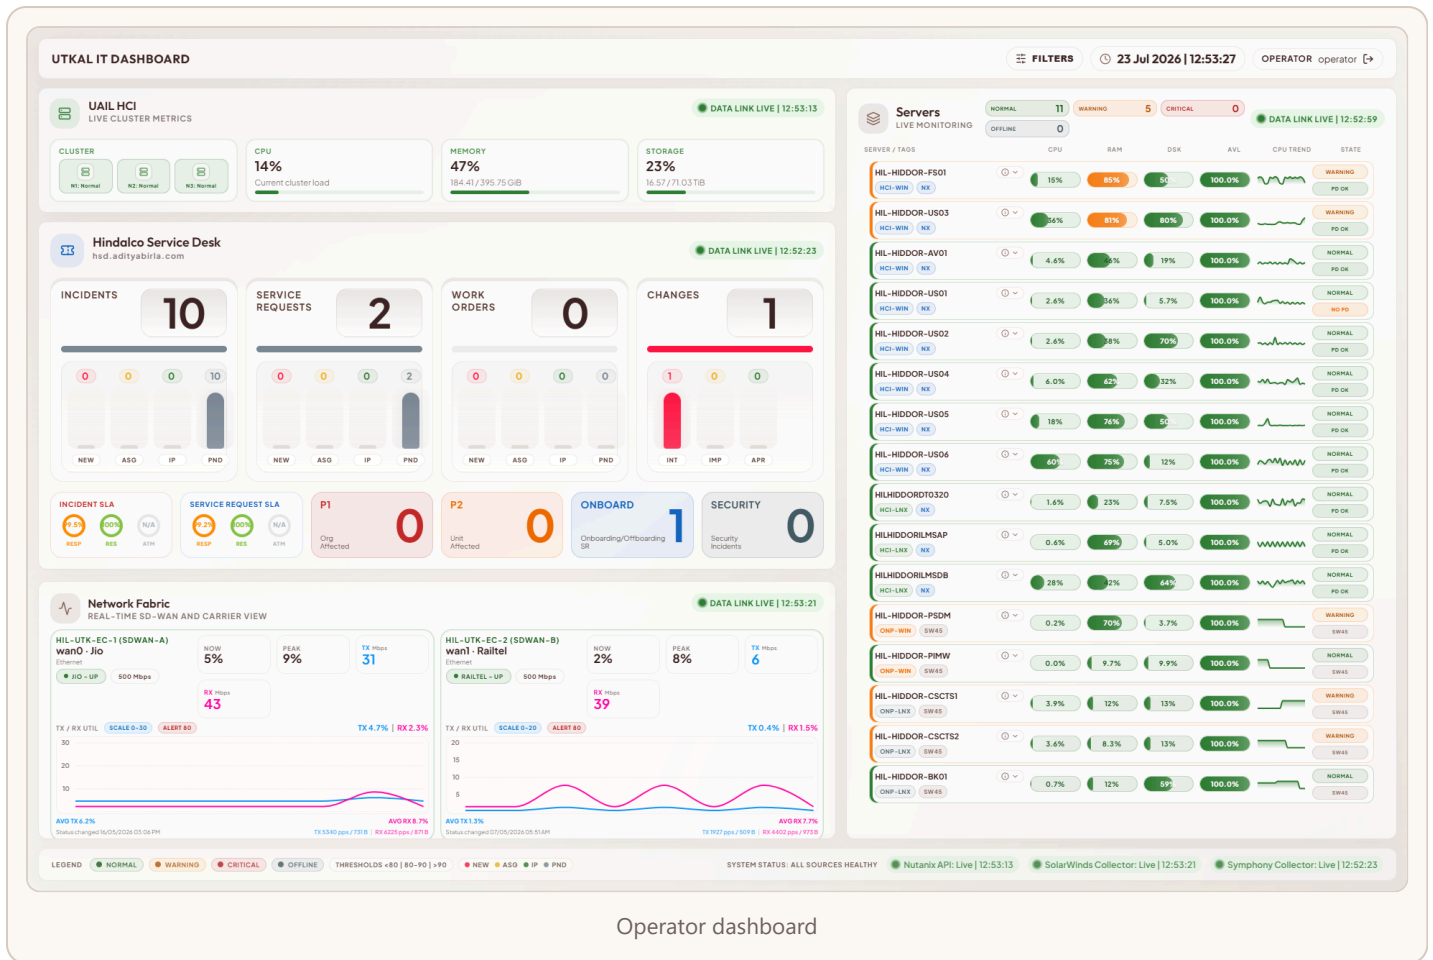

Operator dashboard

The operator dashboard is organized into four major domains:

- HCI cluster metrics
- HSD backlog and SLA metrics
- Network status and utilization
- Server fleet state

5. Reading The Dashboard

5.1 Data-Link Status

Each major card shows a concise data-link status.

State	Meaning
OK	the collector is updating normally
STALE	the last success is older than expected
ERROR	the collector attempted to refresh but failed
NEVER	the section has not yet received a successful sync

Important rule:

- if the data-link is stale or erroring, the displayed numbers are last-synced values, not guaranteed-live values

5.2 Color Language

- green: healthy
- amber: warning
- orange: elevated concern
- red: critical or about to miss
- slate/grey: offline or unavailable

5.3 HCI Section

Use HCI to see:

- cluster resource posture
- node health
- threshold-based utilization bars

5.4 HSD Section

Use HSD to see:

- open work item totals
- backlog mix across new, assigned, in progress, and pending
- SLA posture
- P1, P2, onboarding, and security work pressure

5.5 Network Section

Use Network to see:

- link state for carriers and SDWAN paths
- current Tx/Rx values
- sparkline history and utilization trend

5.6 Server Section

Use Servers to see:

- HCI VM versus on-prem grouping
- Windows versus Linux grouping
- normal, warning, critical, and offline posture
- fallback or source attribution where relevant

6. Filters

The operator surface supports filters for:

- visible sections
- server status
- server platform
- server OS
- server source
- network carrier and path
- HSD work types and special queues


Use filters when:

- you need to isolate one domain
- you want to hide noise for a focused operational view
- you want to inspect one class of servers or one class of tickets

7. Mobile And Portrait Use

On narrow screens the dashboard switches to a stacked responsive layout. This is intended for monitoring and quick review, not as a replacement for the primary wallboard display.

8. Admin Console

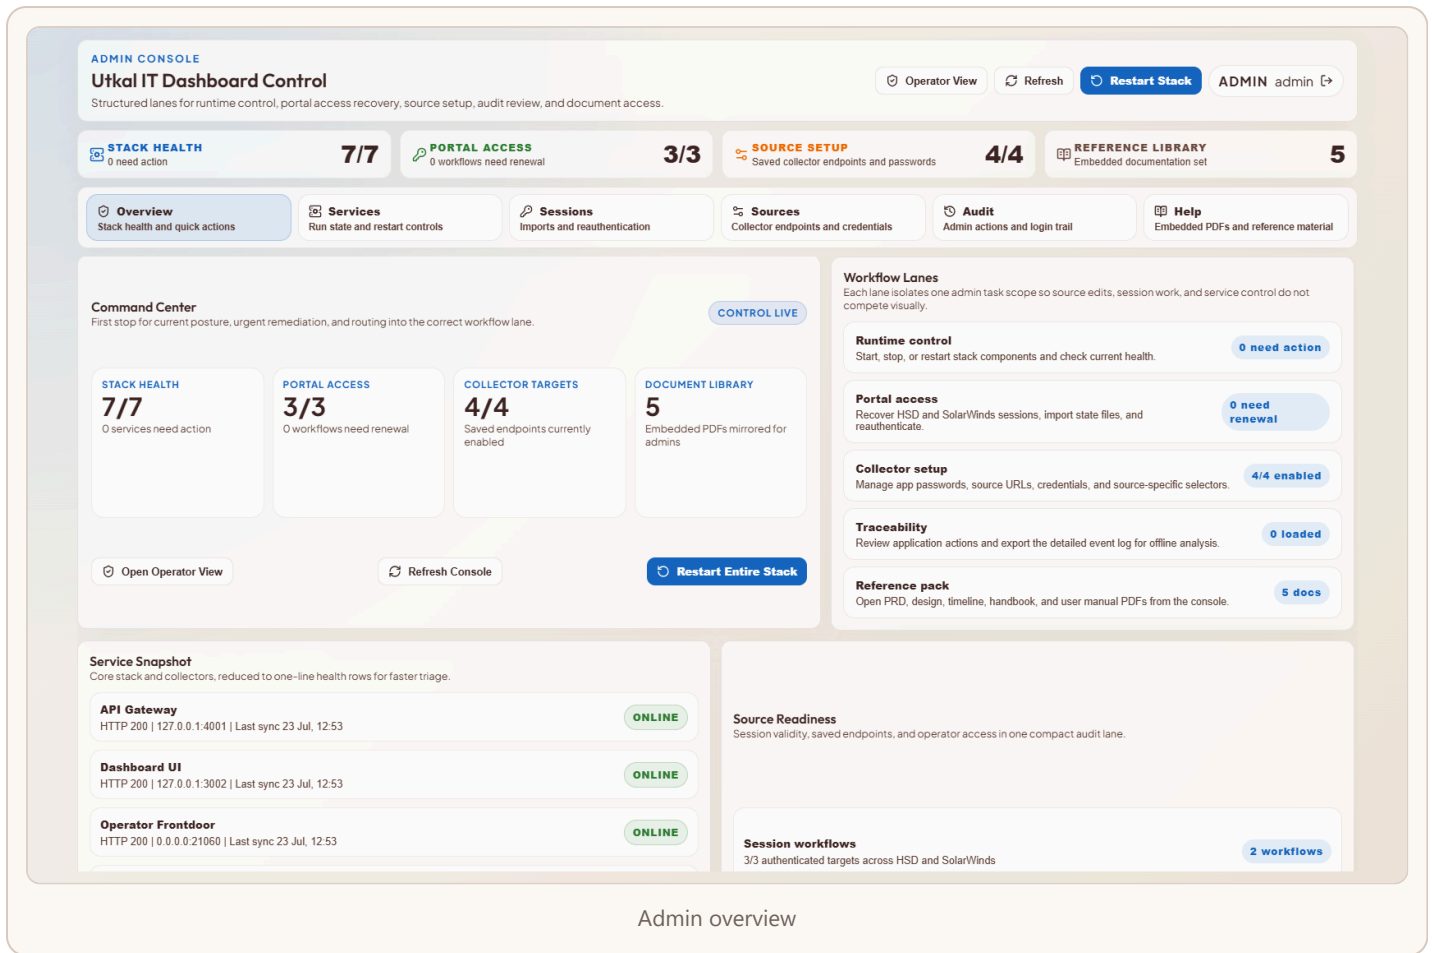

Admin overview

The admin console provides six workflow lanes:

- Overview
- Services
- Sessions
- Sources
- Audit
- Help

The top summary strip surfaces:

- stack health
- portal access readiness
- source setup state
- reference library access

9. Services Lane

Use **Services** to:

- inspect PM2-backed process health
- restart a single service
- restart the full stack when needed
- confirm health summaries and recent sync posture


Operational note:

- the deployed stack is intended to restore automatically on Windows startup
- service controls can be issued from the admin surface, but server-local reauthentication still requires an active interactive Windows session on the host

Use this tab first when:

- a card is stale
- a collector appears down
- the dashboard stops updating

10. Sessions Lane

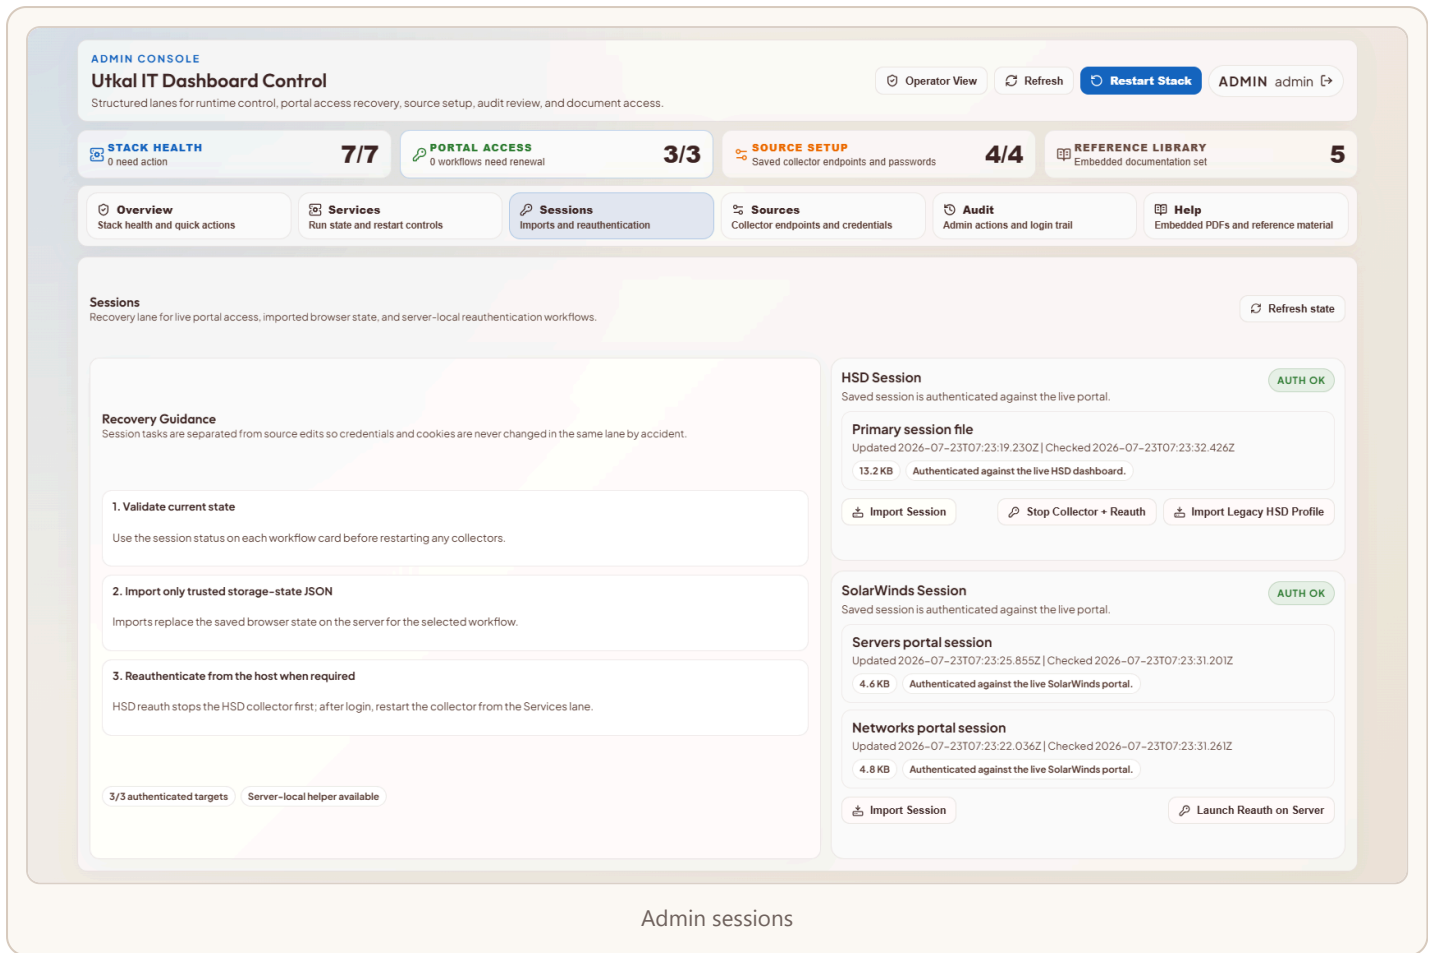

Use **Sessions** to validate whether HSD and SolarWinds session files are still accepted by the live portals.

Typical states:

- **AUTH OK**
- **EXPIRED**
- **UNREACHABLE**
- **MISSING**
- **INVALID**

Important:

- SolarWinds servers, SolarWinds networks, and HSD are maintained separately
- a session problem on one source does not imply the others are invalid

11. HSD Recovery

When HSD is expired:

1. Open the admin console on the server if possible.
2. Go to `Sessions` .
3. Use `Stop Collector + Reauth` .
4. This stops `symphony-collector` first and opens the HSD login helper on the server.
5. Complete the interactive login in Edge.
6. Return to the admin console, refresh session state, and restart `HSD Collector` from `Services` .

Use legacy profile import only when an older authenticated profile must be recovered deliberately.

12. SolarWinds Recovery

When SolarWinds session validation fails:

1. Open `Sessions` .
2. Launch the SolarWinds reauthentication helper.
3. Complete the login flow.
4. Refresh the session state and verify recovery.

13. Sources Lane

ADMIN CONSOLE
Utkal IT Dashboard Control
Structured lanes for runtime control, portal access recovery, source setup, audit review, and document access.

Operator View Refresh Restart Stack ADMIN admin

STACK HEALTH 0 need action **7/7** **PORTAL ACCESS** 0 workflows need renewal **3/3** **SOURCE SETUP** Saved collector endpoints and passwords **4/4** **REFERENCE LIBRARY** Embedded documentation set **5**

Overview Stack health and quick actions Services Run state and restart controls Sessions Imports and reauthentication Sources Collector endpoints and credentials Audit Admin actions and login trail Help Embedded PDFs and reference material

Source Configuration
Separated control areas for app access, endpoint configuration, and source-specific metadata. Save Sources

PASSWORD MODE
PG
Admin and operator login source

TARGETS ENABLED
4/4
Collectors currently active

SAVE DISCIPLINE
1
Edit endpoints here, then verify from Services or Sessions

Application Access
Admin-only lane for changing the web login passwords. Leave fields blank to keep the current values. Save Passwords

Mode Postgres primary Admin env Operator env Updated 23/7/2026, 12:53:30 pm Admin login 23/7/2026, 12:53:30 pm
Operator login 23/7/2026, 12:53:24 pm

Admin password **Confirm admin password** **Operator password** **Confirm operator password**
Leave blank to keep unchanged Repeat admin password Leave blank to keep unchanged Repeat operator password

Change passwords only when needed
Leave all fields blank to keep the current admin and operator credentials unchanged.

Separate app access from source credentials
These passwords control dashboard login only. Nutanix, SolarWinds, and HSD credentials stay in their own source cards.

Verify after saving
After saving, confirm authentication and collector behavior from the Services and Sessions lanes.

Collector endpoints
One card per source domain, with endpoint, credentials, polling cadence, and source-specific selectors. Save once after all changes

HSD / Symphony
Session-dependent service desk source and exact queue/workgroup mapping. ☒ Enabled
Confg: postgres|Secret: env

hsd.adityabirla.com Poll 60 s Tech-Unit IT

Target URL **Username** **Password**
https://hsd.adityabirla.com/M hil-dor.itdashboard@adityabi Leave blank to keep existing
Configured

Poll interval (seconds)
60

Notes
Bootstrap from env. Secrets remain env-backed.

Exact workgroup

Admin sources

Use **Sources** to manage:

- enable or disable state
- target URLs
- usernames and passwords
- poll intervals
- source-specific metadata such as monitored servers or network object IDs

Save source changes before expecting the new values to take effect.

Workflow note:

- keep password changes inside the **Application Access** lane
- keep collector endpoint edits inside the **Collector endpoints** lane
- verify source changes from **Services** or **Sessions**, not while editing

Credential model:

- Nutanix credentials are configured independently
- SolarWinds 45 and SolarWinds 46 credentials are configured independently
- HSD credentials are configured independently

14. Audit Lane

ADMIN CONSOLE

Utkal IT Dashboard Control

Structured lanes for runtime control, portal access recovery, source setup, audit review, and document access.

Operator View

Refresh

Restart Stack

ADMIN admin

STACK HEALTH

0 need action

7/7

PORTAL ACCESS

0 workflows need renewal

3/3

SOURCE SETUP

Saved collector endpoints and passwords

4/4

REFERENCE LIBRARY

Embedded documentation set

5

Overview

Stack health and quick actions

Services

Run state and restart controls

Sessions

Imports and reauthentication

Sources

Collector endpoints and credentials

Audit

Admin actions and login trail

Help

Embedded PDFs and reference material

Audit Trail

Screen view is intentionally compact: timestamp, action, result, and actor only. Use Excel export for the full detailed event payload.

Refresh audit

Export Excel

LOADED ROWS

50

Loaded 23/7/2026, 12:53:38 pm

SUCCESS

47

Completed actions

DENIED

0

Rejected attempts

FAILED

3

Errored operations

Action type

admin.settings.update

Result

All

Actor

admin

Surface

All

Row limit

50

Filtered rows stay minimal on screen; export includes source IP, target IDs, request summaries, and error payloads.

Reset filters

Apply filters

TIMESTAMP	ACTION	RESULT	WHO
23 Jul 2026, 12:53:30	auth.login admin	SUCCESS	admin admin
23 Jul 2026, 12:53:24	auth.login operator	SUCCESS	operator viewer
23 Jul 2026, 12:51:26	auth.login admin	SUCCESS	admin admin
23 Jul 2026, 12:51:20	auth.login operator	SUCCESS	operator viewer
23 Jul 2026, 12:49:17	auth.login admin	SUCCESS	admin admin
23 Jul 2026, 12:49:11	auth.login operator	SUCCESS	operator viewer

Admin audit


Use **Audit** to:

- filter recent application actions by actor, result, and surface
- review a concise on-screen table with timestamp, action, result, and actor
- export the detailed event log as an Excel-compatible file for offline analysis

Operational note:

- the on-screen table is intentionally compact for quick review
- the export includes deeper fields such as target IDs, source IPs, and serialized request/result summaries

15. Help Lane

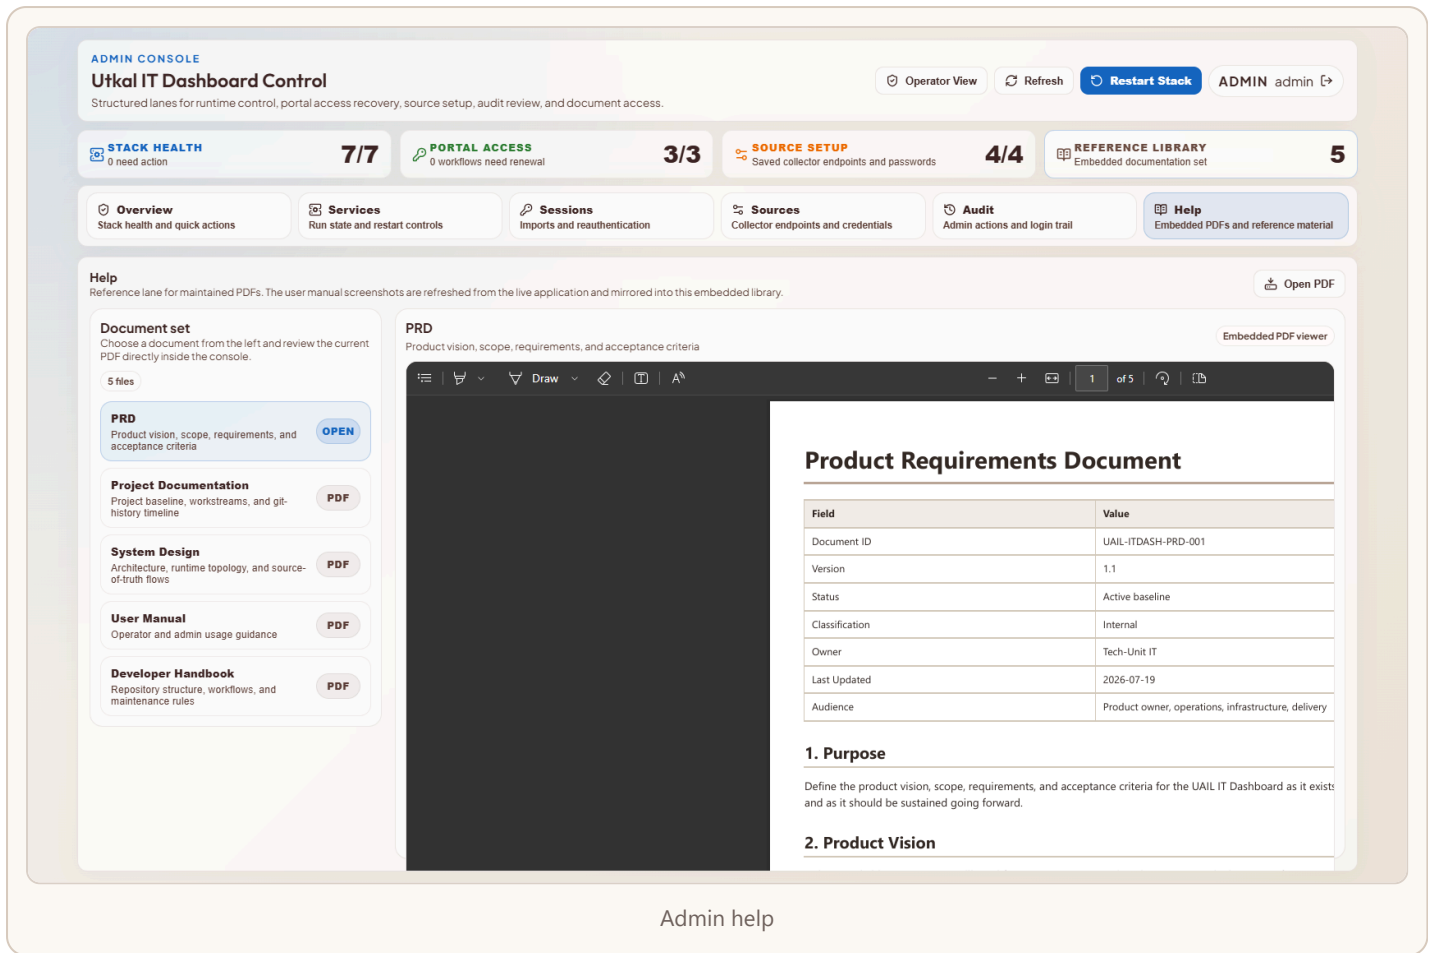

The **Help** tab exposes the maintained PDF documentation set directly inside the admin console.

Use it for:

- viewing the PRD
- reviewing project history and timeline
- checking system design details
- opening the user manual
- opening the developer handbook

16. Troubleshooting Guide

16.1 A Dashboard Card Looks Wrong

1. Check the card data-link status.
2. If stale or erroring, treat it as last-synced.
3. If healthy but abnormal, treat it as a live operational condition.
4. Escalate to admin review if needed.

16.2 A Collector Is Not Updating

1. Check `Services` .
2. Check `Sessions` .
3. Check `Sources` .
4. Restart the affected service only after confirming the probable cause.

16.3 Credentials Were Changed

1. Update the values in `Sources` .
2. Save changes.
3. Restart the affected collector if necessary.
4. Verify the next successful sync.

17. Operational Dos And Don'ts

Do:

- use the data-link state to judge freshness
- use filters to simplify the wallboard view
- use admin Help for the latest internal documentation

Do not:

- assume a visible number is live if the card is stale
- expose internal ports `3001` or `4000`
- use legacy HSD import as a normal daily path