

LAPORAN PRAKTIKUM

Aplikasi Berbasis Platform

MODUL 1 - 2

GIT & HTML



Disusun oleh:

MUHAMMAD RAFIFUL HANA

2311102227

S1 IF-11-04

Dosen Pengampu:

Cahyo Prihantoro, S.Kom., M.Eng.

PROGRAM STUDI S1 INFORMATIKA

FAKULTAS INFORMATIKA

UNIVERSITAS TELKOM PURWOKERTO

2025


DASAR TEORI

Git itu semacam sistem pengontrol versi yang dipakai buat ngatur perubahan di proyek perangkat lunak. Linus Torvalds yang bikin, lho. Jadi, setiap kali ada perubahan di file—entah dikerjain bareng-bareng atau sendirian—Git bakal nyatet semuanya. Bedanya sama sistem lain, Git ini modelnya terdistribusi. Artinya, database Git nggak cuma ada di satu tempat, tapi tersebar di banyak lokasi.

LATIHAN KELAS – GUIDED

1. Guided 1 (GIT)

Screenshot

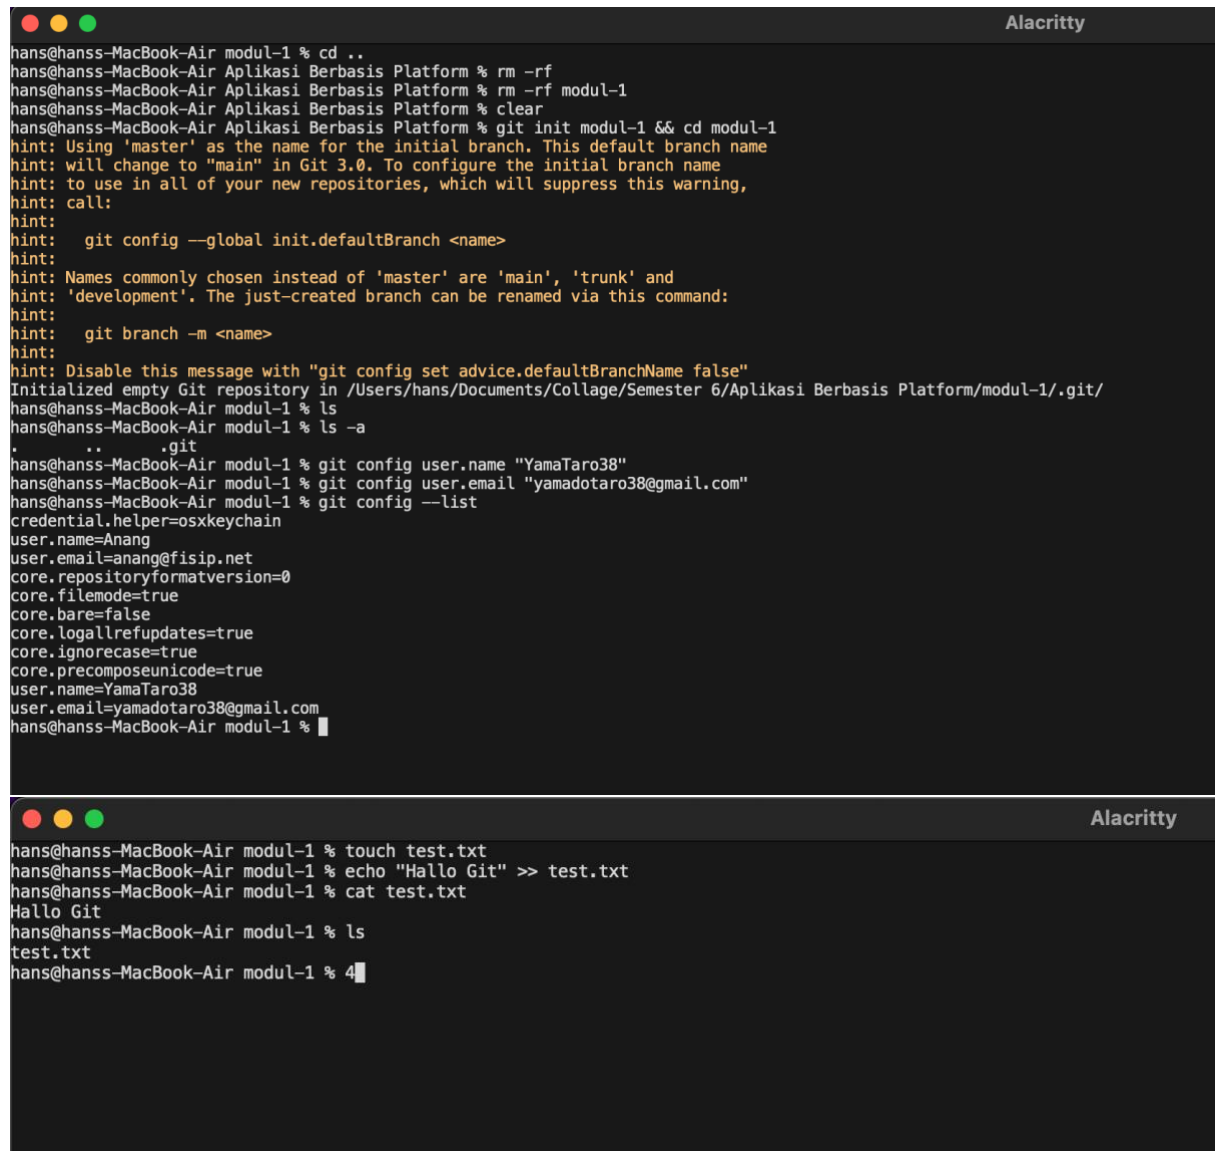

```
hans@hanss-MacBook-Air modul-1 % cd ..
hans@hanss-MacBook-Air Aplikasi Berbasis Platform % rm -rf
hans@hanss-MacBook-Air Aplikasi Berbasis Platform % rm -rf modul-1
hans@hanss-MacBook-Air Aplikasi Berbasis Platform % clear
hans@hanss-MacBook-Air Aplikasi Berbasis Platform % git init modul-1 && cd modul-1
hint: Using 'master' as the name for the initial branch. This default branch name
hint: will change to "main" in Git 3.0. To configure the initial branch name
hint: to use in all of your new repositories, which will suppress this warning,
hint: call:
hint:   git config --global init.defaultBranch <name>
hint: Names commonly chosen instead of 'master' are 'main', 'trunk' and
hint: 'development'. The just-created branch can be renamed via this command:
hint:   git branch -m <name>
hint: Disable this message with "git config set advice.defaultBranchName false"
Initialized empty Git repository in /Users/hans/Documents/Collage/Semester 6/Aplikasi Berbasis Platform/modul-1/.git/
hans@hanss-MacBook-Air modul-1 % ls
hans@hanss-MacBook-Air modul-1 % ls -a
.
..
.git
hans@hanss-MacBook-Air modul-1 % git config user.name "YamaTaro38"
hans@hanss-MacBook-Air modul-1 % git config user.email "yamadotaro38@gmail.com"
hans@hanss-MacBook-Air modul-1 % git config --list
credential.helper=osxkeychain
user.name=Anang
user.email=anang@fisip.net
core.repositoryformatversion=0
core.filemode=true
core.bare=false
core.logallrefupdates=true
core.ignorecase=true
core.precomposeunicode=true
user.name=YamaTaro38
user.email=yamadotaro38@gmail.com
hans@hanss-MacBook-Air modul-1 %
```

```
hans@hanss-MacBook-Air modul-1 % touch test.txt
hans@hanss-MacBook-Air modul-1 % echo "Hallo Git" >> test.txt
hans@hanss-MacBook-Air modul-1 % cat test.txt
Hallo Git
hans@hanss-MacBook-Air modul-1 % ls
test.txt
hans@hanss-MacBook-Air modul-1 % 4
```

https://github.com/new

New repository

Search Type to search

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1

General

Owner *

YamaTaro38

Repository name *

Webpro

Webpro is available.

Great repository names are short and memorable. How about [improved-invention?](#)

Description

0 / 350 characters

2

Configuration

Choose visibility *

Choose who can see and commit to this repository

Public

Add README

READMEs can be used as longer descriptions. [About READMEs](#)

Off

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

No .gitignore

Add license

Licenses explain how others can use your code. [About licenses](#)

No license

https://github.com/YamaTaro38/Webpro

YamaTaro38 / Webpro

Search Type to search

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

Webpro Public

Pin Watch 0 Fork 0 Star 0



Start coding with Codespaces

Add a README file and start coding in a secure, configurable, and dedicated development environment.

Create a codespace



Add collaborators to this repository

Search for people using their GitHub username or email address.

Invite collaborators


Quick setup — if you've done this kind of thing before

Set up in Desktop or HTTPS SSH git@github.com:YamaTaro38/Webpro.git

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# Webpro" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin git@github.com:YamaTaro38/Webpro.git
git push -u origin main
```

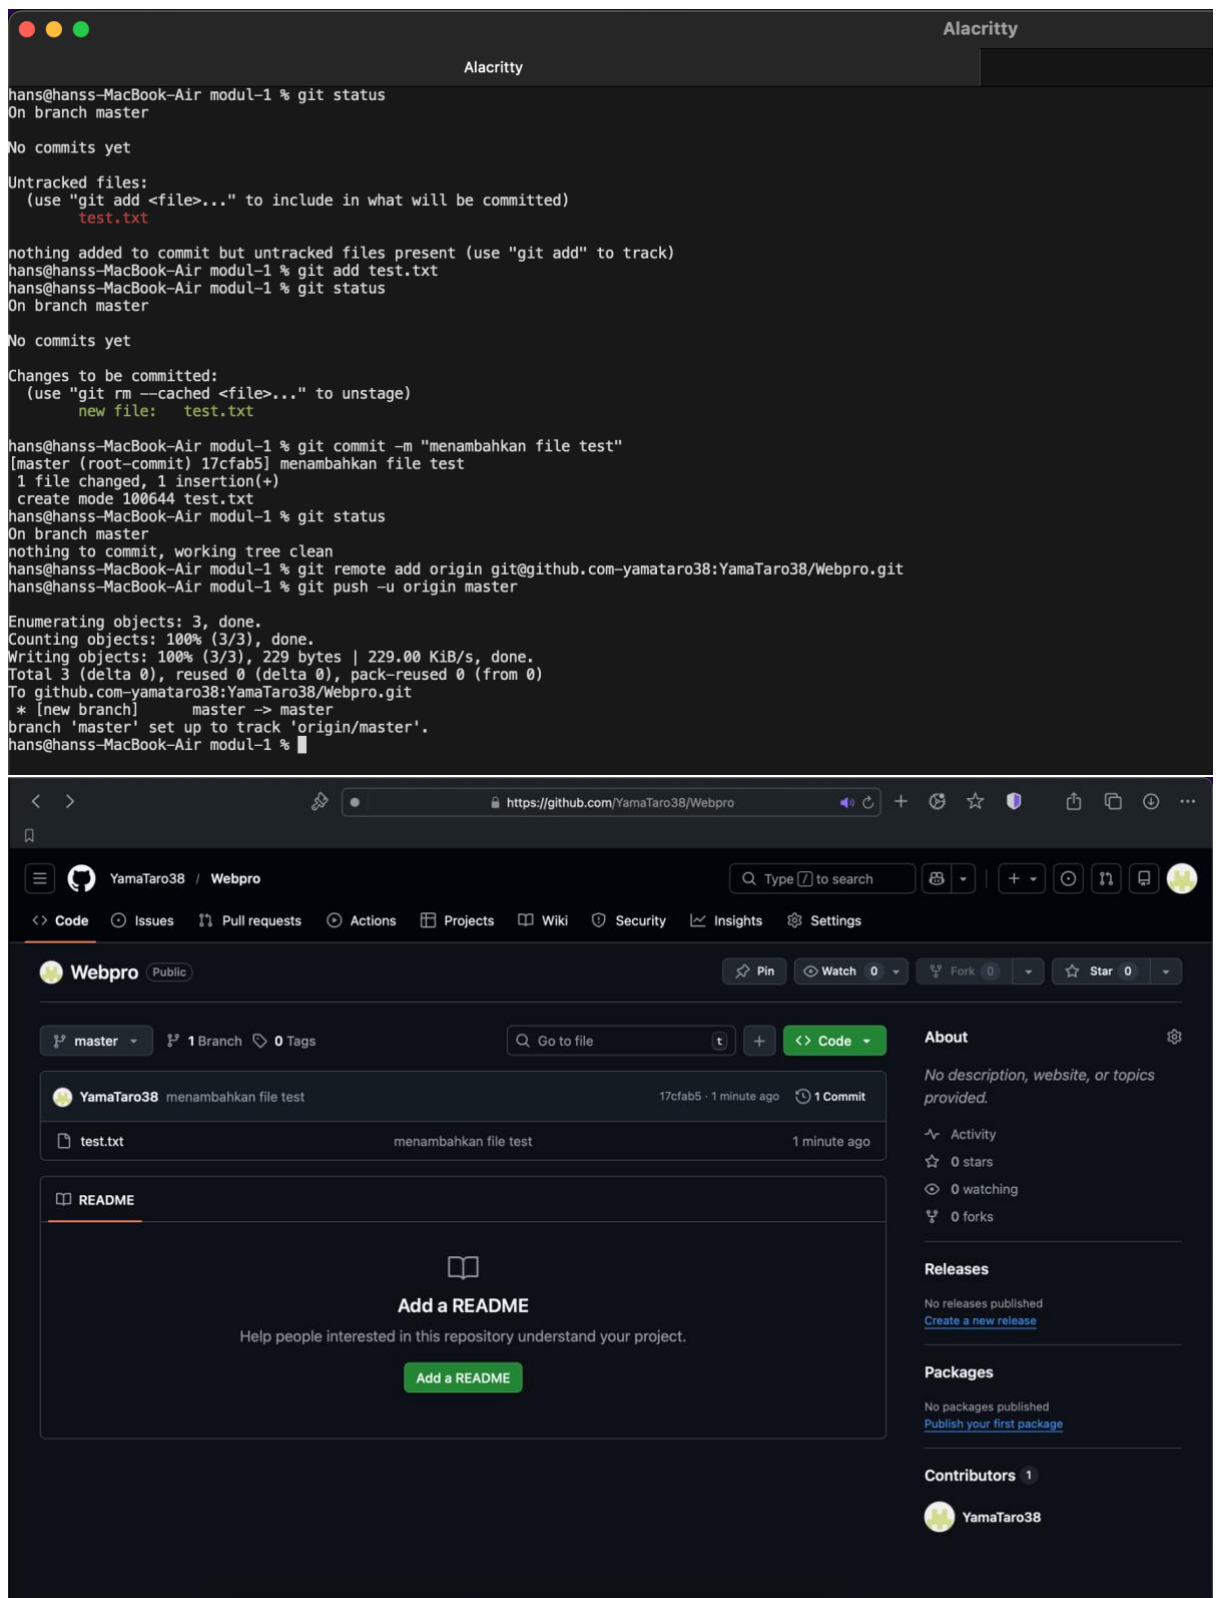

Deskripsi

Serangkaian gambar tersebut menunjukkan langkah-langkah saat pertama kali mengunggah proyek lokal ke GitHub. Semuanya dimulai dari membuat folder kerja

modul-1 lewat terminal, mengatur identitas Git, lalu bikin file test.txt sebagai isi awal proyek.

Setelah itu, kita bikin repository baru bernama "Webpro" di GitHub dan menghubungkannya ke komputer lokal dengan perintah git remote add. Terakhir, file masuk ke tahap staging, commit, lalu push. Hasilnya, file dari komputer langsung muncul dan tersimpan di halaman repository GitHub.

2. Guided 2 (HTML)

Source code (1)

```
<!DOCTYPE html>
<html>

<head>
  <!-- Contoh elemen berisi tag lain -->
  <title>Page Title</title>
</head> asdff

<body>
  <h1>My First Heading</h1>
  <!-- Contoh Elemen berisi Teks -->
  <p>My first paragraph.</p>
</body>
```

Source code (2)

```
<!DOCTYPE html>
<html lang="id">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <title>Formulir Pendaftaran Praktikan</title>
</head>

<body>
  <center>
    <h2>Formulir Pendaftaran Praktikan</h2>
    <form action="#" method="POST">
      <table>
        <tr>
          <td><label
for="nama_id"><b>Nama:</b></label></td>
          <td>:</td>
          <td><input type="text" name="nama_input"
id="nama_id" placeholder="Input Nama" value="Praktikan"
readonly></td>
        </tr>
        <tr>
          <td><label
for="uname_id"><b>Username:</b></label></td>
          <td>:</td>
          <td><input type="text" name="uname_input"
id="uname_id" placeholder="Input Username"
value="Praktikum" disabled></td>
```

```

        </tr>
        <tr>
            <td><label
for="password_id"><b>Password:</b></label></td>
            <td>:</td>
            <td><input type="password"
name="password_input" id="password_id" placeholder="Input
Password"></td>
        </tr>
        <tr>
            <td><label
for="email_id"><b>Email:</b></label></td>
            <td>:</td>
            <td><input type="email" name="email_input"
id="email_id" placeholder="Input Email"></td>
        </tr>
        <tr>
            <td><b>Jenis Kelamin:</b></td>
            <td>:</td>
            <td>
                <input type="radio" name="jk_input"
id="pria" value="Pria">
                <label for="pria">Pria</label>
                <input type="radio" name="jk_input"
id="wanita" value="Wanita">
                <label for="wanita">Wanita</label>
            </td>
        </tr>
        <tr>
            <td><b>Hobi:</b></td>
            <td>:</td>
            <td>
                <input type="checkbox" name="hobi_input"
id="renang" value="Renang">
                <label for="renang">Renang</label><br>
                <input type="checkbox" name="hobi_input"
id="bersepeda" value="Bersepeda">
                <label
for="bersepeda">Bersepeda</label><br>
                <input type="checkbox" name="hobi_input"
id="memancing" value="Memancing">
                <label for="memancing">Memancing</label>
            </td>
        </tr>
        <tr>
            <td><label for="jp_id"><b>Jenjang
Pendidikan:</b></label></td>
            <td>:</td>
            <td>
                <select name="jp_input" id="jp_id">
                    <option value="" selected>-----Pilih--
----</option>
                    <option value="D3">Tamat D3</option>
                    <option value="S1">Tamat S1</option>
                    <option value="S2">Tamat S2</option>
                    <option value="S3">Tamat S3</option>
                </select>
            </td>
        </tr>
    </tr>


```

```

        <td><label for="kritik_saran"><b>Kritik &
Saran:</b></label></td>
        <td></td>
        <td><textarea id="kritik_saran"
name="kritik_saran" rows="5" cols="30"></textarea></td>
    </tr>
    <tr>
        <td colspan="3" align="right">
            <input type="button" value="Cancel"
class="btn-cancel">
            <input type="submit" value="Submit"
class="btn-submit">
        </td>
    </tr>
</table>
</form>
</center>
</body>
</html>

```

Screenshoot hasil



My First Heading

My first paragraph.

 A screenshot of a web browser window displaying a registration form titled "Formulir Pendaftaran Praktikan". The form includes the following fields:

- Nama:** Input field with "Praktikan" entered.
- Username:** Input field with "Praktikum" entered.
- Password:** Input field with "Input Password" entered.
- Email:** Input field with "Input Email" entered.
- Jenis Kelamin:** Radio buttons for "Pria" (selected) and "Wanita".
- Hobi:** Checkboxes for "Renang", "Bersepeda", and "Memancing".
- Jenjang Pendidikan:** Dropdown menu with "PBB" selected.
- Kritik & Saran:** Textarea for feedback.

 At the bottom right of the form are "Cancel" and "Submit" buttons.

Deskripsi program

Gambar pertama menunjukkan halaman web sederhana. Ada judul utama pakai elemen heading `<h1>`, terus di bawahnya ada deskripsi singkat di elemen paragraf `<p>`.

Gambar kedua menampilkan formulir pendaftaran yang interaktif. Di situ, ada berbagai jenis input: kolom teks buat nama, kolom sandi, pilihan jenis kelamin dengan radio button, checkbox buat hobi, dropdown untuk memilih opsi, dan textarea khusus buat kritik dan saran.