

LAPORAN PRAKTIKUM

Aplikasi Berbasis Platform

MODUL 2

GIT



Disusun oleh:

SITI MADINA HALIM SIREGAR

2311102243

S1 IF-11-04

Dosen Pengampu:

Cahyo Prihantoro S.Kom., M.Eng.

PROGRAM STUDI S1 INFORMATIKA

FAKULTAS INFORMATIKA

TELKOM UNIVERSITY PURWOKERTO

2025/2026

DASAR TEORI

Git adalah sebuah sistem kontrol versi (Version Control System) yang digunakan untuk melacak dan mengelola perubahan pada file atau kode dalam suatu proyek, terutama dalam pengembangan perangkat lunak. Git memungkinkan pengembang untuk menyimpan riwayat perubahan sehingga setiap versi dari kode dapat dilihat kembali atau dikembalikan jika terjadi kesalahan. Selain itu, Git juga memudahkan kerja sama dalam tim karena beberapa orang dapat bekerja pada proyek yang sama secara bersamaan tanpa saling menimpa pekerjaan. Dalam penggunaannya, Git sering dikombinasikan dengan layanan penyimpanan repository online seperti GitHub, GitLab, atau Bitbucket untuk menyimpan dan membagikan kode secara online. Dengan demikian, Git menjadi salah satu alat penting yang membantu pengembang dalam mengelola versi kode secara efisien dan terstruktur.

LATIHAN KELAS – GUIDED

1. Instalasi GIT

- Sudah di lakukan instalasi

```
C:\Users\ASUS Vivobook>git --version
git version 2.51.0.windows.1

C:\Users\ASUS Vivobook>|
```

- git config --global user.name "Nama Anda" git config --global user.email

```
C:\Users\ASUS Vivobook>git config --global user.name "Siti Madina Halim"
C:\Users\ASUS Vivobook>git config --global user.email "smadinahalim@gmail.com"

C:\Users\ASUS Vivobook>git config --list
diff.astextplain.textconv=astextplain
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
http.sslbackend=schannel
core.autocrlf=true
core.fscache=true
core.symlinks=false
pull.rebase=false
credential.helper=manager
credential.https://dev.azure.com.usehttppath=true
init.defaultbranch=master
user.name=Siti Madina Halim
user.email=smadinahalim@gmail.com
```

- membuat repositori baru " git init modul-1"

```
PS D:\ドキュメント\SEMESTER 6\praktikum abp> git init modul-1
Initialized empty Git repository in D:/ドキュメント/SEMESTER 6/praktikum abp/modul-1/.git/
PS D:\ドキュメント\SEMESTER 6\praktikum abp> |
```

- menambahkan isi repositori

```
PS D:\ドキュメント\SEMESTER 6\praktikum abp\modul-1> New-Item test.txt

Directory: D:\ドキュメント\SEMESTER 6\praktikum abp\modul-1


Mode                LastWriteTime         Length Name
----                -
-a-----          3/7/2026  12:53 PM             0 test.txt

PS D:\ドキュメント\SEMESTER 6\praktikum abp\modul-1> git add test.txt
PS D:\ドキュメント\SEMESTER 6\praktikum abp\modul-1> git commit -m "menambahkan file test"
[master (root-commit) 08c65ce] menambahkan file test
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 test.txt
PS D:\ドキュメント\SEMESTER 6\praktikum abp\modul-1>
```

Name	Date modified	Type	Size
 test.txt	07/03/2026 12:53	Text Document	0 KB

- membuat repositori online

login link berikut ini. <https://github.com/new>

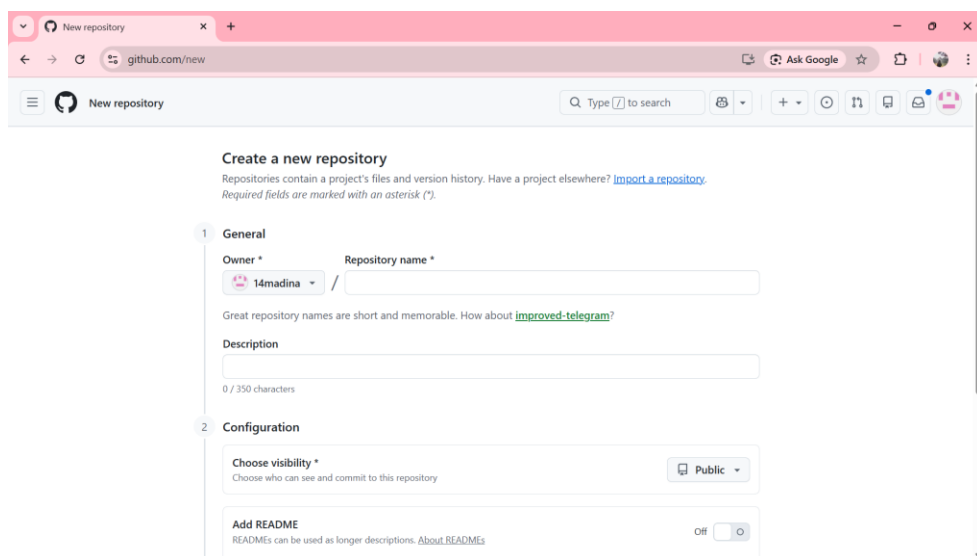

Isi detail dari repository kemudian klik create

New repository

github.com/new

1 General

Owner * 14madina

Repository name * Webpro

Webpro is available.

Great repository names are short and memorable. How about [improved-telegram](#)?

Description

belajar membuat repository

26 / 350 characters

2 Configuration

Choose visibility * Public

Choose who can see and commit to this repository

Add README

READMEs can be used as longer descriptions. [About READMEs](#)

Off

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

No .gitignore

Add license

Licenses explain how others can use your code. [About licenses](#)

No license

Create repository

14madina/Webpro

github.com/14madina/Webpro

Get started with GitHub Copilot

Invite collaborators

Quick setup — if you've done this kind of thing before

Set up in Desktop or HTTPS SSH <https://github.com/14madina/webpro.git>

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# Webpro" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/14madina/Webpro.git
git push -u origin main
```


...or push an existing repository from the command line

```
git remote add origin https://github.com/14madina/Webpro.git
git branch -M main
git push -u origin main
```

- menyimpan hasil pekerjaan di repositori online

<https://github.com/14madina/Webpro.git>

```
PS D:\ドキュメント\SEMESTER 6\praktikum abp\modul-1> git remote set-url origin https://github.com/14madina/Webpro.git
PS D:\ドキュメント\SEMESTER 6\praktikum abp\modul-1> git push -u origin master
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 223 bytes | 74.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/14madina/Webpro.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.
PS D:\ドキュメント\SEMESTER 6\praktikum abp\modul-1>
```

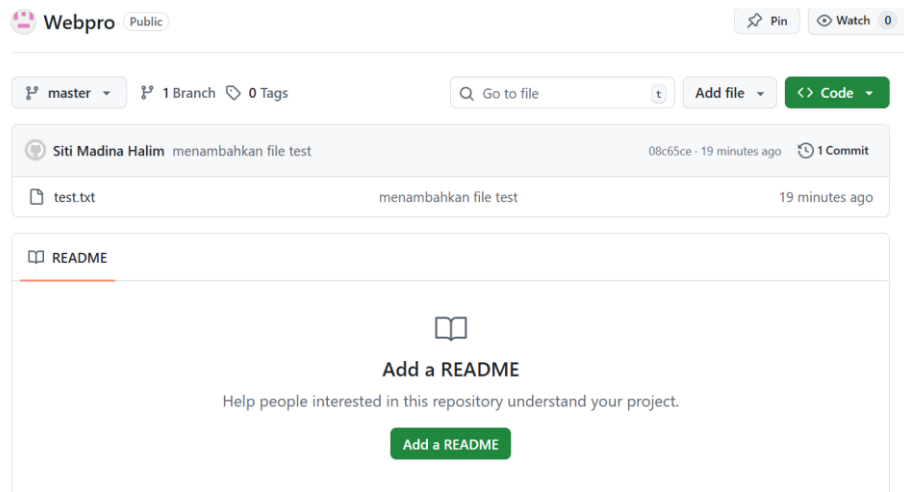

- clone repositori milik orang lain

Buka repositori yang akan di-clone pada Github, lalu klik tombol clone.

`git clone https://github.com/14madina/Webpro.git`

```
PS D:\ドキュメント\SEMESTER 6\praktikum abp\modul-1> git clone https://github.com/14madina/Webpro.git
Cloning into 'Webpro'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 3 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.
PS D:\ドキュメント\SEMESTER 6\praktikum abp\modul-1>
```