

# **LAPORAN PRAKTIKUM**

**Aplikasi Berbasis Platform**

## **MODUL 7**



**Disusun oleh:**

**NAUFAL GERALDO PUTRA P.**

**2311102154**

**S1 IF-11-04**

**Dosen Pengampu:**

**Cahyo Prihantoro, S.Kom., M.Eng**

**PROGRAM STUDI S1 INFORMATIKA**

**FAKULTAS INFORMATIKA**

**INSTITUT TEKNOLOGI TELKOM PURWOKERTO**

**2026/2027**

LINK GITHUB PRIBADI: <https://github.com/NGZ101/Praktikum-APB>

LINK GITHUB KELAS: <https://github.com/Aplikasi-Berbasis-Platform-SIIF-11-04/Pertemuan-11-Mobile.git>

Soal

Untuk tugas sendiri kalian baca aja modul 7 , dan buat route qtau navigasi dari sources code yang di kasih kemaren ( 6 sampai 7 halaman) , terus tambahkan notifikasi. Untuk bentuk notifikasinya bebas, bisa pas perpindahan halamannya atau pas masukan datanya

Jawaban

### 1. Code Main

Berikut code yang mengontrol navigation bar dan notification.

```
import 'package:flutter/material.dart';
import 'screens/button.dart';
import 'screens/container.dart';
import 'screens/flutter1.dart';
import 'screens/rowdancollom.dart';
import 'screens/tessting.dart';
import 'screens/textfield.dart';

void main() {
  runApp(const MyApp());
}

class MyApp extends StatelessWidget {
  const MyApp({super.key});

  // This widget is the root of your application.
  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      debugShowCheckedModeBanner: false,
      title: 'Flutter Demo',
      theme: ThemeData(colorScheme: .fromSeed(seedColor:
Colors.blue)),
      home: const MyHomePage(title: 'Modul 7 - Pertemuan 12'),
    );
  }
}

class MyHomePage extends StatefulWidget {
  const MyHomePage({super.key, required this.title});
  final String title;

  @override
  State<MyHomePage> createState() => _MyHomePageState();
}
```

```

class _MyHomePageState extends State<MyHomePage> {
  int _indexNow = 0;
  void _onItemTapped(int index) {
    setState(() {
      _indexNow = index;
    });

    final List<String> labels = [
      'Button',
      'Container',
      'My App',
      'Row Dan Column',
      'Testing',
      'Textfield',
    ];

    ScaffoldMessenger.of(context).clearSnackBars();
    ScaffoldMessenger.of(context).showSnackBar(
      SnackBar(
        content: Text('Berhasil ke halaman ${labels[index]}'),
        backgroundColor: Colors.green,
        duration: const Duration(
          milliseconds: 800,
        ),
      ),
    );
  }

  @override
  Widget build(BuildContext context) {
    final List<Widget> screens = [
      Button1(),
      Container1(),
      Myapp1(),
      Rowdancollom1(),
      Tessting1(),
      Textfield1(),
    ];
    return Scaffold(
      appBar: AppBar(
        backgroundColor: Theme.of(context).colorScheme.inversePrimary,
        title: Text(widget.title),
      ),
      body: screens[_indexNow],
      bottomNavigationBar: BottomNavigationBar(
        currentIndex: _indexNow,
        onTap: _onItemTapped,
      ),
    );
  }
}

```

```

        type: BottomNavigationBarType.fixed,
        items: const [
          BottomNavigationBarItem(
            icon: Icon(Icons.smart_button),
            label: 'Button',
          ),
          BottomNavigationBarItem(icon: Icon(Icons.square), label:
'Container'),
          BottomNavigationBarItem(
            icon: Icon(Icons.app_shortcut_outlined),
            label: 'My App',
          ),
          BottomNavigationBarItem(
            icon: Icon(Icons.grid_3x3),
            label: 'Row Dan Collumn',
          ),
          BottomNavigationBarItem(
            icon: Icon(Icons.developer_mode),
            label: 'Testing',
          ),
          BottomNavigationBarItem(
            icon: Icon(Icons.text_fields),
            label: 'Textfield',
          ),
        ],
      ),
    );
  }
}

```

## 2. Code button.dart

Berikut adalah halaman berisi tombol dengan text “login”.

```

import 'package:flutter/material.dart';

class Button1 extends StatelessWidget {
  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      debugShowCheckedModeBanner: false,
      home: Scaffold(
        appBar: AppBar(title: Text("ini aplikasi saya ")),
        body: Center(child:
          OutlinedButton(
            onPressed: (){
              print("button di tekan ");
            },
            style: OutlinedButton.styleFrom(


```

```

        backgroundColor: Colors.amberAccent
      ),
      child: new Text("login")
    ),),
  ),
);
}
}

```

**Berikut Hasil Navigasi dan Notifikasi:**

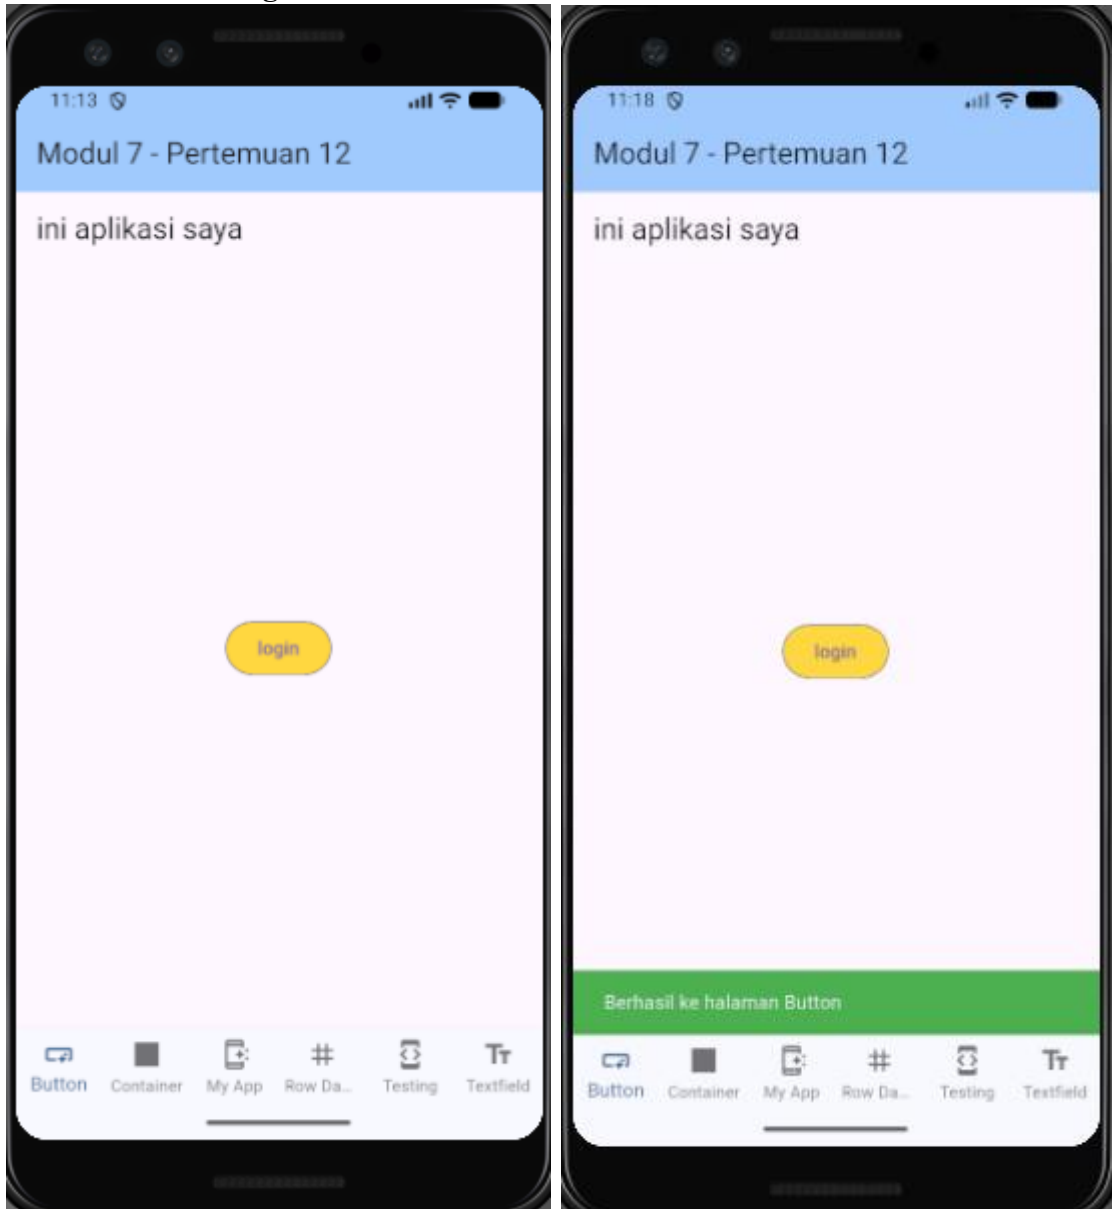

### 3. Code Container.dart

Berikut adalah halaman berisi container berwarna merah dengan border bawah dan kiri berwarna black12 serta border kanan berwarna deepPurpleAccent yang memiliki teks “belajar container”.

```

import 'package:flutter/material.dart';

```


```

class Container1 extends StatelessWidget {
  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      debugShowCheckedModeBanner: false,
      home: Scaffold(
        appBar: AppBar(title: Text("ini aplikasi saya ")) ,
        body: Container(
          padding: EdgeInsets.symmetric(vertical: 20, horizontal: 30),
          decoration: BoxDecoration(
            color: Colors.red,
            border: Border(
              bottom: BorderSide(width: 3,color: Colors.black12),
              left: BorderSide(width: 3,color: Colors.black12),
              right: BorderSide(width: 3, color:
Colors.deepPurpleAccent),
              top: BorderSide(width: 3, color: Colors.teal)

            )
          ),
          child: Center(child: Text("belajar container"),),
          //height: 200,
          //width: 200,
          width: double.infinity,
          height: 100,
        ),
      ),
    );
  }
}

```

**Berikut Hasil Navigasi dan Notifikasi:**

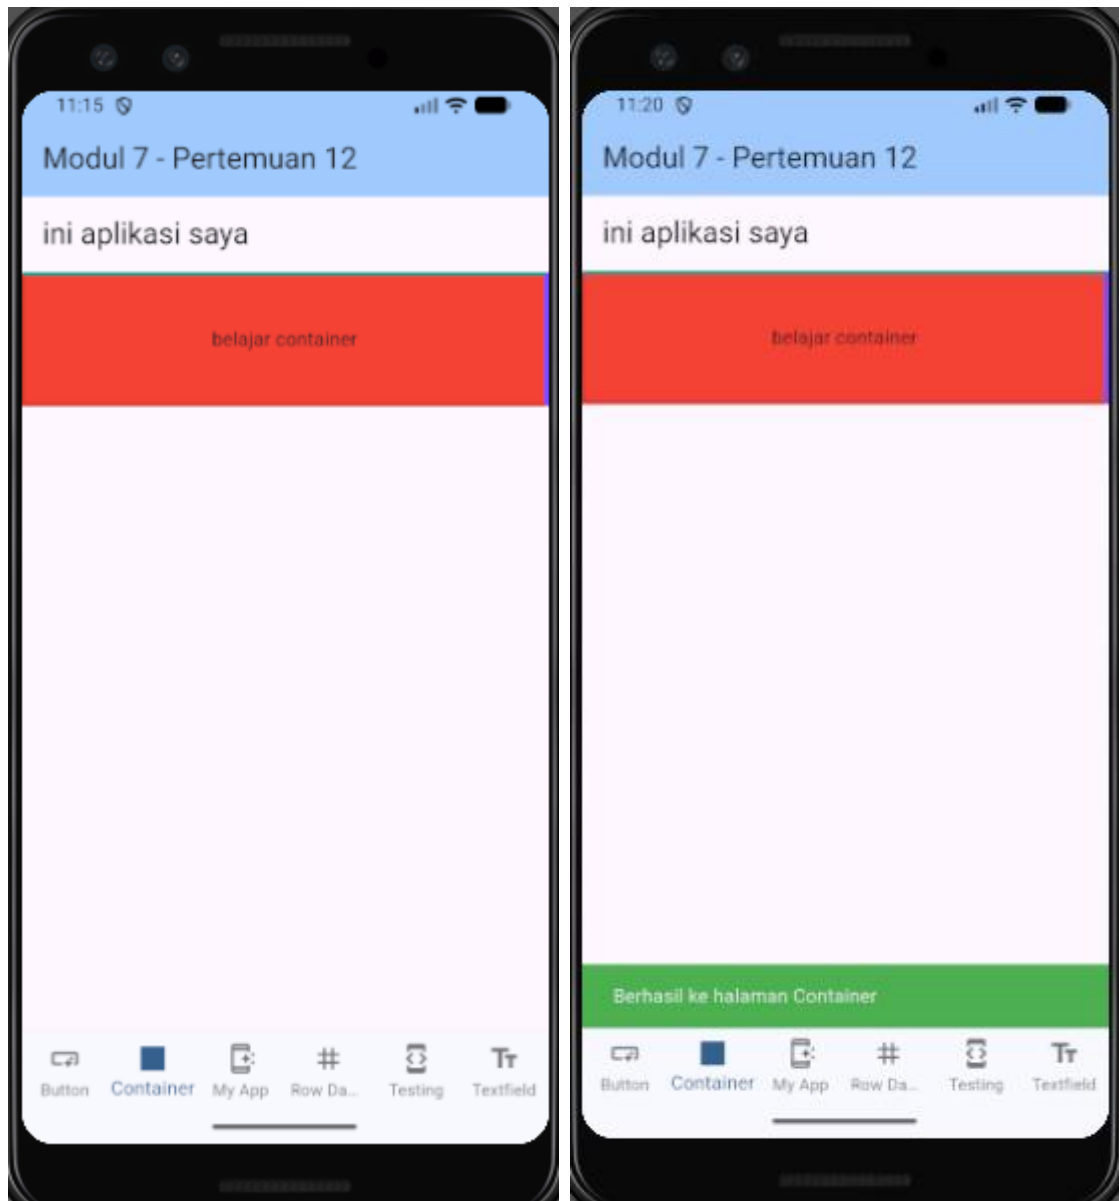

#### 4. Code Flutter1.dart


Berikut adalah halaman berisi title: “ini aplikasi saya” dan body: “ini data saya”.

```
import 'package:flutter/material.dart';

class MyApp1 extends StatelessWidget {
  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      debugShowCheckedModeBanner: false,
      home: Scaffold(
        appBar: AppBar(title: Text("ini aplikasi saya ")),
        body: Text("ini data saya "),
      ),
    );
  }
}
```

```
}
```

Berikut Hasil Navigasi dan Notifikasi:

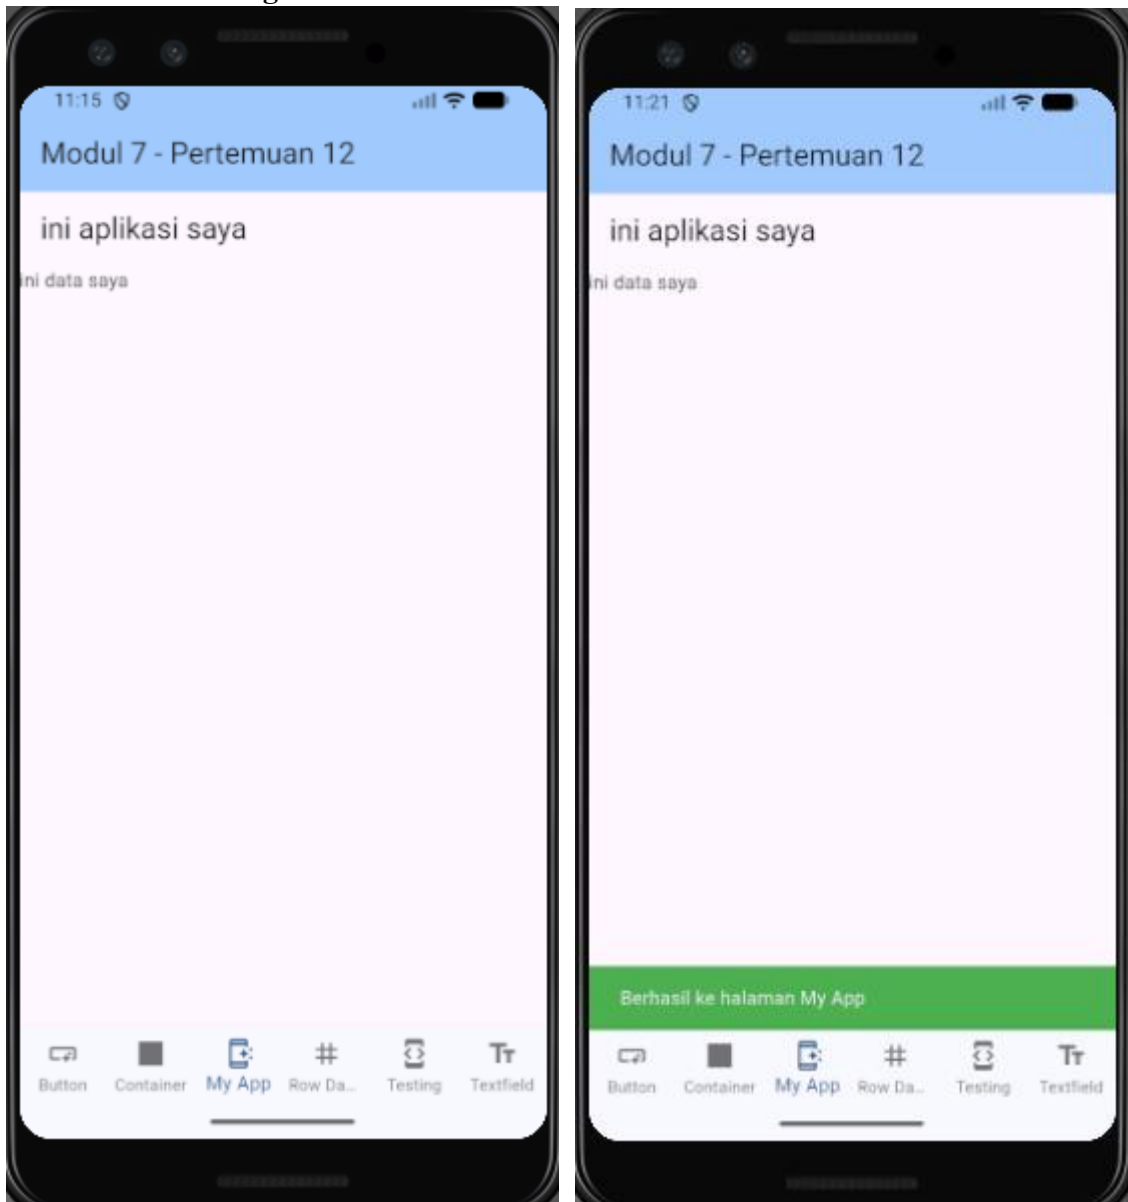

##### 5. Code Rowdancollom.dart

Berikut adalah halaman berisi 2 text field untuk login, satu untuk memasukkan username dan satu untuk memasukkan password yang menyembunyikan input user serta Elevated Button dengan text: “data”.

```
import 'package:flutter/material.dart';

class Rowdancollom1 extends StatelessWidget {
  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      debugShowCheckedModeBanner: false,
      home: Scaffold(
        appBar: AppBar(title:
```

```


        Text("login ")) ,
body: Column(
  children: [
    Text("FROM LOGIN"),
    Padding(
      padding: EdgeInsets.all(20) ,
      child: TextField( decoration: InputDecoration(
        border: OutlineInputBorder(),
        hintText: "silahkan masukan username"
      )),
    ),
    Padding(
      padding: EdgeInsets.all(20) ,
      child: TextField(
        obscureText: true,
        decoration: InputDecoration(
          border: OutlineInputBorder(),
          hintText: "silahkan masukan password"
        )),
    ),

    ElevatedButton(onPressed: (){} ,child: Text("data")),

  ],
),
),
);
}
}

```

**Berikut Hasil Navigasi dan Notifikasi:**

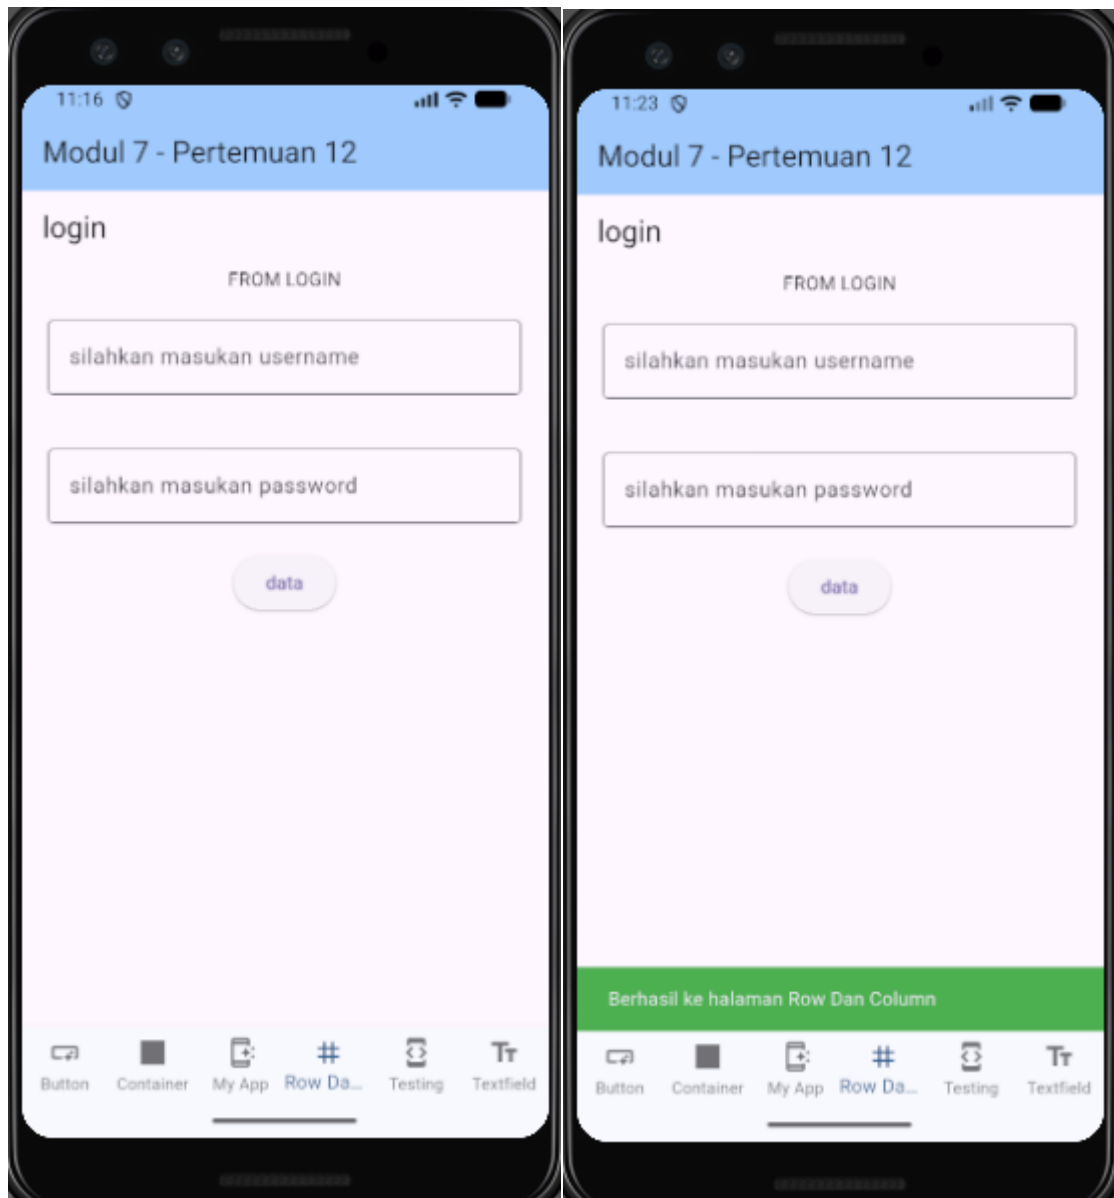

## 6. Code Tessting.dart

Berikut adalah halaman berisi code aplikasi default flutter.

```
import 'package:flutter/material.dart';

class Tessting1 extends StatelessWidget {
  const Tessting1({super.key});

  // This widget is the root of your application.
  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      title: 'Flutter Demo',
      theme: ThemeData(
        // This is the theme of your application.
        //
```

```

        // TRY THIS: Try running your application with "flutter run".
        You'll see
        // the application has a purple toolbar. Then, without
        quitting the app,
        // try changing the seedColor in the colorScheme below to
        Colors.green
        // and then invoke "hot reload" (save your changes or press
        the "hot
        // reload" button in a Flutter-supported IDE, or press "r" if
        you used
        // the command line to start the app).
        //
        // Notice that the counter didn't reset back to zero; the
        application
        // state is not lost during the reload. To reset the state,
        use hot
        // restart instead.
        //
        // This works for code too, not just values: Most code
        changes can be
        // tested with just a hot reload.
        colorScheme: .fromSeed(seedColor: Colors.deepPurple),
    ),
    home: const MyHomePage(title: 'Flutter Demo Home Page'),
  );
}
}

class MyHomePage extends StatefulWidget {
  const MyHomePage({super.key, required this.title});

  // This widget is the home page of your application. It is
  stateful, meaning
  // that it has a State object (defined below) that contains fields
  that affect
  // how it looks.

  // This class is the configuration for the state. It holds the
  values (in this
  // case the title) provided by the parent (in this case the App
  widget) and
  // used by the build method of the State. Fields in a Widget
  subclass are
  // always marked "final".

  final String title;

  @override

```

```

    State<MyHomePage> createState() => _MyHomePageState();
}

class _MyHomePageState extends State<MyHomePage> {
    int _counter = 0;

    void _incrementCounter() {
        setState(() {
            // This call to setState tells the Flutter framework that
            something has
            // changed in this State, which causes it to rerun the build
            method below
            // so that the display can reflect the updated values. If we
            changed
            // _counter without calling setState(), then the build method
            would not be
            // called again, and so nothing would appear to happen.
            _counter++;
        });
    }

    @override
    Widget build(BuildContext context) {
        // This method is rerun every time setState is called, for
        instance as done
        // by the _incrementCounter method above.
        //
        // The Flutter framework has been optimized to make rerunning
        build methods
        // fast, so that you can just rebuild anything that needs
        updating rather
        // than having to individually change instances of widgets.
        return Scaffold(
            appBar: AppBar(
                // TRY THIS: Try changing the color here to a specific color
                (to
                // Colors.amber, perhaps?) and trigger a hot reload to see
                the AppBar
                // change color while the other colors stay the same.
                backgroundColor:
                Theme.of(context).colorScheme.inversePrimary,
                // Here we take the value from the MyHomePage object that was
                created by
                // the App.build method, and use it to set our appBar title.
                title: Text(widget.title),
            ),
            body: Center(


```

```

        // Center is a layout widget. It takes a single child and
positions it
        // in the middle of the parent.
        child: Column(
            // Column is also a layout widget. It takes a list of
children and
            // arranges them vertically. By default, it sizes itself to
fit its
            // children horizontally, and tries to be as tall as its
parent.
            //
            // Column has various properties to control how it sizes
itself and
            // how it positions its children. Here we use
mainAxisAlignment to
            // center the children vertically; the main axis here is
the vertical
            // axis because Columns are vertical (the cross axis would
be
            // horizontal).
            //
            // TRY THIS: Invoke "debug painting" (choose the "Toggle
Debug Paint"
            // action in the IDE, or press "p" in the console), to see
the
            // wireframe for each widget.
            mainAxisAlignment: .center,
            children: [
                const Text('You have pushed the button this many
times:'),
                Text(
                    '$_counter',
                    style: Theme.of(context).textTheme.headlineMedium,
                ),
            ],
        ),
    ),
    floatingActionButton: FloatingActionButton(
        onPressed: _incrementCounter,
        tooltip: 'Increment',
        child: const Icon(Icons.add),
    ),
);
}
}

```

**Berikut Hasil Navigasi dan Notifikasi:**

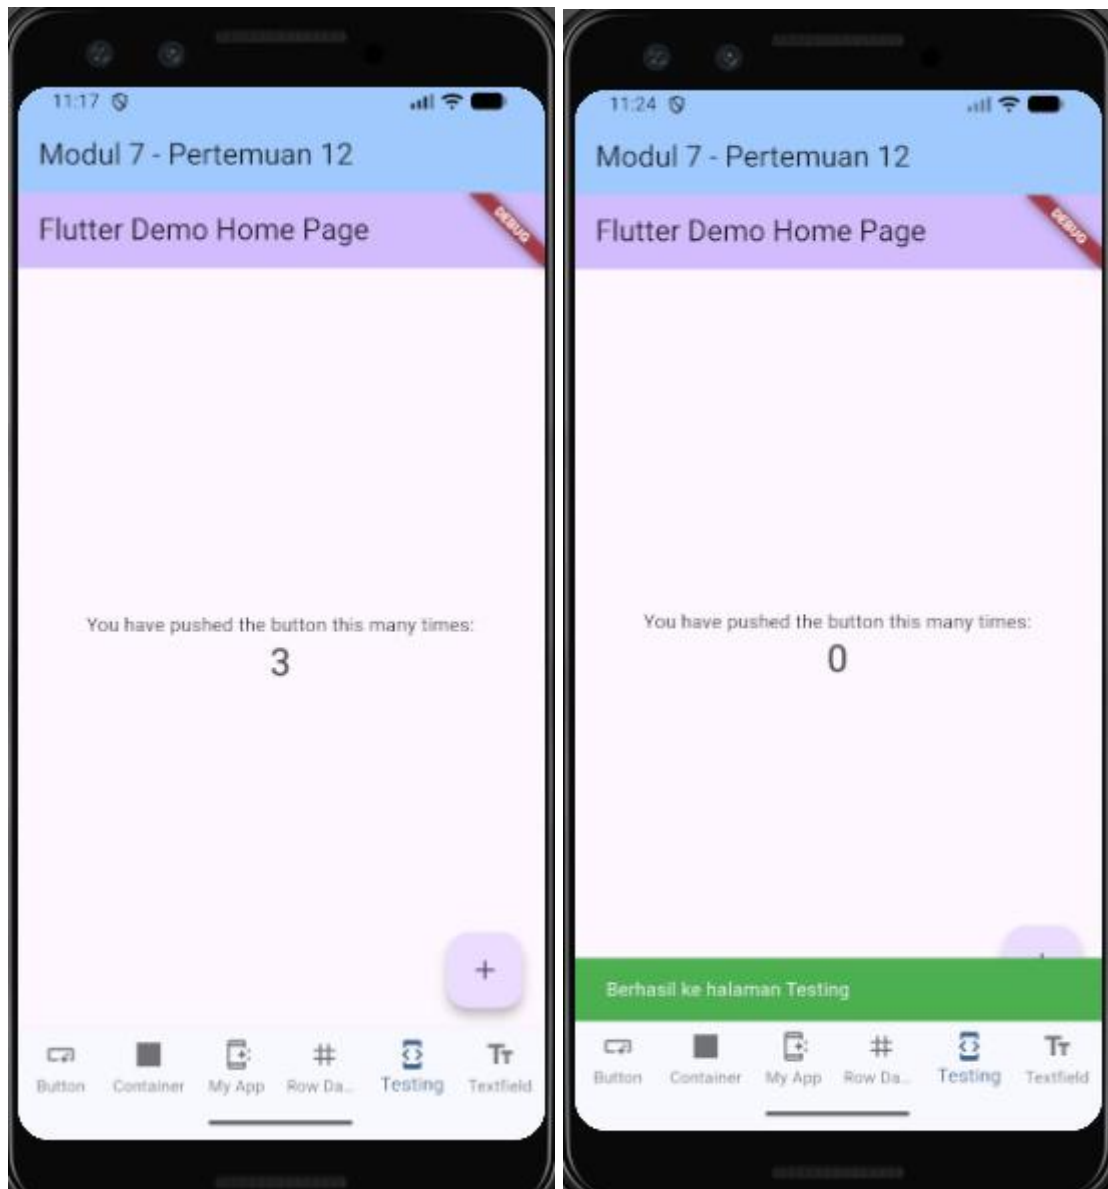

## 7. Code Textfield.dart

Berikut adalah halaman berisi textfield berwarna biru dengan icon supervisor\_account, border radius 40 sehingga sudut terlihat bulat, dan hintText: "silahkan masukan user name ".

```
import 'package:flutter/material.dart';

class Textfield1 extends StatelessWidget {
  @override
  Widget build(BuildContext context) {
    return MaterialApp(
      debugShowCheckedModeBanner: false,
      home: Scaffold(
        appBar: AppBar(title: Text("ini aplikasi saya ")),
        body: TextField(
```

```
        maxLength: 20,  
        decoration: InputDecoration(  
          border: new OutlineInputBorder(  
            borderRadius: new BorderRadius.circular(40),  
            borderSide: BorderSide(color: Colors.green)  
          ),  
          filled: true,  
          fillColor: Colors.blue,  
          labelText: "username",  
          hintText: "silahkan masukan user name ",  
          helperText: "masukan hanya 20 karakter",  
          prefixIcon: Icon(Icons.supervisor_account)  
        ),  
      ),  
    ),),  
  },  
}
```

**Berikut Hasil Navigasi dan Notifikasi:**



### PENJELASAN

Aplikasi ini mengimplementasikan komponen Bottom Navigation Bar dengan memanfaatkan state indeks aktif (`_indexNow`) untuk mengatur perpindahan halaman. Melalui sinkronisasi indeks tersebut dengan `BottomNavigationBarItem`, user dapat menjelajahi enam halaman berbeda yang telah disusun secara modular di dalam folder screens.

Aplikasi ini juga menggunakan notifikasi (`ScaffoldMessenger.of(context).showSnackBar`) yang memberi tahu user bahwa mereka berhasil ke halaman tertentu berdasarkan index halaman sekarang dan final `List<String>` label yang diberikan setiap halaman (`content: Text('Berhasil ke halaman ${labels[index]}')`)).