

LAPORAN PRAKTIKUM

Aplikasi Berbasis Platform

MODUL 5

Bootstrap



Disusun oleh:

Chandra Noer Aditya

2311102317

S1 IF-11-REG04

Dosen Pengampu:

Cahyo Prihantoro, S.Kom., M.Eng

PROGRAM STUDI S1 INFORMATIKA

FAKULTAS INFORMATIKA TELKOM

UNIVERSITY

2026/2027

GUIDED

Code

Dashboard.html

```
<!DOCTYPE html>

<html lang="id">

<head>

  <meta charset="UTF-8">

  <title>Form Input</title>

  <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3
.0/dist/css/bootstrap.min.css">

</head>

<body class="container mt-5">

  <h2>Tambah Data</h2>

  <form id="formData">

    <input type="text" id="nama" class="form-
control mb-2" placeholder="Nama" required>

    <input type="text" id="alamat"
class="form-control mb-2"
placeholder="Alamat" required>

    <button type="submit" class="btn btn-
primary">Simpan</button>

    <a href="tabel.html" class="btn btn-
success">Lihat Data</a>

  </form>

  <!-- jQuery -->

  <script src="https://code.jquery.com/jquery-
3.6.0.min.js"></script>

  <script>

    $(document).ready(function(){

      $("#formData").submit(function(e){


        e.preventDefault();

        let nama = $("#nama").val();
```

```
let alamat = $("#alamat").val();

$.ajax({
  url: "http://localhost:3000/users",
  method: "POST",
  contentType: "application/json",
  data: JSON.stringify({
    nama: nama,
    alamat: alamat
  }),
  success: function(res){
    alert("👏 Data berhasil  
ditambahkan");
    $("#formData")[0].reset();
  },
  error: function(err){
    console.error("Error:", err);
    alert("❌ Gagal menambahkan  
data");
  }
});
});
</script>
</body>
</html>
```

Output

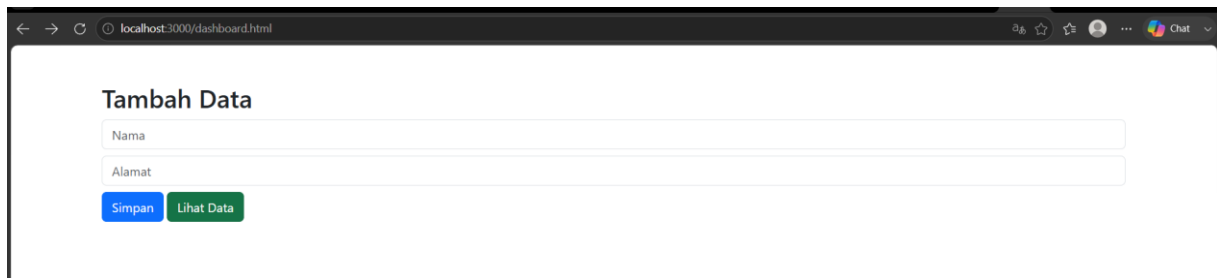

Tabel.html

```
<!DOCTYPE html>
<html lang="id">
<head>
  <meta charset="UTF-8">
  <title>Data Users</title>
  <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3
.0/dist/css/bootstrap.min.css">
  <link rel="stylesheet"
href="https://cdn.datatables.net/1.13.4/css/jquery
.dataTables.min.css">
</head>
<body class="container mt-5">
  <h2>Data Users</h2>
  <a href="dashboard.html" class="btn btn-
primary mb-3">Tambah</a>

  <table id="myTable" class="display"
style="width:100%">
    <thead>
      <tr>
        <th>Nama</th>
```

```
<th>Alamat</th>

<th>Aksi</th>

</tr>

</thead>

</table>
```

```
<script src="https://code.jquery.com/jquery-3.6.0.min.js"></script>
```

```
<script
src="https://cdn.datatables.net/1.13.4/js/jquery.d
ataTables.min.js"></script>
```

```
<script>

$(document).ready(function(){

    // Inisialisasi DataTables

    var table = $('#myTable').DataTable({

        ajax: {

            url: "http://localhost:3000/users",

            dataSrc: ""

        },

        columns: [

            { data: 'nama' },

            { data: 'alamat' },

            {

                data: null,

                render: function(data) {

                    return `

                        <a
href="edit.html?id=${data.id}" class="btn btn-
warning btn-sm">Edit</a>

                        <button
onclick="hapus(${data.id})" class="btn btn-
danger btn-sm">Hapus</button>
```

```

        `;
    }
}
]
});


// FUNCTION DELETE (Dibuat global
agar bisa dipanggil onclick)

window.hapus = function(id) {
    if(confirm("Yakin hapus?")){
        $.ajax({
            url: "http://localhost:3000/users/"
+ id,
            method: "DELETE",
            success: function(){
                alert("Data berhasil dihapus");
                table.ajax.reload(); // reload
tanpa refresh halaman
            },
            error: function(){
                alert("Gagal hapus data");
            }
        });
    }
}

});
</script>
</body>
</html>

```

output

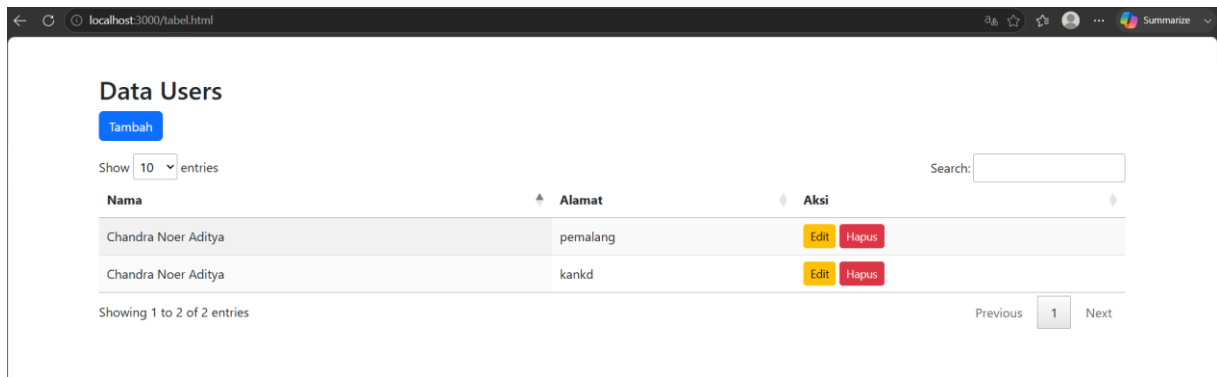

Edit.html

```
<!DOCTYPE html>
<html lang="id">
<head>
  <meta charset="UTF-8">
  <title>Edit Data</title>
  <link rel="stylesheet"
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3
.0/dist/css/bootstrap.min.css">
</head>
<body class="container mt-5">
  <h2>Edit Data</h2>
  <form id="editForm">
    <input type="text" id="nama" class="form-
control mb-2" placeholder="Nama" required>
    <input type="text" id="alamat"
class="form-control mb-2"
placeholder="Alamat" required>
    <button type="submit" class="btn btn-
primary">Update</button>
    <a href="table.html" class="btn btn-
secondary">Batal</a>
```

```
</form>
```

```
<script src="https://code.jquery.com/jquery-3.6.0.min.js"></script>
```

```
<script>
```


```
    $(document).ready(function() {  
        const urlParams = new  
URLSearchParams(window.location.search);  
  
        const id = urlParams.get('id');  
  
        // Ambil data lama berdasarkan ID  
        $.ajax({  
            url: "http://localhost:3000/users/" + id,  
            method: "GET",  
            success: function(data){  
                $("#nama").val(data.nama);  
                $("#alamat").val(data.alamat);  
            },  
            error: function(){  
                alert("Gagal ambil data");  
            }  
        });  
  
        // Proses Update data  
        $("#editForm").submit(function(e){  
            e.preventDefault();  
            $.ajax({  
                url: "http://localhost:3000/users/" +  
id,  
                method: "PUT",  
                contentType: "application/json",
```

```

        data: JSON.stringify({
            nama: $("#nama").val(),
            alamat: $("#alamat").val()
        }),
        success: function(){
            alert(" 🎯 Berhasil update");
            window.location.href =
"tabel.html";
        },
        error: function(){
            alert(" ❌ Gagal update");
        }
    });
});
});
</script>
</body>
</html>

```

Output

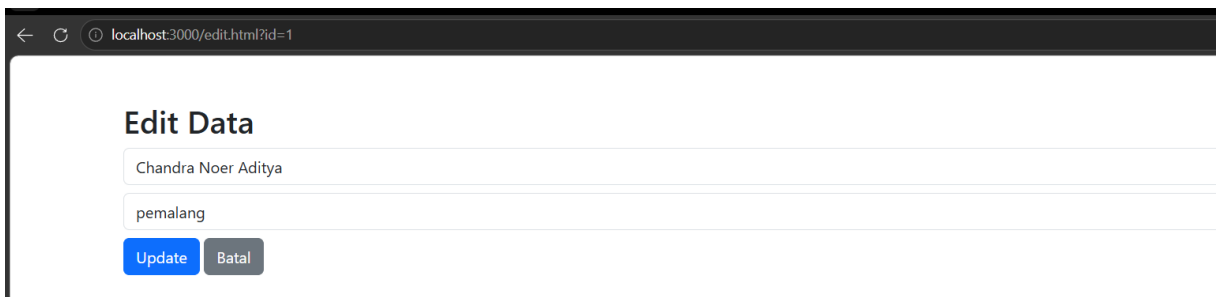

The screenshot shows a web browser window with the address bar displaying 'localhost:3000/edit.html?id=1'. The main content area features a form titled 'Edit Data'. The form has two input fields: the first contains 'Chandra Noer Aditya' and the second contains 'pemalang'. Below the input fields are two buttons: a blue 'Update' button and a grey 'Batal' button.

Server.js

```

require('dotenv').config();

const express = require('express');

const { createClient } =
require('@supabase/supabase-js');

```

```

const cors = require('cors');

const path = require('path');

const app = express();

app.use(cors());
app.use(express.json());

app.use(express.static(path.join(__dirname,
'public')));

// VALIDASI ENV
if (!process.env.SUPABASE_URL ||
!process.env.SUPABASE_KEY) {

    console.error("✗
SUPABASE_URL/SUPABASE_KEY belum
diisi di .env");

    process.exit(1);
}

// KONEKSI SUPABASE
const supabase = createClient(
    process.env.SUPABASE_URL,
    process.env.SUPABASE_KEY
);

// TEST API
app.get('/test', async (req, res) => {

    const { data, error } = await
supabase.from('users').select('*');

    if (error) return res.status(500).json(error);

    res.json(data);

```

```
});
```

```
// CREATE
```

```
app.post('/users', async (req, res) => {  
  const { nama, alamat } = req.body;  
  const { data, error } = await supabase  
    .from('users')  
    .insert([ { nama, alamat } ])  
    .select();  
  
  if (error) return res.status(500).json(error);  
  res.json(data);  
});
```

```
// READ
```

```
app.get('/users', async (req, res) => {  
  const { data, error } = await supabase  
    .from('users')  
    .select('*');  
  
  if (error) return res.status(500).json(error);  
  res.json(data);  
});
```

```
// GET BY ID
```

```
app.get('/users/:id', async (req, res) => {  
  const { data, error } = await supabase  
    .from('users')  
    .select('*')  
    .eq('id', req.params.id)
```

```
.single());

if (error) return res.status(500).json(error);
res.json(data);
});

// UPDATE
app.put('/users/:id', async (req, res) => {
  const { nama, alamat } = req.body;
  const { data, error } = await supabase
    .from('users')
    .update({ nama, alamat })
    .eq('id', req.params.id)
    .select();

  if (error) return res.status(500).json(error);
  res.json(data);
});

// DELETE
app.delete('/users/:id', async (req, res) => {
  const { data, error } = await supabase
    .from('users')
    .delete()
    .eq('id', req.params.id)
    .select();

  if (error) return res.status(500).json(error);
  res.json(data);
});
```

```
// ROOT → index.html
app.get('/', (req, res) => {
  res.sendFile(path.join(__dirname, 'public',
'index.html'));
});

// START SERVER
app.listen(3000, () => {
  console.log(" Server jalan di
http://localhost:3000");
});
```

Link github: <https://github.com/chandra-furina/Modul5.git>