

LAPORAN PRAKTIKUM

Aplikasi Berbasis Platform

MODUL 6

Javascript dan JQuery



Disusun oleh:

Chandra Noer Aditya

2311102317

S1 IF-11-REG04

Dosen Pengampu:

Cahyo Prihantoro, S.Kom., M.Eng

PROGRAM STUDI S1 INFORMATIKA

FAKULTAS INFORMATIKA TELKOM

UNIVERSITY

2026/2027

GUIDED

Javascript

1. Array

Kode

```
var data = ["satu", 2, true];
var arr2 = [["satu", "dua"],
["tiga", "empat"]];
console.log(data[2]);
console.log(arr2[0][1]);
console.log(data[10]); var
dataNew = ["a", "b", "c"];
dataNew.push("d");
console.log(dataNew);
dataNew.pop();
console.log(dataNew);
```

```
C:\Users\ACER\OneDrive\Music\Komputasi-awan\Tutorial_CSS_2311102317_Chandra Noer Aditya>node "c:\Users\ACER\OneDrive\Music\Komputasi-awan\Tutorial_CSS_2311102317_Chandra Noer Aditya\array.js"
true
dua
undefined
[ 'a', 'b', 'c', 'd' ]
[ 'a', 'b', 'c' ]
C:\Users\ACER\OneDrive\Music\Komputasi-awan\Tutorial_CSS_2311102317_Chandra Noer Aditya>
```

2. Structure

Kode

```
var gelar;

var pendidikan = "S2";

if (pendidikan === "S1") {
    gelar = "Sarjana";
} else if (pendidikan === "S2") {
    gelar = "Master";
} else if (pendidikan === "S3") {
    gelar = "Doktor";
} else {
    gelar = "Tidak Diketahui";
}

console.log(gelar);

console.log(5 == "5");
console.log(5 === "5");
console.log(1 == true);
console.log(1 === true);
```

```
// true
// false
// true
// false
console.log(null == undefined); // true
console.log(null === undefined); // false
console.log("" == 0);
console.log("" === 0);
//perulangan for
for (var i = 0; i < 5; i++) {
// true
// false
//perulangan while
var i = 1;
while (i < 5) {
console.log("Perulangan while ke-" + i);
i++;
}
//perulangan do-while
var input;
do {
input = Math.floor(Math.random() * 10); // angka random 0–9
console.log("Input:", input);
} while (input !== 5); // berhenti kalau dapat angka 5
console.log("Perulangan for ke-" + i);
}
```

```

C:\Users\VACER\OneDrive\Music\Komputasi-awan\Tutorial_CSS_2311102317_Chandra Noer Aditya>node "c:\Users\VACER\OneDrive\Music\Komputasi-awan\Tutorial_CSS_2311102317_Chandra Noer Aditya\struktur.js"
Master
true
false
true
false
true
false
true
false
false
Perulangan while ke-1
Perulangan while ke-2
Perulangan while ke-3
Perulangan while ke-4
Input: 3
Input: 5
Perulangan for ke-5

```

3. Function

Kode

```

function tambah(a, b){
return a + b
};

var tambah = function (a, b){
return a + b
};

console.log(tambah(3, 5));

var simpan = tambah(3, 5);
console.log(tambah(simpan, 2));

//simpan = 8
//mengembalikan 10
console.log(tambah(tambah(3, 5), 2)); //mengembalikan 10
console.log(tambah(tambah(2, 3), 4)); //mengembalikan 9

```

```

C:\Users\VACER\OneDrive\Music\Komputasi-awan\Tutorial_CSS_2311102317_Chandra Noer Aditya\function.js"
8
10
10
9

```

B. JQuery

1. CDn

Kode

```

<html>

<head>

```

```
<title>The jQuery Example</title>

<script src="https://code.jquery.com/jquery
3.6.0.min.js"></script>

</script>

<script type="text/javascript">
$(document).ready(function () {
document.write("Hello, World!");
});
</script>

</head>

<body>

<h1>Hello</h1>

</body>

</html>
```

2. efek hide/show

kode

```
<!DOCTYPE html>

<html>

<head>

  <script src="https://code.jquery.com/jquery
3.7.1.min.js"></script>

  <script>

    $(document).ready(function () {

      $("#hide").click(function () {

        $("p").hide();

      });

      $("#show").click(function () {

        $("p").show();

      });

    });

  </script>
```

```
</head>

<body>
  <p>If you click on the "Hide" button, I will disappear.</p>
  <button id="hide">Hide</button>
  <button id="show">Show</button>
</body>

</html>
```

3 efek animasi

kode

```
<!DOCTYPE html>
<html>

<head>
  <script src="https://code.jquery.com/jquery
3.7.1.min.js"></script>
  <script>
    $(document).ready(function () {
      $("button").click(function () {
        $("div").animate({
          height: 'toggle'
        });
      });
    });
  </script>
</head>

<body>
  <p>Click the button multiple times to toggle the animation.</p>
  <button>Start Animation</button>
  <p>By default, all HTML elements have a static position, and
```

cannot be moved.

To manipulate the position, remember to first set the CSS

position property of

the element to relative, fixed, or absolute!</p>

<div style="background:#98bf21; height:100px; width:100px;
position:absolute;">

</div>

</body>

</html>

Unguided

1. Buat 1 halaman Website ramadan dan tambahkan button atau semacam nya ketika di klik akan menampilkan modal "selamat anda mendapatkan THR" buat se interaktif itu dan se bagus mungkin.

Kode

```
<!DOCTYPE html>
<html lang="id">
<head>
<meta charset="UTF-8" />
<meta name="viewport" content="width=device-width, initial-scale=1.0"/>
<title>Ramadan Mubarak</title>
```

```
<style>

body {
  margin: 0;
  font-family: 'Segoe UI', sans-serif;
  background: linear-gradient(135deg, #0f172a, #1e293b);
  color: white;
  height: 100vh;
  display: flex;
  justify-content: center;
  align-items: center;
  overflow: hidden;
}

/* dekorasi bintang */
.stars {
  position: absolute;
  width: 100%;
  height: 100%;
  background: url('https://www.transparenttextures.com/patterns/stardust.png');
  opacity: 0.2;
}

.container {
  text-align: center;
  z-index: 2;
  padding: 20px;
}

h1 {
  font-size: 3rem;
  margin-bottom: 10px;
  color: #fbbf24;
```



```
}

p {
  color: #cbd5e1;
  margin-bottom: 30px;
}

button {
  padding: 15px 30px;
  font-size: 18px;
  border: none;
  border-radius: 999px;
  cursor: pointer;
  background: linear-gradient(45deg, #f59e0b, #f97316);
  color: white;
  font-weight: bold;
  transition: 0.3s;
  box-shadow: 0 10px 25px rgba(0,0,0,0.3);
}

button:hover {
  transform: scale(1.05);
}

/* MODAL */
.modal {
  position: fixed;
  top: 0;
  left: 0;
  width: 100%;
  height: 100%;
  display: none;
```

```
    justify-content: center;

    align-items: center;

    background: rgba(0,0,0,0.7);

    z-index: 10;
}

.modal-content {
    background: white;

    color: #111827;

    padding: 30px;

    border-radius: 20px;

    text-align: center;

    width: 300px;

    animation: pop 0.3s ease;
}

.modal-content h2 {
    margin-bottom: 10px;
}

.close {
    margin-top: 15px;

    display: inline-block;

    padding: 10px 20px;

    background: #ef4444;

    color: white;

    border-radius: 10px;

    cursor: pointer;
}

@keyframes pop {
    from { transform: scale(0.7); opacity: 0; }
```

```

    to { transform: scale(1); opacity: 1; }
  }
</style>
</head>

<body>

<div class="stars"></div>

<div class="container">
  <h1> 🌙 Ramadan Mubarak</h1>
  <p>Semoga bulan suci ini membawa berkah untuk kita semua</p>
  <button onclick="openModal()">Klik untuk THR 🎁</button>
</div>

<div class="modal" id="modal">
  <div class="modal-content">
    <h2> 🎉 Selamat!</h2>
    <p>Anda mendapatkan THR 💰 🎊</p>
    <div class="close" onclick="closeModal()">Tutup</div>
  </div>
</div>

<script>
  function openModal() {
    document.getElementById("modal").style.display = "flex";
  }


  function closeModal() {
    document.getElementById("modal").style.display = "none";
  }


```

```
// klik luar modal untuk close
window.onclick = function(e) {
  const modal = document.getElementById("modal");
  if (e.target === modal) {
    modal.style.display = "none";
  }
}
</script>

</body>
</html>
```

Output

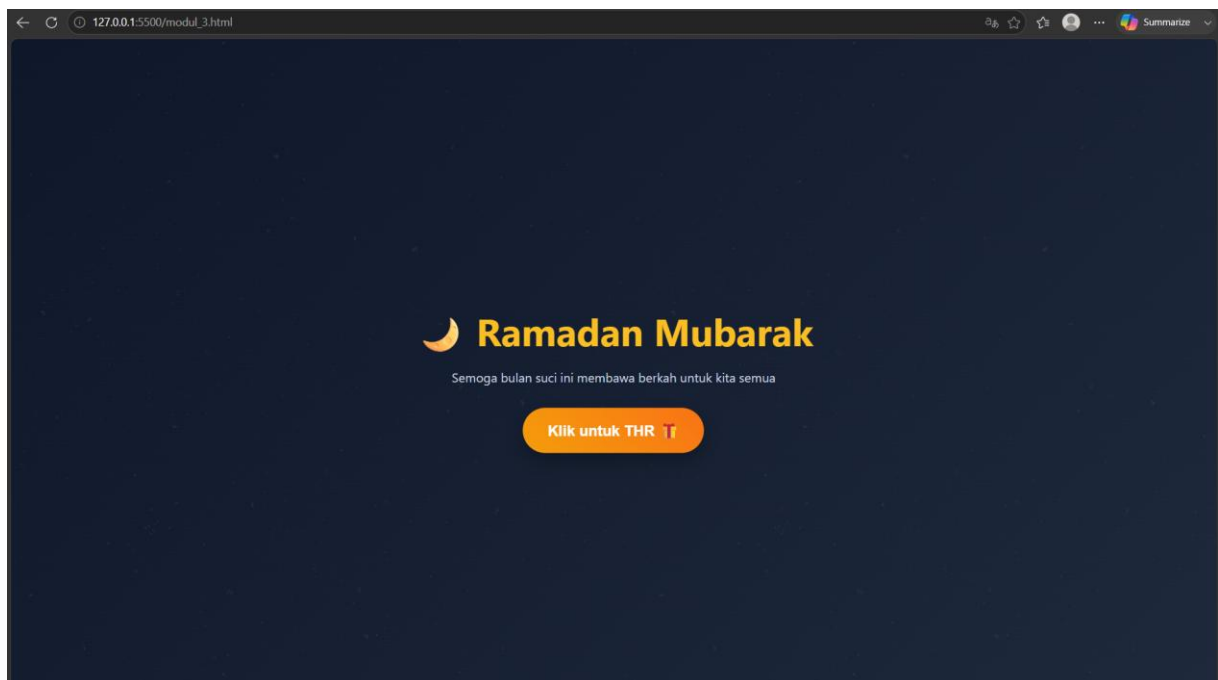

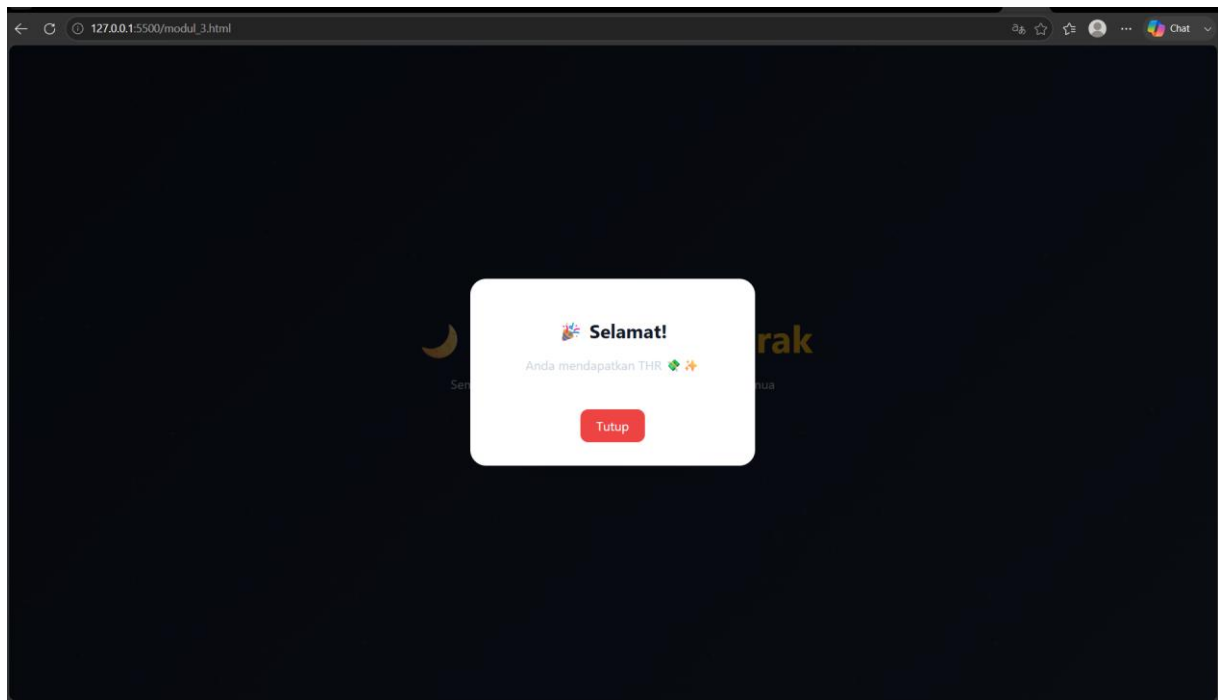

Link github: <https://github.com/chandra-furina/modul6.git>