

Table of Contents

1	Introduction.....	1
	1.1 Introduction into UML state diagrams.....	1
	1.1.1 Initial state.....	2
	1.1.2 Final State.....	2
	1.1.3 Entry Point.....	2
	1.1.4 Exit Point.....	2
	1.1.5 Events.....	2
	1.1.6 States.....	2
	1.1.7 Transitions.....	3
	1.1.8 Composite State.....	3
	1.1.9 Concurrent regions.....	4
	1.1.10 Package.....	4
	1.2 Introduction into State transition diagrams.....	5
2	2 The Oradio state diagrams views.....	6
	2.1 The OradioMain state diagram.....	6
	2.1.1 State table.....	7
	2.2 The OradioMain composite state.....	8
	2.2.1 State diagram.....	8
	2.2.2 State table.....	9
	m.....	9
	2.3 Other state handler as packages.....	10
4	3 Top-down layered static view.....	11
	4 Detailed design of the oradio_control module.....	12
	4.1 Classess.....	12
	4.1.1 Purpose.....	12
	4.1.2 Design & Threading.....	12
	4.1.3 API Reference.....	12
	4.1.3.1 BUTTONS Constants.....	12
	4.1.3.2 Methods:.....	12
	4.1.4 Error handling.....	12
	4.1.5 Attributes for module test.....	12
	4.2 Module test.....	12

6

1 Introduction

8 The oradio_control is based on a state machine.

10 1.1 Introduction into UML state diagrams

12 A state diagram models the behavior of a system or an object in response to events. A state diagram mainly consists of states, events, guards, transitions, and actions. It's a behavioral diagram and it represents the behavior using finite state transitions.

14 1.1.1 Initial state

It shows the starting point of the system. It's represented as a filled circle



1.1.2 Final State

18 It shows the ending point of the system. It's represented as a circle with a dot inside



20 1.1.3 Entry Point

An input connector for control flow into an activity from outside (named) — used when connecting activities across activity partitions or when reusing activity nodes.




24 1.1.4 Exit Point

An output connector for control flow leaving an activity to outside; used to indicate exit from an activity (named).



28 1.1.5 Events

An event can be a signal, trigger or a change in the environment of the system. Events may or may not lead to a change in the system's state.




Event /action :

- 32
- **event:** trigger that causes the transition.
 - **/action:** An operation executed in response to an accepted event

34 1.1.6 States

36 A state represents the conditions or circumstances of an object of a class at an instant of time.

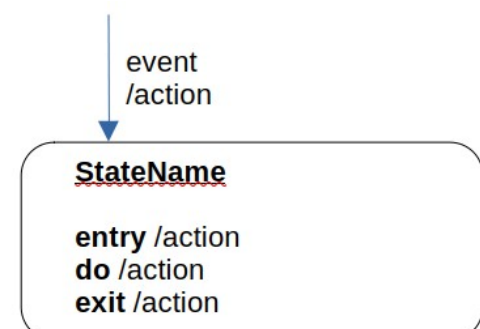

- 38 • **StateName:** The name of the state
- 40 • Use a short, descriptive noun or noun phrase as StateName (e.g., Idle, Processing, Authenticated).
- 42 • Make it domain-centric: reflect business meaning
- Be consistent: pick a naming convention (PascalCase, snake_case) and use it everywhere.

44 State actions are invoked when the system is in a specific state. There are 3 types of state actions:

- 46 • **Entry** actions: they are executed when the system enters the state
- **Do** actions: they are continuously executed while the system is in the state
- 48 • **Exit** actions: they are executed when the system exits the state

50 1.1.7 Transitions

 Transitions are shown as arrows from one state to another. They may have three indicators written on them:

- 54 • The event that triggers the transition
- The guard statement which is a condition that must be true for the transition to take place
- An action statement that will happen as a result of the transition

56


`[isSpotifyConnected]
ButtonPlay
/playSound()
/setLed()
/startSpotifyPlayback()`

58

60 1.1.8 Composite State


 A state that has substructure and internal behavior. It can contain one or more regions, which can contain one or more states. The state diagrams are executed in parallel.

62

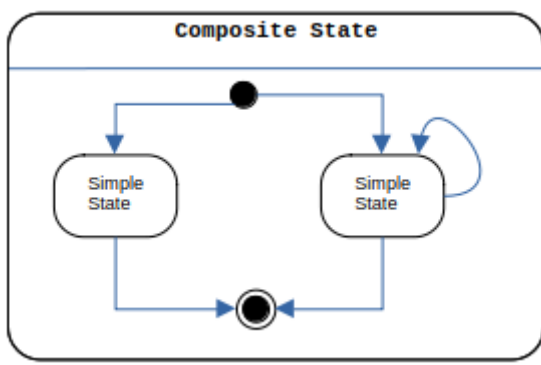


64 1.1.9 Concurrent regions

66 Represent separate areas of concern within a state, allowing for independent state transitions in each region, simultaneously.

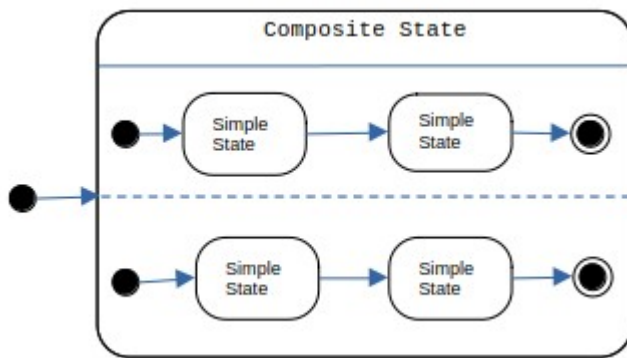

68 1.1.10 Package

70 The UML design symbol for a package is depicted as a tabbed folder, which represents a container for grouping related UML elements.

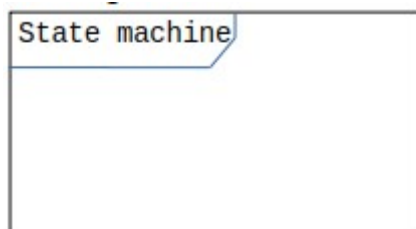

72

1.2 Introduction into State transition diagrams


- 74 a state-transition table is a table showing what state a finit-state machine will move to,
based on the current state and other inputs. It is essentially a truth table in which the
- 76 inputs include the current state along with other inputs, and the outputs include the next
state along with other outputs.

Current State	Event	Condition(guards)	Next State	Action

78

2 The Oradio state diagrams views

80 2.1 The OradioMain state diagram

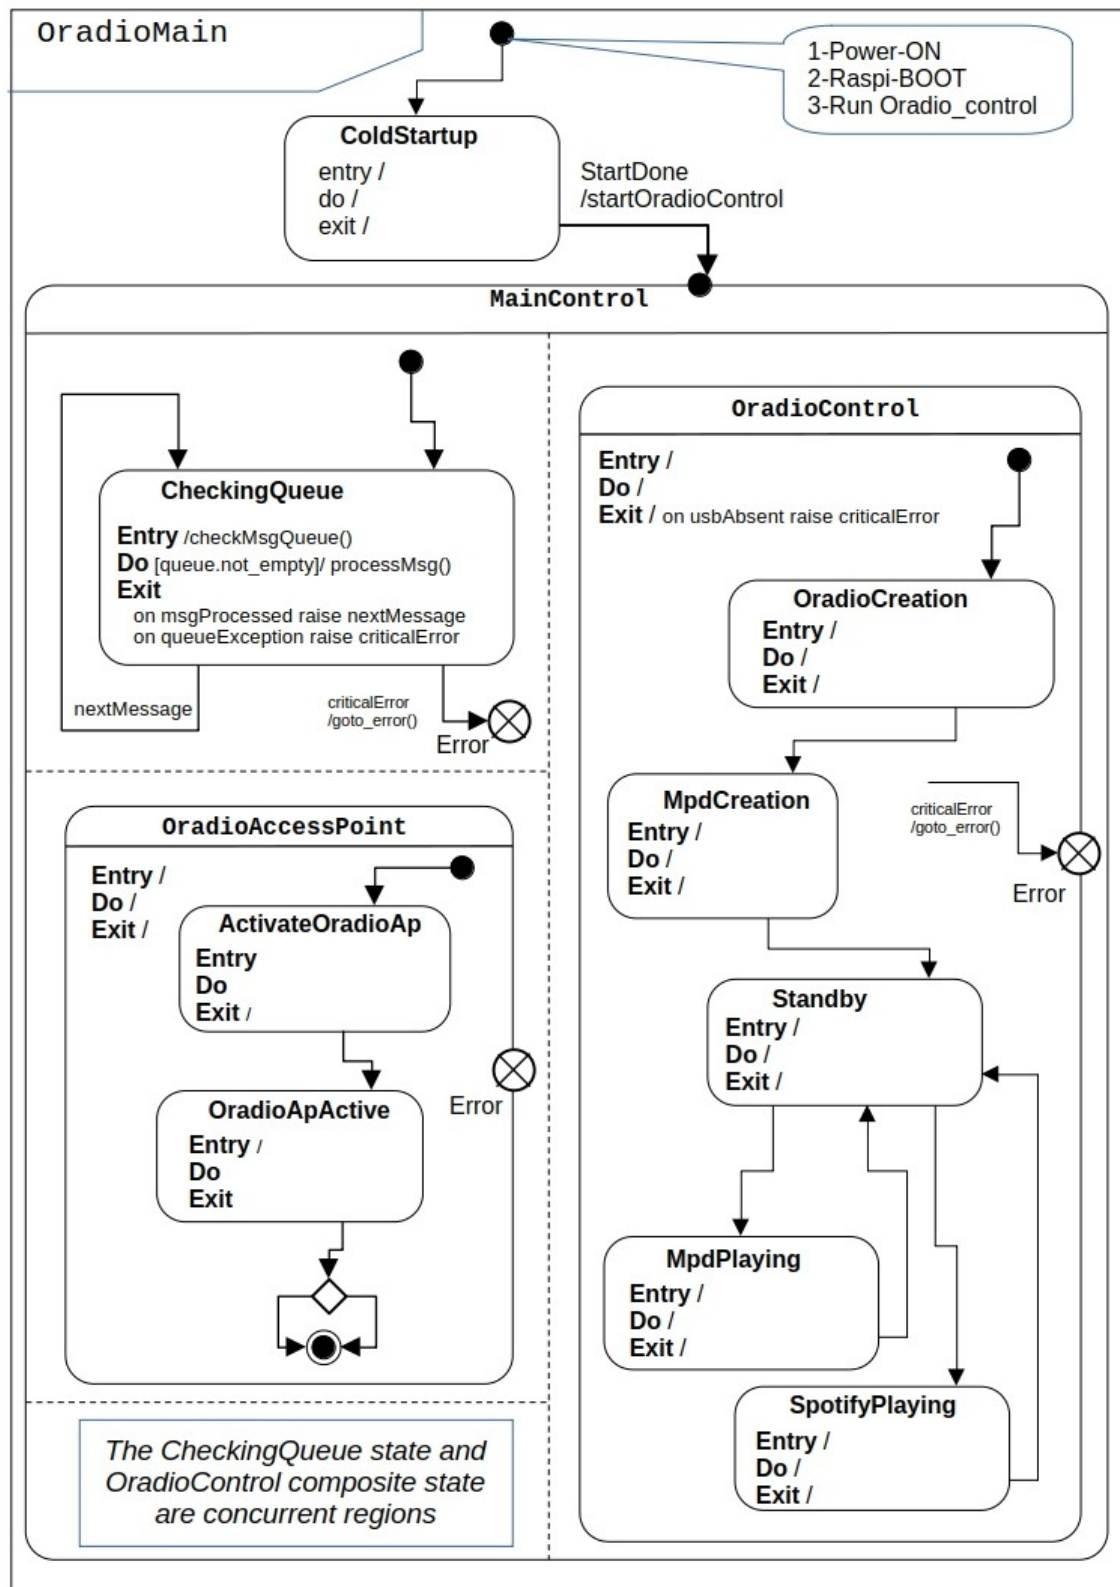


82 2.1.1 State table

TBD

84

86 2.2 The OradioMain composite state

2.2.1 State diagram

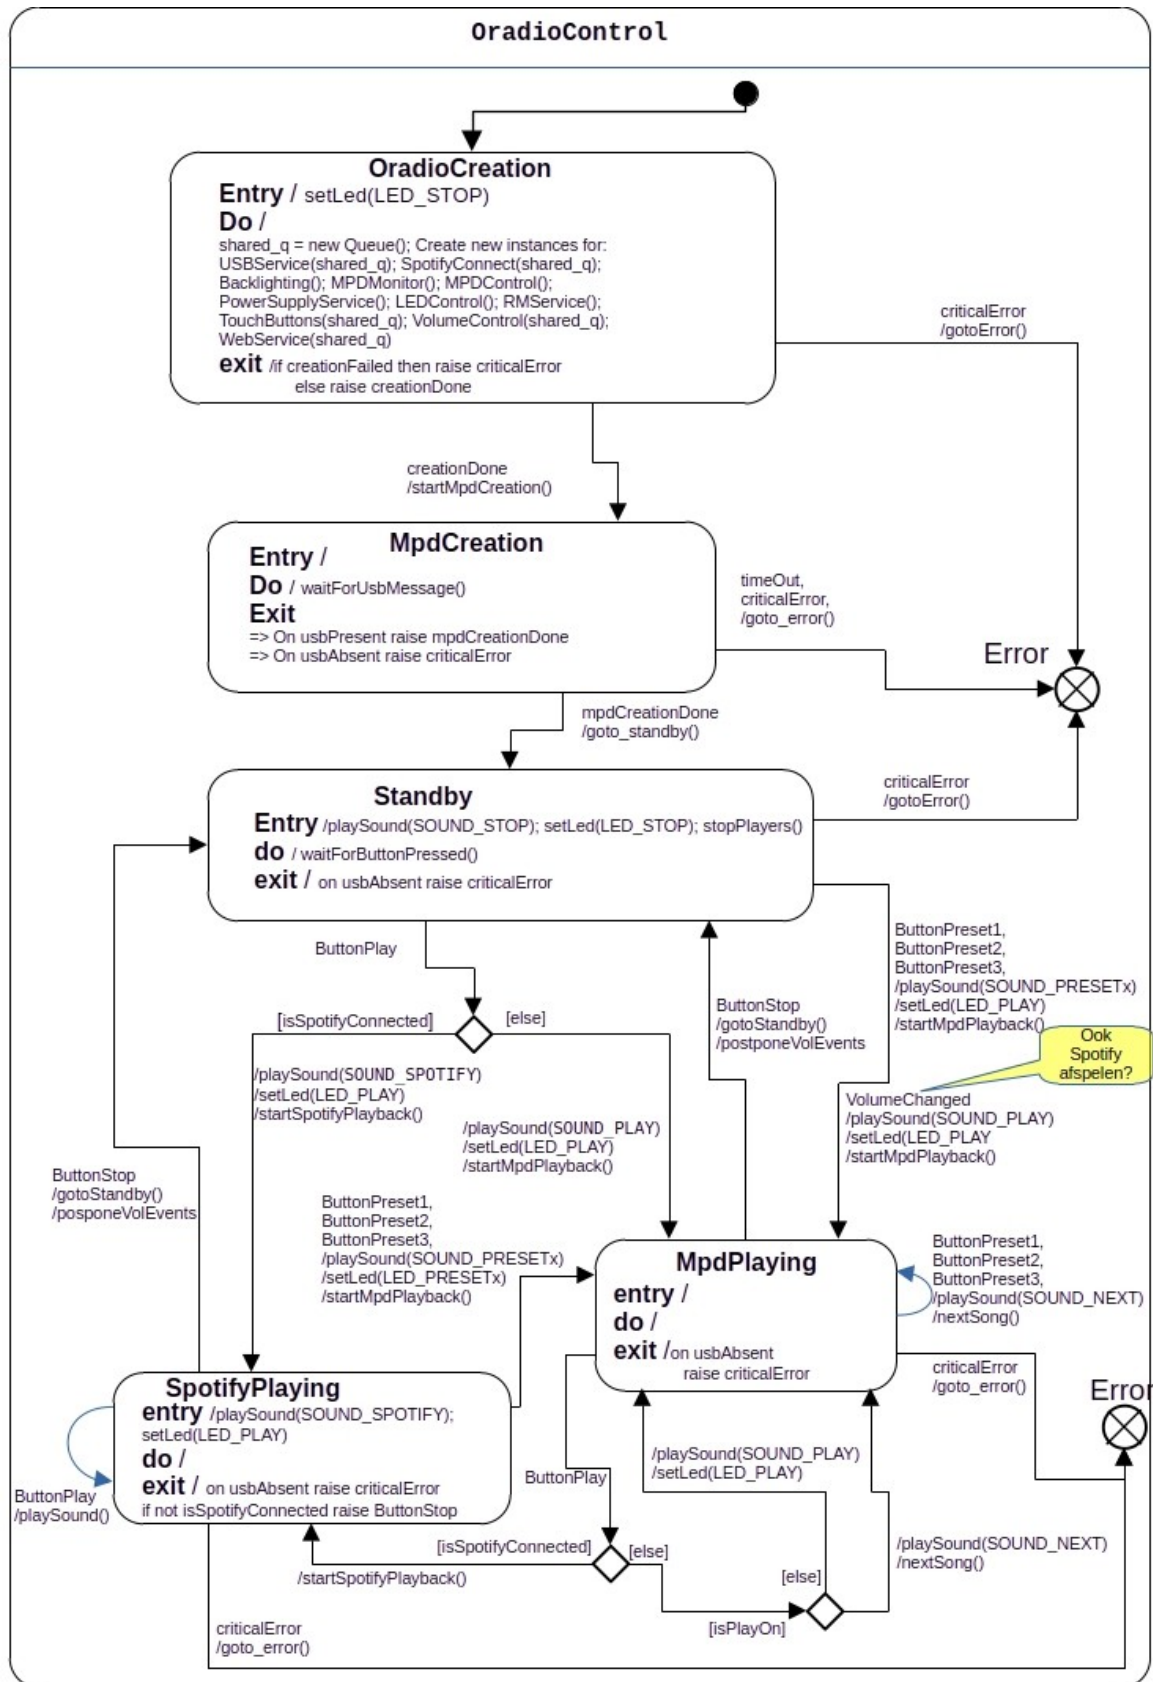


2.2.2 State table


Current State	Event	Condition	Next State	Action
OradioCreation	criticalError	creationFailed	ErrorHandling	goto_error()
	creationDone	not creationFailed	MpdCreation	start_mpd_creation()
MpdCreation	usbAbsent	None	ErrorHandling	goto_error()
	usbPresent	None	Standby	goto_standby()
	timeOut	None	ErrorHandling	goto_error()
	mpdCreationDone	None	Standby	goto_standby()
Standby	ButtonPreset1, ButtonPreset2, ButtonPreset3	ButtonPressed	MpdPlaying	playSound(SOUND_PRESETx) setLed(LED_PLAY) startMpdPlayback()
	VolumeChanged	None	MpdPlaying	playSound(SOUND_PLAY) setLed(LED_PLAY) startMpdPlayback()
	ButtonPlay	ButtonPressed not isSpotifyConnected	MpdPlaying	playSound(SOUND_PLAY) setLed(LED_PLAY) startMpdPlayback()
		ButtonPressed isSpotifyConnected	MpdPlaying	playSound(SOUND_SPOTIFY) setLed(LED_PLAY) startSpotifyPlayback()
	usbAbsent	None	ErrorHandling	goto_error()
MpdPlaying	ButtonPlay	isSpotifyConnected	SpotifyPlaying	
		not isSpotifyConnected isPlayOn	MpdPlaying	nextSong()
		not isSpotifyConnected not isPlayOn	MpdPlaying	playSound() setLed()
	ButtonStop	None	Standby	gotoStandby()
	usbAbsent	None	ErrorHandling	goto_error()
SpotifyPlaying	ButtonStop	ButtonPressed	Standby	gotoStandby()
		not isSpotifyConnected	Standby	gotoStandby()
	usbAbsent	None	ErrorHandling	goto_error()

92 2.3 AccessPoint composite state

2.3.1 State diagram

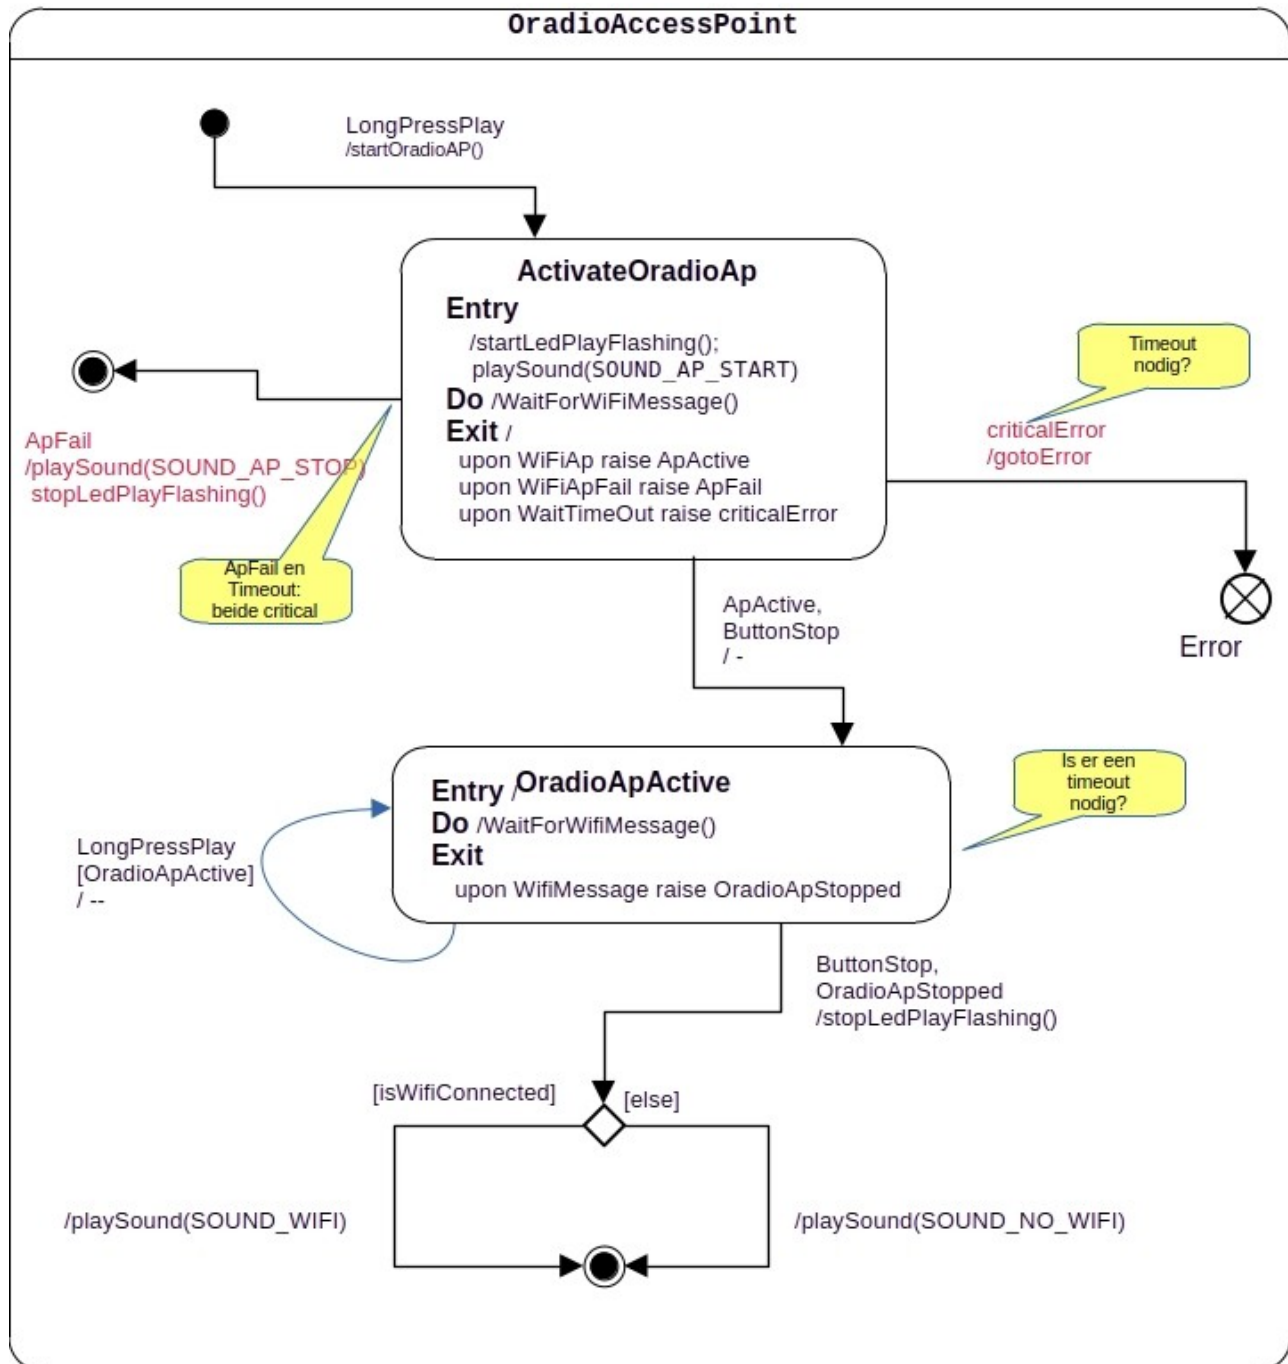

2.3.2 State table

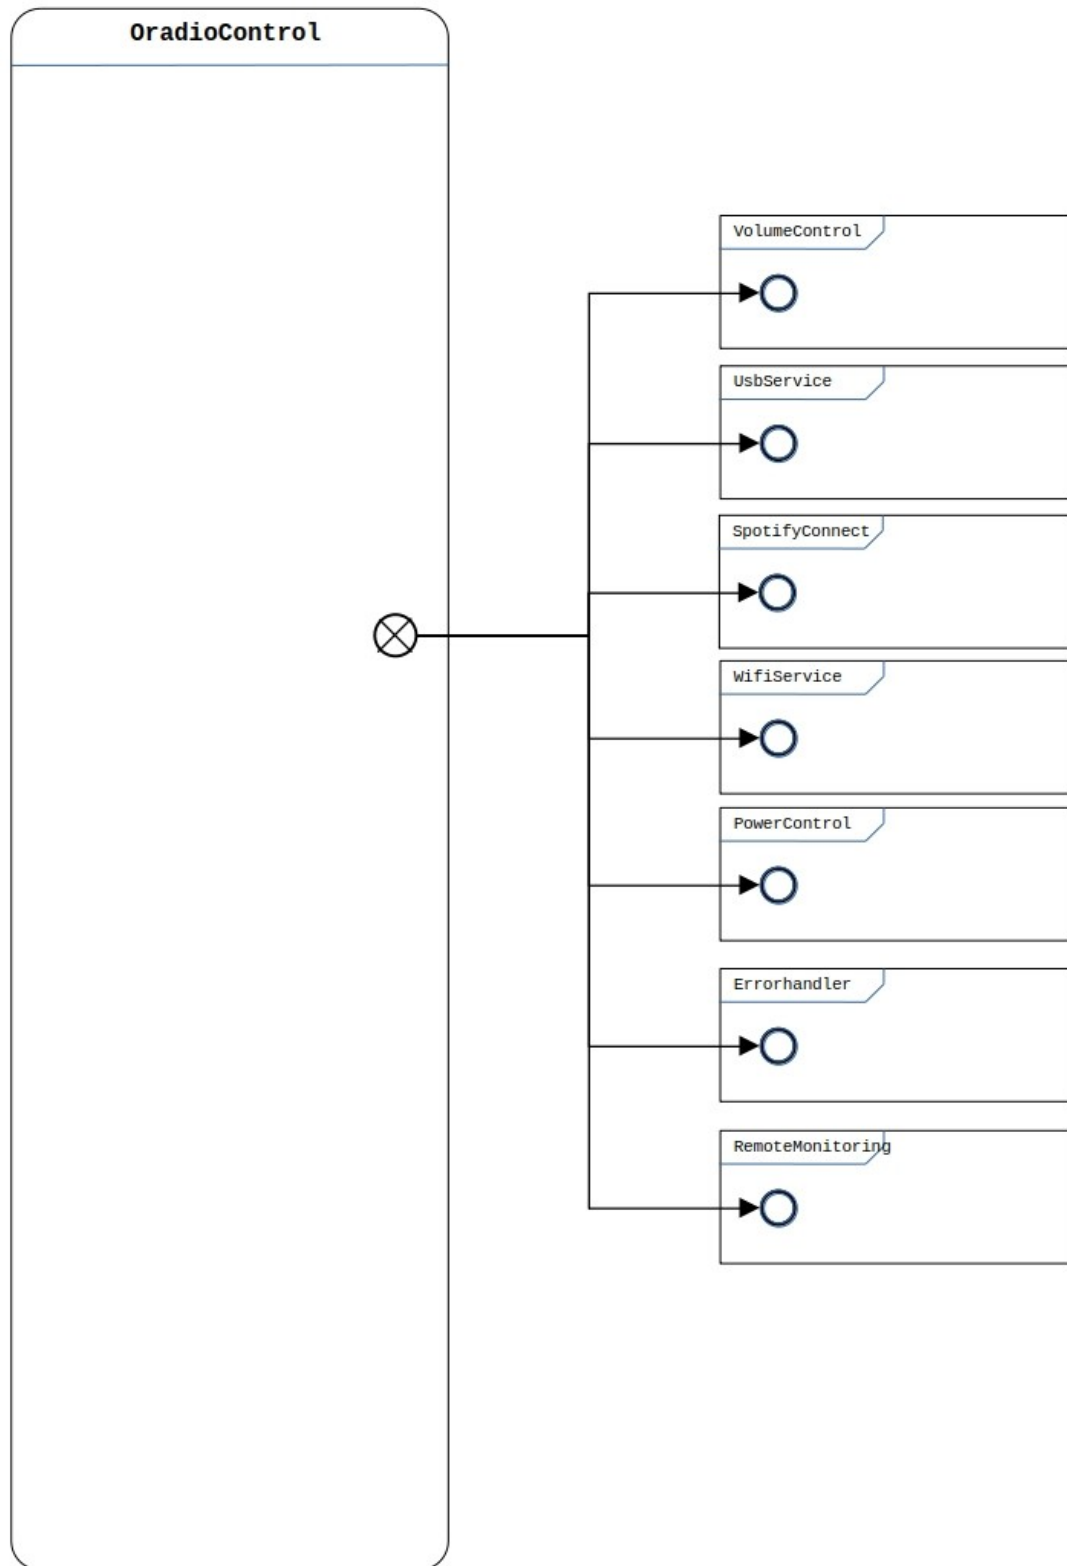

98 3 Top-down layered static view

100 TBD

102

104	4	Detailed design of the oradio_control module.
106	4.1	Classess
	4.1.1	Purpose
108		
	4.1.2	Design & Threading
110		
	4.1.3	API Reference
112	4.1.3.1	BUTTONS Constants
114		
	4.1.3.2	Methods:
116		
118	4.1.4	Error handling
120		
	4.1.5	Attributes for module test
122		
	4.2	Module test
124		