

Red Hat System Administration I

Interoduction

Objectives

- **introduce the Classroom Environment**

rht-vmctl Commands

- **rht-vmctl start** 『 server | desktop 』
 - start server or desktop machine
- **rht-vmctl view** 『 server | desktop 』
 - view "physical console" to log in and work with server or desktop machine
- **rht-vmctl reset** 『 server | desktop 』
 - reset server or desktop


Classroom Machines

- **desktopX.example.com**
 - student client computer
 - ipaddress:172.25.x.10
- **serverx.example.com**
 - student server computer
 - ipaddress:172.25.x.11
- **classroom.example.com**
 - classroom utility server
 - ipaddress:172.25.254.254


Language settings

- `gnome-control-center`

```
[kiosk@foundation0 ~]$ gnome-control-center
```

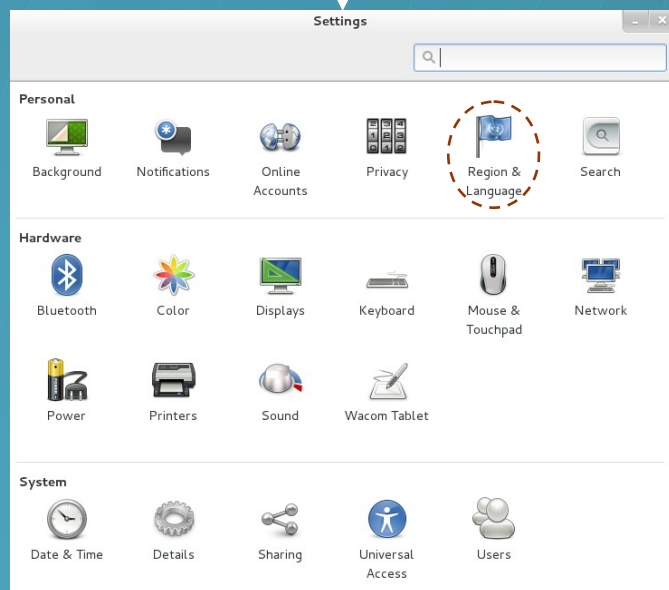

- Region&language

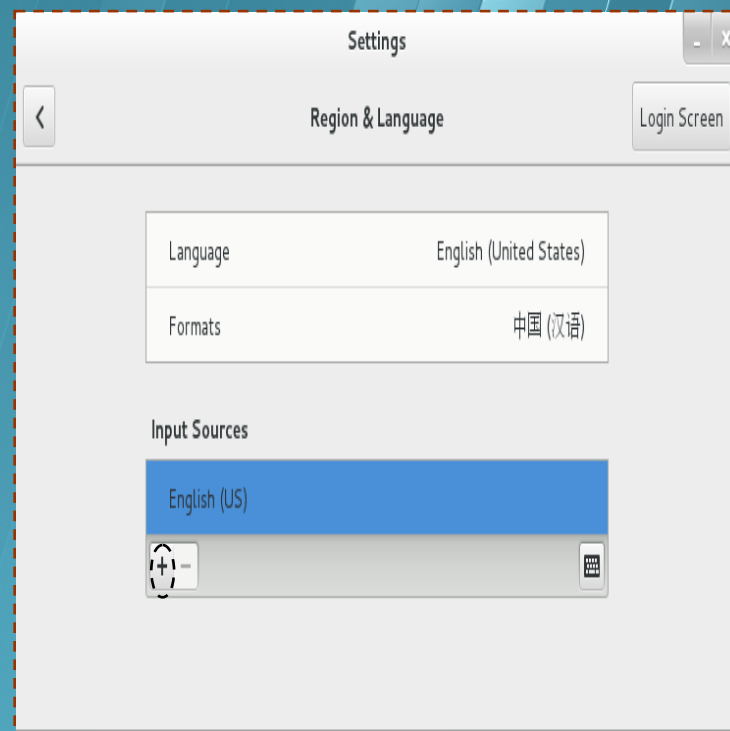

That's all