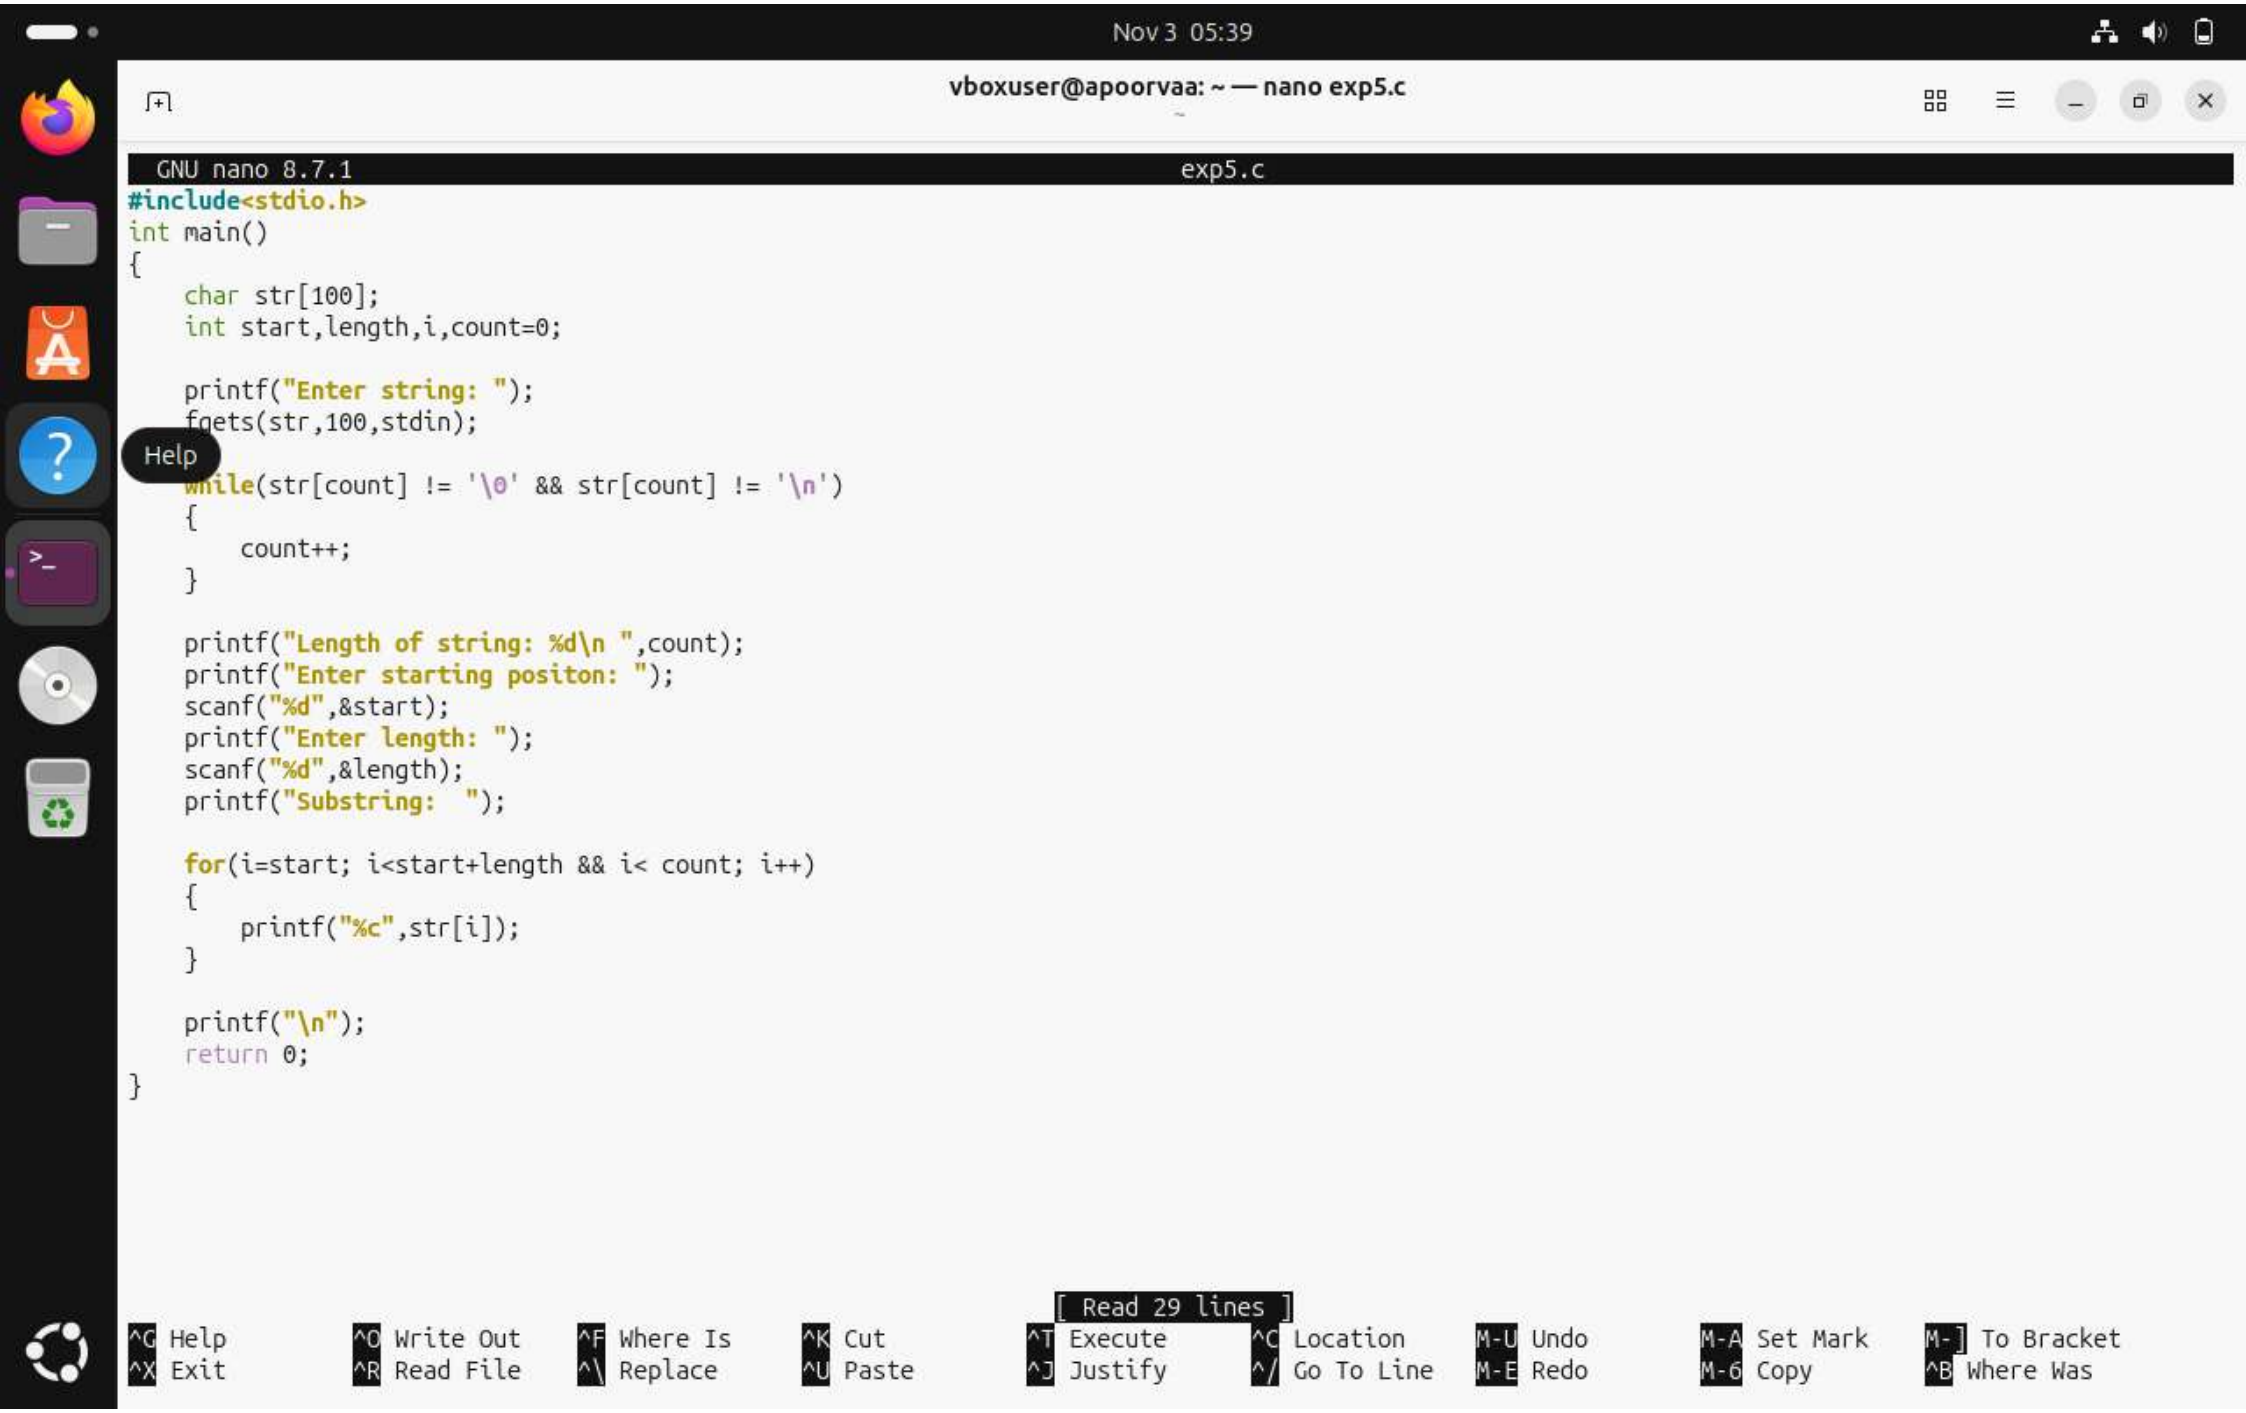

Nov 3 05:39
Firefox
vboxuser@apoorvaa: ~
8. YUVAAN SHAH BROOKLYN
vboxuser@apoorvaa:~$ grep -i Krystal Names.txt
2.KRYSTAL DSOUZA
6. KRYSTAL GILL
vboxuser@apoorvaa:~$ grep -i Krystal Names.txt | sed 'd' Names.txt
vboxuser@apoorvaa:~$ cat Names.txt
1.AARAV VERMA
2.KRYSTAL DSOUZA
3.RIYA KAPOOR
4.SHUBHAM GILL
5.RIYA SHAH
6. KRYSTAL GILL
7. MUSKAAN SHAH LA
8. YUVAAN SHAH BROOKLYN
vboxuser@apoorvaa:~$ grep -rvi Krystal Names.txt
1.AARAV VERMA
3.RIYA KAPOOR
4.SHUBHAM GILL
5.RIYA SHAH
7. MUSKAAN SHAH LA
8. YUVAAN SHAH BROOKLYN
vboxuser@apoorvaa:~$ gcc exp5.c -o exp5
vboxuser@apoorvaa:~$ ./exp5
Enter string: Hey feyre darling
Length of string: 17
Enter starting positon: 2
Enter length: 4
Substring: y fe
vboxuser@apoorvaa:~$ time ./exp5
Enter string: hey feyre darling
Length of string: 17
Enter starting positon: 2
Enter length: 5
Substring: y fey
real 0m7.135s
user 0m0.004s
sys 0m0.005s
vboxuser@apoorvaa:~$


Nov 3 05:39
vboxuser@apoorvaa: ~ — nano exp5.c
GNU nano 8.7.1 exp5.c
#include<stdio.h>
int main()
{
char str[100];
int start,length,i,count=0;
printf("Enter string: ");
fgets(str,100,stdin);
while(str[count] != '\0' && str[count] != '\n')
{
count++;
}
printf("Length of string: %d\n ",count);
printf("Enter starting positon: ");
scanf("%d",&start);
printf("Enter length: ");
scanf("%d",&length);
printf("Substring: ");
for(i=start; i<start+length && i< count; i++)
{
printf("%c",str[i]);
}
printf("\n");
return 0;
}
Help
[Read 29 lines]
^G Help ^O Write Out ^F Where Is ^K Cut ^T Execute ^C Location M-U Undo M-A Set Mark M-] To Bracket
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line M-E Redo M-6 Copy ^B Where Was