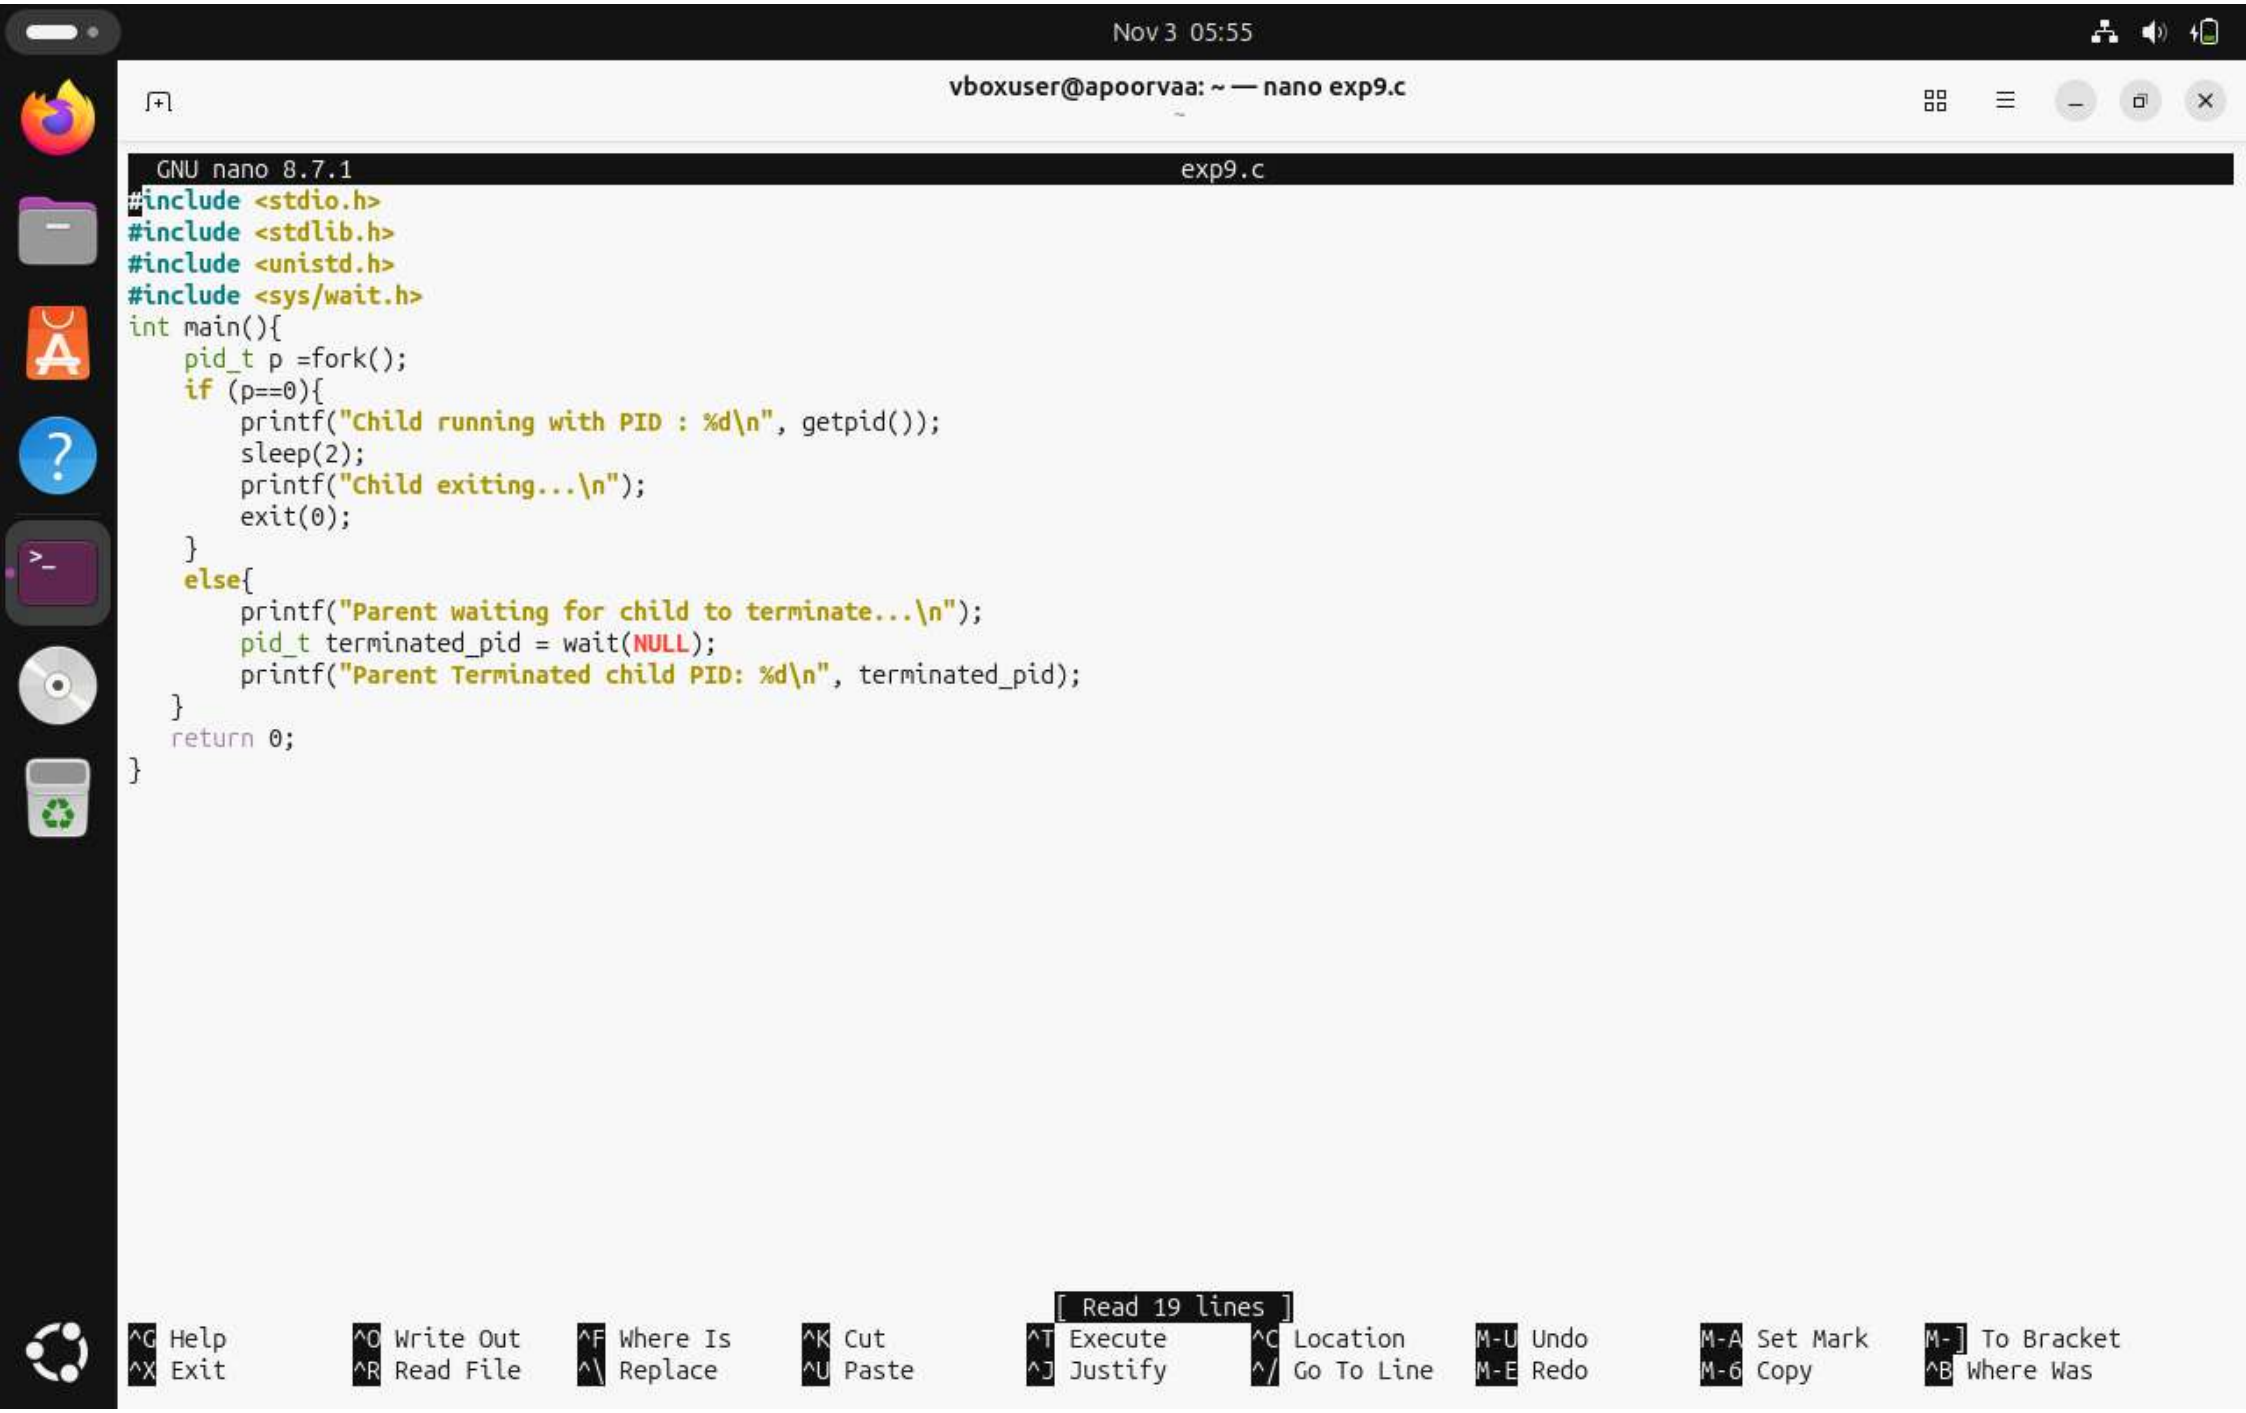
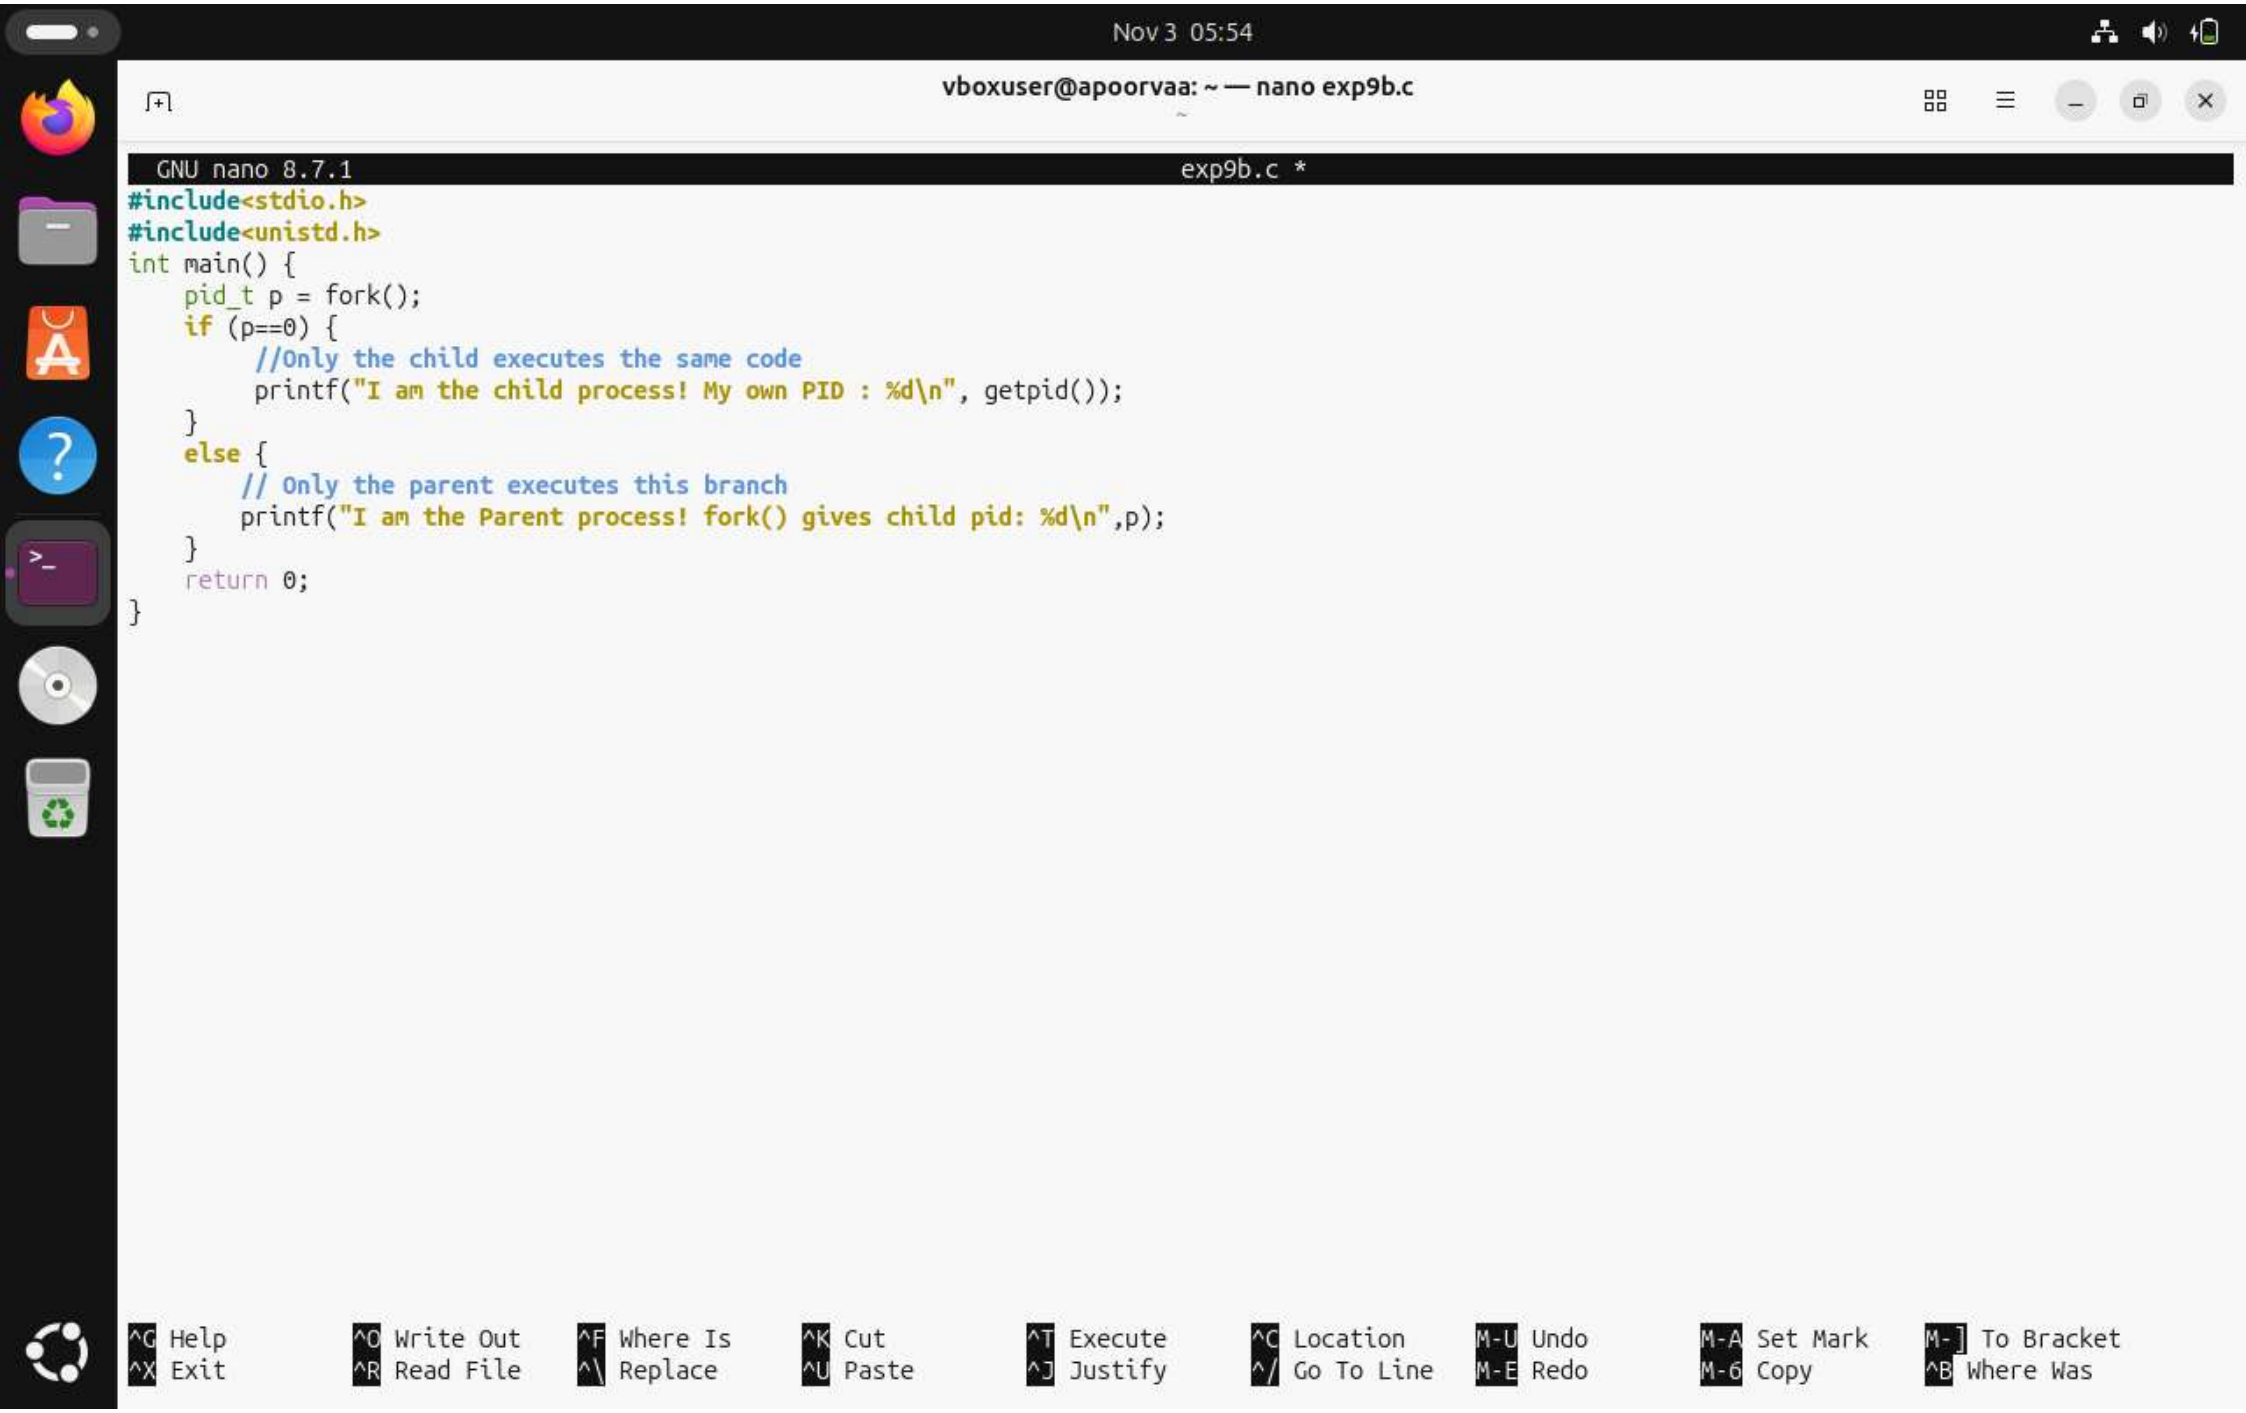

Nov 3 05:55
vboxuser@apoorvaa: ~ — nano exp9.c
GNU nano 8.7.1 exp9.c
#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
#include <sys/wait.h>
int main(){
pid_t p =fork();
if (p==0){
printf("Child running with PID : %d\n", getpid());
sleep(2);
printf("Child exiting...\n");
exit(0);
}
else{
printf("Parent waiting for child to terminate...\n");
pid_t terminated_pid = wait(NULL);
printf("Parent Terminated child PID: %d\n", terminated_pid);
}
return 0;
}
[Read 19 lines]
^G Help ^O Write Out ^F Where Is ^K Cut ^T Execute ^C Location M-U Undo M-A Set Mark M-] To Bracket
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line M-E Redo M-6 Copy ^B Where Was


Nov 3 05:54
vboxuser@apoorvaa: ~ — nano exp9b.c
GNU nano 8.7.1 exp9b.c *
#include<stdio.h>
#include<unistd.h>
int main() {
pid_t p = fork();
if (p==0) {
//Only the child executes the same code
printf("I am the child process! My own PID : %d\n", getpid());
}
else {
// Only the parent executes this branch
printf("I am the Parent process! fork() gives child pid: %d\n",p);
}
return 0;
}
^G Help ^O Write Out ^F Where Is ^K Cut ^T Execute ^C Location M-U Undo M-A Set Mark M-] To Bracket
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line M-E Redo M-6 Copy ^B Where Was