
ORPQUANT: GEOMETRIC ORTHOGONAL RESIDUAL PROJECTION FOR MULTIPLIER-FREE POWER-OF-TWO TRANSFORMER QUANTIZATION *

Maoyang Xiang, Bo Wang

Information Systems Technology and Design
Singapore University of Technology and Design
Singapore
{maoyang_xiang, bo_wang}@sutd.edu.sg

Tao Luo

Institute of High Performance Computing (IHPC)
Agency for Science, Technology and Research (A*STAR)
Singapore
luo_tao@a-star.edu.sg

ABSTRACT

The deployment of Large Language Models (LLMs) and Vision Transformers (ViTs) on edge devices is significantly constrained by memory limitations and the critical timing bottlenecks introduced by dense Multiply-Accumulate (MAC) arrays. In the ultra-low bit regime, logarithmic Power-of-Two (PoT) quantization provides a hardware-efficient alternative by replacing MAC operations with bit-shifts. However, the non-uniform exponential lattice is inherently limited by a **Low Angular Resolution Regime**, a structural flaw that becomes particularly pronounced at sub-4-bit thresholds, leading to a notable degradation of high-dimensional feature manifolds.

To address this geometric limitation, we propose Orthogonal Residual Projection (ORP), an algorithm-hardware co-design framework. By formulating quantization as a dual-basis geometric projection, ORP adaptively synthesizes a higher-resolution residual lattice using strictly shift-and-add operations. Furthermore, ORP’s analytical solver offers a practical alternative to computationally intensive gradient-based optimization, reducing the full-model calibration time for LLaMA-2-7B to approximately **15 minutes**.

Extensive evaluations demonstrate ORP’s applicability across modalities and its hardware efficiency. Under the 3-bit (W3/A16) constraint, ORP achieves a perplexity of 6.10 on LLaMA-2-7B, comparing favorably to conventional MAC-intensive baselines like AWQ without relying on asymmetric scaling, while maintaining competitive accuracy in 4-bit scenarios. At the silicon level, standard-cell RTL synthesis at a 28nm node indicates that ORP effectively mitigates the timing bottlenecks associated with dense multiplier trees. By flattening the combinational logic depth, our parallel shift-and-add datapath reduces the critical path delay to **0.35 ns**. This theoretically allows the accelerator to operate at **2.85 GHz**, suggesting an agile, multiplier-free execution paradigm for high-throughput edge intelligence.

Keywords Orthogonal · Power-of-Two · Multiplier-Free

1 Introduction

The deployment of large language models (LLMs) and vision transformers (ViTs) on edge devices is frequently constrained by the *multiplier tax*—the critical combinational logic depth and routing complexity associated with hardware multiply-accumulate (MAC) units. In modern silicon processes, a 16-bit floating-point multiplier consumes an order of magnitude more energy and introduces significantly deeper logic paths than simple addition or bit-wise operations. To advance high-throughput edge computing, there is a growing motivation to transition from computation-heavy, multiplication-centric architectures to multiplier-free paradigms. In this context, **Power-of-Two**

*In preparation.

(PoT) quantization emerges as a promising approach, offering potential improvements in timing efficiency by replacing deep multiplication trees with parallel bit-shifts.

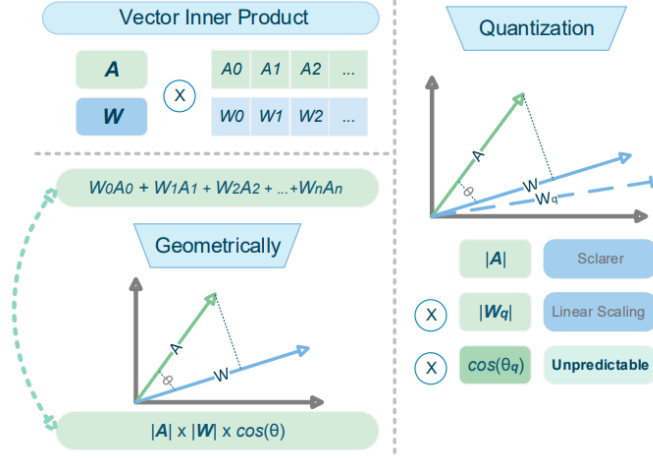


Figure 1: The geometric worldview of quantization. Beyond simple algebraic accumulation (top), the vector inner product is fundamentally a geometric projection (bottom). While magnitude errors (*Scaler*) are predictable scalars that can be easily calibrated, standard quantization introduces unpredictable and uncorrectable angular deviation ($\cos \theta_q$).

Despite its hardware advantages, low-bit quantization often faces challenges regarding precision. Conventional approaches typically attribute this performance degradation to a scalar distribution mismatch between the discrete lattice and the Gaussian statistics of neural weights. However, this scalar-centric perspective often overlooks the high-dimensional nature of Transformer operations[1]. As illustrated in Fig. 1, the inner product is essentially the projection of a continuous weight vector onto a discrete lattice manifold. In high-dimensional spaces, the fidelity of this projection depends not just on magnitude, but critically on the preservation of the vector’s direction, which dictates the alignment of latent features. While current methods effectively manage the scaling factor (*Scaler*), directional integrity can remain unpredictable, contributing significantly to performance degradation in extreme quantization.

When applying this geometric perspective to the hardware-friendly PoT domain, a key limitation emerges: its inherently non-uniform angular resolution. Unlike linear lattices, the angular distribution of PoT basis vectors is governed by the $\arctan(2^k)$ function. Consequently, it operates within a **low angular resolution regime**, as shown in Fig. 2, which is particularly pronounced around the diagonal regions of the projection space. This structural characteristic creates an **Angular Gap**, where the quantized vector’s orientation can deviate enough to substantially compromise the semantic integrity of the feature manifold.

To address the angular degradation associated with a 1-D PoT mapping, we introduce the **Orthogonal Residual Projection (ORP)** framework. Rather than mapping continuous high-dimensional vectors onto a single discrete basis ($\mathbf{b}_1$), ORP constructs a 2-D orthogonal subspace to correct the angular distortion mathematically. By deriving a secondary basis ($\mathbf{b}_2$) that is orthogonal to the primary projection ($\langle \mathbf{b}_1, \mathbf{b}_2 \rangle = 0$), the framework captures the orthogonal residual—directional information often lost during the initial 1-D mapping. This dual-basis projection helps mitigate the **Low Angular Resolution Regime** and preserves the spatial orientation of the feature manifold, while remaining compatible with the zero-MAC hardware constraints of the PoT domain.

To implement this projection efficiently while maintaining representational fidelity, ORP utilizes a decoupled, three-stage pipeline. First, a preconditioned manifold smoothing mechanism is applied to adjust the weight topology. Second, a geometric residual matching process determines the discrete orthogonal basis ($\mathbf{b}_2$) in Euclidean space. By isolating this discrete search from activation data, the method enables an $\mathcal{O}(N)$ basis selection that reduces susceptibility to calibration bias. Finally, a data-driven joint scale optimization incorporates calibration data to compute the continuous coefficients (c_1 and c_2). This stage evaluates **channel-wise importance** based on empirical input features, dynamically prioritizing the projection fidelity of critical feature dimensions according to their activation magnitudes.

Evaluating multiplier-free networks solely on algorithmic metrics may not fully reflect their physical deployment constraints. To address the gap between theoretical sparsity and practical silicon implementation, we extend our evaluation to standard-cell RTL synthesis, analyzing the timing implications associated with conventional arithmetic units.

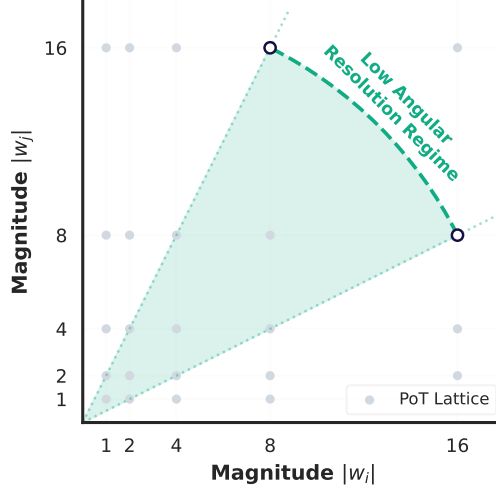


Figure 2: The Power-of-Two (PoT) lattice structure exhibits a non-uniform angular resolution, particularly in high-magnitude regions. As illustrated by the shaded area, the grid density decreases significantly, resulting in a **Low Angular Resolution Regime**. This structural characteristic introduces notable **Angular Gaps** between valid lattice points, irrespective of the bit-width.

In summary, the main contributions of this work are as follows:

- We formalize the **Low Angular Resolution Regime** inherent to extreme PoT quantization. To address this, we propose the ORP framework, providing a deterministic, $\mathcal{O}(N)$ closed-form algorithmic solution to extract orthogonal discrete bases without relying on gradient-based optimization.
- By providing an analytical alternative to computationally intensive backpropagation and iterative searches, ORP substantially accelerates the deployment pipeline. We reduce the full-model calibration time for LLaMA-2-7B from hours (e.g., AWQ, SpinQuant) to approximately **15.1 minutes** on a single workstation, facilitating efficient on-site edge adaptation.
- ORP demonstrates that strict hardware constraints can still yield competitive representational fidelity. Under a zero-MAC, shift-and-add execution paradigm, it attains reliable accuracy across modalities, achieving a perplexity of **5.09** on LLaMA-2-13B (**W4/A16**) and **79.54%** Top-1 accuracy on ViT-Base (**W4/A4**).
- We evaluate the hardware efficiency of our architecture through 28nm RTL synthesis. By replacing dense multiplier trees with a parallel shift-and-add datapath, the design effectively reduces combinational logic depth, resulting in a critical path delay of **0.35 ns** and a theoretical maximum clock frequency of $\approx$ **2.85 GHz**. Furthermore, under an iso-frequency comparison at 1.8 GHz (matching the conventional MAC baseline), the accelerator delivers a highly efficient **3.33 TOPS/W**, alleviating the routing congestion and area overhead typically associated with deep MAC carry-chains.

2 Related Work

The deployment of large-scale foundation models on resource-constrained edge platforms has driven extensive research into neural network quantization [2, 3]. While significant progress has been achieved in compressing model weights, simultaneously maintaining ultra-low bit-width accuracy and mitigating computationally heavy hardware operations remains a notable challenge. In this section, we review the prior literature across three pivotal domains. First, we examine the evolution of Post-Training Quantization (PTQ) and the hardware implications of reconstruction-heavy paradigms. Second, we analyze recent advancements in high-dimensional rotational quantization, highlighting the trade-off between geometric angular resolution and on-chip computational overhead. Finally, we discuss the trajectory of multiplier-free architectures, examining the representational limitations of scalar logarithmic quantization and demonstrating how our proposed framework aims to address these challenges.

2.1 Post-Training Quantization and the Reconstruction Bottleneck

Post-Training Quantization (PTQ) has emerged as a fundamental technique for deploying large-scale vision transformers (ViTs) and Large Language Models (LLMs), primarily due to its circumvention of the substantial computational costs associated with retraining. Early PTQ methods predominantly focused on scalar rounding mechanisms and optimal clipping ranges [4, 5]. However, to extend quantization into the ultra-low bit-width regime (≤ 4 -bit), recent state-of-the-art frameworks have increasingly shifted towards block-wise error reconstruction. In the vision domain, methods such as BRECQ, QDrop, and AIQViT aim to maintain accuracy by iteratively compensating for quantization perturbations using gradient-based optimization [6, 7, 8]. Similarly, in the LLM domain, methodologies mitigate quantization errors by exploiting second-order Hessian information to minimize local reconstruction loss [3], or by applying activation-aware scaling to protect highly salient outlier weights [4].

Despite their empirical success in significantly reducing memory bandwidth—an important advancement for LLM deployment—these reconstruction-heavy paradigms often encounter two distinct bottlenecks. First, the stochastic iterative grid search required during calibration can incur substantial time costs, often taking hours per model. Second, from a hardware architecture perspective, they predominantly operate as *weight-only compression* rather than full datapath quantization. Because they generally necessitate runtime dequantization to higher-precision formats (e.g., FP16) before executing the matrix multiplication, they successfully alleviate the memory wall but do not fully eliminate the timing bottlenecks of dense Multiply-Accumulate (MAC) units on silicon. To address these limitations, our ORP framework provides an analytical solver that operates natively in the quantized domain, facilitating multiplier-free hardware compatibility without the overhead of iterative searches.

2.2 High-Dimensional Geometry and Rotational Quantization

As traditional 1D scalar quantization approaches practical limits around the 3-bit threshold, recent literature has explored high-dimensional geometric spaces. A prominent trend involves using orthogonal rotations to precondition the weight and activation manifolds prior to discretization. Three notable methodologies represent the state-of-the-art in this rotational paradigm. First, the QuIP family establishes theoretical bounds for sub-3-bit fidelity by utilizing fixed Randomized Hadamard Transforms (RHT) to ensure error incoherence, coupling this with advanced vector projection onto the dense E_8 lattice [9, 10]. Extending this concept, QuaRot applies Hadamard rotations holistically to both weights and activations, smoothing outliers to facilitate uniform low-bit quantization[11]. Advancing beyond fixed transforms, SpinQuant introduces parameterized orthogonal matrices, actively rotating the feature spaces via gradient optimization[12].

Although mathematically elegant, the paradigm of explicitly rotating data to fit an optimal lattice introduces hardware considerations. While high-performance cloud accelerators may absorb this complexity, applying these dense orthogonal matrices at runtime often requires deep addition trees and non-local memory routing (e.g., butterfly networks). This can exacerbate on-chip wire routing congestion and vector decoding latency. Such architectural complexities present challenges for the minimalist hardware philosophy required for edge computing. This architectural bottleneck motivates the exploration of purely multiplier-free and transform-free networks, which we discuss next.

2.3 Multiplier-Free Architectures and Logarithmic Quantization

To reduce both the MAC unit reliance of standard PTQ and the transform overheads of rotational methods, architectural focus has increasingly shifted towards multiplier-free networks. This philosophy often manifests through ternary representations or PoT quantization, replacing matrix multiplications with shift-and-add logic. Prominent examples include the BitNet architecture for models trained from scratch [13], ShiftAddLLM for retrofitting pre-trained LLMs [14], and RepQ-ViT [5], which employs a post-training per-channel PoT quantization scheme.

However, achieving multiplier-free inference without compromising model utility remains an open challenge, as existing methodologies exhibit operational trade-offs. While BitNet demonstrates the viability of ternary weights, it typically requires resource-intensive from-scratch training paradigms, and matching full-precision performance at equivalent parameter scales remains an active area of exploration. Conversely, post-training methods like ShiftAddLLM rely on bit-level operational substitutions, effectively replacing standard multiplications with an expanded volume of bit-sliced additions. While arithmetically valid, this increases the accumulation workload and frequently requires layer-wise optimization. Finally, while shift-add frameworks like RepQ-ViT are effective in vision tasks, they often face challenges generalizing to LLMs. LLM fidelity relies on preserving significant activation outliers, a requirement that rigid per-channel scalar formats can struggle to accommodate, leading to notable accuracy degradation under sub-4-bit constraints.

Crucially, independent scalar rounding often does not fully account for the non-uniform angular distribution of the PoT metric space, leading to the **Low Angular Resolution Regime** and substantial **Angular Gaps**. Here, ORP introduces an alternative paradigm. Rather than explicitly rotating the high-dimensional data at runtime or relying on expanded bit-slice additions (as in ShiftAddLLM), ORP *leaves the data stationary and adaptively constructs the local lattice*. By leveraging the $\mathcal{O}(N)$ Strided Dual-Exchange Theorem, ORP captures critical angular fidelity in-place via a 2D orthogonal residual basis. This fine-grained geometric repair achieves **competitive representational fidelity** compared to state-of-the-art rotational methods, providing a robust prerequisite for viable sub-4-bit multiplier-free deployment.

3 Methodology

In this section, we detail the theoretical formulation and execution pipeline of the ORP framework. Diverging from traditional 1-D scalar quantization, ORP conceptualizes quantization error fundamentally as a geometric angular deviation. Rather than attempting to compensate for this error through conventional scaling, ORP addresses the deviation by capturing the residual within a 2-D orthogonal subspace, constrained by a multiplier-free, Power-of-Two (PoT) hardware paradigm. To promote both representational fidelity and algorithmic efficiency, the framework decouples the projection process into three distinct stages: manifold-aligned preconditioning, geometric discrete basis search, and data-driven joint scale optimization.

3.1 Overall Framework of ORP

Traditional Power-of-Two (PoT) quantization projects a weight vector $\mathbf{w} \in \mathbb{R}^d$ onto a 1D discrete lattice $\mathcal{S} = \{0, \pm 2^k \mid k \in \mathbb{Z}\}$ as $\hat{\mathbf{w}} = c_1 \mathbf{b}_1$. However, this 1D projection encounters limitations related to the **Low Angular Resolution Regime** due to the non-uniform angular distribution inherent in the PoT domain. ORP addresses this by employing a Gram-Schmidt-like expansion within the discrete lattice. The objective is to find a secondary basis $\mathbf{b}_2 \in \mathcal{S}^d$ and continuous scales c_1, c_2 such that $\hat{\mathbf{w}} = c_1 \mathbf{b}_1 + c_2 \mathbf{b}_2$, subject to the orthogonality constraint $\mathbf{b}_1 \perp \mathbf{b}_2$.

3.2 Manifold-Aligned Preconditioning

To mitigate severe performance degradation caused by activation outliers, ORP performs a channel-wise preconditioning before the geometric search. This aligns the Euclidean weight space with the empirical feature manifold. Let $\mathbf{a}_{max}$ denote the calibration activation statistics (e.g., the root mean square for CV tasks or the maximum absolute value for LLMs), and $\mathbf{w}_{max}$ be the column-wise maximum absolute weight. We define a smoothing scaling vector $\mathbf{s}_{vec}$ controlled by a balancing factor $\alpha_{smooth} \in [0, 1]$:

$$\mathbf{s}_{vec} = \frac{\mathbf{a}_{max}^{\alpha_{smooth}}}{\mathbf{w}_{max}^{1-\alpha_{smooth}}}$$

The processed weight is then computed as $\mathbf{w}_{proc} = \mathbf{w} \odot \mathbf{s}_{vec}$. This transformation implicitly stretches the dimensions with higher activation energy, ensuring that the subsequent geometric search naturally prioritizes channels that dominate the model’s output stability without requiring complex iterative re-weighting.

3.3 Primary Projection and Orthogonal Residual Extraction

To effectively utilize the representational capacity of an ultra-low bit hardware budget (e.g., 3-bit or 4-bit), ORP transitions from a conventional symmetric projection to a hardware-aware, asymmetric logarithmic lattice. A requirement for energy-proportional edge inference is the existence of an absolute zero-state, which is essential to trigger hardware zero-skipping and clock gating.

For instance, at the 3-bit threshold (i.e., exactly $2^3 = 8$ discrete physical states), instead of relying on external sparsity masks, our quantization function $\mathcal{Q}(\cdot)$ explicitly breaks spatial symmetry by repurposing the smallest positive quantization bin to represent the absolute zero. Consequently, the primary geometric anchor $\mathbf{b}_1$ is constrained to the following asymmetric discrete lattice $\mathcal{L}_{3bit}$:

$$\mathcal{L}_{3bit} = \{-1, -0.5, -0.25, -0.125, 0, +0.25, +0.5, +1\}$$

Mathematically, we first bound the preconditioned weight into the lattice domain $[-1, 1]$ using a channel-wise max-normalization scalar $s_{norm} = \|\mathbf{w}_{proc}\|_\infty$. For the normalized weight $\mathbf{v} = \mathbf{w}_{proc}/s_{norm}$, the primary projection $\mathbf{b}_1 = \mathcal{Q}(\mathbf{v})$ assigns each element to its nearest valid state in $\mathcal{L}_{3bit}$.

Because this native 1D mapping maps continuous vectors to exponentially sparse coordinates, it can introduce notable angular gaps. As illustrated in Fig. 3, to isolate and correct this geometric deviation, we define the orthogonal

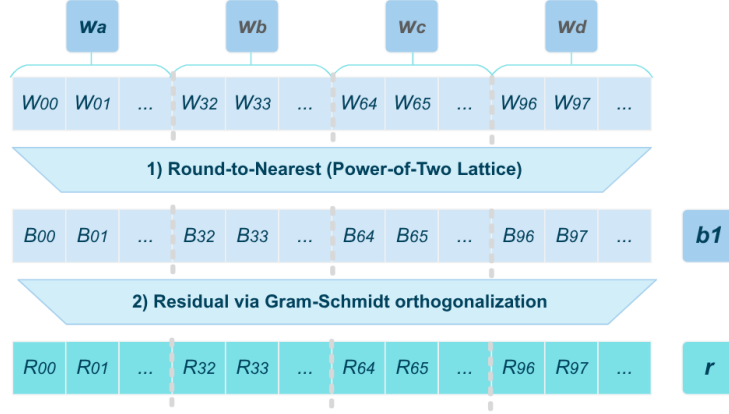


Figure 3: Primary projection and residual extraction. The 128-dimensional macro-block is conceptually partitioned into four 32-dimensional micro-blocks (W_a, W_b, W_c, W_d). After the initial Round-to-Nearest PoT projection ($\mathbf{b}_1$), the orthogonal residual ($\mathbf{r}_\perp$) is extracted via Gram-Schmidt orthogonalization in-place.

quantization residual $\mathbf{r}_\perp$ via a Gram-Schmidt projection. By projecting the original preconditioned weight away from the primary axis $\mathbf{b}_1$, we obtain:

$$\mathbf{r}_\perp = \mathbf{w}_{proc} - \frac{\langle \mathbf{w}_{proc}, \mathbf{b}_1 \rangle}{\|\mathbf{b}_1\|_2^2} \mathbf{b}_1 \quad (1)$$

By definition, this residual is orthogonal to the primary anchor ($\mathbf{r}_\perp \perp \mathbf{b}_1$). The subsequent objective is to construct a secondary discrete basis $\mathbf{b}_2$ that maximally aligns with this orthogonal residual.

3.4 Hierarchical Strided Dual-Exchange and Orthogonal Residual Projection

A key challenge in extreme low-bit quantization is balancing the memory overhead of scaling factors with the geometric degrees of freedom required for angular fitting. As illustrated in Fig. 3, ORP employs a **Hierarchical Block Architecture**. Continuous projection coefficients (c_1, c_2) are shared across a coarse macro-block of size $N = 128$ to limit memory footprints. Conversely, the generation of the secondary orthogonal basis $\mathbf{b}_2$ is executed at a finer micro-block granularity of $G = 32$ (denoted as blocks a, b, c, d).

To construct the micro-block components of $\mathbf{b}_2$ that maximize the inner product with the local orthogonal residual $\mathbf{r}_\perp$, while maintaining discrete hardware constraints, we propose the **Strided Dual-Exchange** operator.

Theorem 1 (Strided Dual-Exchange Orthogonality). Let $\mathbf{v} = [x_0, x_1, \dots, x_{G-1}]^T$ be a micro-block sub-vector of $\mathbf{b}_1$. Given a stride $s \in \{1, 2, \dots, G/2\}$, we define a bijective index mapping $\sigma_s(i) = (i + s) \pmod{G}$, partitioning the indices into disjoint pairs (i, j) where $j = \sigma_s(i)$. Let $\eta_i \in \{+1, -1\}$ be a local sign factor for each pair. We construct the dual-exchanged vector $\mathbf{v}^* = [y_0, y_1, \dots, y_{G-1}]^T$ by applying the transformation:

$$[y_i, y_j] = [-\eta_i x_j, \eta_i x_i]$$

Then, $\mathbf{v}^*$ is orthogonal to $\mathbf{v}$, i.e., $\langle \mathbf{v}, \mathbf{v}^* \rangle = 0$, for any valid stride s and sign configuration $\boldsymbol{\eta}$.

Proof. For each pair (i, j) , the local inner product is $x_i y_i + x_j y_j = x_i(-\eta_i x_j) + x_j(\eta_i x_i) = 0$. Summing over all pairs yields $\langle \mathbf{v}, \mathbf{v}^* \rangle = 0$. ■

As demonstrated in Fig. 4, this theorem ensures orthogonality in the 2D plane through index permutation and sign inversion. Although the negation in Theorem 1 may algebraically yield a state missing from the asymmetric $\mathcal{L}_{3\text{bit}}$ (e.g., $+0.125$), this is resolved efficiently in hardware. In standard Shift-Add ALUs, states are encoded in Sign-Magnitude format. The operation $-\eta_i x_j$ requires no additional memory state; it can be implemented as an XOR gate toggling the sign bit on-the-fly.

To assemble the full macro-block $\mathbf{b}_2$ that optimally aligns with $\mathbf{r}_\perp$, ORP utilizes a decoupled dual-level search:

1. **Micro-Block Analytical Sign Inference:** For a candidate stride s , the objective is to maximize the alignment with the orthogonal residual $\max \langle \mathbf{b}_2, \mathbf{r}_\perp \rangle$. For each pair (i, j) , the local inner product contribution is:

$$y_i r_{\perp, i} + y_j r_{\perp, j} = (-\eta_i x_j) r_{\perp, i} + (\eta_i x_i) r_{\perp, j} = \eta_i (x_i r_{\perp, j} - x_j r_{\perp, i})$$

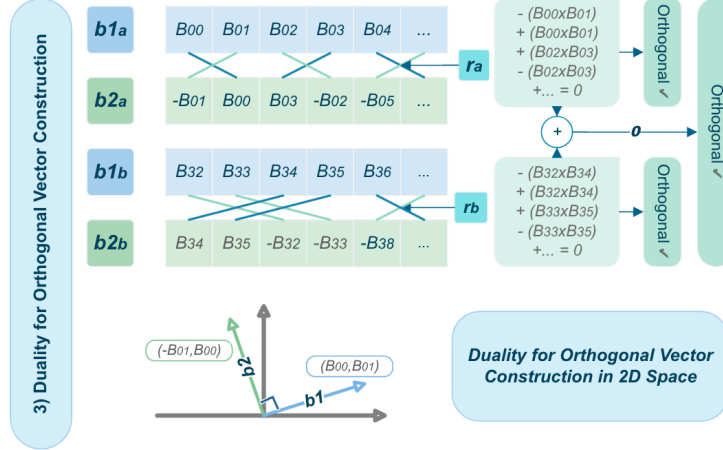


Figure 4: By applying localized intra-block permutations and sign flips across different strides (e.g., adjacent swap $s = 1$ for block a , and strided swap $s = 2$ for block b), the derived basis $\mathbf{b}_2$ maintains mathematical orthogonality to $\mathbf{b}_1$ without leaving the discrete lattice.

To maximize this sum, the optimal sign η_i^* is determined analytically to align with the direction of the term in parentheses:

$$\eta_i^* = \text{sign}(x_i r_{\perp,j} - x_j r_{\perp,i})$$

2. **Constant-Time Stride Evaluation:** Because the candidate stride space is finite and small (i.e., exactly 16 structural permutations for $G = 32$), we perform a deterministic enumeration to select the optimal stride s . Unlike stochastic greedy algorithms that may encounter local minima or iterative methods that incur overhead, this bounded analytical evaluation provides the intra-block optimal configuration in $\mathcal{O}(G)$ operations.
3. **Macro-Block Assembly:** The $N/G = 4$ optimally configured micro-blocks (blocks a, b, c, d) are concatenated to form the complete 128-dimensional basis $\mathbf{b}_2$.

By leveraging this hierarchical design and analytical sign formulation, ORP yields the optimal discrete basis via deterministic $\mathcal{O}(N)$ operations, avoiding the need for exhaustive search in high-dimensional spaces.

3.5 Joint Scale Optimization: GEO vs. REF Modes

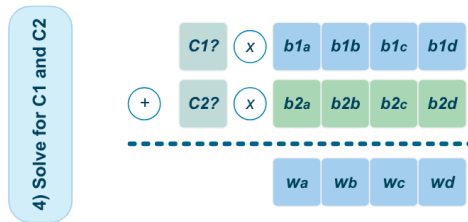


Figure 5: Once the orthogonal bases are anchored, the continuous scales c_1 and c_2 are solved globally and broadcasted across the entire 128-dimensional macro-block (spanning micro-blocks a, b, c, d) to approximate the original weight.

As illustrated in Fig. 5, once the discrete orthogonal directions $\mathbf{b}_1$ and $\mathbf{b}_2$ are anchored, we solve for the continuous scales c_1 and c_2 , which are shared across a macro-block of size $N = 128$ to bound memory overhead. We introduce two specialized solver modes:

1. GEO Mode (Geometric Optimization): In the absence of external calibration data, we assume an isotropic feature space, simplifying the optimization to a Euclidean distance minimization in the preconditioned weight domain. The objective is to minimize the geometric projection error $\|\mathbf{w}_{proc} - (c_1 \mathbf{b}_1 + c_2 \mathbf{b}_2)\|_2^2$. The optimal scales are analytically

derived by solving the 2×2 least-squares system:

$$\begin{bmatrix} \mathbf{b}_1^T \mathbf{b}_1 & \mathbf{b}_1^T \mathbf{b}_2 \\ \mathbf{b}_2^T \mathbf{b}_1 & \mathbf{b}_2^T \mathbf{b}_2 \end{bmatrix} \begin{bmatrix} c_1 \\ c_2 \end{bmatrix} = \begin{bmatrix} \mathbf{w}_{proc}^T \mathbf{b}_1 \\ \mathbf{w}_{proc}^T \mathbf{b}_2 \end{bmatrix} \quad (2)$$

Crucially, because Theorem 1 mathematically ensures structural orthogonality between the two discrete bases ($\mathbf{b}_1^T \mathbf{b}_2 = 0$), the off-diagonal cross terms vanish. This diagonalizes the system and decouples the variables, allowing the continuous scales to be computed via independent, straightforward scalar projections: $c_1 = (\mathbf{w}_{proc}^T \mathbf{b}_1) / \|\mathbf{b}_1\|_2^2$ and $c_2 = (\mathbf{w}_{proc}^T \mathbf{b}_2) / \|\mathbf{b}_2\|_2^2$. This property makes the GEO mode computationally straightforward, facilitating zero-shot quantization or rapid edge deployment.

2. REF Mode (Activation-Aware Refinement): To capture cross-channel feature correlations and compensate for quantization loss in the feature manifold, REF mode incorporates the calibration inputs $\mathbf{X}_q \in \mathbb{R}^{N \times d}$. We define the layer-wise output target $\mathbf{Y} = \mathbf{X}_q \mathbf{w}_{proc}$ and the projected basis matrices $\mathbf{A} = [\mathbf{X}_q \mathbf{b}_1, \mathbf{X}_q \mathbf{b}_2]$. The continuous scales $\mathbf{c} = [c_1, c_2]^T$ are jointly optimized using Ridge regression to address ill-conditioned feature matrices:

$$\mathbf{c}^* = (\mathbf{A}^T \mathbf{A} + \lambda \mathbf{I})^{-1} \mathbf{A}^T \mathbf{Y} \quad (3)$$

where $\lambda = 10^{-4}$ acts as the Tikhonov regularization factor. By absorbing the empirical feature covariance $\mathbf{X}_q^T \mathbf{X}_q$, the REF mode compensates for spatial noise.

It is important to distinguish our decoupled formulation from paradigms that embed dynamic activation quantization explicitly within the scale-solving loop. Injecting discrete, non-smooth activation quantization noise directly into the design matrix $\mathbf{A}$ can negatively impact the numerical stability of the normal equations. Mathematically, this induces an **Errors-in-Variables (EIV)** problem. A stochastically perturbed covariance matrix can lead to biased estimators and erratic matrix inversions, which may introduce bias into the optimal continuous scales $\mathbf{c}^*$. To mitigate this, our REF mode isolates the geometric basis optimization from dynamic activation noise, relying on calibration features to yield deterministic and mathematically sound coefficients.

3.6 Fully Quantized Inference Dataflow

To deploy the ORP framework on hardware, both the dynamic activations $\mathbf{X}$ and the continuous geometric scales (c_1, c_2) must be symmetrically quantized to b_a -bit and b_c -bit integers (denoted as $\tilde{\mathbf{X}}$ and $\tilde{\mathbf{c}}_m$), with respective global scaling factors s_x and s_{cm} . By integrating these integer components, the linear layer computation $\mathbf{Y} = \mathbf{X}\mathbf{W}$ is transformed into a hardware-compatible dataflow:

$$\hat{\mathbf{Y}} = (s_x s_{c1}) \left[(\tilde{\mathbf{X}} \mathbf{B}_1) \text{diag}(\tilde{\mathbf{c}}_1) \right] + (s_x s_{c2}) \left[(\tilde{\mathbf{X}} \mathbf{B}_2) \text{diag}(\tilde{\mathbf{c}}_2) \right] \quad (4)$$

This formulation confines the floating-point scaling factors to the final global accumulation step. The core $\mathcal{O}(N^2)$ matrix multiplications— $(\tilde{\mathbf{X}} \mathbf{B}_1)$ and $(\tilde{\mathbf{X}} \mathbf{B}_2)$ —are executed using zero-MAC shift-add operations, as $\mathbf{B}_1, \mathbf{B}_2 \in \mathcal{S}$. Furthermore, the b_c -bit integer scaling via $\text{diag}(\tilde{\mathbf{c}})$ introduces a lightweight $\mathcal{O}(N)$ multiplication per 128-dimensional macro-block. By amortizing this operation across the inner loop, the computational overhead becomes minimal, yielding an effectively multiplier-free datapath while maintaining sub-4-bit representational fidelity.

4 Result

To systematically validate the ORP framework, we present an empirical evaluation structured around four core dimensions.

First, we assess the framework’s cross-modality applicability by applying zero-MAC hardware constraints to Vision Transformers on the ImageNet-1K benchmark. Second, we examine the relationship between algorithmic fidelity and physical deployment through an Edge NLP algorithm-hardware co-evaluation, integrating LLaMA-2 calibration efficiency with 28nm RTL synthesis metrics. Third, we evaluate the architectural design choices via an ablation study on the geometric benefits of dual-basis projection. Finally, we explore the framework’s deployment flexibility and resilience to calibration bias through zero-shot reasoning tasks, comparing the data-free GEO and REF paradigms.

4.1 Main Results on Vision Transformers

To evaluate the cross-modality applicability of ORP, we test standard Vision Transformers on the ImageNet-1K benchmark. We apply specific hardware constraints to ORP: symmetric INT8 activations, purely INT8 scaling

Table 1: Top-1 Accuracy (%) on ImageNet-1K for various Vision Transformers. **REC** denotes whether the method requires runtime reconstruction (dequantization) prior to arithmetic operations. (GS=128 indicates Group Size).

Method	REC	W/A	DeiT-S	DeiT-B	ViT-S	ViT-B	Swin-S	Swin-B
Full-Precision	-	32/32	79.85	81.80	81.39	80.32	83.23	85.27
QDrop[7]	✓	3/3	16.89	22.38	4.32	5.99	58.96	52.19
BRECQ[6]	✓	3/3	8.26	12.87	1.86	0.14	7.32	1.21
AIQViT[8]	✓	3/3	55.36	66.15	41.32	43.68	71.42	63.01
RepQ-ViT[5]	×	3/3	4.85	7.23	0.44	0.17	1.22	4.87
Ours	×	3/3	20.75	61.02	2.93	42.18	26.60	23.22
Ours	×	3/4	70.16	77.94	67.51	78.49	79.21	81.37
Ours	×	3/6	76.07	80.20	75.42	80.31	81.36	83.34
PTQ4ViT[15]	✓	4/4	34.08	64.39	42.57	30.69	76.09	74.02
APQ-ViT[16]	✓	4/4	43.55	67.48	47.95	41.41	77.15	76.48
QDrop[7]	✓	4/4	35.79	65.47	17.77	21.72	78.92	80.49
BRECQ[6]	✓	4/4	54.31	62.96	63.90	61.54	76.63	74.15
AIQViT[8]	✓	4/4	72.75	79.19	70.63	74.15	80.93	81.22
RepQ-ViT[5]	×	4/4	69.03	75.61	65.05	68.48	79.45	78.32
Ours	×	4/4	73.28	79.04	72.87	79.54	80.61	82.61
Ours	×	4/6	78.35	81.14	78.78	80.96	82.39	84.34

coefficients, and a standard group size ($gs = 128$) adopted directly from our LLM configurations. While group-wise quantization introduces a finer granularity than the per-channel scaling used by baselines like RepQ-ViT, our strict restriction to INT8 scales effectively offsets the memory overhead. More importantly, unlike baselines that require FP16 scales and runtime dequantization (REC) feeding into dense MAC arrays, ORP provides a strictly multiplier-free datapath without zero-point compensation overhead. As detailed in Table 1, ORP demonstrates strong performance under these hardware constraints. In the 4/4-bit setting, ORP achieves competitive accuracy compared to REC-dependent baselines and outperforms existing REC-free methods, reaching **73.28%** on DeiT-S and **79.54%** on ViT-B using PoT bitwise shifts. Furthermore, ORP shows adaptability in the sub-4-bit regime. Although applying purely MAC-free methods at 3/3-bit results in performance degradation, marginally relaxing the activation bandwidth to W3/A4 helps restore accuracy. This hybrid configuration yields **78.49%** on ViT-B, surpassing 4/4-bit baselines such as APQ-ViT (41.41%). Ultimately, the W3/A6 configuration (80.31% on ViT-B) performs similarly to the full-precision baseline (80.32%), indicating that ORP serves as a reliable, high-fidelity execution paradigm across both linguistic and visual domains.

4.2 Edge NLP Inference and Hardware Co-Evaluation

To explore the practical deployment potential of the ORP framework in resource-constrained edge scenarios, we present an algorithm-hardware co-evaluation. Table 2 provides a comprehensive overview, integrating predictive perplexity, software-level calibration time, and RTL-synthesized hardware metrics at a 28nm technology node.

Figure 6 illustrates the architectural distinctions between our approach and traditional baselines. Conventional quantization methods (e.g., AWQ, SpinQuant) typically map their execution onto traditional Multiply-Accumulate (MAC) units. A notable characteristic in digital VLSI design is that at ultra-low bit-widths (e.g., 3-bit or 4-bit), the silicon area of a standard MAC unit does not significantly exceed that of a shift-adder, as the multiplier logic scales down. However, the primary hardware bottleneck in these extreme low-bit regimes shifts from area to *combinational logic depth*. Even a low-bit multiplier necessitates an internal adder tree, which introduces unavoidable routing and propagation delays. By leveraging the Power-of-Two (PoT) nature of our orthogonal residuals, the ORP datapath bypasses this multiplication tree. The computation is physically instantiated as parallel bit-shifters, effectively flattening the logic depth.

This flattened architecture translates into tangible timing improvements. As detailed in Table 2, under sub-4-bit configurations, the ORP hardware unit achieves a consistent critical path delay of **0.35 ns**. Compared to the AWQ baseline (which ranges up to 0.90 ns), this shortened logic path theoretically allows the ORP accelerator to operate at a frequency of approximately **2.85 GHz** on 28nm silicon. Concurrently, it maintains a favorable balance of energy efficiency, delivering up to **3.33 TOPS/W** under the W3/A8 configuration.

Coupled with these hardware characteristics, ORP demonstrates practical advantages in software deployment, particularly regarding calibration efficiency. Our ORP implementation relies entirely on vanilla PyTorch operators without any custom CUDA optimizations. The computational overhead inherent to gradient-based optimization is substantial; for

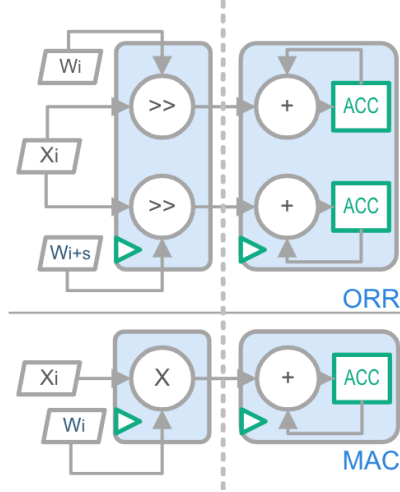


Figure 6: Hardware microarchitecture comparison. The standard MAC unit (bottom) relies on conventional multiplication logic, whereas the proposed ORP datapath (top) executes operations using parallel bit-shifters ($\gg$) and adders, avoiding dense multiplier arrays.

Table 2: Algorithm-Hardware Co-Evaluation on LLaMA-2 Models. NLP performance is measured by WikiText-2 Perplexity (PPL). Calibration time (QT) is measured on a single workstation. Hardware efficiency (Energy Efficiency and Critical Path Delay) is synthesized at a 28nm technology node.

W/A	Method	Accuracy (PPL $\downarrow$)		Calibration Time		Hardware (28nm)	
		L2-7B	L2-13B	QT (7B)	QT (13B)	TOPS/W $\uparrow$	Delay (ns) $\downarrow$
16/16	Base	5.49	4.91	—	—	—	—
4/16	AWQ	5.66	5.00	32.1 min	49.6 min	1.53	0.90
	ORP (Ours)	5.78	5.09	15.1 min	34.8 min	2.12	0.60
4/8	AWQ	5.66	5.00	32.1 min	49.6 min	2.94	0.60
	SpinQuant	5.70	5.00	358.0 min	—	—	—
	ORP (Ours)	5.79	5.10	15.1 min	34.8 min	2.63	0.35
3/16	AWQ	6.49	5.47	32.1 min	49.6 min	1.97	0.80
	ORP (Ours)	6.10	5.32	15.1 min	34.8 min	2.03	0.35
3/8	AWQ	6.50	5.47	32.1 min	49.6 min	3.31	0.50
	ORP (Ours)	6.11	5.34	15.1 min	34.8 min	3.33	0.35

instance, using its official repository implementation, SpinQuant requires approximately 358.0 minutes to calibrate the L2-7B model. To evaluate search-based methods under a strictly controlled, pure-Python environment, we benchmarked AWQ using the LLMC framework [17], recording calibration times of 32.1 minutes for L2-7B and 49.6 minutes for L2-13B. In stark contrast, ORP’s analytical formulation fundamentally shifts the computational paradigm. Operating strictly under the same unoptimized conditions, ORP completes the calibration in merely 15.1 minutes for the L2-7B model. This dramatic acceleration over both gradient-driven and search-based methods underscores the profound inherent efficiency of our closed-form solution, demonstrating exceptional practical performance even prior to any hardware-level engineering optimization.

Beyond computational efficiency, ORP robustly preserves model fidelity. While it maintains competitive performance in standard 4-bit configurations compared to AWQ, it shows a notable improvement in the more challenging 3-bit regime, successfully reducing the L2-7B perplexity from 6.49 to 6.10. Ultimately, ORP provides a highly favorable trade-off between accuracy and deployment agility. Even in instances where perplexity might be marginally higher, the magnitude of reduction in calibration time—achieved purely through algorithmic innovation rather than hardware engineering—combined with improvements in hardware frequency, makes ORP an exceptionally practical choice for dynamic edge adaptation.

Table 3: Ablation study on the basis dimension (K) across different grid topologies in the REF mode (Updated per latest logs). Transitioning from a single basis ($K = 1$) to our dual orthogonal basis ($K = 2$) consistently restores perplexity, effectively mitigating the representation degradation in extremely sparse Log_2 grids.

Topology	W/A	Dim (K)	L2-7B ↓	L2-13B ↓
PoT	3/16	$K = 1$	6.76	5.71
		$K = 2$	6.10	5.32
	4/16	$K = 1$	5.98	5.22
		$K = 2$	5.78	5.09
Linear	3/16	$K = 1$	6.68	5.75
		$K = 2$	6.07	5.31
	4/16	$K = 1$	5.71	5.06
		$K = 2$	5.61	4.99

Table 4: Performance and deployment efficiency of the ORP framework on LLaMA-2 models compared to the FP16 baseline. All experiments were conducted on a single NVIDIA RTX 6000 Ada (96GB) GPU. GEO and REF denote the data-free mode and activation-refined mode, respectively.

Model	W/A	Mode	Time	WK↓	HS↑	ARC-C↑	WG↑
L2-7B	16/16	FP16	–	5.49	57.14%	43.34%	69.06%
	4/16	ORP-GEO	11.9 min	5.85	55.87%	42.24%	67.64%
	4/16	ORP-REF	15.1 min	5.78	55.48%	40.36%	68.03%
	3/16	ORP-GEO	11.9 min	6.83	51.82%	39.42%	67.72%
	3/16	ORP-REF	15.1 min	6.10	54.11%	40.10%	68.35%
	16/16	FP16	–	4.91	60.07%	48.46%	72.30%
L2-13B	4/16	ORP-GEO	28.4 min	5.14	59.08%	47.87%	72.14%
	4/16	ORP-REF	34.8 min	5.09	58.91%	47.53%	71.27%
	3/16	ORP-GEO	28.4 min	5.84	54.56%	41.55%	70.40%
	3/16	ORP-REF	34.8 min	5.32	58.50%	43.86%	72.06%

4.3 The Geometric Dividend of Dual-Basis Reconstruction

To empirically validate the architectural design of the proposed method, we conduct a targeted ablation study isolating the basis dimension (K) across distinct grid topologies (PoT versus Linear). As illustrated in Table 3, transitioning from a standard single-basis projection ($K = 1$) to our dual orthogonal basis ($K = 2$) yields notable geometric benefits, particularly in aggressively quantized regimes.

Clear evidence of ORP’s efficacy emerges under the 3-bit Log_2 configuration. Constrained by the exponential sparsity of its representational manifold, the single-basis Log_2 projection experiences a notable angular degradation, resulting in a perplexity of 6.760 on the 7B model. However, the introduction of the orthogonal residual dimension ($\mathbf{b}_2$) effectively corrects this spatial distortion, reducing the perplexity to 6.100—a substantial improvement of $\Delta 0.66$ without expanding the primary bit-width datapath.

Crucially, this ablation uncovers an important hardware-algorithm synergy. Our dual-basis Log_2 formulation at 3-bit (PPL 6.100) outperforms the conventional single-basis Linear formulation (PPL 6.670). This demonstrates that ORP equips the multiplier-free shift-and-add paradigm with sufficient representational capacity to exceed standard compute-heavy linear quantization. Furthermore, the empirical data corroborates our geometric thesis regarding grid saturation. While the $K = 2$ expansion delivers substantial improvements at 3-bit, the relative improvement naturally narrows at 4-bit (e.g., from 5.98 to 5.78 for Log_2 7B). This scaling behavior indicates that ORP’s two-dimensional spatial correction provides the greatest impact precisely where hardware constraints and manifold sparsity are most severe.

4.4 Zero-Shot Reasoning and The Dual-Track Deployment Paradigm

Table 4 evaluates the ORP framework on LLaMA-2 under extreme low-bit configurations, reporting WikiText-2 (WK) perplexity and zero-shot reasoning accuracy (HellaSwag, ARC-C, WinoGrande). A notable highlight is ORP’s

calibration efficiency. Unlike search-based methods requiring hours, our analytical solver completes full-model calibration in approximately **11.9–15.1 minutes** on a single workstation. The data-free Geometric-Only (GEO) mode serves as a strong baseline, maintaining 67.72% on WG even at 3-bit (W3/A16). Conversely, the Activation-Refined (REF) mode uses a small calibration set to suppress outliers, consistently delivering **improved overall accuracy**. For L2-7B at 3-bit, REF reduces WK perplexity from 6.83 to 6.10, demonstrating ORP’s practical flexibility between instant instantiation and data-driven precision.

The 13B REF model (W4/A16) achieves 5.09 perplexity and 58.91% on HellaSwag, indicating that multiplier-free PoT operations can support large-scale inference while maintaining representational fidelity. Furthermore, the 4-bit configurations highlight an interesting dynamic regarding **domain generalization**. While the 13B REF mode achieves lower in-domain perplexity (5.09 vs. 5.14), it is marginally outperformed by the data-free GEO mode on zero-shot tasks like WG (71.27% vs. 72.14%). This observation aligns with the **Calibration Bias** inherent to data-driven PTQ: REF trades slight out-of-domain generalization to absorb specific calibration outliers. In contrast, GEO relies strictly on static geometric weight manifolds, making it inherently resistant to dataset overfitting and providing a highly reliable baseline for diverse reasoning tasks.

5 Conclusion

In this paper, we propose the Orthogonal Residual Projection (ORP) framework, an algorithm-hardware co-design approach for ultra-low-bit model quantization. By diverging from traditional Multiply-Accumulate (MAC) dependent execution, ORP formulates quantization as a dual-basis geometric projection, enabling the mapping of both Large Language Models (LLaMA-2) and Vision Transformers (ViTs) onto a multiplier-free, Power-of-Two (PoT) datapath.

Our empirical evaluation indicates that ORP achieves a favorable Pareto frontier for edge intelligence. Algorithmically, the analytical solver facilitates full-model calibration in approximately 15 minutes, reducing the computational overhead typically associated with contemporary search-based methods. Furthermore, the decoupling of the Geometric-Only (GEO) and Activation-Refined (REF) modes provides a practical perspective on calibration bias, offering practitioners a flexible choice between data-free zero-shot reasoning and data-driven precision.

At the hardware level, the shift-and-add architecture reduces the combinational logic depth inherent to dense multipliers. Synthesized at a 28nm technology node, the ORP accelerator attains a critical path delay of 0.35 ns, supporting a theoretical maximum clock frequency of approximately 2.85 GHz. Additionally, under an iso-frequency comparison at 1.8 GHz, it delivers an energy efficiency of 3.33 TOPS/W under sub-4-bit constraints.

Ultimately, ORP demonstrates that extreme quantization can be realized effectively without relying on asymmetric scaling, runtime dequantization, or deep multiplier trees. By aligning geometric principles with silicon-level timing efficiency, ORP offers a viable path toward the agile deployment of large foundation models on resource-constrained edge devices.

References

- [1] Jiale Chen, Yalda Shabanzadeh, Elvir Crnčević, Torsten Hoefer, and Dan Alistarh. The geometry of llm quantization: Gptq as babai’s nearest plane algorithm. *arXiv preprint arXiv:2507.18553*, 2025.
- [2] Guangxuan Xiao, Ji Lin, Mickael Seznec, Hao Wu, Julien Demouth, and Song Han. Smoothquant: Accurate and efficient post-training quantization for large language models. In *International conference on machine learning*, pages 38087–38099. PMLR, 2023.
- [3] Elias Frantar, Saleh Ashkboos, Torsten Hoefer, and Dan Alistarh. Gptq: Accurate post-training quantization for generative pre-trained transformers. *arXiv preprint arXiv:2210.17323*, 2022.
- [4] Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, and Song Han. Awq: Activation-aware weight quantization for on-device llm compression and acceleration. *Proceedings of machine learning and systems*, 6:87–100, 2024.
- [5] Zhikai Li, Junrui Xiao, Lianwei Yang, and Qingyi Gu. Repq-vit: Scale reparameterization for post-training quantization of vision transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 17227–17236, 2023.
- [6] Yuhang Li, Ruihao Gong, Xu Tan, Yang Yang, Peng Hu, Qi Zhang, Fengwei Yu, Wei Wang, and Shi Gu. BRECQ: Pushing the Limit of Post-Training Quantization by Block Reconstruction, July 2021. arXiv:2102.05426 [cs].
- [7] Xiuying Wei, Ruihao Gong, Yuhang Li, Xianglong Liu, and Fengwei Yu. QDrop: Randomly Dropping Quantization for Extremely Low-bit Post-Training Quantization, February 2023. arXiv:2203.05740 [cs].

- [8] Runqing Jiang, Ye Zhang, Longguang Wang, Pengpeng Yu, and Yulan Guo. Aiqvit: Architecture-informed post-training quantization for vision transformers. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 39, pages 17635–17643, 2025.
- [9] Jerry Chee, Yaohui Cai, Volodymyr Kuleshov, and Christopher M De Sa. Quip: 2-bit quantization of large language models with guarantees. *Advances in neural information processing systems*, 36:4396–4429, 2023.
- [10] Albert Tseng, Jerry Chee, Qingyao Sun, Volodymyr Kuleshov, and Christopher De Sa. Quip#: Even better llm quantization with hadamard incoherence and lattice codebooks. *Proceedings of machine learning research*, 235:48630, 2024.
- [11] Saleh Ashkboos, Amirkeivan Mohtashami, Maximilian L. Croci, Bo Li, Pashmina Cameron, Martin Jaggi, Dan Alistarh, Torsten Hoefler, and James Hensman. Quarot: Outlier-free 4-bit inference in rotated llms. *Advances in Neural Information Processing Systems*, 37:100213–100240, 2024.
- [12] Zechun Liu, Changsheng Zhao, Igor Fedorov, Bilge Soran, Dhruv Choudhary, Raghuraman Krishnamoorthi, Vikas Chandra, Yuandong Tian, and Tijmen Blankevoort. Spinquant: Llm quantization with learned rotations. *arXiv preprint arXiv:2405.16406*, 2024.
- [13] Hongyu Wang, Shuming Ma, Li Dong, Shaohan Huang, Huaijie Wang, Lingxiao Ma, Fan Yang, Ruiping Wang, Yi Wu, and Furu Wei. Bitnet: Scaling 1-bit transformers for large language models. *arXiv preprint arXiv:2310.11453*, 2023.
- [14] Haoran You, Yipin Guo, Yichao Fu, Wei Zhou, Huihong Shi, Xiaofan Zhang, Souvik Kundu, Amir Yazdanbakhsh, and Yingyan Celine Lin. Shiftaddllm: Accelerating pretrained llms via post-training multiplication-less reparameterization. *Advances in Neural Information Processing Systems*, 37:24822–24848, 2024.
- [15] Zhihang Yuan, Chenhao Xue, Yiqi Chen, Qiang Wu, and Guangyu Sun. PTQ4ViT: Post-training Quantization for Vision Transformers with Twin Uniform Quantization. In Shai Avidan, Gabriel Brostow, Moustapha Cissé, Giovanni Maria Farinella, and Tal Hassner, editors, *Computer Vision – ECCV 2022*, volume 13672, pages 191–207. Springer Nature Switzerland, Cham, 2022. Series Title: Lecture Notes in Computer Science.
- [16] Yifu Ding, Haotong Qin, Qinghua Yan, Zhenhua Chai, Junjie Liu, Xiaolin Wei, and Xianglong Liu. Towards accurate post-training quantization for vision transformer. In *Proceedings of the 30th ACM international conference on multimedia*, pages 5380–5388, 2022.
- [17] Chengtao Lv, Bilang Zhang, Yang Yong, Ruihao Gong, Yushi Huang, Shiqiao Gu, Jiajun Wu, Yumeng Shi, Jinyang Guo, and Wenya Wang. Llm+: Benchmarking vision-language model compression with a plug-and-play toolkit. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 24189–24197, 2026.