OpenAI Codex CLI: Storage Persistence & Data Flow

Table 1: OpenAI Codex Storage Persistence Map

Store	What it Stores	Written By	Auto-Loaded?	How Deleted
`~/.codex/config.toml`	User configuration, sandbox policy, and feature flags.	User / Harness	YES	Manual file deletion.
`~/.codex/auth.json`	API keys, OAuth tokens, and account identity.	Harness	YES	`codex logout` or manual deletion.
`~/.codex/state_5.sqlite`	Active threads, git metadata, and token counts.	Harness	YES	`codex delete` or database reset.
`~/.codex/sessions/...`	Full append-only conversation transcript and tool outputs.	Harness	NO (Yes on resume)	`codex delete` or manual purge.
`~/.codex/memories_1.sqlite`	Extracted long-term agent memories and facts.	Harness	YES	Thread or row deletion.
`~/.codex/AGENTS.md`	Global user instructions and behavior guidelines.	User	YES	Manual file deletion.
`<project>/AGENTS.md`	Project-specific rules and build instructions.	Developer	YES	Manual deletion or `git rm`.

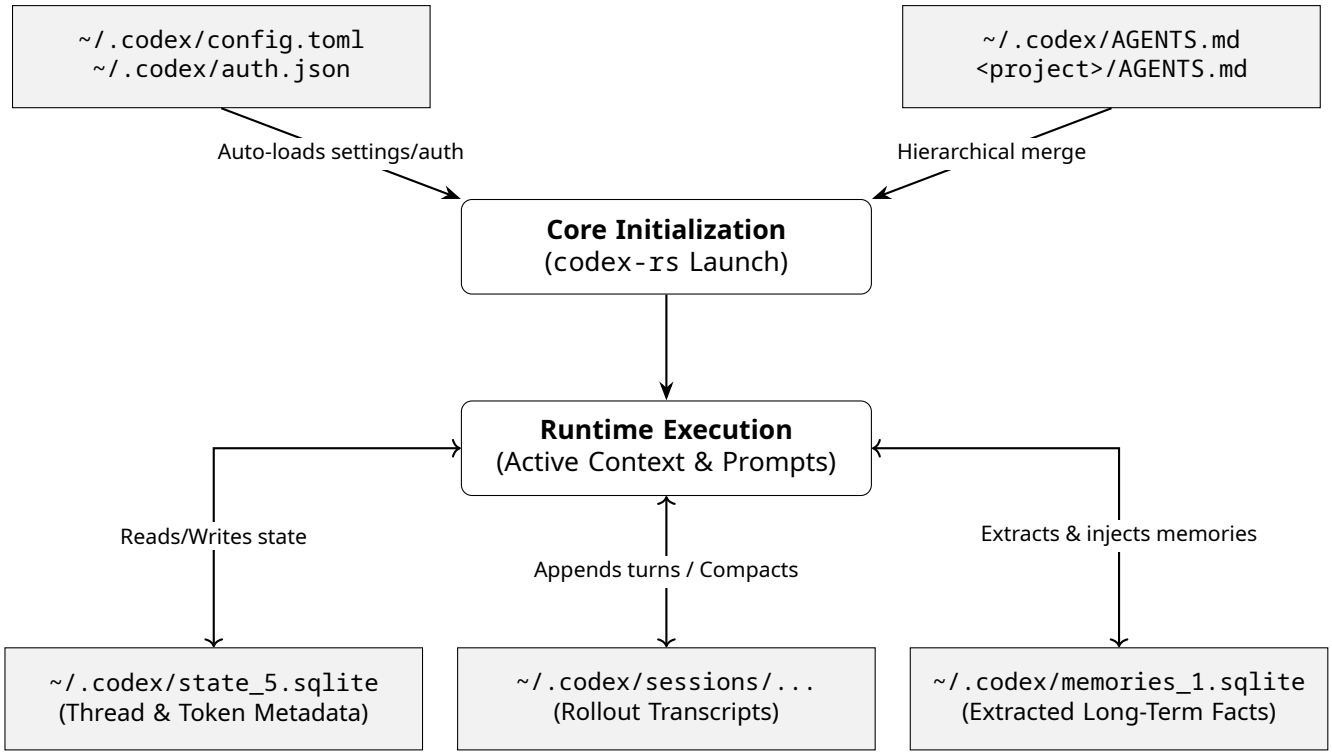

Figure 1: Codex CLI Storage Architecture & Data Flow Diagram