



# Home Access Plus+

Access your school from Home

Version 9 Manual



# Home Access Plus+

Version 9 Documentation

Updated 19/04/2013 19:42:00

For best results, follow the video

<http://hap.codeplex.com/wikipage?title=Installation%20Video&referringTitle=Documentation>


Home Access Plus+ needs to be installed onto a Website with SSL enabled, i.e. a HTTPS website.

You can get a free SSL Certificate from <http://www.startssl.com>

## Installation Instructions IIS 6

1. Remote Desktop and/or log on to your primary domain controller (it can run on a member server)
2. Go to <http://www.microsoft.com/net>
3. Download .net framework version 4.
4. Install .net framework 4
5. Restart the server
6. Load IIS Manager
7. Expand the server
8. Click on web service extensions
9. Select ASP.net v4.xxx
10. Click Allow
11. Right Click on Application Pools
12. Select Add New Pool
13. Enter a Pool ID (e.g. "HAP")
14. Right Click on HAP (Pool ID) and Click Properties
15. Deselect Recycle worker process in minutes
16. Click on Performance
17. Deselect Idle shutdown timer
18. Install an SSL Certificate onto the Default Website:
  - a. Right click on the Website you want to put HAP+ into and click Properties
  - b. Under Web Site Identification click Advanced
  - c. In the Advanced Web site identification box, under Multiple identities for this Web site, verify that the Web site IP address is assigned to port 443, the default port for secure communications, and then click OK. Optionally, to configure more SSL ports for this Web site, click Add under Multiple identities of this Web site, and then click OK.
  - d. On the Directory Security or File Security tab, under Secure communications, click Edit.
  - e. To enable SSL client certificate authentication and mapping features, select the Enable client certificate mapping check box, click Edit, add the 1-to-1 or many-to-1 mappings you need, and then click OK three times.
19. Browse to <http://hap.codeplex.com>
20. Download the latest version
21. Browse to
  - a. **RM CC:** D:\RMNetwork\RMManage\Web Components
  - b. **All other:** Your IIS wwwroot for the website you wish to use
22. Create a new folder called "HAP"
23. Extract the contents of the HAP Download to this folder
24. Right click HAP and select properties
25. Deselect readonly and click ok.

*Allow it to reset every readonly attribute*

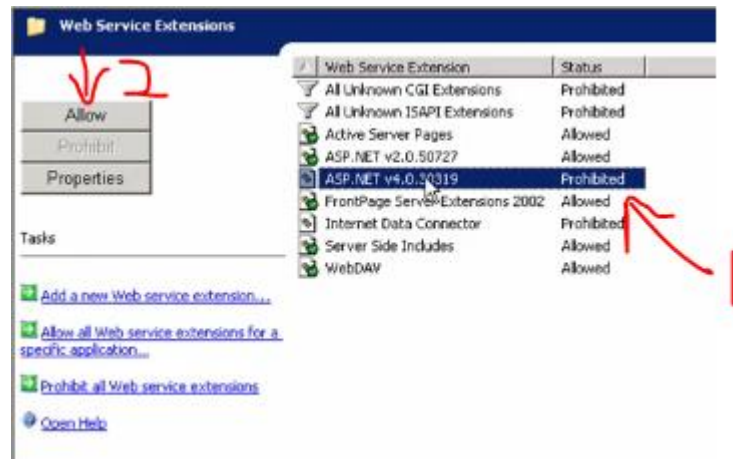




# Home Access Plus+

Version 9 Documentation

Updated 19/04/2013 19:42:00

26. Add the permission:
  - a. IIS\_WPG and Network Service. Set them to Read & Execute permissions
  - b. App\_Data Folder: Set to Read & Write
27. Go back to IIS Manager
28. Expand Web Sites
29. Select the website you want to use
30. Right Click on HAP and click properties
31. Click the create button next to Application name:
32. Select "HAP" (App Pool from 13) as the application pool
33. Click the ASP.net Tab
34. Change ASP.net Version to v4.x.x
35. Click Apply
36. Click Yes on the Confirm Box
37. Wait...
38. Click on Directory
39. Click the Configuration Button
40. Double Click on the .ascx Application Extension
41. Copy the Executable path
42. Click OK
43. Click Insert... under wildcard application maps
44. Paste the Path from 41
45. Deselect Verify that file exists
46. Click OK
47. Click OK
48. Under Documents
49. Remove all from the default documents
50. Add "Default.aspx"
51. Click the Directory Security Tab
52. Click Edit
53. Tick Enable Anonymous Access
54. Untick Basic Authentication
55. Click OK
56. Close IIS Manager

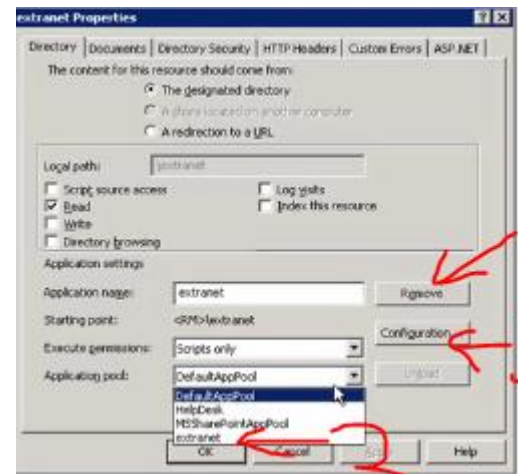



# Home Access Plus+

Version 9 Documentation

Updated 19/04/2013 19:42:00

## Installation Instructions IIS 7

1. Remote Desktop and/or log on to your primary domain controller (it can run on a member server)
2. Go to <http://www.microsoft.com/net>
3. Download .net framework version 4 (Full not Client).
4. Install .net framework 4
5. Restart the server
6. Load IIS Manager
7. Expand the server
8. Click on Application Pools
9. Select Add Application Pool...
10. Enter a Pool ID (e.g. "HAP")
11. Select .NET Framework v4
12. Integrated Managed Pipeline Mode
13. Click OK
14. Select your server in the tree on the left
15. Double click on the Server Certificates in the main section
16. Import or Create an SSL Certificate
17. Select a site in the tree view and click Bindings... in the Actions pane.
18. Click Add... to add your new SSL binding to the site.  
(if HTTPS already exists check that it has the correct certificate assigned to it)
19. Click **Add...** to add your new SSL binding to the site.
20. Select **https** as the Type, and assign the **SSL Certificate** added to IIS from above
21. Click OK
22. Click Close
  - For more information visit <http://learn.iis.net/page.aspx/144/how-to-set-up-ssl-on-iis/>
23. Browse to <http://hap.codeplex.com>
24. Download the latest version of the HAP+ Web ZIP
25. Browse to Your IIS wwwroot for the website you wish to use (C:\inetpub\wwwroot)
26. Create a new folder called "HAP"
27. Extract the contents of the HAP Download to this folder
28. Right click HAP and select properties
29. Deselect readonly and click ok.  
*Allow it to reset every readonly attribute*
30. Add the permission:
  - a. IIS AppPool\HAP (Findable from the Local Machine). Set them to Read & Execute permissions
  - b. App\_Data Folder: Set to Read & Write
31. Go back to IIS Manager
32. Expand Web Sites
33. Select the website you want to use
34. Right Click on HAP and select Convert to Application...
35. Tell IIS to use the HAP Application Pool
36. Select "HAP"
37. Double Click on IIS Authentication
38. Confirm Anonymous and Forms Authentication is Enabled, and the rest are disabled
39. Click on Anonymous Authentication
40. Click on Edit...




# Home Access Plus+

Version 9 Documentation

Updated 19/04/2013 19:42:00

41. Select Application pool identity
42. Go Back
43. Close IIS Manager

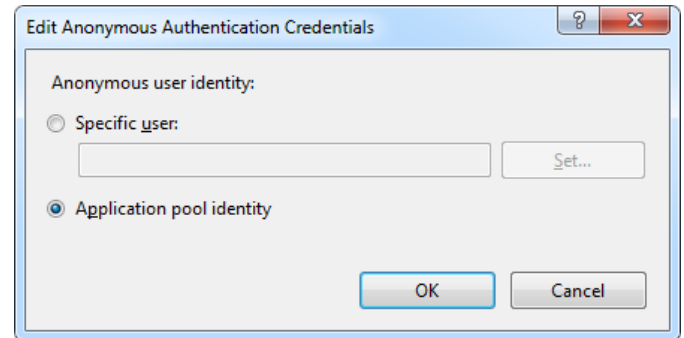

## Configuration

1. Browse to your website and the setup should run

## Kerberos Internal SSO

To enable this, please follow the video at

<http://hap.codeplex.com/wikipage?title=Kerberos%20Setup&referringTitle=Videos>

## Exchange 2007/2010/2013/Office 365 LiveTiles

If you are using Kerberos SSO or Windows Authentication, please set (Under the Proxy/SMTP Tab of the HAP+ Settings) the EWS Url as well a user to use for base impersonation, please this Technet Article:

<http://technet.microsoft.com/en-us/library/ff793352%28v=office.14%29.aspx>

## Layout Integration/Branding

1. Browse to ~/master.masterpage
2. Edit the content of this file to suit your site's layout

## User Card Setup

1. Download the HAP+ User Card Installer from the HAP+ Site
2. Extract the ZIP file
3. Edit HAP User Card.config in notepad
4. Change:
  - a. The Endpoint Address to your HAP+ URL
  - b. Change the OU for controlled assessment users (BLANK = DISABLED FEATURE)
  - c. Enable/Disable the Help Desk Tab
5. Deploy HAP User Card Setup.msi

## Logon Tracker Setup

1. Download the HAP+ Logon Tracker Installer from the HAP+ Site
2. Deploy HAP User Card Setup.msi
3. In a Group Policy Object add Startup/Logon/Logoff/Shutdown Scripts:
  - a. Startup: "%windir%\system32\hap logon tracker.exe" <https://%yourdomain%/hap>
  - b. Logon: "%windir%\system32\hap logon tracker.exe" logon <https://%yourdomain%/hap>
  - c. Logoff: "%windir%\system32\hap logon tracker.exe" <https://%yourdomain%/hap>
  - d. Shutdown: "%windir%\system32\hap logon tracker.exe" <https://%yourdomain%/hap>
- Note the Parameter(s), this tells the logon tracker where HAP+ is installed



# Home Access Plus+

Version 9 Documentation

Updated 19/04/2013 19:42:00

## Logon Tracker SQL Provider

New in HAP+ v6 is the ability to offload the Logon Tracker to a SQL Provider

1. Open SQL Server Management Console (SQLEXPRESS or SQL FULL)
2. Create a new Database
3. IIS 7.5: Add IIS APPPOOL\ \$apppool\$ where \$apppool\$ is the apppool identity of the application pool to the databases users
4. Execute ~/app\_data/hap.sql to create the tables
5. Close SQL Server Management Console
6. Open ~/web.config
7. Find the connectionStrings entry
8. You should find a SqlConnectionString, edit this to be your SQL Server's ConString
9. Find the hapConfig tracker entry
10. Change provider="XML" to provider=" SqlConnectionString" (or whatever you have called your SQL Connection String Provider
11. Save
12. Run HAP+
13. Browse to the Tracker Page
14. Run the Migration from the XML files
15. Enjoy the speed boost

## Booking System Rooms Drop Down

There's a hidden feature of the HAP+ Booking System, for Equipment and Laptops, which shows a list of rooms to use rather than a text box to enter. You can define a global list or use a local list.

This is a sample Xml excerpt for this, you can add this code either at the Booking System level and/or at the Resource Level.

```
<bookingsystem...>
  <rooms inherit="False">
    <room>A1</room>
    ...
  </rooms>
  ...
  <resources...>
    <resource...>
      <rooms inherit="True" />
    </resource>
    ...
  </resources>
</bookingsystem>
```

On each resource you need to use the drop down list you need to, at least, have the inherit option set in the rooms element in the resource:

```
<resource...>
  <rooms inherit="True" />
</resource>
```

For more info, please open a thread of the HAP+ Edeugeek Forum.



# Home Access Plus+

Version 9 Documentation

Updated 19/04/2013 19:42:00

## The Live Tiles

### Uptime Live Tiles

The Uptime Live Tiles are an advanced feature and are added directly in the HAPConfig.xml

```
<Link name="%a name, usually server name%" showto="Inherit" description="Uptime"
url="#" icon="" target="" type="uptime:%servername%" />
```

Notes:

Uptime Live Tiles only work on Active Directory connected servers.

### Calendar Live Tiles

The Calendar Live Tiles allow you to place a live tile that accesses another mailbox's calendar, are an advanced feature and are added directly in the HAPConfig.xml

```
<Link name="%a name%" showto="Inherit" description="%a description%" url="%url to
calendar%" icon="~/images/icons/metro/applications/calendar.png" target=""
type="exchange.calendar:%mailbox smtp address%" />
```

## The Other Tiles

The Live Tiles are:

- Uptime – Show a server's Uptime – See above
- Exchange Calendar – Shows the next 48 hours of calendar appointments in Exchange  
Add: `type="exchange.appointments"` to the Live Tile in ~/App\_Data/HAPConfig.xml
- Exchange Unread Emails – Shows an unread mail count from Exchange  
Add: `type="exchange.unread"` to the Live Tile in ~/App\_Data/HAPConfig.xml
- My Files – Shows the Drive Space indicators  
Add: `type="myfiles"` to the Live Tile in the ~/App\_Data/HAPConfig.xml
- Help Desk – Shows the Open Help Desk Tickets  
Add: `type="helpdesk"` to the Live Tile in the ~/App\_Data/HAPConfig.xml
- Booking System – Shows your bookings from the booking system for the next week  
Add: `type="bookings"` to the Live Tile in the ~/App\_Data/HAPConfig.xml