



## Step 4: Add a Reference to the Service in the Adapter

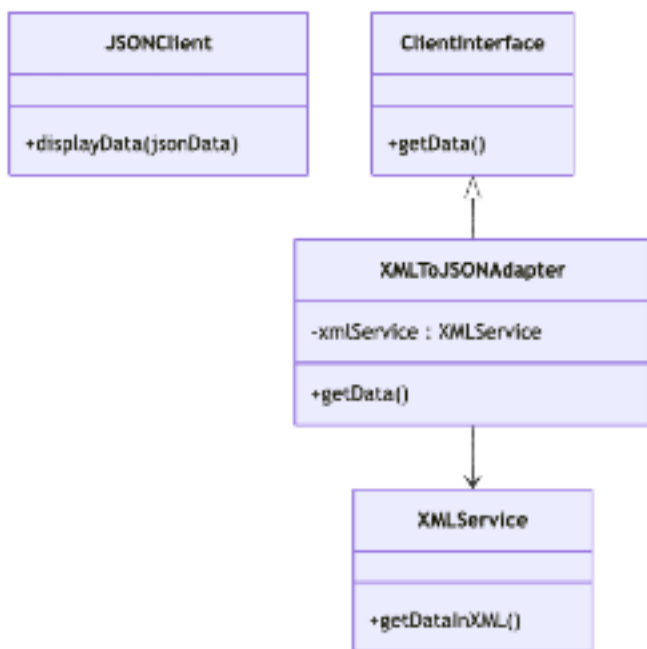

- We'll modify **XMLToJSONAdapter** to hold a reference to an **XMLService** instance. This reference can be passed in through the constructor, allowing the adapter to access and convert the XML data.

## Step 5: Implement the Adapter's Conversion Logic

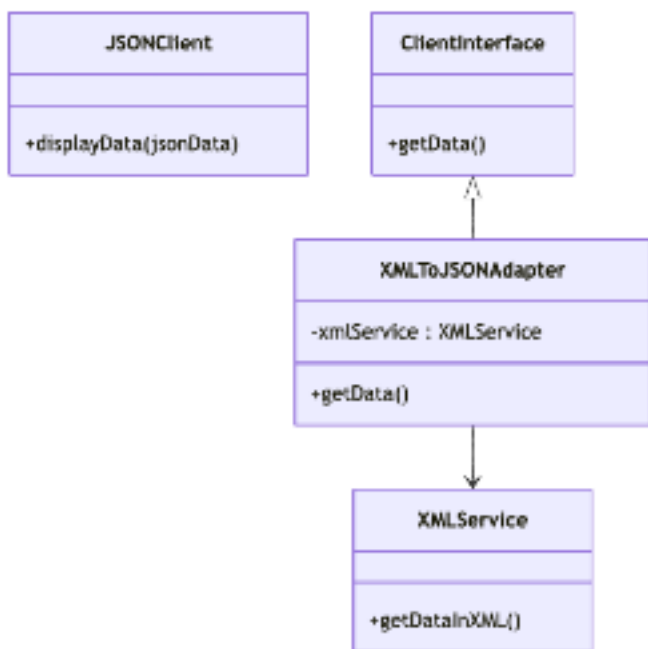

- In this step, we'll complete the **XMLToJSONAdapter** by adding conversion logic in the `getData` method. This method will retrieve XML data from **XMLService**, convert it to JSON, and return it.