Ian Tyler Applebaum · Instructor · Temple University CIS

TEMPLE
UNIVERSITY

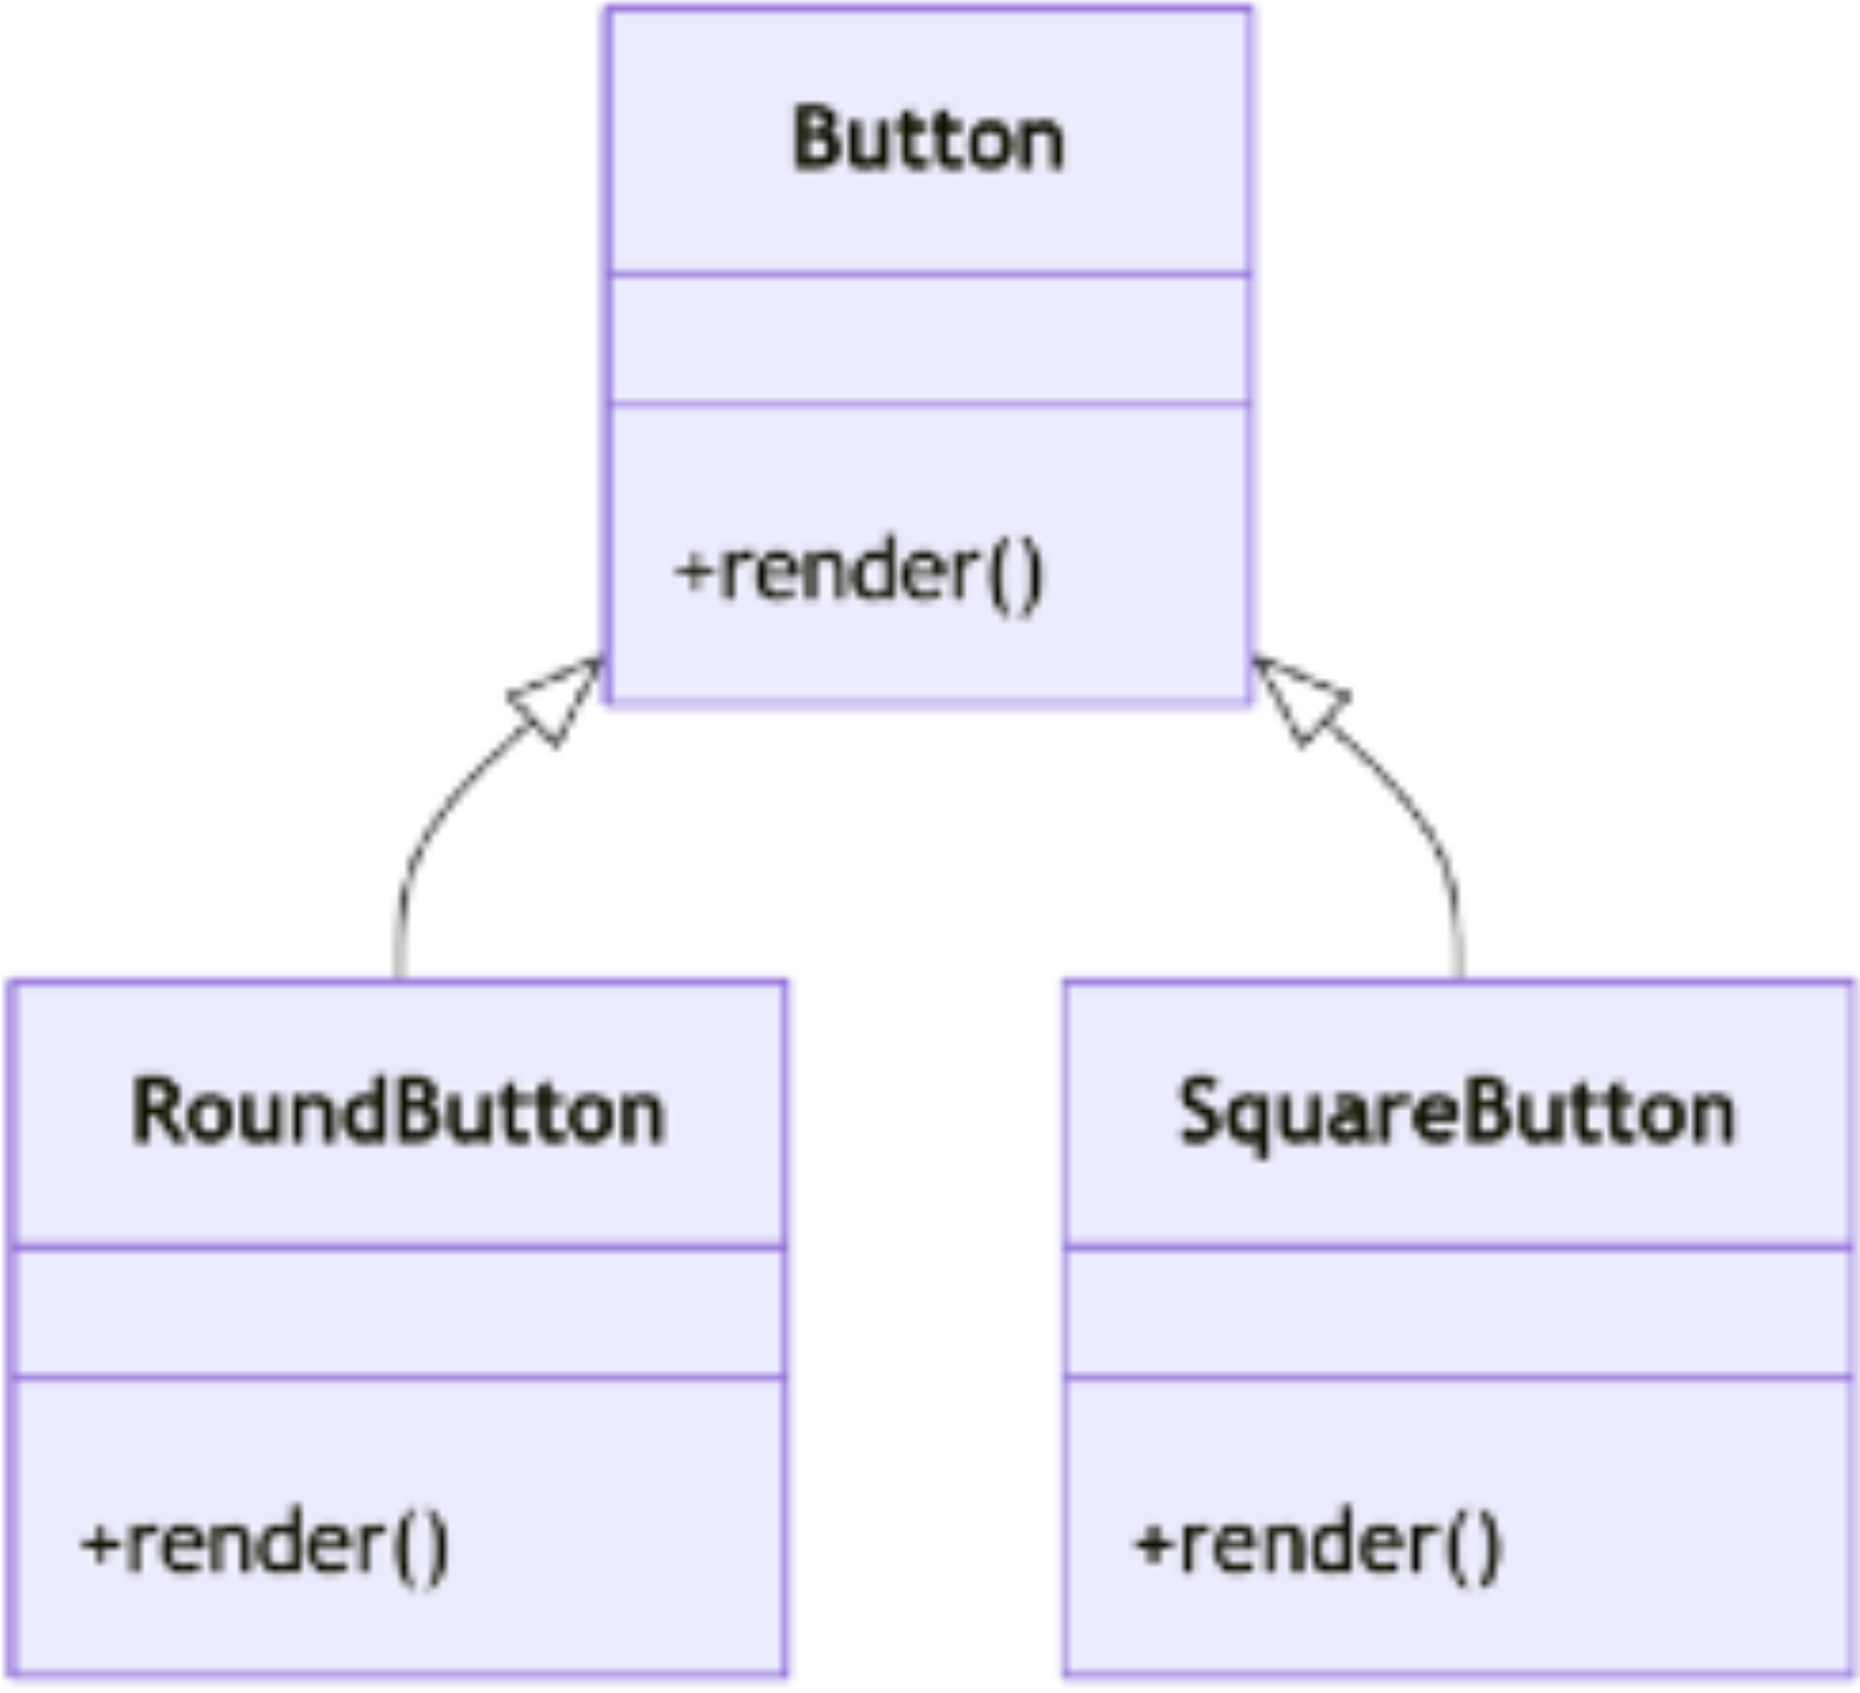
Button
+render()
RoundButton
+render()
SquareButton
+render()

Step 2: Create Theme-Based Button Subclasses

- Now let’s create specific button types that implement the Button interface. We’ll add two button styles: RoundButton and SquareButton.

Step 2: Create Theme-Based Button Subclasses

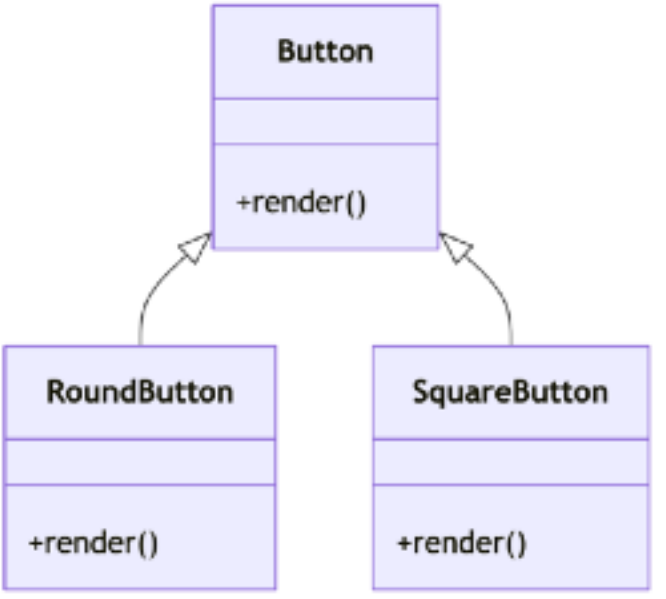

- Now let's create specific button types that implement the Button interface. We'll add two button styles: RoundButton and SquareButton.
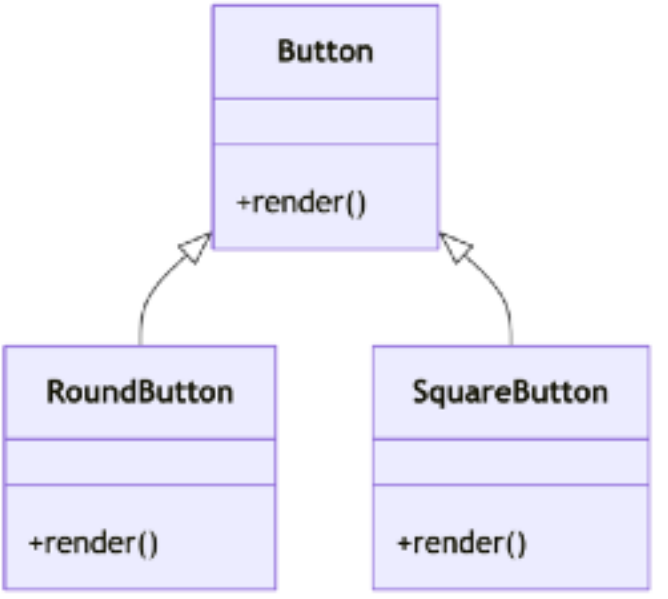
Step 2: Create Theme-Based Button Subclasses