






TEMPLE
UNIVERSITY®

Jan Tyler Applegate • Instructor • Temple University CIS

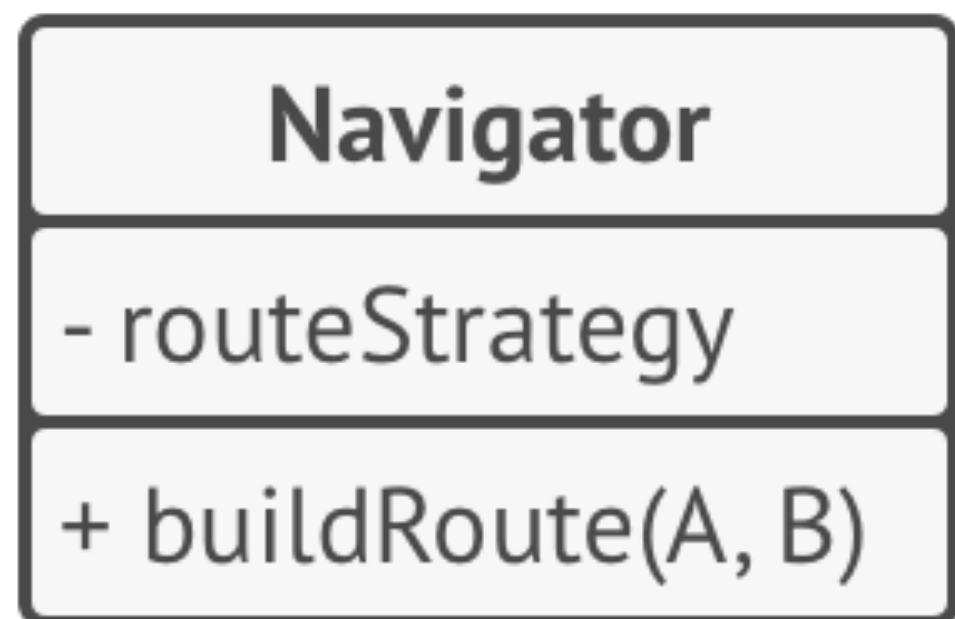

route = routeStrategy.buildRoute(A, B)

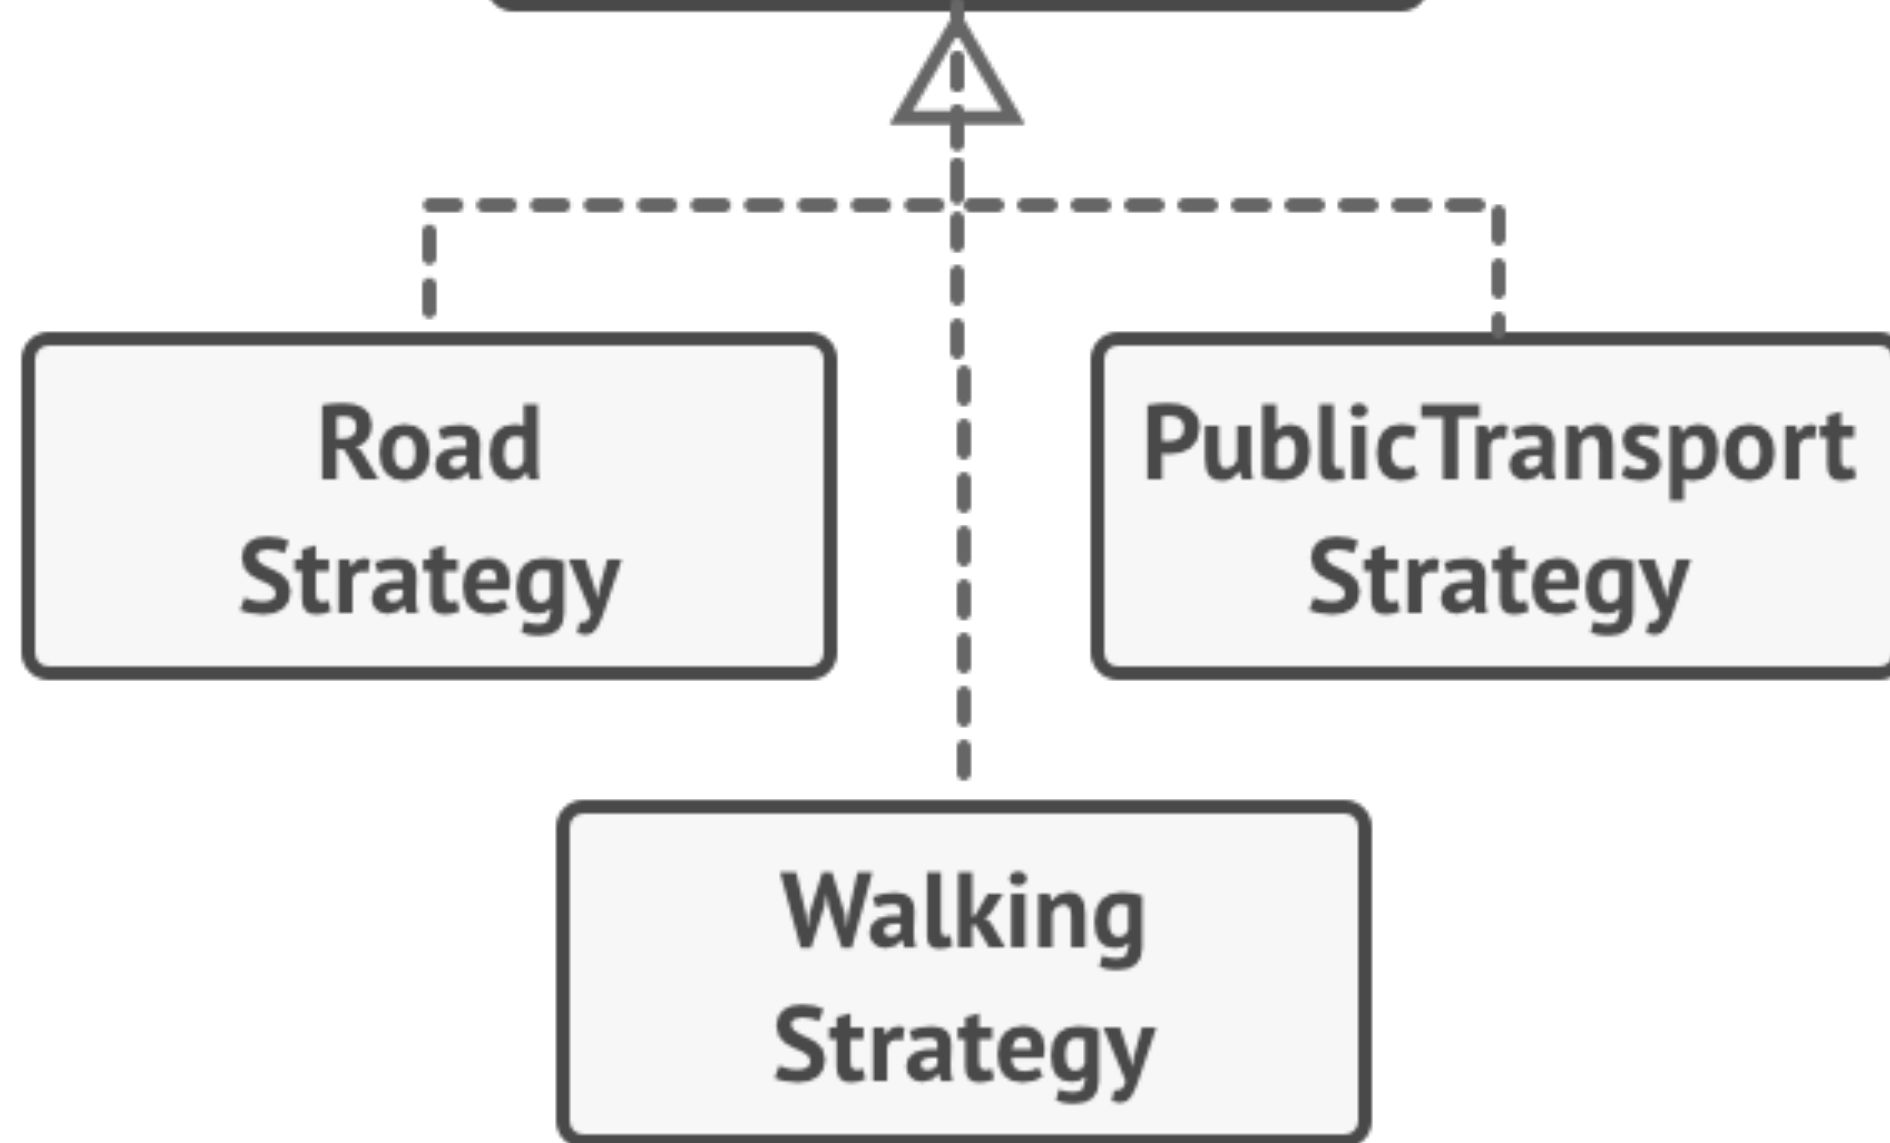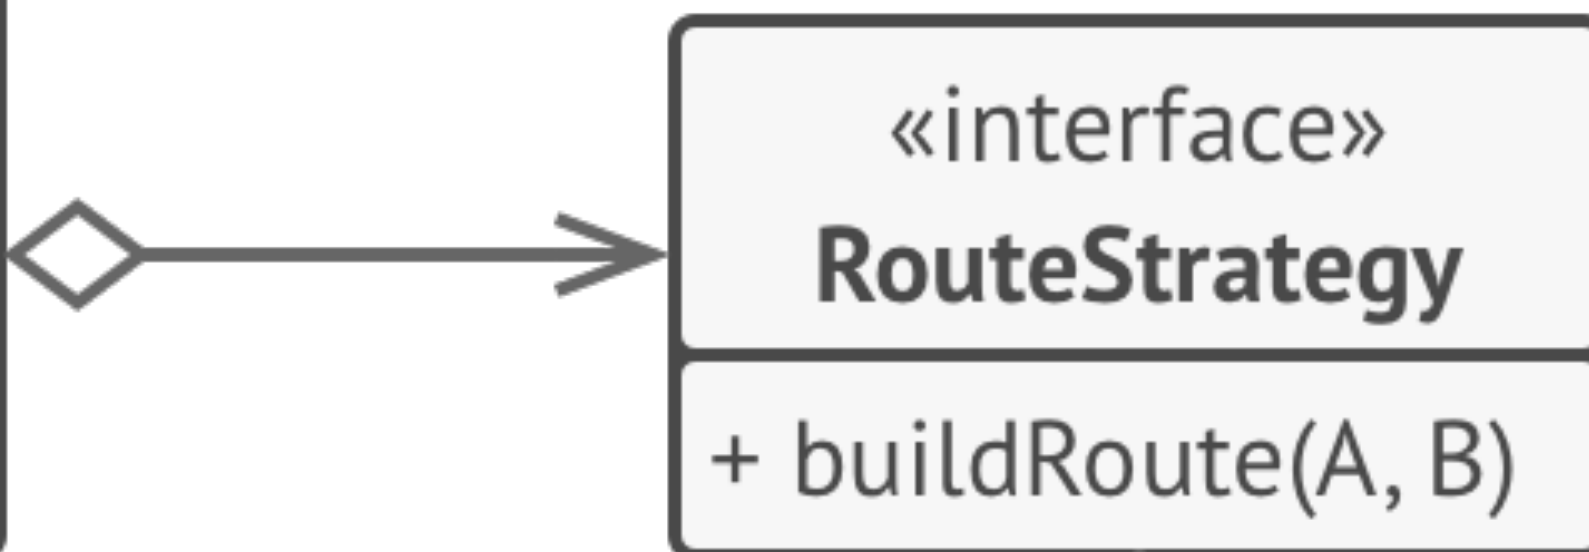

Strategy Pattern

Strategy pattern separates algorithms into classes for easy

modification and addition.

a field of forest or a reference to one of the

• The original class, called `Intext`, must have



• The context isn't responsible for selecting

strategies.

an appropriate algorithm for the job.





in many ways and extract its algorithms into

• The content gates the work to a linked

strategy instead of executing it on its

separate strategy classes.

• Takes a class that does something specific

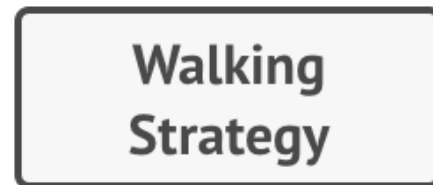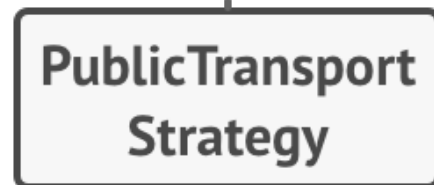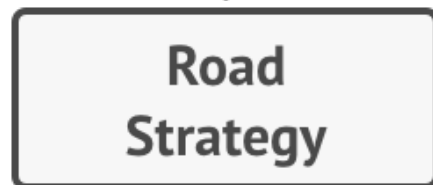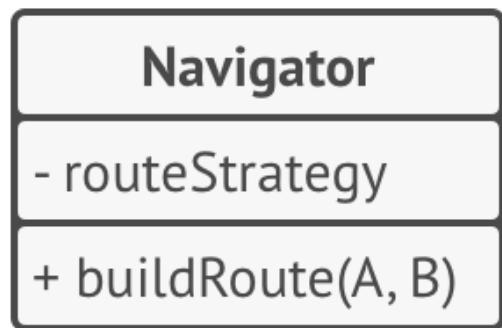

route = routeStrategy.buildRoute(A, B)