


## Step 2: Public Static Method for Getting the Singleton Instance

<b>ApiService</b>
<u>-#instance</u>
<u>+getInstance()</u> <u>+fetchUser()</u>

- Next, we'll create a static `getInstance$` method that will return the singleton instance. This method will later handle instance initialization if it doesn't already exist.

## Step 3: Implement Lazy Initialization

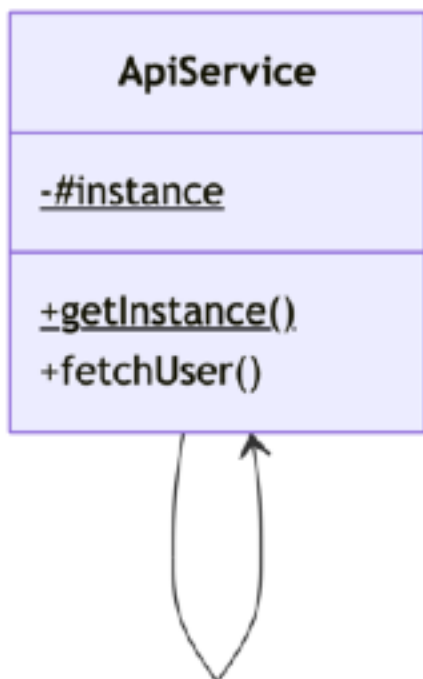

- We'll add lazy initialization in `getInstance()` so the `ApiService` instance is created only on the first call. The method will return the existing instance on subsequent calls.