


Step 3: Create an Adapter Class



- Now, we'll create an **Adapter class** that implements the **ClientInterface**. For now, we'll leave the methods empty to set up the adapter structure.

Step 4: Add a Reference to the Service in the Adapter

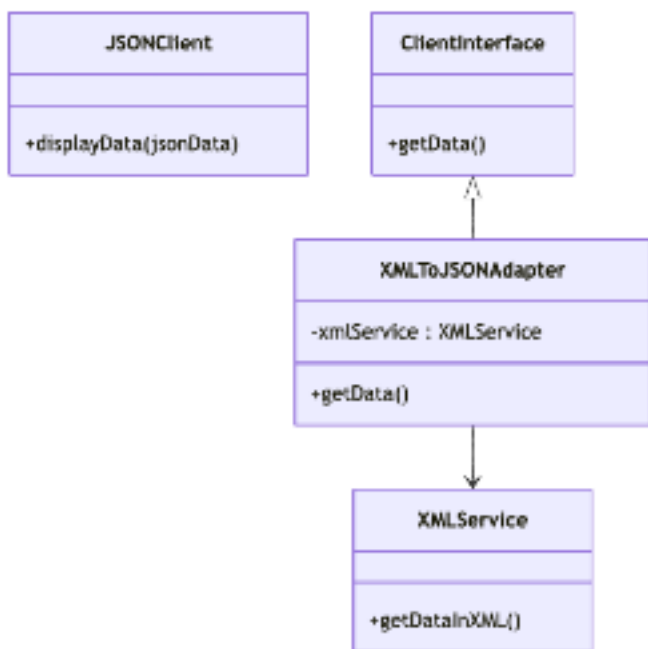

- We'll modify **XMLToJSONAdapter** to hold a reference to an **XMLService** instance. This reference can be passed in through the constructor, allowing the adapter to access and convert the XML data.