Formatting Instructions for Applied Machine Learning Lab Preprints

Tobias Deußer[1,2], Rajkumar Ramamurthy[1,2,3], Lorenz Sparrenberg[1,2], Rafet Sifa[1,2,4]

[1]University of Bonn, Germany
[2]Lamarr-Institute for Machine Learning and Artificial Intelligence, Bonn, Germany
[3]Accura AI Labs, Düsseldorf, Germany
[4]Fraunhofer IAIS, Sankt Augustin, Germany

Corresponding author: `tdeusser@uni-bonn.de`
ORCID iD: `0000-0003-4685-0847`

Abstract

The abstract paragraph should be indented 1/2 inch on both left and right-hand margins. Use 10 point type, with a vertical spacing of 11 points. The word **Abstract** must be centered, in bold, and in point size 12. Two line spaces precede the abstract. The abstract must be limited to one paragraph.

Keywords Preprint · Template · LaTeX · Colour-Blind Safe Figures

1 Using the template

Load the style with `\usepackage{amlpreprint}` and use the bibliography style `amlpreprint`. The template is derived from the style files of Transactions on Machine Learning Research (TMLR) and always produces a de-anonymized preprint without any mention of TMLR. Unlike the TMLR template, there are no package options, a table of contents can be added with `\tableofcontents`, and the TeX primitives `\month` and `\year` are left intact, so `\today` works: this document was compiled on November 5, 2026.

Authors are given one at a time with `\author[1,2]{Name}`, where the optional argument lists the affiliation marks defined by `\affil[1]{...}`. Corresponding authors' addresses are given with `\email{...}` and ORCID iDs with `\orcid{...}`. The running header alternates between the author names (even pages) and the title (odd pages). If either is too long, override it with `\shortauthors{...}` or `\shorttitle{...}`.

Keywords are given as a comma-separated list with `\keywords{Keyword1, Keyword2}` in the preamble and are printed below the abstract. The PDF title, authors and keywords are filled in automatically from `\title`, `\author` and `\keywords`. Further metadata such as the subject, or overrides, are set with `\hypersetup{pdfsubject={...}}`.

2 General formatting

The text is confined within a rectangle 6.5 inches wide and 9 inches long on US Letter paper. The left margin is 1 inch. The body uses 10 point type with a vertical spacing of 11 points. Paragraphs are separated by 1/2 line space, with no indentation.

The paper title is 17 point, in bold and left-aligned, followed by the compact author block described above.

3 Headings: first level

First level headings are in bold, flush left and in point size 12. One line space before the first level heading and 1/2 line space after the first level heading.

3.1 Headings: second level

Second level headings are in bold, flush left and in point size 10. One line space before the second level heading and 1/2 line space after the second level heading.

3.1.1 Headings: third level

Third level headings are in bold, flush left and in point size 10. One line space before the third level heading and 1/2 line space after the third level heading.

4 Citations, figures, tables, references

4.1 Citations within the text

Citations within the text are based on the `natbib` package and include the authors' last names and year (with the "et al." construct for more than two authors). When the authors or the publication are included in the sentence, the citation should not be in parenthesis, using `\citet{}` (as in "See Hinton et al. (2006) for more information."). Otherwise, the citation should be in parenthesis using `\citep{}` (as in "Deep learning shows promise to make progress towards AI (Bengio & LeCun, 2007).").

The corresponding references are listed in alphabetical order of authors in the **References** section.

For numeric citations in IEEE style, load the style with `\usepackage[ieee]{amlpreprint}`. Citations are then written with `\cite{}` and typeset as numbers in square brackets, e.g. [1] or [1, 3–5], and the references are formatted with `IEEEtran.bst` and listed in order of citation. Keep `\bibliographystyle{amlpreprint}`: it selects the matching bibliography style for either option.

In both modes, an entry in the reference list shows at most 10 author names, followed by "et al.". The limit is set with the option `maxbibnames`, e.g. `\usepackage[maxbibnames=5]{amlpreprint}`, and `maxbibnames=0` lists all authors.

4.2 Footnotes

Indicate footnotes with a number[1] in the text. Place the footnotes at the bottom of the page on which they appear. Precede the footnote with a horizontal rule of 2 inches.[2]

4.3 Figures

Place figure files in the `figures/` folder. The figure number and caption always appear after the figure. The caption is lower case (except for the first word and proper nouns), and figures are numbered consecutively. Images are included with `\includegraphics` (the style loads `graphicx` and sets the search path to `figures/`), with the width given as a multiple of the line width, as in Figure 1:

```
\includegraphics[width=0.9\linewidth]{selective.pdf}
```

TikZ figures are kept in their own file and included with `\input{figures/pipeline.tex}`, as in Figure 2.

4.4 Colours

All colours should be colour-blind safe. Use the muted scheme by Paul Tol[3], which the style defines as named `xcolor` colours (in Tol's recommended order):

[1] Sample of the first footnote
[2] Sample of the second footnote
[3] `https://sronpersonalpages.nl/~pault/`

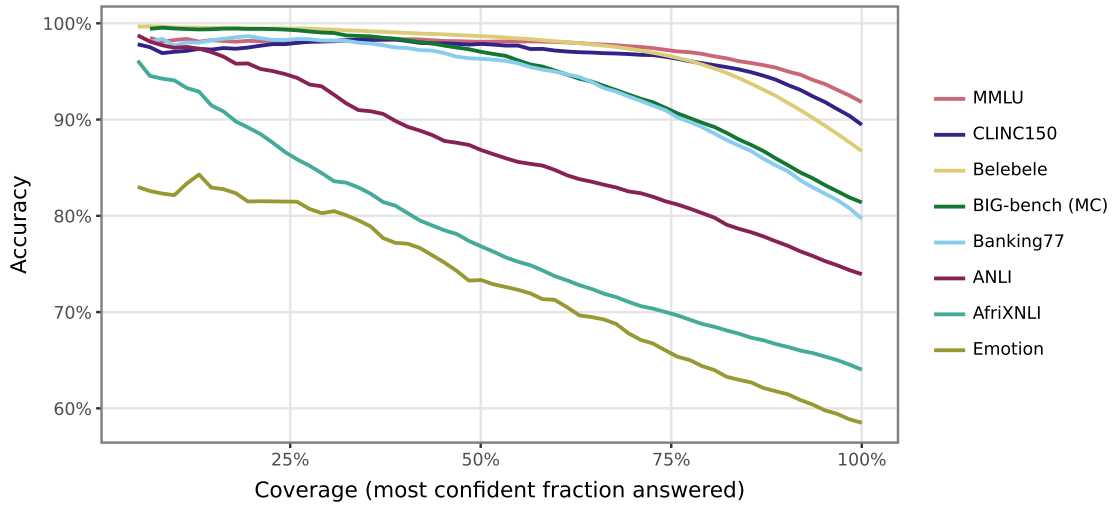


Figure 1: Accuracy as a function of coverage when only the most confident fraction of inputs is answered. Example of a PDF figure produced with matplotlib using the Tol muted palette.

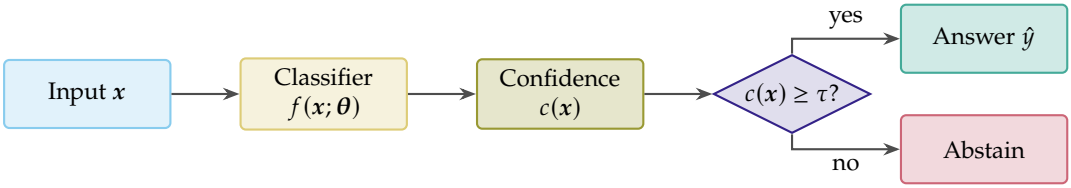


Figure 2: Selective prediction: an input is answered only if the model's confidence exceeds a threshold τ. Example of a TikZ figure using the palette colours defined by the style.

`tolrose` `tolindigo` `tolsand` `tolgreen`
`tolcyan` `tolwine` `tolteal` `tololive`
`tolpurple` `tolpalegrey`

`tolpalegrey` is reserved for bad or missing data. For plots made outside of LaTeX, e.g. with matplotlib, use the same colours via their hex codes (listed in `amlpreprint.sty`).

4.5 Tables

Place table files in the `tables/` folder and include them with `\input{tables/cost.tex}`. All tables are centered. The table number and title always appear before the table. Tables use the `booktabs` rules (`\toprule`, `\midrule`, `\bottomrule`), no vertical lines, and alternating rows shaded with `\rowcolor{gray!10}`, as in Table 1.

5 Default notation

To encourage standardized notation, the template includes the notation file from the textbook *Deep Learning* (Goodfellow et al., 2016), available at `https://github.com/goodfeli/dlbook_notation/`. Its use is not required and can be disabled by removing the `\input{math_commands.tex}` line. For example, `$\vx \in \R^n$` gives $\boldsymbol{x} \in \mathbb{R}^n$ and `$\E_{\rx\sim P}[f(x)]$` gives $\mathbb{E}_{\mathrm{x}\sim P}[f(x)]$.

Author Contributions

If you'd like to, you may include a section for author contributions.

Table 1: Requests, input tokens, cost and latency per task category.

Category	Requests	Input tok. (M)	Tok./req.	Cost (USD)	Latency (s)
Text classification	57,223	32.0	559	1.34	0.36
Intent and topic routing	50,208	28.5	567	1.19	0.35
NLI, paraphrase and grounding	51,094	39.9	780	1.67	0.36
Reading comprehension and knowledge	140,425	91.8	654	3.86	0.37
Commonsense and reasoning	30,837	15.7	509	0.66	0.37
Safety, moderation and legal	10,048	5.6	557	0.23	0.36
Rubric scoring	6,174	4.5	727	0.19	0.36
Total	346,009	217.9	630	9.15	0.36

Acknowledgments

Use unnumbered third level headings for the acknowledgments. All acknowledgments, including those to funding agencies, go at the end of the paper.

References

Yoshua Bengio and Yann LeCun. Scaling learning algorithms towards AI. In *Large Scale Kernel Machines*. MIT Press, 2007.

Ian Goodfellow, Yoshua Bengio, Aaron Courville, and Yoshua Bengio. *Deep learning*, volume 1. MIT Press, 2016.

Geoffrey E. Hinton, Simon Osindero, and Yee Whye Teh. A fast learning algorithm for deep belief nets. *Neural Computation*, 18:1527–1554, 2006.

A Appendix

You may include other additional sections here.