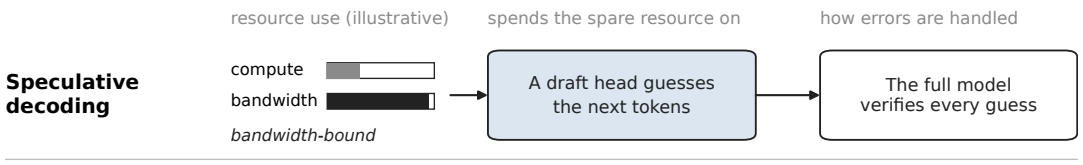
resource use (illustrative)
spends the spare resource on
how errors are handled
Speculative decoding
compute
bandwidth
bandwidth-bound
A draft head guesses the next tokens
The full model verifies every guess
RidgeFill prefill
compute
bandwidth
compute-bound
Reads extra weights (the maps); late layers predicted, not computed
No affordable verifier: keep exact the rows most likely to matter