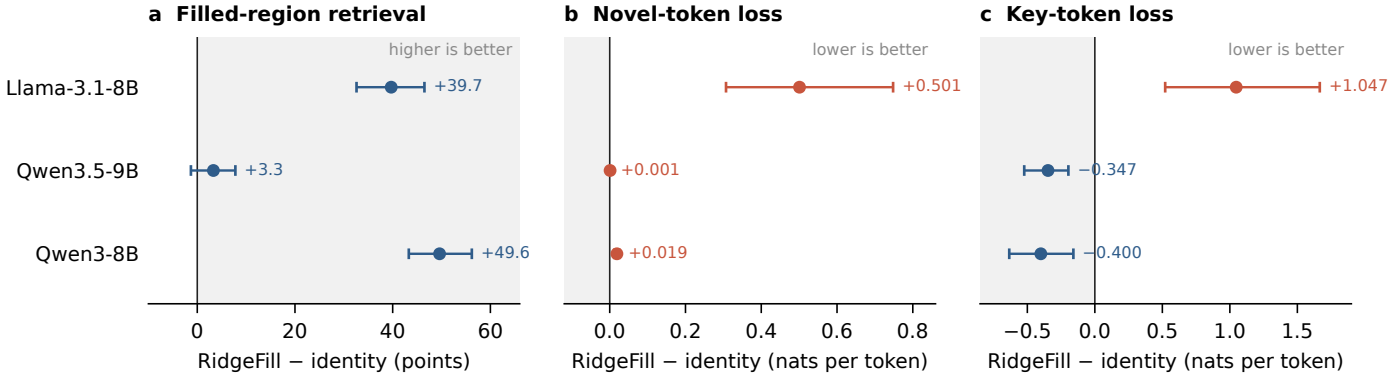
a Filled-region retrieval
higher is better
Llama-3.1-8B
Qwen3.5-9B
Qwen3-8B
+39.7
+3.3
+49.6
0
20
40
60
RidgeFill − identity (points)
b Novel-token loss
lower is better
+0.501
+0.001
+0.019
0.0
0.2
0.4
0.6
0.8
RidgeFill − identity (nats per token)
c Key-token loss
lower is better
+1.047
−0.347
−0.400
−0.5
0.0
0.5
1.0
1.5
RidgeFill − identity (nats per token)