Packet Tracer - TCP and UDP Communications

Objectives

Part 1: Generate Network Traffic in Simulation Mode

Part 2: Examine the Functionality of the TCP and UDP Protocols

Background

This simulation activity is intended to provide a foundation for understanding TCP and UDP in detail. Packet Tracer simulation mode provides you the ability to view the state of different PDUs as they travel through the network.

Packet Tracer Simulation mode enables you to view each of the protocols and the associated PDUs. The steps outlined below lead you through the process of requesting network services using various applications that are available on a client PC. You will explore the functionality of the TCP and UDP protocols, multiplexing, and the function of port numbers in determining which local application requested the data or is sending the data. Packet Tracer will not score this activity.

Instructions Part 1: Generate Network Traffic in Simulation Mode and View Multiplexing

Step 1: Generate traffic to populate Address Resolution Protocol (ARP) tables.

Perform the following task to reduce the amount of network traffic viewed in the simulation. a.

Click **MultiServer** and click the **Desktop** tab > **Command Prompt**.

b. Enter the **ping -n 1 192.168.1.255** command. You are pinging the broadcast address for the client LAN. The command option will send only one ping request rather than the usual four. This will take a few seconds as every device on the network responds to the ping request from MultiServer. c. Close the **MultiServer** window.

```
Pinging 192.168.1.255 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time<1ms TTL=128
Reply from 192.168.1.1: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.255:
    Packets: Sent = 1, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

Step 2: Generate web (HTTP) traffic.

a. Switch to Simulation mode.

b. Click **HTTP Client** and open the **Web Browser** from the desktop.

c. In the URL field, enter **192.168.1.254** and click **Go**. Envelopes (PDUs) will appear in the topology window.

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

d. Minimize, but do not close, the **HTTP Client** configuration window.

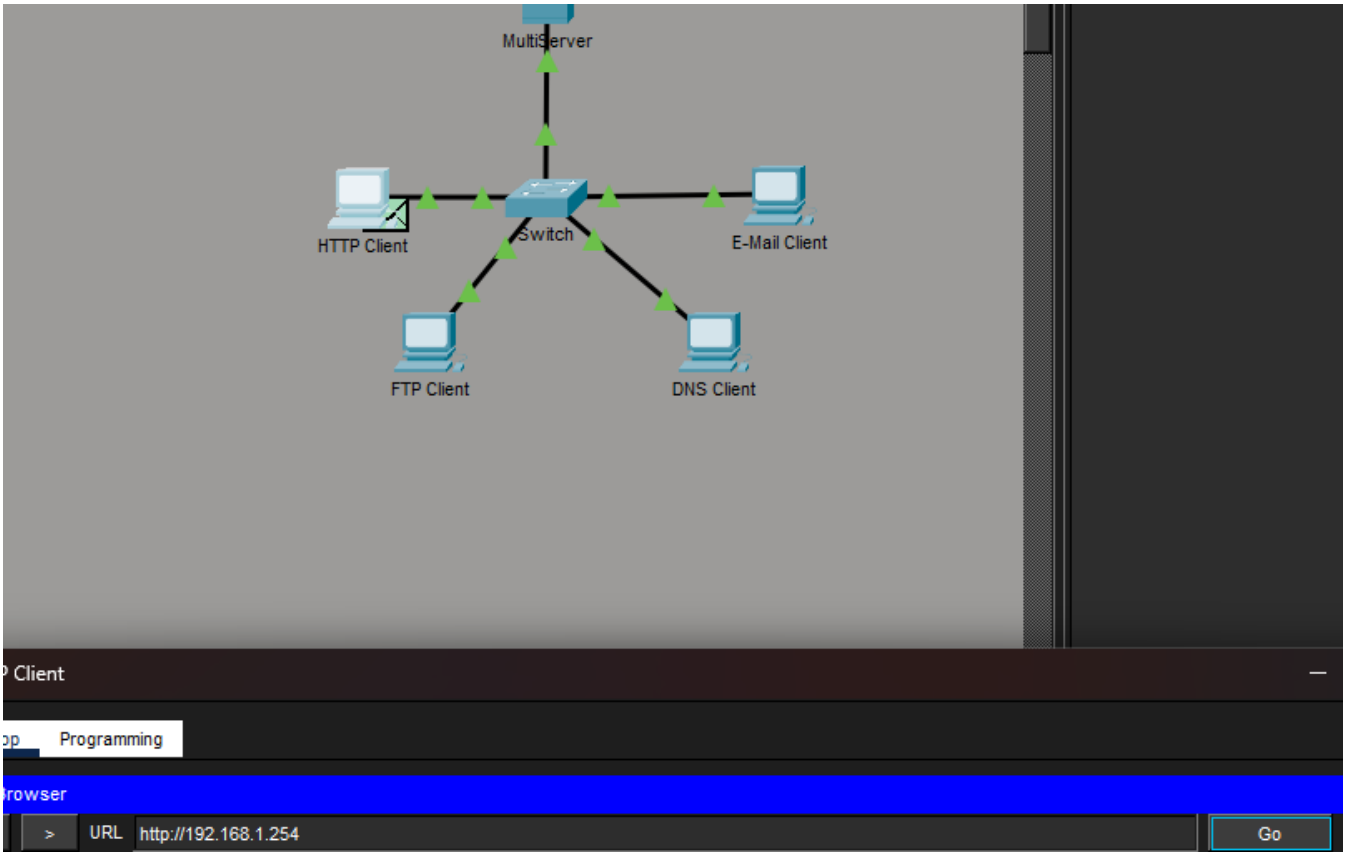

Step 3: Generate FTP traffic.

a. Click **FTP Client** and open the **Command Prompt** from the desktop

b. Enter the **ftp 192.168.1.254** command. PDUs will appear in the simulation window.

c. Minimize, but do not close, the **FTP Client** configuration window.

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

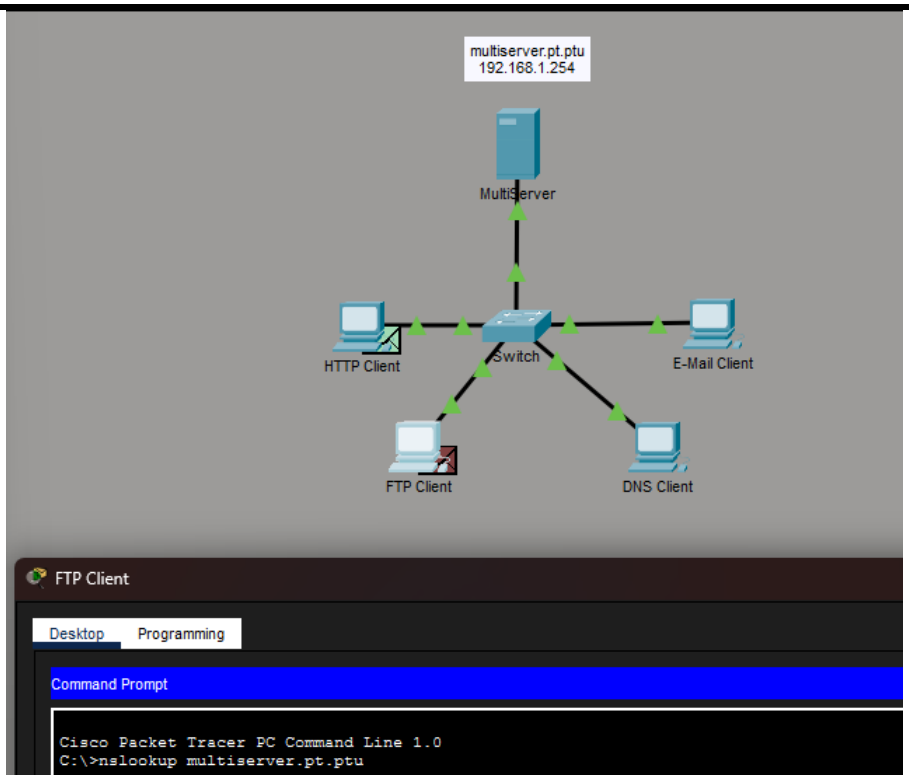

Step 4: Generate DNS traffic.

a. Click DNS Client and open the **Command Prompt**.

b. Enter the **nslookup multiserver.pt.ptu** command. A PDU will appear in the simulation window.

c. Minimize, but do not close, the **DNS Client** configuration window.

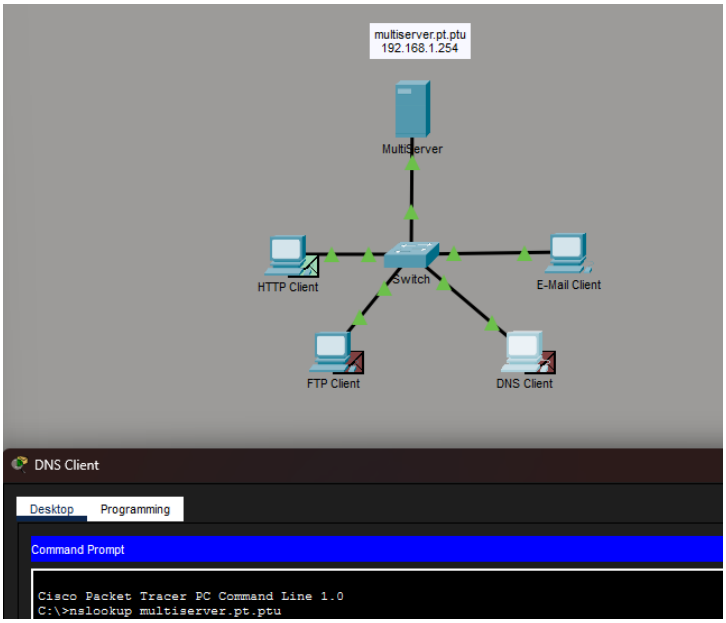

Step 5: Generate Email traffic.

a. Click **E-Mail Client** and open the **E Mail** tool from the Desktop.

b. Click **Compose** and enter the following information:

1) **To:** user@multiserver.pt.ptu

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

2) **Subject:** personalize the subject line

3) **E-Mail Body:** personalize the Email

c. Click **Send**.

d. Minimize, but do not close, the **E-Mail Client** configuration window.

Step 6: Verify that the traffic is generated and ready for simulation.

There should now be PDU entries in the simulation panel for each of the client computers.

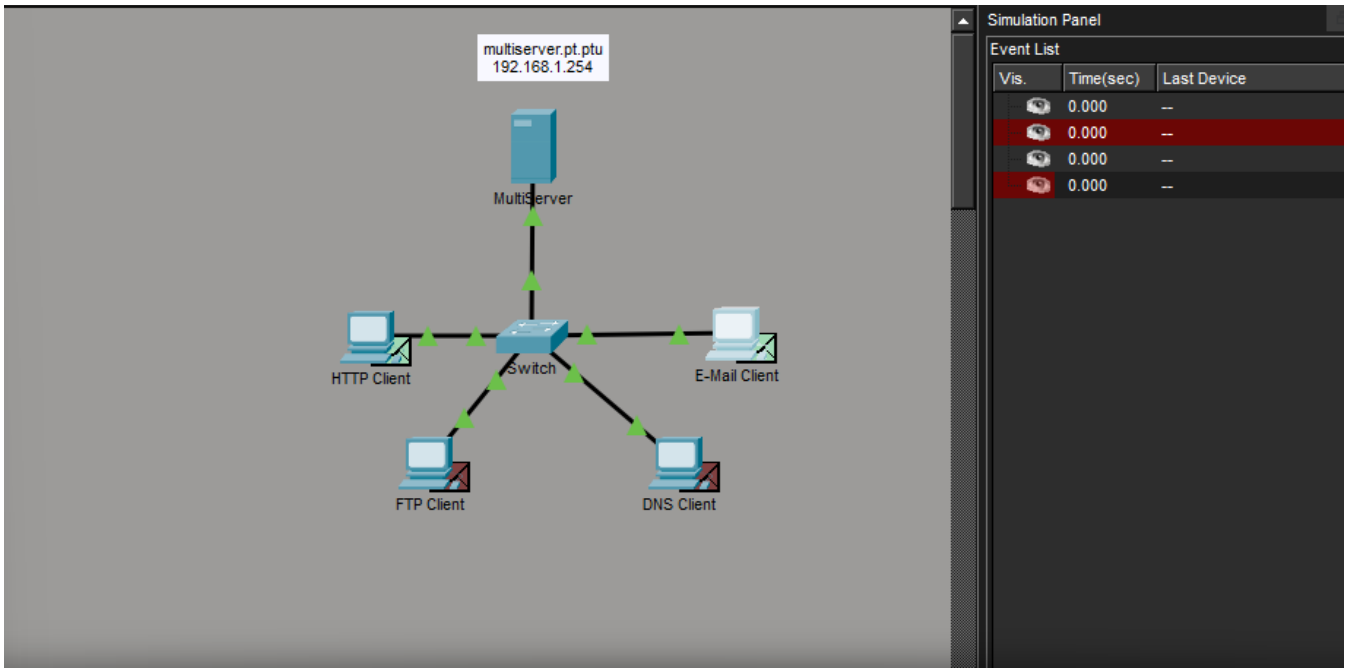

Step 7: Examine multiplexing as the traffic crosses the network.

You will now use the **Capture/Forward button** in the Simulation Panel to observe the different protocols travelling on the network.

Note: The **Capture/Forward** button ‘ **>|** ‘ is a small arrow pointing to the right with a vertical bar next to it. a.

Click **Capture/Forward** once. All of the PDUs travel to the switch.

b. Click **Capture/Forward** six times and watch the PDUs from the different hosts as they travel on the network. Note that only one PDU can cross a wire in each direction at any given time.

What is this called?

ตอบ Multiplexing

A variety of PDUs appears in the event list in the Simulation Panel. What is the meaning of the different colors?

ตอบ สีที่แตกต่างกันแสดงถึง โปรโตคอลหรือชนิดของ PDU ที่แตกต่างกัน เพื่อให้แยกประเภทของข้อมูลที่ส่งในเครือข่ายได้ง่าย

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

Part 2: Examine Functionality of the TCP and UDP Protocols

Step 1: Examine HTTP traffic as the clients communicate with the server.

a. Click **Reset Simulation**.

b. Filter the traffic that is currently displayed to only **HTTP** and **TCP** PDUs. To filter the traffic that is currently displayed:

   1) Click **Edit Filters** and toggle the **Show All/None** button.

   2) Select **HTTP** and **TCP**. Click the red “x” in the upper right-hand corner of the Edit Filters box to close it. Visible Events should now display only **HTTP** and **TCP** PDUs.

c. Open the browser on HTTP Client and enter **192.168.1.254** in the URL field. Click **Go** to connect to the server over HTTP. Minimize the HTTP Client window.

d. Click **Capture/Forward** until you see a PDU appear for HTTP. Note that the color of the envelope in the topology window matches the color code for the HTTP PDU in the Simulation Panel.

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

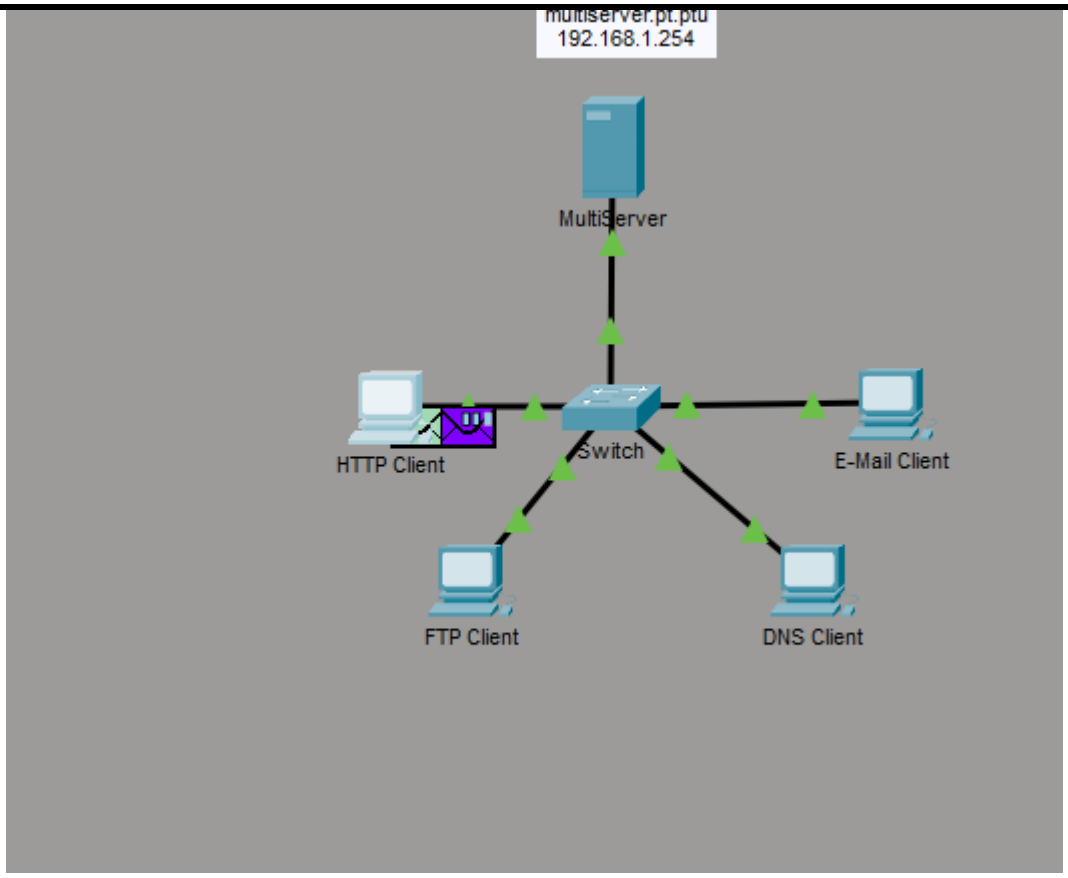

Why did it take so long for the HTTP PDU to appear?

ตอบ เพราะ TCP ต้องทำ 3-way handshake (SYN, SYN-ACK, ACK) ก่อนเริ่มส่งข้อมูลจริง

e. Click the PDU envelope to show the PDU details. Click the **Outbound PDU Details** tab and scroll down to the second to the last section.

What is the section labeled?

ตอบ Transmission Control Protocol (TCP)

Are these communications considered to be reliable?

ตอบ **Yes**, TCP เป็นโปรโตคอลที่เชื่อถือได้ (reliable)

Record the **SRC PORT**, **DEST PORT**, **SEQUENCE NUM**, and **ACK NUM** values.

ตอบ SRC PORT: **1025 (ephemeral)**

DEST PORT: **80 (HTTP)**

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

SEQUENCE NUM: ค่าเริ่มต้น (เช่น 0 หรือ 1)

ACK NUM: ค่าอ้างอิงการตอบรับ

f. Look at the value in the Flags field, which is located next to the Window field. The values to the right of the “b” represent the TCP flags that are set for this stage of the data conversation. Each of the six places corresponds to a flag. The presence of a “1” in any place indicates that the flag is set. More than one flag can be set at a time. The values for the flags are shown below.

Flag Place	**6**	**5**	**4**	**3**	**2**	**1**
Value	URG	ACK	PSH	RST	SYN	FIN

Which TCP flags are set in this PDU?

ตอบ **SYN** (ช่วงเริ่มต้นการเชื่อมต่อ)

g. Close the PDU and click **Capture/Forward** until a PDU with a checkmark returns to the **HTTP Client**.

h. Click the PDU envelope and select **Inbound PDU Details**.

How are the port and sequence numbers different than before?

ตอบ **Source/Destination Port สลับกัน** และ Sequence/ACK เปลี่ยนตามการตอบรับ

i. Click the HTTP PDU which **HTTP Client** has prepared to send to **MultiServer**. This is the beginning of the HTTP communication. Click this second PDU envelope and select **Outbound PDU Details**.

What information is now listed in the TCP section?

ตอบ มี **HTTP data**, PSH/ACK flags และ sequence ที่เพิ่มขึ้นจากเดิม

How are the port and sequence numbers different from the previous two PDUs?

ตอบ หมายเลขพอร์ตยังคงเหมือนเดิม แต่ **sequence number เพิ่มขึ้นจากเดิม** เพื่อแสดงลำดับข้อมูลใหม่ที่ถูกส่งในรอบถัดไป

j. Reset the simulation.

Step 2: Examine FTP traffic as the clients communicate with the server.

a. Open the command prompt on the FTP Client desktop. Initiate an FTP connection by entering **ftp 192.168.1.254**.

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

```
C:\>ftp 192.168.1.254.
Trying to connect...192.168.1.254.
```

b. In the Simulation Panel, change **Edit Filters** to display only **FTP** and **TCP**.

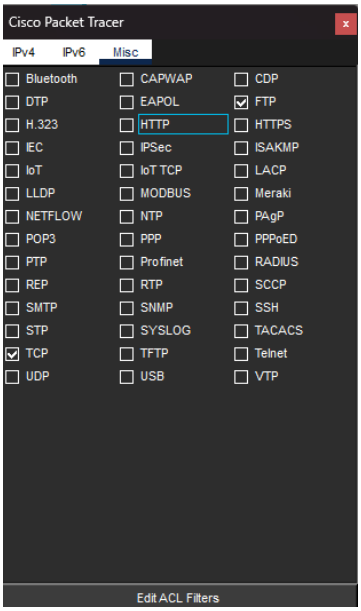

c. Click **Capture/Forward**. Click the second PDU envelope to open it.

Click the **Outbound PDU Details** tab and scroll down to the TCP section.

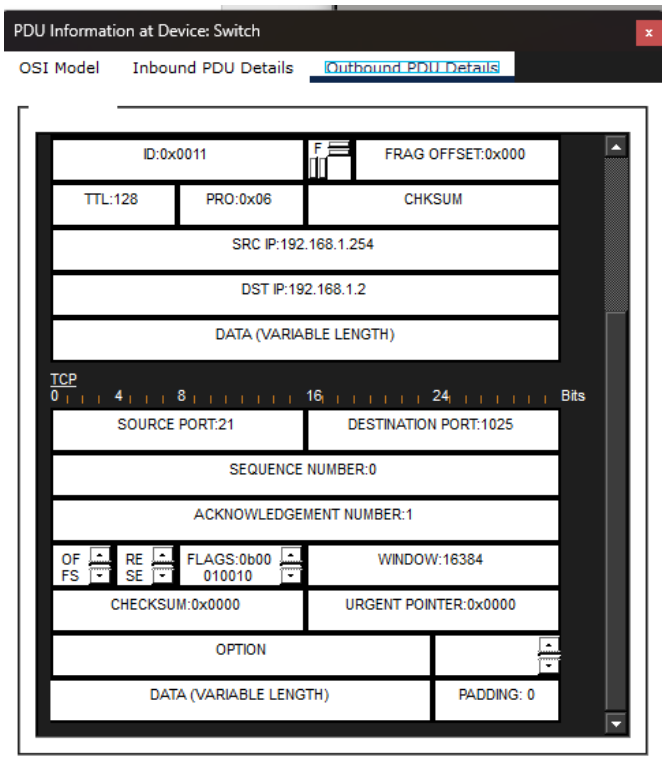

Are these communications considered to be reliable?

ตอบ ใช่

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

d. Record the **SRC PORT**, **DEST PORT**, **SEQUENCE NUM**, and **ACK NUM** values.

What is the value in the flag field?

e. Close the PDU and click **Capture/Forward** until a PDU returns to the **FTP Client** with a checkmark.

f. Click the PDU envelope and select **Inbound PDU Details**.

How are the port and sequence numbers different than before?

ตอบ พอร์ตสลับฝั่ง และ sequence/ack เพิ่มตามลำดับการรับส่ง

g. Click the **Outbound PDU Details** tab.

How are the port and sequence numbers different from the previous results?

ตอบ หมายเลขพอร์ต **สลับฝั่งระหว่างต้นทางกับปลายทาง** และ **sequence number เปลี่ยนค่า/เพิ่มขึ้น** ตามลำดับการรับ–ส่งข้อมูลใหม่

h. Close the PDU and click **Capture/Forward** until a second PDU returns to the **FTP Client**. The PDU is a different color.

i. Open the PDU and select **Inbound PDU Details**. Scroll down past the TCP section.

What is the message from the server?

j. Click Reset Simulation.

Step 3: Examine DNS traffic as the clients communicate with the server.

a. Repeat the steps in Part 1 to create DNS traffic.

b. In the Simulation Panel, change **Edit Filters** to display only **DNS** and **UDP**.

c. Click the PDU envelope to open it.

d. Look at the OSI Model details for the outbound PDU.

What is the Layer 4 protocol?

ตอบ โปรโตคอลชั้นที่ 4 คือ **UDP**

Are these communications considered to be reliable?

ตอบ ไม่

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

e. Open the Outbound PDU Details tab and find the UDP section of the PDU formats. Record the **SRC PORT** and **DEST PORT** values.

Why are there no sequence and acknowledgement numbers?

ตอบ เพราะ **UDP ไม่มีการควบคุมลำดับและการยืนยันข้อมูล**

f. Close the **PDU** and click **Capture/Forward** until a PDU with a check mark returns to the **DNS Client**.

g. Click the PDU envelope and select **Inbound PDU Details**.

How are the port and sequence numbers different than before?

ตอบ มีแค่ **Source/Destination Port**, ไม่มี sequence/ack

What is the last section of the **PDU** called?

ตอบ DNS

What is the IP address for the name **multiserver.pt.ptu**?

ตอบ 192.168.1.254

h. Click Reset Simulation.

Step 4: Examine email traffic as the clients communicate with the server.

a. Repeat the steps in Part 1 to send an email to **user@multiserver.pt.ptu**.

b. In the Simulation Panel, change **Edit Filters** to display only **POP3, SMTP** and **TCP**.

c. Click the first PDU envelope to open it.

d. Click the **Outbound PDU Details** tab and scroll down to the last section.

What transport layer protocol does email traffic use?

ตอบ TCP

Are these communications considered to be reliable?

ตอบ ใช่

e. Record the **SRC PORT**, **DEST PORT**, **SEQUENCE NUM**, and **ACK NUM** values.

What is the flag field value?

ตอบ SYN

f. Close the **PDU** and click **Capture/Forward** until a PDU returns to the **E-Mail Client** with a checkmark.

g. Click the TCP PDU envelope and select **Inbound PDU Details**.

How are the port and sequence numbers different than before?

ตอบ พอร์ตสลับฝั่ง และ sequence/ack เพิ่มตามรอบการรับส่ง

h. Click the **Outbound PDU Details** tab.

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public

How are the port and sequence numbers different from the previous two results?

ตอบ หมายเลขพอร์ต **สลับกันระหว่างต้นทางกับปลายทาง** และ **sequence number เปลี่ยนค่า/เพิ่มขึ้น** ตามการตอบรับข้อมูลรอบใหม่

i. There is a second **PDU** of a different color that **E-Mail Client** has prepared to send to **MultiServer**. This is the beginning of the email communication. Click this second PDU envelope and select **Outbound PDU Details**.

How are the port and sequence numbers different from the previous two **PDU**s?

ตอบ หมายเลขพอร์ตยังคงเดิม แต่ **sequence number เปลี่ยนค่า/เพิ่มขึ้น** เพื่อแสดงการส่งข้อมูลในลำดับถัดไป

What email protocol is associated with TCP port 25?

ตอบ SMTP

What protocol is associated with TCP port 110?

ตอบ POP3

พัทธดนย์ คำนัน 673380416-3 Sec.3

© 2013 - 2019 Cisco and/or its affiliates. All rights reserved. Cisco Public