



Steps to Add more Client Codes to encryption key store file:

Step 1: Double click below Icon




Step 2: Drag & drop the aes-keystore.jck file into KeyStore window to open the file


Step 3: Enter the password for the file to unlock

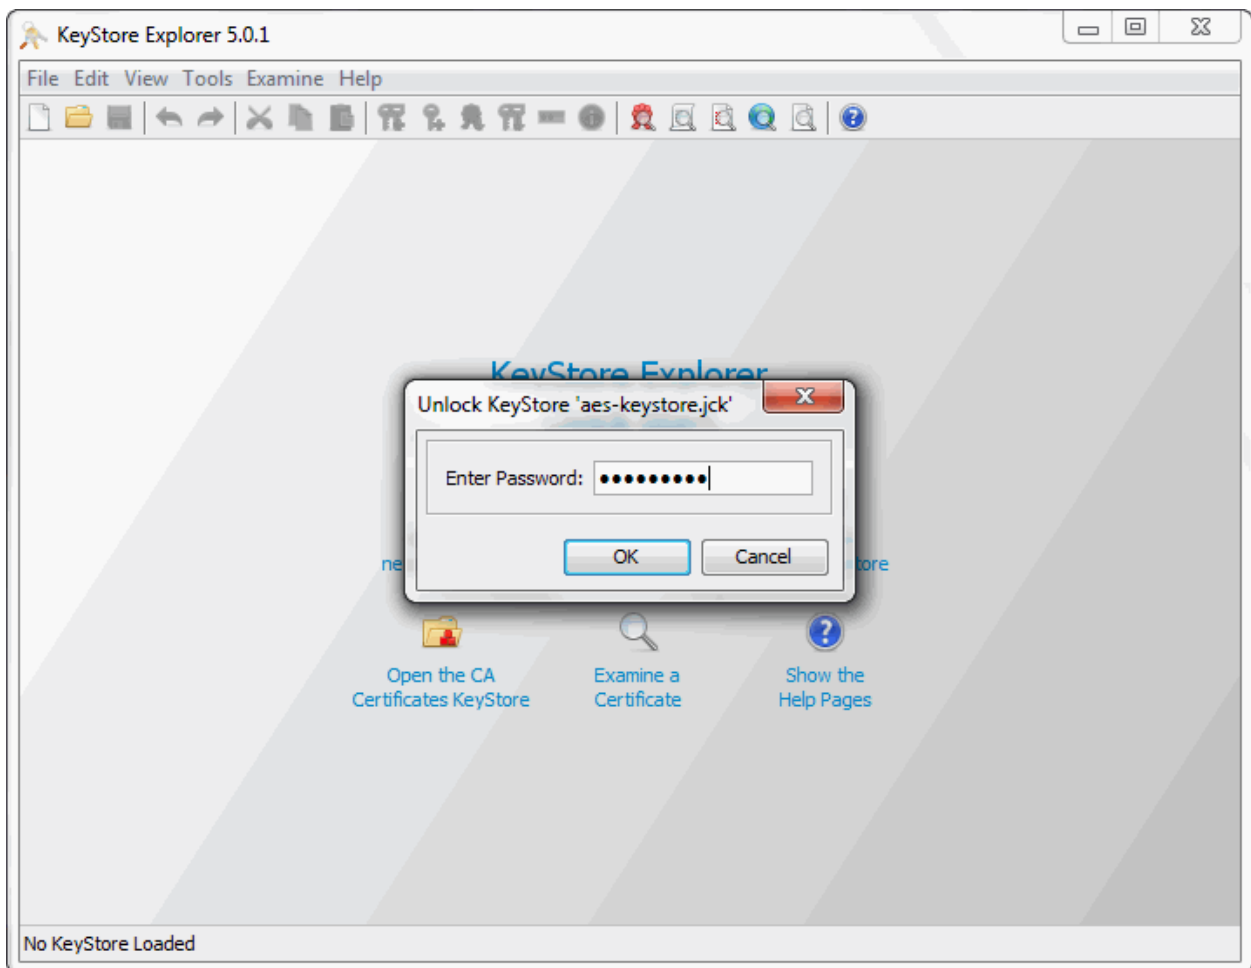


Step 4: To add new client code, click Tools > Generate Secret Key

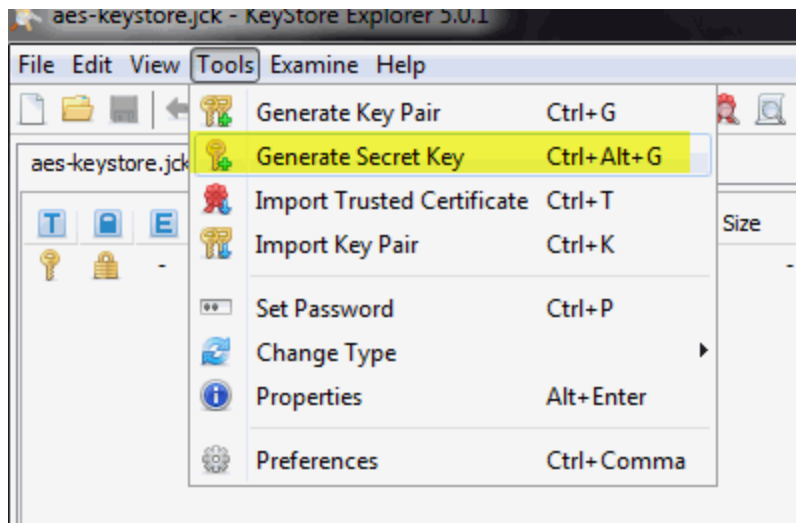

Step 5: Choose AES Algorithm and key size as 256

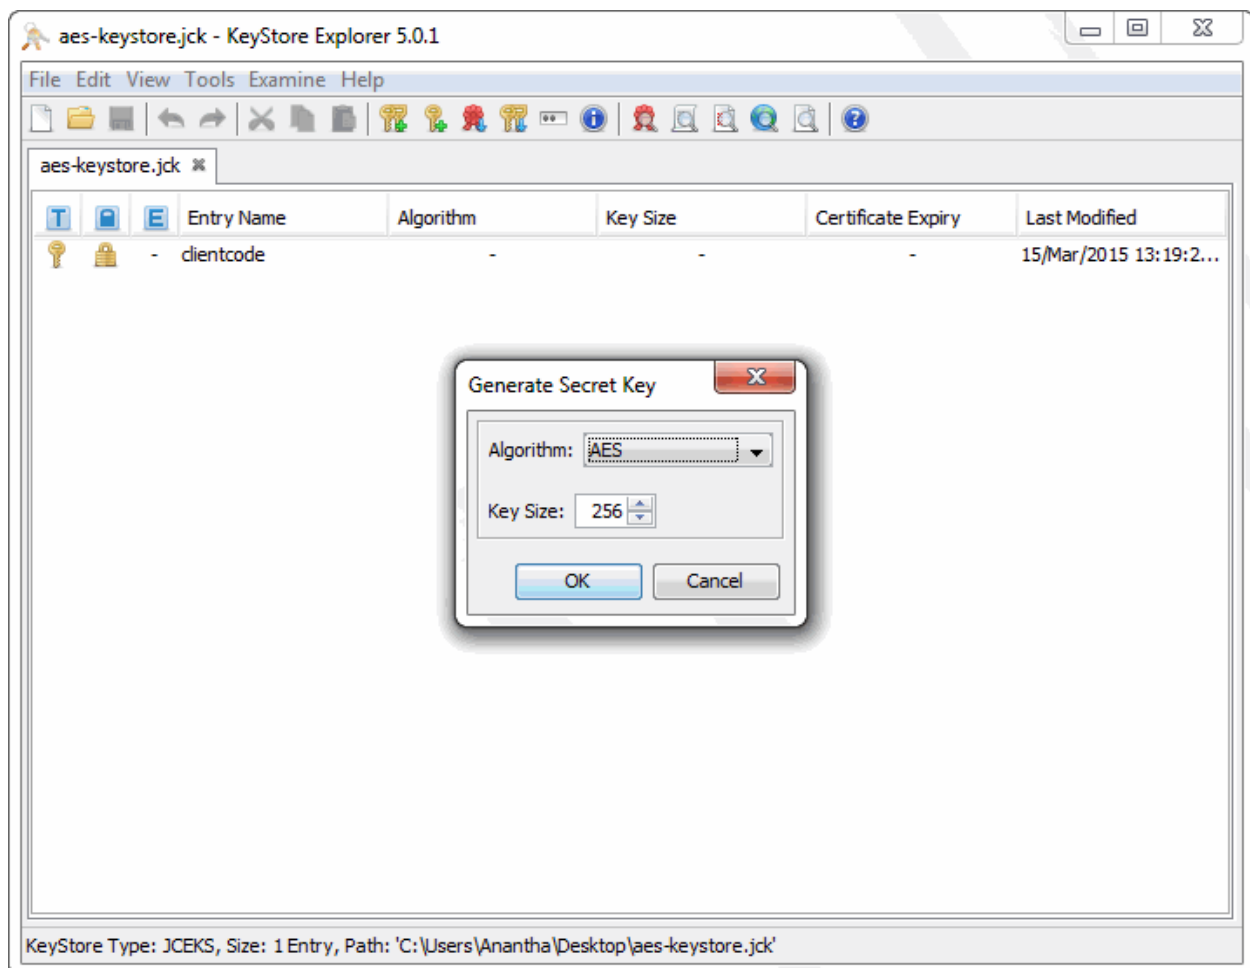


Step 6: Enter new Alias - new client code all in lowercase

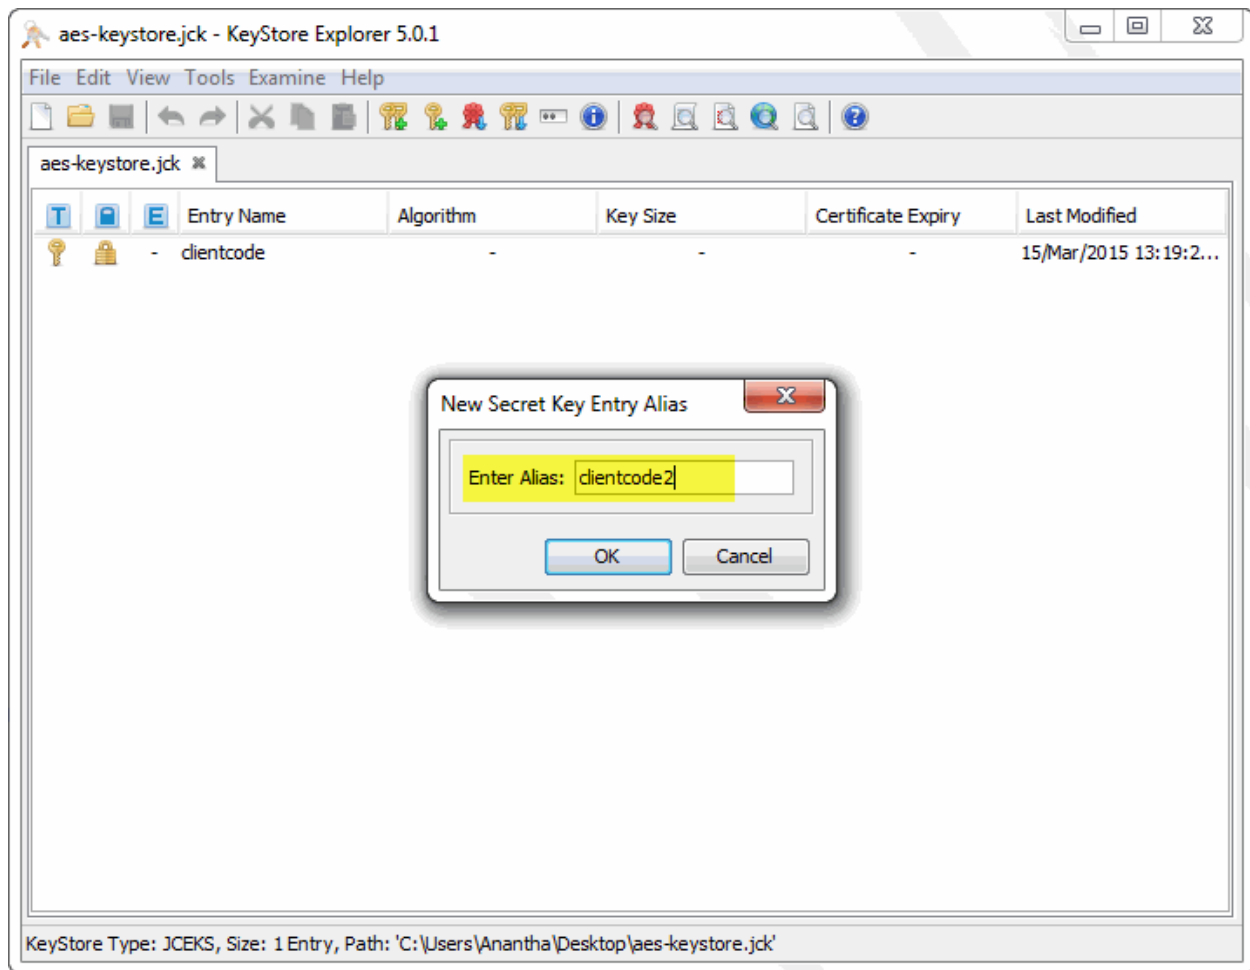


Step 7: Enter password the encryption key for new client code (alias)


Note: you may keep same password for all clientcodes (aliases) or different for each one

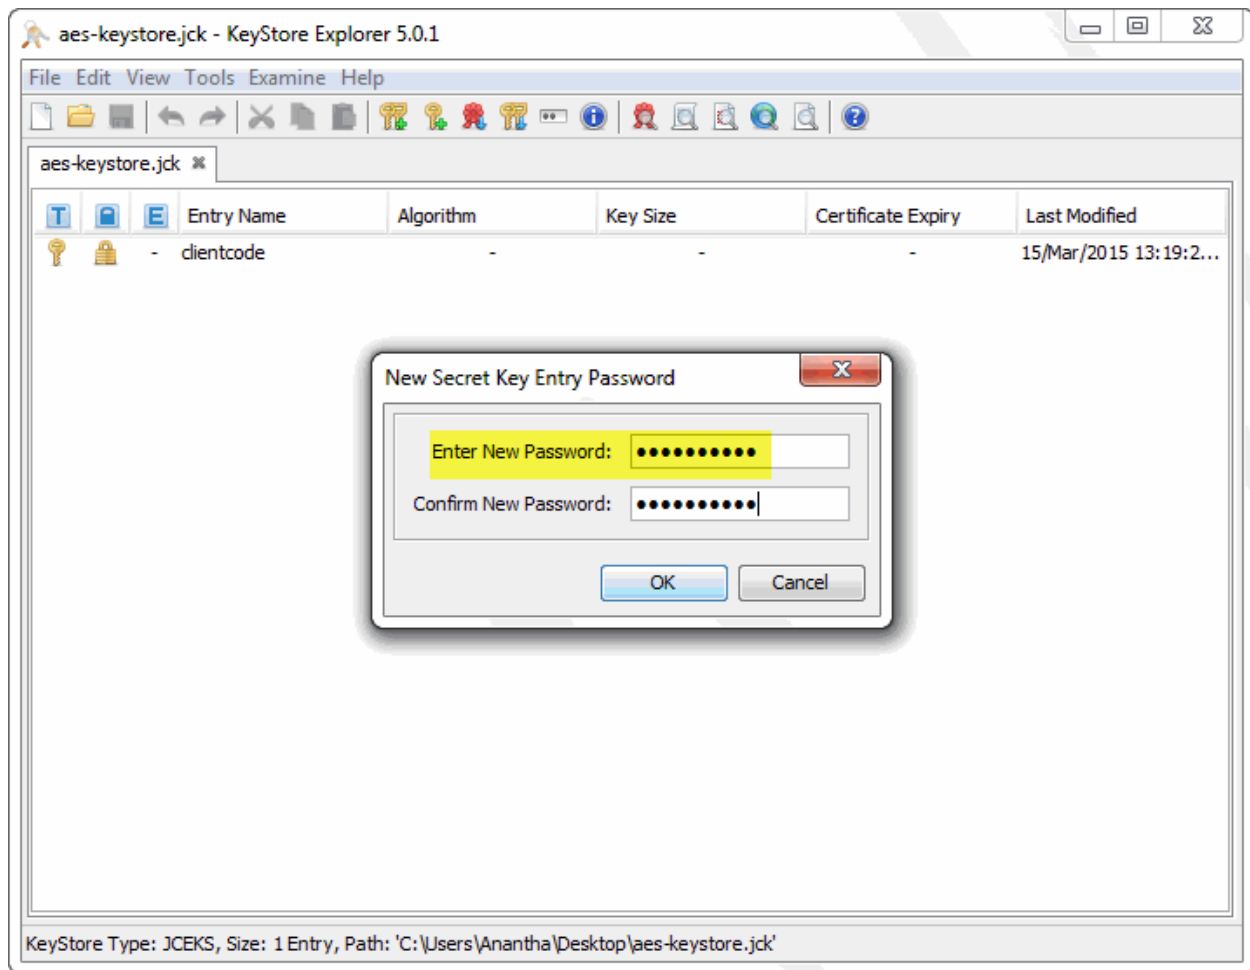

Step 8: Secret Key generation successful

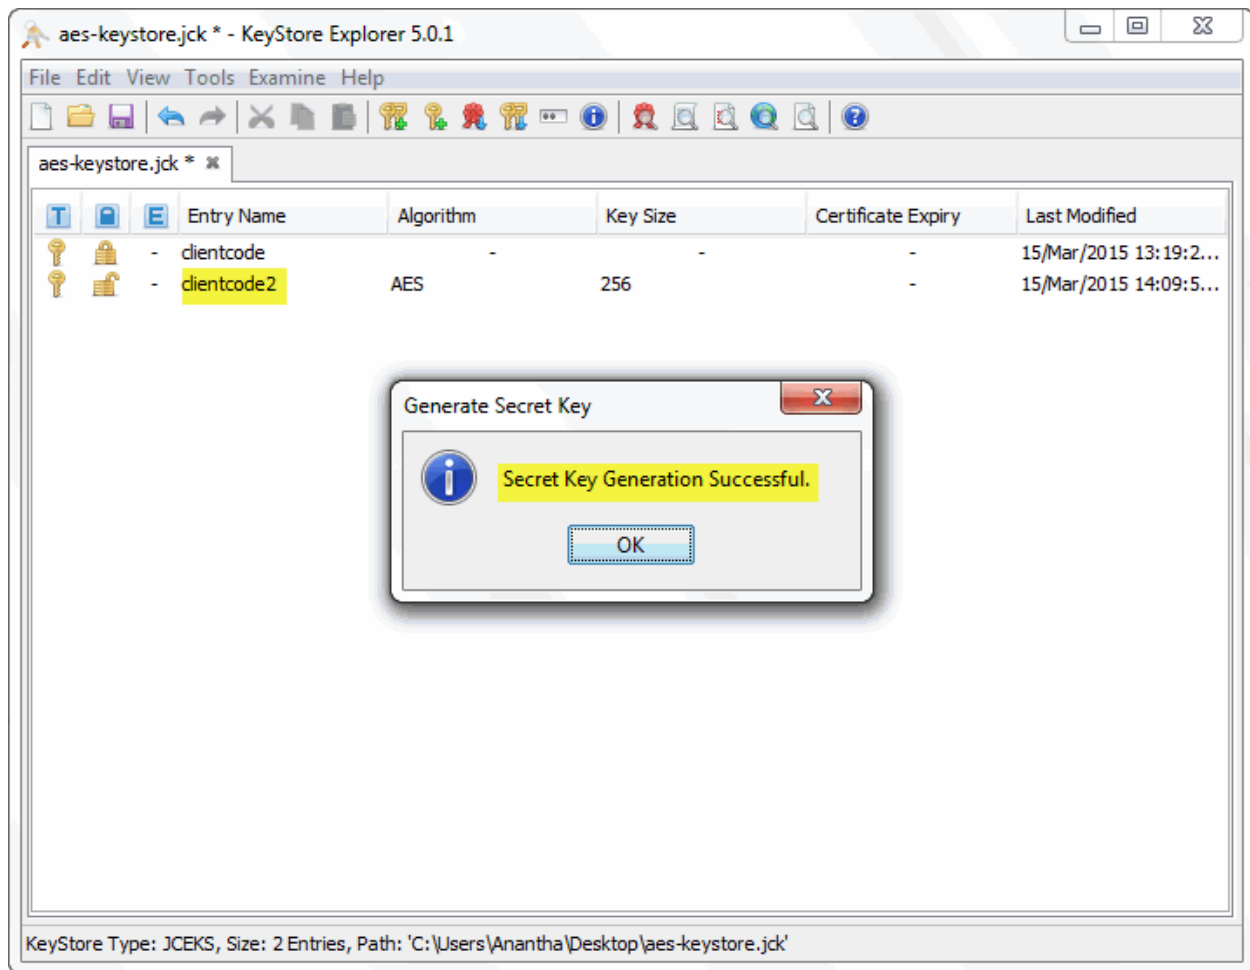

Step 9: Now save this file on the local disk by clicking File > Save

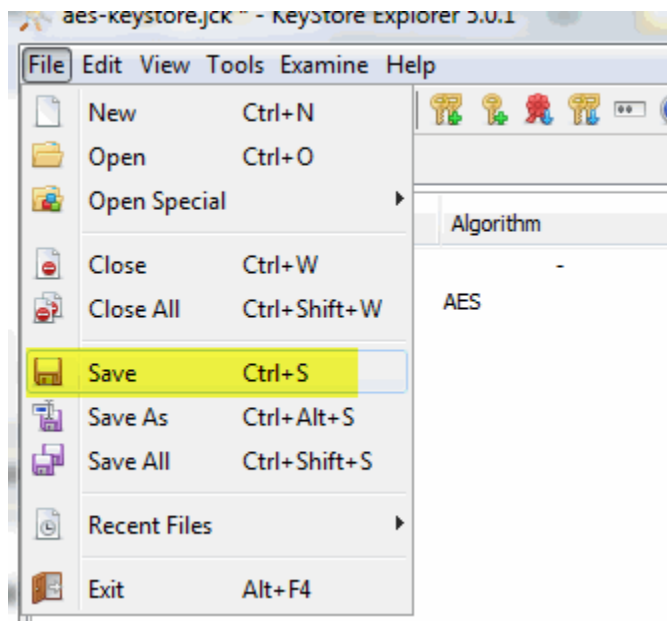

Step 10: copy this file to server /apps/properties/aes-keystore.jck

Step 11: vi /apps/properties/common.properties and add below:

PASSWORD_ENCRYPT_DECRYPT_KEY_VALUE=417f3b92ba4549b2f22340e3107d869d

KEY_STORE_LOCATION=/apps/properties/aes-keystore.jck

KEY_STORE_PASSWORD=<file_password_here>

<ALIAS>.KEY_STORE_KEY_PASSWORD=<encryption_password_for_alias_here>

<ALIAS2>.KEY_STORE_KEY_PASSWORD=<encryption_password_for_alias2_here>

IV_PARAMETER_SPEC_VALUE=NBDY37FHETIJSSIG