



Cisco Secure Network Analytics

Release Notes 7.5.2



Table of Contents

Introduction	4
Overview	4
Terminology	4
Before You Update	4
Software Version	4
Smart Licensing	4
Third-Party Applications	4
Supported Hardware Platforms	5
CIMC Firmware Version	5
Data Store Appliance Support	6
IPv6 Support	7
Network Management	7
SSL/TLS Appliance Identity Certificates	8
Cisco Bundles	8
Apps Version Compatibility	8
Browsers	8
Alternative Access	9
Data Store Private LAN Settings and Data Node Expansion	10
UDP High Availability	10
What's New	11
Analytics	11
New Alerts for NVM Telemetry	11
New Alerts for Zeek Telemetry	11
Renamed Alerts	12
Audit Log Destination	12
Cisco XDR Integration	12
Dark Mode Theme	13
Data Store Certificate Management	13

Diagnostics Pack	14
Host Group Automation	15
Nutanix Support	17
Packet Capture	17
Radius Message-Authenticator	17
Report Builder	17
Reports	18
Dashboards	19
Schedule History	19
Revocation Checking Using Your Uploaded CRL File	20
Security Insight Dashboard	20
Static Routes	20
Zeek Telemetry	20
Known Issues	22
Contacting Support	25
Change History	26
Release Support Information	27

Introduction

Overview

This document provides information about the new features and improvements, bug fixes, and known issues for the v7.5.2 release of Cisco Secure Network Analytics (formerly Stealthwatch).

 To review release notes for previous releases, go [here](#).

For additional information about Secure Network Analytics, go to cisco.com.

Terminology

This guide uses the term “**appliance**” for any Secure Network Analytics product, including virtual products such as the Secure Network Analytics Flow Sensor Virtual Edition (VE).

A “**cluster**” is your group of Secure Network Analytics appliances that are managed by the Manager.

Before You Update

Before you begin the update process, review the [Update Guide](#). It is important to note the following:

Software Version

To update the appliance software to v7.5.2, the appliance must have version 7.4.x, 7.5.0, or 7.5.1 installed.

Smart Licensing

We have changed the transport configuration requirements for Smart Licensing.



If you are upgrading the appliance from v7.4.1 or earlier, make sure the appliance is able to connect to smarteceiver.cisco.com.



You no longer need to purchase an Endpoint license for NVM telemetry starting with v7.5.1. NVM traffic is now included along with NetFlow when calculating Flow Rate (FPS) licensing requirements.

Third-Party Applications

Secure Network Analytics does *not* support installing third-party applications on appliances.

Supported Hardware Platforms

Secure Network Analytics is available on the latest generation of UCS hardware (M6). To view the supported hardware platforms for each system version, refer to the [Hardware and Version Support Matrix](#).

M4 Appliances No Longer Supported: Make sure to remove all M4 appliances from your cluster, and make sure you're using only M5, M6, or Virtual appliances when you upgrade to Secure Network Analytics v7.5.2.

M4 appliances are not supported for v7.5.1 and later.

CIMC Firmware Version

Make sure to update the CIMC firmware version using the common update process or common update patch specific to your hardware. The M5 common update patch applies to M5 hardware and the M6 common update patch applies to M6 hardware for the appliances shown in the following table.

M5 Hardware	M6 Hardware
SMC 2210 (Manager 2210)	SMC 2300 (Manager 2300)
FC 4210	FC 4300
FC 5210 Engine	---
FC 5210 Database	---
FS 1210	FS 1300
FS 3210	FS 3300
FS 4210 / FS 4240	FS 4300
UD 2210	---
DS6200	DN6300

Data Store Appliance Support

The following table describes Data Store appliance support:

Appliance	Required?	Supported Models
Data Store	yes	- DS 6200 multi node (v7.4 or greater) or single node (v7.4.1 or greater), Virtual Edition - DN 6300 multi node or single node (v7.4.2 or greater), Virtual Edition
Manager	yes	- Manager 2210 or Manager Virtual Edition (v7.4 or greater). Four models available for virtual edition - Manager 2300 or Manager Virtual Edition (v7.4.2 or greater).
Flow Collector	yes	- Flow Collector 4210s or Flow Collector Virtual Edition (v7.4 or greater)* - Flow Collector 4300s or Flow Collector Virtual Edition (v7.4.2 or greater)* - Flow Collector 5210s or Flow Collector Virtual Edition (v7.4 or greater)* * Four models available for Virtual Edition
Flow Sensor	no	- For M5SX generations, any model at v7.4 or greater. - For the M6SX generation, Flow Sensors are only supported at v7.4.2 or greater.
UDP Director	no	UD 2210



Mix and match of Data Nodes is not supported. Data Nodes must be either all virtual or all hardware and they must be from the same hardware generation (all DS 6200 or all DN 6300).

IPv6 Support

We provide the following support for IPv6 and Dual Stack in v7.5.2:

Appliance/Desktop Client	IPv6 and Dual Stack Support	IPv4 Only Support
Managers	✓	✓
Flow Collectors	✓	✓
Flow Sensors	✓	✓
Data Nodes		✓
Desktop Client		✓
UDP Directors*		

* UDP Director Support

- **M5 UDP Directors:** When configuring M5 UDP Director (UD2210), your options are IPv4 and Dual Stack. If you select the Dual Stack option, UDP will only forward over IPv4. You can, however, use IPv6 for management. For information about IPv6 forwarding for UDP Directors, refer to the [Cisco Telemetry Broker User Guide](#).
- **Changing the Network Mode:** For information about changing the network mode of your appliance, refer to the [System Configuration Guide](#).

Network Management

With the exception of your Data Node appliances and UDP Directors, you can change the network mode of your appliances in any of the following ways:

IPv4 only to Dual stack	Dual stack to IPv4 only	IPv6 to IPv4 only
IPv4 only to IPv6 only	Dual stack to IPv6 only	IPv6 only to Dual stack



The only supported network mode for Data Nodes is IPv4. Changing the network mode of Data Nodes is not supported in v7.5.2.

When configuring an M5 UDP Director (UD2210), your options are IPv4 and Dual Stack. If you select the Dual Stack option, UDP will only forward over IPv4. You can, however, use IPv6 for management. For information about IPv6 forwarding for UDP Directors, refer to the [Cisco Telemetry Broker User Guide](#). For information about changing the network mode of your appliance, refer to the [System Configuration Guide](#).

SSL/TLS Appliance Identity Certificates



Make sure you replace your appliance identity certificates before they expire. To check expiration dates, follow the instructions in the [SSL/TLS Certificates for Managed Appliances Guide](#).

We have simplified the workflow for generating new Cisco self-signed appliance identity certificates when your existing certificates have not expired.

You can generate identity certificates for all managed appliances or for selected, individual appliances using the Certificate Refresh menu in the Manager appliance console (SystemConfig).

- **Host Information:** The appliance host information (IP address, host name, domain name) is preserved.
- **Instructions:** Follow the instructions in the [SSL/TLS Certificates for Managed Appliances Guide](#).
- **Custom Certificates:** The appliance identity certificate is replaced automatically with a Cisco self-signed appliance identity certificate in this certificate refresh procedure. To use custom certificates, follow the instructions for Replacing the SSL/TLS Appliance Identity Certificate in the [SSL/TLS Certificates for Managed Appliances Guide](#).

Cisco Bundles

Make sure you have the latest Cisco Bundles common update patch installed. For more information, refer to the readme for the [Cisco Bundles Common Update Patch](#). The patch provides pre-validated digital certificates of a select number of root certificate authorities (CAs). It includes a core certificate bundle and an external certificate bundle, which are used for connecting to Cisco services and to non-Cisco services.

Apps Version Compatibility

To view the latest Secure Network Analytics apps compatibility information, refer to the [Secure Network Analytics Apps Version Compatibility Matrix](#). Review the matrix to confirm the apps you'll be using are compatible with Secure Network Analytics v7.5.2.

Browsers

- **Compatible Browsers:** Secure Network Analytics supports the latest rapid release of Chrome, Firefox, and Edge.
- **Microsoft Edge:** There may be a file size limitation with Microsoft Edge. We do not recommend using Microsoft Edge to upload the software update files (SWU).

- **Shortcuts:** If you use browser shortcuts to access the Appliance Admin interface for any of your Secure Network Analytics appliances, the shortcuts may not work after the update process is complete. In this case, delete the shortcuts and recreate them.
- **Certificates:** Some browsers have changed their expiration date requirements for appliance identity certificates. If you can't access your appliance, refer to the [SSL/TLS Certificates for Managed Appliances Guide](#) to replace the certificate or contact [Cisco Support](#).

Alternative Access



It is important to enable an alternative way to access your Secure Network Analytics appliances for any future service needs.

Make sure you can access your Secure Network Analytics appliances using one of the following options:

Virtual Appliances - Console (serial connection to console port)

To access an appliance through **KVM**, refer to the [Virtual Edition Appliance Installation Guide](#). To connect to an appliance through **VMware**, refer to the vCenter Server Appliance Management Interface documentation for vSphere. To connect to an appliance through **Nutanix AHV**, refer to the Launching a VM Console through Prism Central (AHV) documentation.

Hardware - Console (serial connection to console port)

To connect to an appliance using a laptop, or a keyboard with a monitor, refer to the latest [Secure Network Analytics Hardware Installation Guide](#) listed on the [Install and Upgrade Guides](#) page.

Hardware - CIMC (UCS appliance)

To access an appliance through CIMC, refer to the latest guide for your platform listed on the [Cisco Integrated Management Controller \(CIMC\) Configuration Guides](#) page.

Alternative Method

If you're unable to log in to the appliance using the virtual or hardware methods, you can enable SSH on the appliance network interface temporarily.



When SSH is enabled, the system's risk of compromise increases. If you do not intend to leave SSH enabled, make sure that you disable SSH when you have finished using it.

Use the following instructions to enable an alternative method to access your Secure Network Analytics appliances for any future service needs.

1. Log in to the Manager.
2. Select **Configure > Global > Central Management**.
3. Click the **⋮ (Ellipsis)** icon in the **Actions** column for the appliance.
4. Select **Edit Appliance Configuration**.
5. Select the **Appliance** tab.
6. Locate the **SSH** section.
7. Check the **Enable SSH** check box to allow SSH access on the appliance.
8. Click **Apply Settings**, then follow the on-screen prompts to save your changes.



Make sure to disable SSH when you have finished using it.

Data Store Private LAN Settings and Data Node Expansion

Starting with v7.4.1, Secure Network Analytics will be enforcing specific requirements for private LAN IP addresses. Make sure any Data Nodes configured using private LAN IP addresses meet these requirements:

- First three octets must be **169.254.42**
- Subnet must be **/24**



Here's an example: 169.254.42.x/24 with the x representing a number (2 to 255) assigned by your site.

For more information, contact [Cisco Support](#).

UDP High Availability

If you have high availability configured on your UDP Directors and plan to upgrade to v7.5.2, make sure to record your high availability settings on your UDP Director before you begin the update.

You will need to reconfigure high availability once your upgrade to v7.5.2 is complete. For more information about updating Secure Network Analytics, refer to the [Update Guide](#).

What's New

These are the new features, improvements, and changes made for the Secure Network Analytics v7.5.2 release.

Analytics

We've added nine new alerts related to NVM telemetry and Zeek telemetry, and we've renamed six alerts.

New Alerts for NVM Telemetry

We've added the following four new alerts for NVM telemetry:

- Potential Gamaredon C2 Callout
- Suspicious Curl Behavior
- Suspicious MSHTA Execution
- Suspicious Process Path

For more information, refer to the alert descriptions in the Help, the [Analytics: Detections, Alerts, and Observations Guide](#), and the [NVM Configuration Guide](#).

New Alerts for Zeek Telemetry

 Make sure you've configured **Zeek Telemetry** for Secure Network Analytics.

We've added the following five new alerts for Zeek telemetry:

- DNS Traffic to Tor Proxy
- PetitPotam Attack Via EFS RPC Calls
- Possible Impacket SecretDump Activity
- Remote Task Creation via ATSVIC Named Pipe
- Suspicious PsExec Execution

For more information, refer to the alert descriptions in the Help, the [Analytics: Detections, Alerts, and Observations Guide](#), and the [System Configuration Guide](#).

Renamed Alerts

The names of the following alerts have been changed:

Alert now known as	Formerly known as
Anomalous Domain Controller Activity	Exceptional Domain Controller
Country Watchlist: Remote Access	Remote Access (Geographic)
Country Watchlist: Protocol Violation	Protocol Violation (Geographic)
SMB Connection Spike: Internal	SMB Connection Spike
SMB Connection Spike: Outbound	Outbound SMB Connection Spike
Suspected Port Abuse: External	Suspected Port Abuse (External)



Go to the newly named alert if you'd like to change the Alert Type Priority for any of these alerts. Alert Type Priority is no longer supported with the former alert name.

Audit Log Destination

You can now configure two remote syslog servers. For more information, refer to the "Audit Log Destination" topic in the Help.

Cisco XDR Integration

Cisco XDR is a cloud-based solution, designed to simplify security operations and empower security teams to detect, prioritize, and respond to the most sophisticated threats. If you're interested in learning more about Cisco XDR, go [here](#). Refer to the [Cisco XDR Integration Guide](#) for details about how to access Cisco XDR through Secure Network Analytics for v7.5.1 or v7.5.2.




Using a webhook through Response Management is *not* supported for v7.5.1 or v7.5.2. If you have been using a webhook configuration to send alarm data to Cisco XDR in Cisco Secure Network Analytics v7.4.2 or v7.5.0, make sure to *disable* the webhook configuration through Response Management before initiating a Cisco XDR integration.

Dark Mode Theme

After updating to v7.5.2, you will have the option to choose a theme for the Manager display. You can choose from the following three options:

- Light
- Dark
- Auto (default)

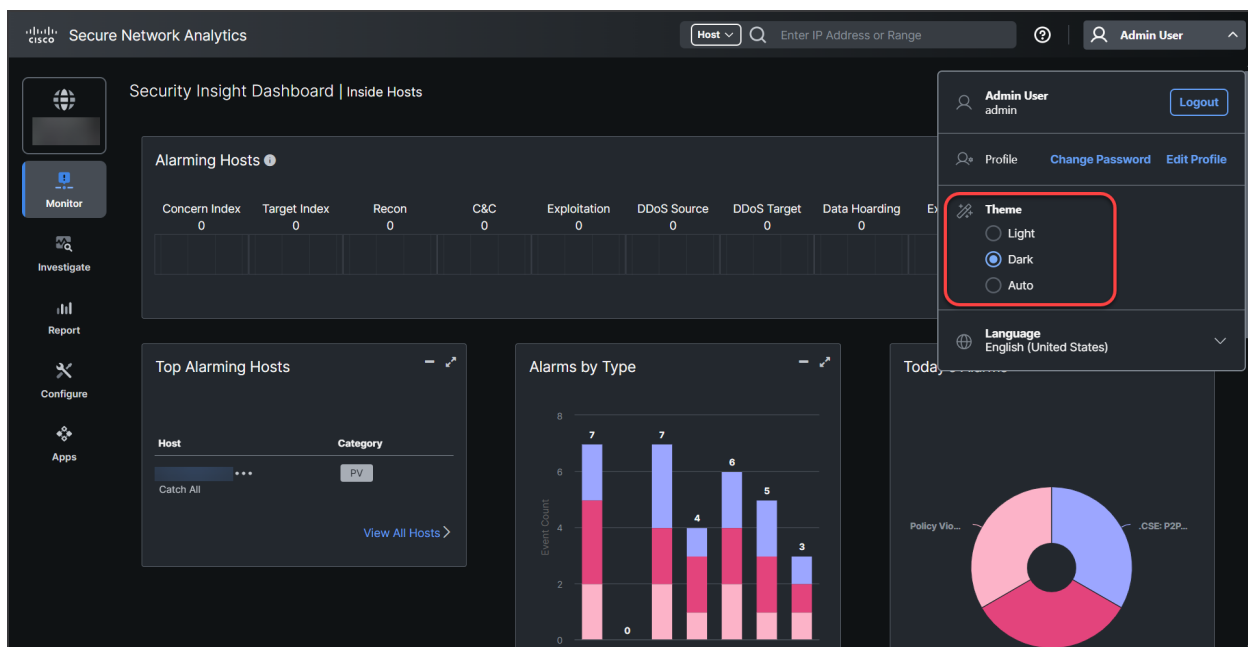

The **Auto** theme automatically changes the appearance of the Manager based on your operating system preferences. The preferred theme selection is stored in the browser and will be automatically applied on subsequent sessions.


For more details, refer to the "Choose a Theme" topic in the Help.

Data Store Certificate Management

We've added the **Database Security** tab to the Data Store section of Central Management. You can use this tab to update the Data Store database with a new self-signed identity certificate with a revised validity period, which ensures enhanced security and compliance. To update the Data Store database with a new self-signed identity certificate with a revised validity period, complete the following steps:

1. From **Central Management > Data Store**, click the **Database Security** tab.

2. Click **Update Identity**.

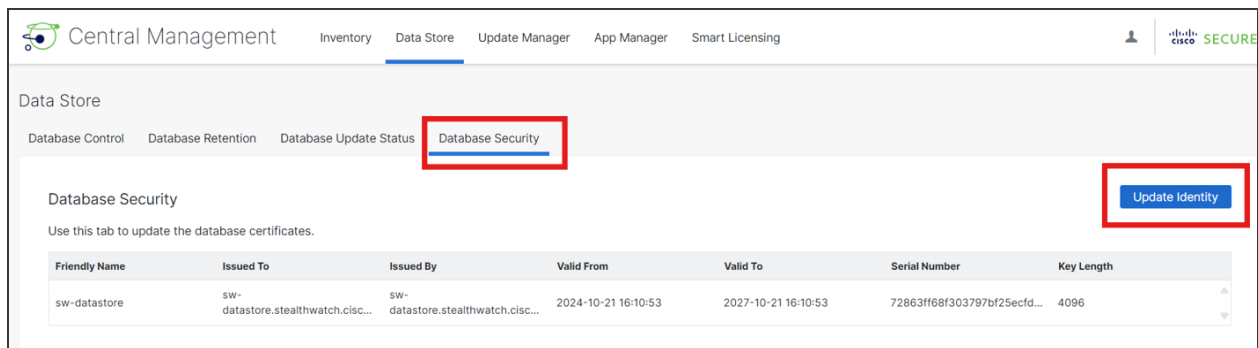

Central Management Inventory Data Store Update Manager App Manager Smart Licensing

Data Store

Database Control Database Retention Database Update Status **Database Security**


Database Security

Use this tab to update the database certificates.

Friendly Name	Issued To	Issued By	Valid From	Valid To	Serial Number	Key Length
sw-datastore	sw-datastore.stealthwatch.cisc...	sw-datastore.stealthwatch.cisc...	2024-10-21 16:10:53	2027-10-21 16:10:53	72863ff68f303797bf25ecd...	4096

Update Identity

3. Enter a certificate validity period between 1 and 5 years. Click **Replace Identity**.

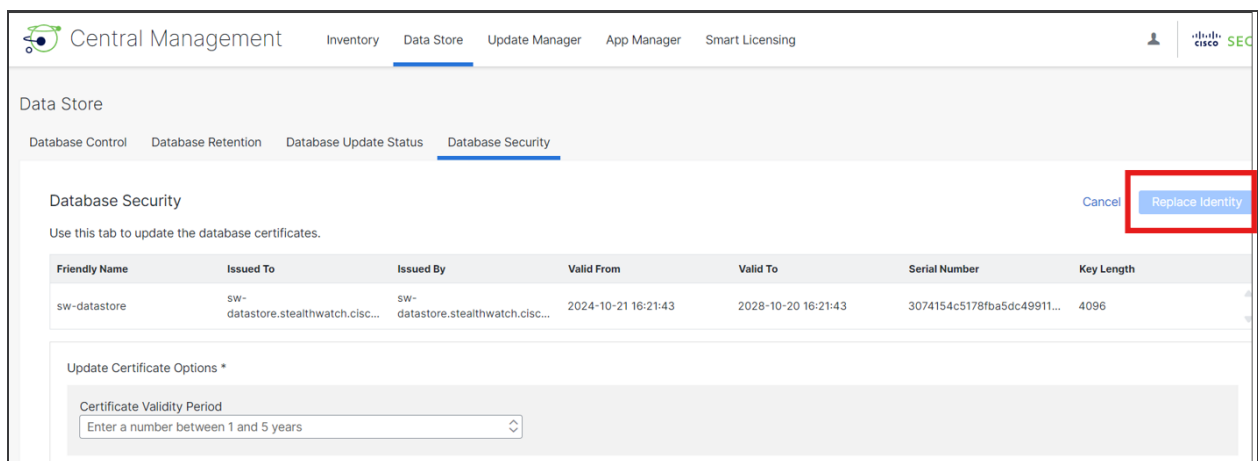

Central Management Inventory Data Store Update Manager App Manager Smart Licensing

Data Store

Database Control Database Retention Database Update Status **Database Security**

Database Security

Use this tab to update the database certificates.

Friendly Name	Issued To	Issued By	Valid From	Valid To	Serial Number	Key Length
sw-datastore	sw-datastore.stealthwatch.cisc...	sw-datastore.stealthwatch.cisc...	2024-10-21 16:21:43	2028-10-20 16:21:43	3074154c5178fba5dc49911...	4096

Cancel **Replace Identity**

Update Certificate Options *

Certificate Validity Period

Enter a number between 1 and 5 years

4. Review the updated validity period of the self-signed Data Store database identity certificate.



You can't update the self-signed Data Store database identity certificate as you would update other certificates in the Appliance Configuration UI.

Refer to the [System Configuration Guide](#) for detailed instructions about updating the self-signed Data Store database identity certificate.

Diagnostics Pack

We have migrated **Diagnostics Pack** creation functionality out of each Admin UI appliances to Central Management under the **Inventory > Support** menu.

Refer to the [System Configuration Guide](#) for detailed instructions about how to generate the Diagnostics Pack.

Host Group Automation

We're introducing host group automation for Secure Network Analytics v7.5.2 for Cisco Identity Services Engine (ISE) customers. For enhanced performance, make sure to install the latest [Cisco Secure Network Analytics \(formerly Stealthwatch\) Manager Update Patch v7.5.2](#) patch.




Important: When configuring Cisco ISE, enable the **Static SGT Classification** option and make sure the ISE Root CA certificate has been added to the Manager Trust Store. Refer to the [ISE and ISE-PIC Configuration Guide](#) for more information.

When setting up host groups, you can now import Cisco ISE endpoint information automatically. You'll be able to use the host group automation service to connect to a single ISE cluster, creating host groups based on the active endpoints in the cluster.

When you enable a host group automation service, it schedules a recurring job that runs once a day (one hour after archive hour). If you've disabled a host group automation service, you can choose to **Run Now** to run the process manually. For detailed instructions, refer to the "Configuring Host Group Automation" topic in the Help.

To access Host Group Automation Setup, do the following:

1. From the main menu, choose **Configure > Detection > Host Group Management**.
2. When the Host Group Management page displays, click **Automation**.

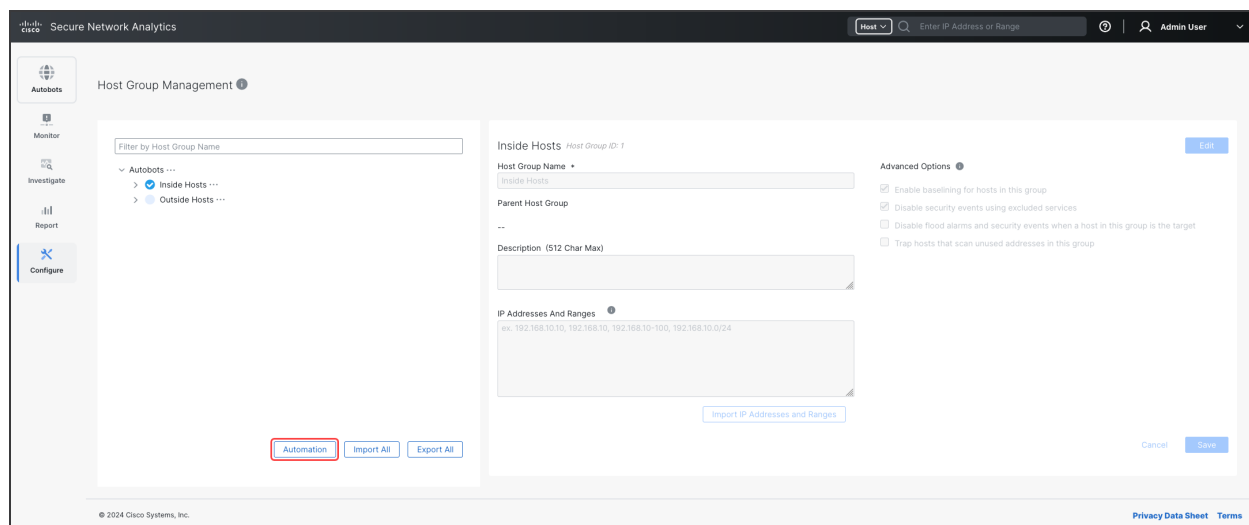

3. Configure host group automation service(s) within the Host Group Automation Set Up area.

The screenshot displays the 'Host Group Automation' setup page in the Cisco Secure Network Analytics interface. At the top, there's a search bar and a 'Host' dropdown. The main content area features a table with columns: Name, Host Group Name, Description, Service Type, Enabled, Last Run, Last Run Status, Next Run, and Action. Below the table, there's a 'Host Group Automation Setup' form. The form includes fields for 'ISE Service Name', 'Description', 'Parent Host Group' (with radio buttons for 'Inside Hosts' and 'Outside Hosts'), and 'ISE Cluster Name'. There are also 'Advanced Options' with checkboxes for 'Enable baselining for hosts in the group', 'Disable security events using excluded services', 'Disable flood alarms and security events when a host in the group is the target', and 'Trap hosts that scan unused addresses in this group'. At the bottom right of the form are buttons for 'Test Connection', 'Cancel', and 'Save'.



While this new feature automatically creates and modifies host groups, it won't automatically delete them. To delete a host group, you must still do it manually.

Note the following:

- New host groups can only be created when active ISE endpoints exist.
- Host group automation is not supported on a secondary Manager.
- Manager appliance backup files include host group automation services.
- If the archive hour is changed, the **Next Run** time stamp won't be updated until a manual or automatic run occurs.
- If the automation service encounters endpoints in ISE that are not classified, it will put them into a host group called Empty. The Empty host group name will be prepended with Endpoint OS, Endpoint Profile, or Security Group Tag, depending on which group it is under.



For more information, refer to the "Configuring Host Group Automation" topic in the Help or the [ISE and ISE-PIC Configuration Guide](#).

Nutanix Support

We now support Nutanix AHV as a platform for deploying virtual appliances.

Validated Nutanix Version Details
Acropolis OS (AOS) Version 6.8
Acropolis Hypervisor (AHV) Version v.20230302.101026
Prism Central Version pc.2024.1.0.2

For more details, refer to the [Virtual Edition Appliance Installation Guide](#).

Packet Capture

The packet capture feature is now available on all appliances in the appliance console (SystemConfig). It has been removed from the appliance administration interface.

For more information, refer to the "Packet Capture" topic in the Help.

Radius Message-Authenticator

You can now enable the Message-Authenticator on RADIUS server to authenticate and ensure the integrity of RADIUS packets to prevent spoofing.

For more information, refer to the "Radius Message-Authenticator" topic in the Help.

Report Builder

We've updated the Report Builder design and user experience workflows for reports, dashboards, and scheduling. For details, refer to the "Report Builder" topic in the Help.

1. Log in to your Manager.
2. From the main menu, choose **Report > Report Builder**.

Reports

All reports (saved by you or other users) are listed here. For details, refer to the "Report Builder" and "Report Templates" topics in the Help.

- **Create a New Report:** Click **+New Report**.
- **Open a Saved Report:** Click the report name.
- **Edit a Saved Report:** Click the ***** (Ellipsis)** icon.

Report Builder

Reports

Search: [] All Reports [v]

Name	Description	Type	Created By	Recurrence	
Alarms		Alarms	admin	Daily ⓘ	...
Alarms - t		Alarms	admin	Daily ⓘ	...
Alerts - <		Alerts	admin		...
Firewall Log Collection Trend -		Firewall Log Collection Trend	admin	Daily ⓘ	...
Network and Server Performance		Network and Server Performance	admin	Daily ⓘ	...
Security Events		Security Events	admin		...
TrustSec Analytics		TrustSec Analytics	admin		...
TrustSec Policy Analytics		TrustSec Policy Analytics	admin		...

Rows per page: 10 1-8 of 8 < 1 >

Editing a Report

Report Builder

Reports

Search: [] All Reports [v]

Name	Description	Type
Network and Server Performance		Network and Server Performance
Security Events		Security Events
Alarms - t		Alarms
Alerts - demo		Alerts
Firewall Log Collection Trend -		Firewall Log Collection Trend
TrustSec Policy Analytics		TrustSec Policy Analytics
Alarms		Alarms
TrustSec Analytics		TrustSec Analytics

Edit Report

Network and Server Performance

Report Title *

Network and Server Performance

Description

An optional description of the report.

General

Time Range *

Last 12 Hours

Flow Collector *

Subject

Include

Enter multiple IPs, one IP range, or select a Host Group

Host IP Addresses or Range *

Host Group selected

Cancel Run Report

© 2024 Cisco Systems, Inc.

Dashboards

Use dashboards to group your critical reports or create your own Network Insights Dashboard. You can change the layout and quickly refresh the report data on your dashboards. All dashboards (saved by you or other users) are listed here. For instructions, refer to the "Dashboards" topic in the Help.

- **Create a New Dashboard:** Click **+New Dashboard**.
- **Open a Saved Dashboard:** Click the dashboard name.
- **Edit a Saved Dashboard:** Click the **⋮ (Ellipsis)** icon.

Report Builder

Reports
Dashboards
Schedule History

+ New Dashboard

Search
All Dashboards

Name	Description	Created By
Dashboard		admin
Telemetry ingest		admin
Network Insights		admin
Network Insights		admin
Network Insight		admin

Rows per page 10 1-5 of 5 1

Schedule History

If your report supports scheduling, you can create a schedule and email delivery list so that it is sent to recipients at a specific frequency (for example, on a daily basis) and time. In v7.5.2, you can choose PDF and/or CSV for your delivery format.

All scheduled reports (saved by you or other users) are listed here. For instructions, refer to the "Scheduling a Report" topic in the Help.

Report Builder

Reports
Dashboards
Schedule History

Search
All Reports

Name	Description	Type	Occurrence	Recurrence	Status
Alarms		Alarms	Wednesday, December 18, 10:20 AM	Daily ⓘ	✓ >
Alarms		Alarms	Tuesday, December 17, 06:00 PM	Daily ⓘ	✓ >
Network and Server Performance		Network and Server Performance	Tuesday, December 17, 03:15 PM	Daily ⓘ	✓ >
Firewall Log Collection Trend -		Firewall Log Collection Trend	Tuesday, December 17, 03:08 PM	Daily ⓘ	✓ >
Alarms		Alarms	Tuesday, December 17, 10:20 AM	Daily ⓘ	✓ >

Revocation Checking Using Your Uploaded CRL File

We have introduced a Certificate Revocation Service API to accept and use the Certificate Revocation List (CRL) file that you upload for revocation checking. This API provides foundational capabilities to enhance your security measures.

For more details about this API, refer to the "Certificate Revocation Service API" section of [SSL/TLS Certificates for Managed Appliances Guide](#).

If you encounter any issues or need further assistance, refer to the "Troubleshooting" section of the [SSL/TLS Certificates for Managed Appliances Guide](#).

Security Insight Dashboard

While the Security Insight Dashboard previously displayed only information about alarms, you can now toggle between the **Alarms view** and the newly added **Alerts view** (if you have Data Store with Analytics enabled). The page initially defaults to the **Alarms view**, so make sure to toggle to **Alerts view** to see the Alerts report.

When you log in to the Manager, the Security Insight Dashboard displays. You can also access the page from the main menu by choosing **Monitor > Security Insight Dashboard**.

For more information, refer to the "Using Dashboard Information to View Network Security Status" and "Alerts Report" topics in the Help.

Static Routes

We no longer support static routes from the Secure Network Analytics v7.5.2 release onwards. You will not be able to add, modify, or delete static routes between the appliance and other networks.

Zeek Telemetry

We now support Zeek telemetry with Secure Network Analytics with Data Store and Analytics enabled.



Make sure Analytics is enabled. Choose **Configure > Detection > Analytics** from the main menu, then click *Analytics On*  .

Zeek telemetry is enabled by default in new deployments during First Time Setup. For more information about First Time Setup, refer to the [System Configuration Guide](#).

To enable ingest of Zeek telemetry after upgrading to v7.5.2 from a previous release, complete the following steps:

1. Log in to your Manager.
2. From the main menu, choose **Configure > Global > Central Management**.
3. On the Inventory page, click the **⋮ (Ellipsis)** icon for your Flow Collector, then choose **View Appliance Statistics**.
4. When the Flow Collector Admin page displays, choose **Support > Advanced Settings**.
5. Set the value to **1** in the **enable_zeek** field.
6. Confirm the port is set to **9514** in the **zeek_syslog_port** field.
7. Click **Apply**.

To verify Zeek that telemetry is being captured, review the **Zeek Log Collection Trend** report.



For more information about reports, click the (**Help**) icon to access the "Report Builder" Help topic.

For more information about configuring Zeek telemetry within Secure Network Analytics, refer to the [Zeek Configuration Guide](#).

Known Issues

This section provides information about the bugs (defects) which may exist in this release. For each defect, there is a corresponding Cisco Defect and Enhancement Tracking System (CDETS) number. Click the CDETS link to view details about an issue.

CDETS	Title
CSCwn15467	Flow Collector Engine: Improper NAT address handling causes performance bottleneck and degraded ingest
CSCwn44137	Flow Collector engine becomes overwhelmed and unresponsive when more than 65535 exporter templates
CSCwn48459	Flow Collector Engine: Unable to effectively process flow with rapidly changing exporter templates
CSCwk57520	Analytics Device Report shows inconsistent data after Manager role change
CSCwk57526	No confirmation dialog when navigating from an edit mode page to another page - changes are lost
CSCwk57527	Host Summary reports show the policy description as if it's the policy name
CSCwn65615	Setting max concurrent session value too low can prevent appliances from being added to Central Management
CSCwn83568	Flow Collector Stopped alarm due to extended engine start up time
CSCwn83569	Audit Log is missing for when LDAP service gets created and deleted
CSCwn83570	Inaccurate Internal Host Count in Visibility Assessment component
CSCwn83572	Flow Collector Management Channel Down Alarm After Upgrade when lc-tomcat comes up before token-authority

CDETS	Title
CSCwn83573	Analytics: Internal server error on Selected Observations page in specific case
CSCwn83574	Alarm notification component missing from central manager pages
CSCwn83575	The Manager does not show any audit log messages for Certificate Revocation List (CRL) changes
CSCwn83576	Space between elements in the UI have increased (doubled) when compared to earlier versions
CSCwn83578	Central Management Update Manager shows 1 year ago in Last Reboot column after change of year
CSCwn83579	Analytics jobs on Manager get stuck in scheduling if no NetFlow ingested on FC for an extended time
CSCwn83580	Analytics: Device Connection Visualization Chart sometimes displays data for the wrong IP
CSCwn83581	fc-core uses excessive memory for host group processing
CSCwn83582	Common Criteria log messages not presenting all required information with regard to certificate related events.
CSCwn83583	Host Group Automation jobs that run for 30 minutes or longer break the scheduler
CSCwn83585	One of the NVM or Zeek findings is sometimes not being generated
CSCwn83586	Log rotation for svc-ndr-engine needs extended to support larger troubleshooting windows
CSCwn91132	Non-Data Store database statistics page not loading and throw 500 internal server error.

CDETS	Title
CSCwn97147	Incorrect memory allocation requirement on Analytics enablement popup
CSCwn97439	Admin UI Help documents 404 for non Manager devices
CSCwk98755	Manager (SMC) Failover Down Alert: Firewall Restart on Sync

Contacting Support

If you need technical support, please do one of the following:

- Contact your local Cisco Partner
- Contact Cisco Support
- To open a case by web: <http://www.cisco.com/c/en/us/support/index.html>
- For phone support: 1-800-553-2447 (U.S.)
- For worldwide support numbers:
<https://www.cisco.com/c/en/us/support/web/tsd-cisco-worldwide-contacts.html>

Change History

Document Version	Published Date	Description
1_0	February 5, 2025	Initial Version.
1_1	February 24, 2025	General Availability (GA).
1_2	April 25, 2025	Updated the "Host Group Automation" topic within the <i>What's New</i> section.

Release Support Information

Official General Availability (GA) date for Release 7.5.2 is February 24, 2025.

For support timeline information regarding general software maintenance support, patches, general maintenance releases, or other information regarding Cisco Secure Network Analytics software lifecycle support, refer to the [Cisco Secure Network Analytics® Software Lifecycle Support Statement](#).

Copyright Information

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

