
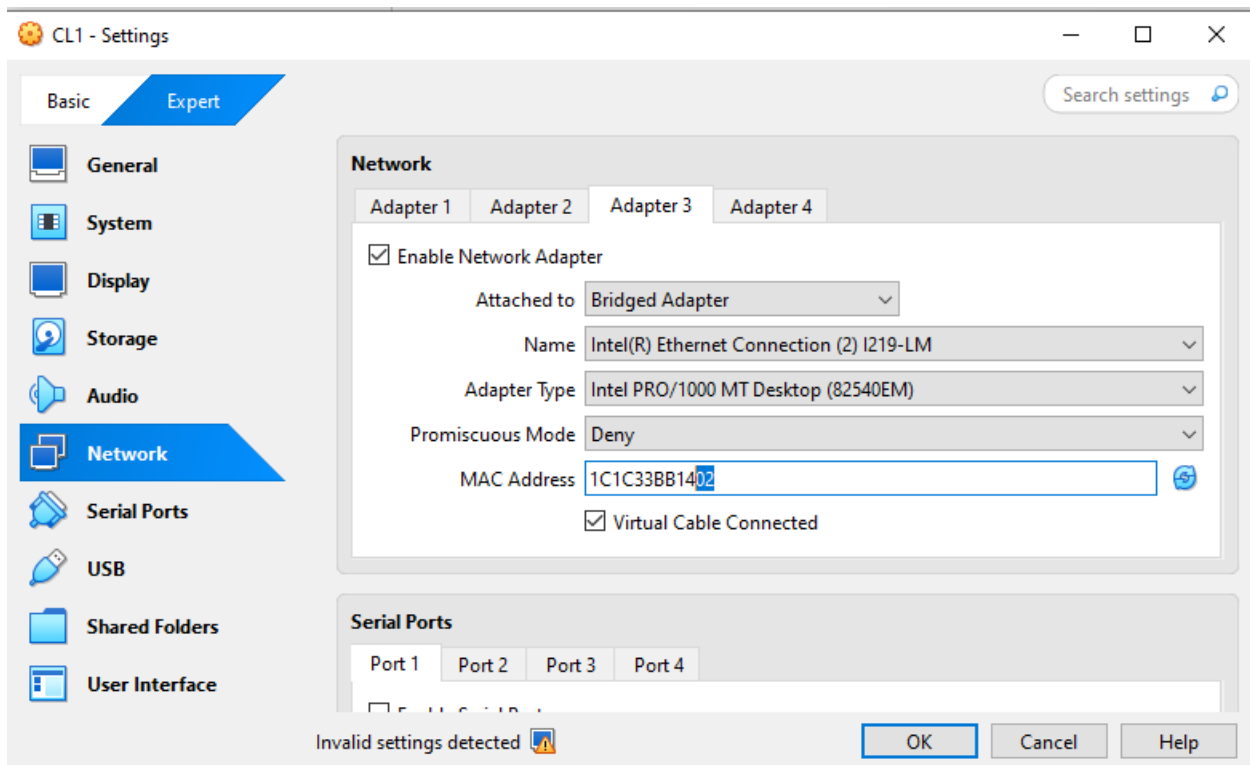


Lab 5 – My Solutions

Changing the settings:

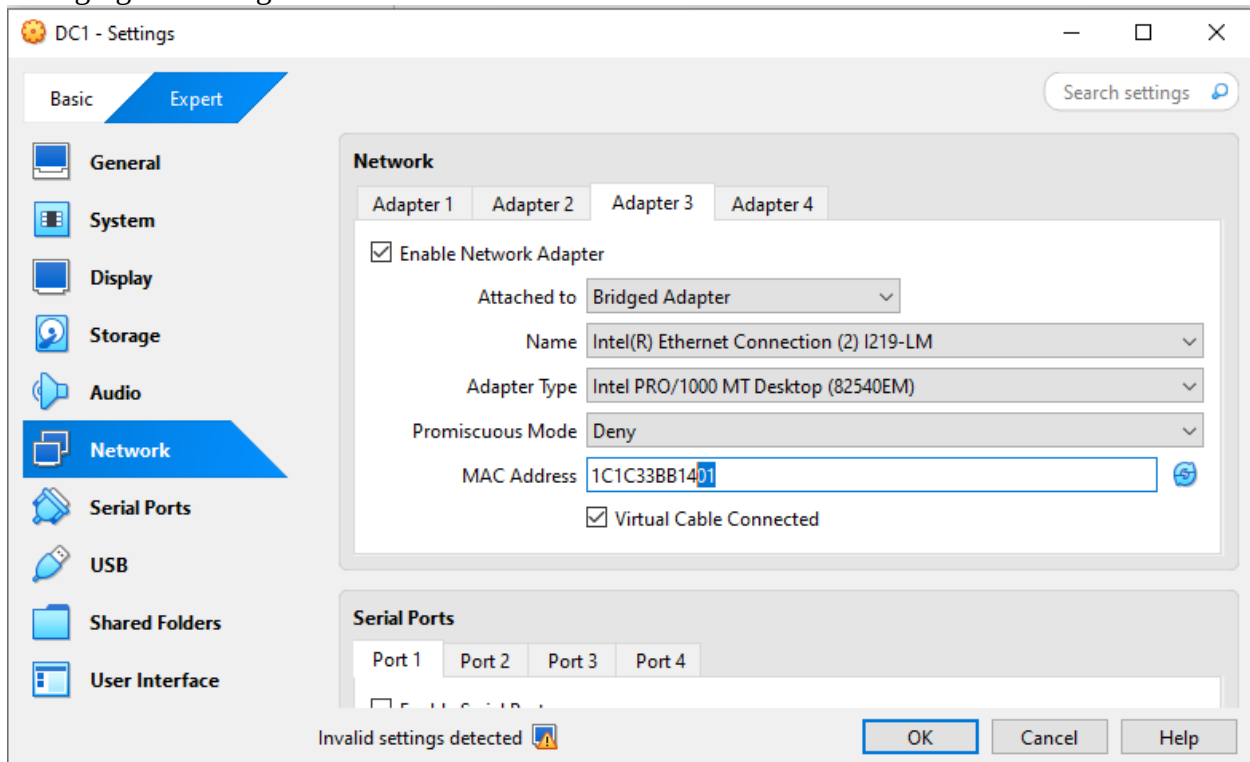

1: FTP - Anonymous Access

PowerShell:

Create folder and file:


```
New-Item -ItemType Directory -Path "D:\FTP" -Force
```

```
Set-Content -Path "D:\FTP\docs.txt" -Value "Hello this is a test file."
```

Install:

```
Install-WindowsFeature -Name Web-Server, Web-FTP-Server -IncludeManagementTools
```

Open inetmgr

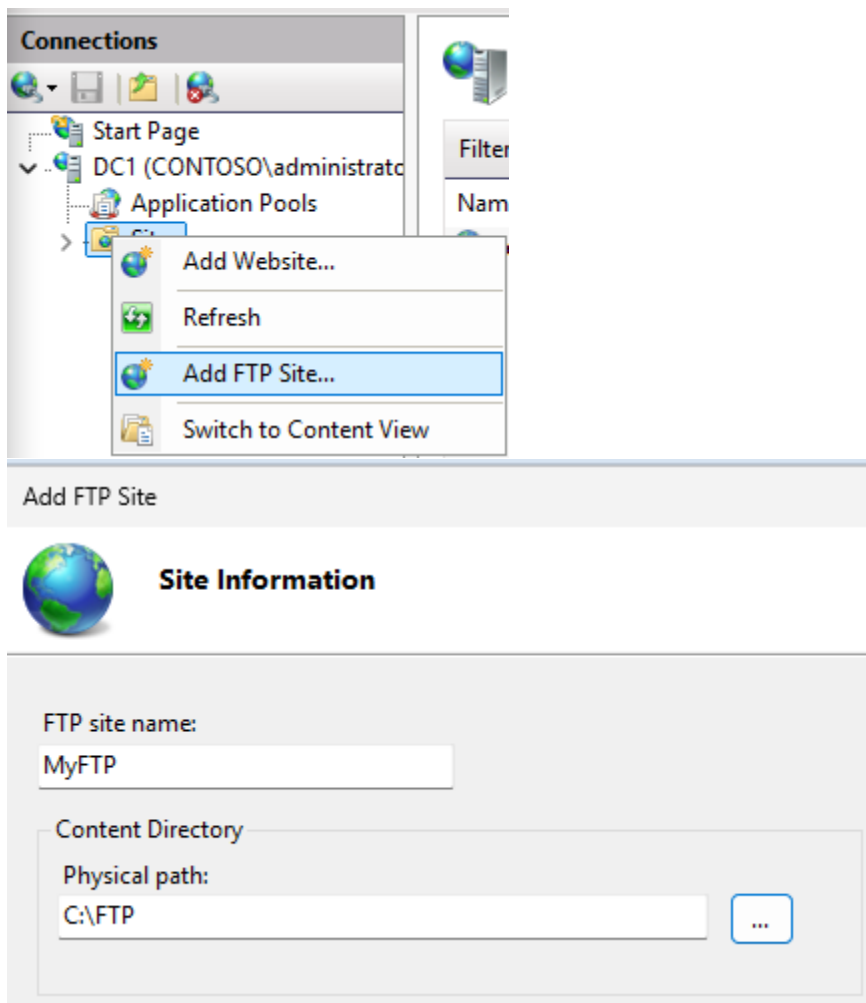

Binding

IP Address: All Unassigned Port: 21

☐ Enable Virtual Host Names:

Virtual Host (example: ftp.contoso.com):

☒ Start FTP site automatically

SSL

☒ No SSL

☐ Allow SSL

☐ Require SSL

SSL Certificate: Not Selected

Authentication

☒ Anonymous

☐ Basic

Authorization

Allow access to: All users

Permissions

☒ Read

☐ Write

PowerShell:

Open firewall for FTP:

```
New-NetFirewallRule -DisplayName "FTP In" -Direction Inbound -Protocol TCP -LocalPort 21 -Action Allow
```

```

PS C:\Users\Administrator> New-NetFirewallRule -DisplayName "FTP In" -Direction Inbound -Protocol TCP -LocalPort 21 -Action Allow

Name : {e9242f98-5dbf-4b4a-96ae-483dfcfabe80}
DisplayName : FTP In
Description :
DisplayGroup :
Group :
Enabled : True
Profile : Any
Platform : {}
Direction : Inbound
Action : Allow
EdgeTraversalPolicy : Block
LooseSourceMapping : False
LocalOnlyMapping : False
Owner :
PrimaryStatus : OK
Status : The rule was parsed successfully from the store. (65536)
EnforcementStatus : NotApplicable
PolicyStoreSource : PersistentStore
PolicyStoreSourceType : Local
RemoteDynamicKeywordAddresses : {}
PolicyAppId :
PackageFamilyName :

```

Check IP for FTP:

Ipconfig

```

Ethernet adapter Ethernet:

    Connection-specific DNS Suffix  . : contoso.internal
    Link-local IPv6 Address . . . . . : fe80::f1ad:1259:f8bb:8ae4%4
    IPv4 Address. . . . . : 192.168.56.200
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.56.1

Ethernet adapter Ethernet 2:

    Connection-specific DNS Suffix  . : lab.wit.pwr.edu.pl
    Link-local IPv6 Address . . . . . : fe80::3405:75ca:fcee:f7d%7
    IPv4 Address. . . . . : 10.0.2.3
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 10.0.2.1

Ethernet adapter Ethernet 3:

    Connection-specific DNS Suffix  . : wiz.local
    Link-local IPv6 Address . . . . . : fe80::cde7:9c96:7379:9b8f%14
    Autoconfiguration IPv4 Address. . : 169.254.236.39
    Subnet Mask . . . . . : 255.255.0.0
    Default Gateway . . . . . : 10.108.33.254

```

Ethernet = Internal network -> 192.168.56.200 ☒ (we use this internal for FTP)




Test

```
PS C:\Users\Administrator> ftp 192.168.56.200
Connected to 192.168.56.200.
220 Microsoft FTP Service
200 OPTS UTF8 command successful - UTF8 encoding now ON.
User (192.168.56.200:(none)): anonymous
331 Anonymous access allowed, send identity (e-mail name) as password.
Password:

230 User logged in.
ftp> ls
200 PORT command successful.
125 Data connection already open; Transfer starting.
docs.txt
web.config
226 Transfer complete.
ftp: 25 bytes received in 0.00Seconds 25.00Kbytes/sec.
```


2: FTP - User Access

Create a user ftpuser and allow all users to read/write:

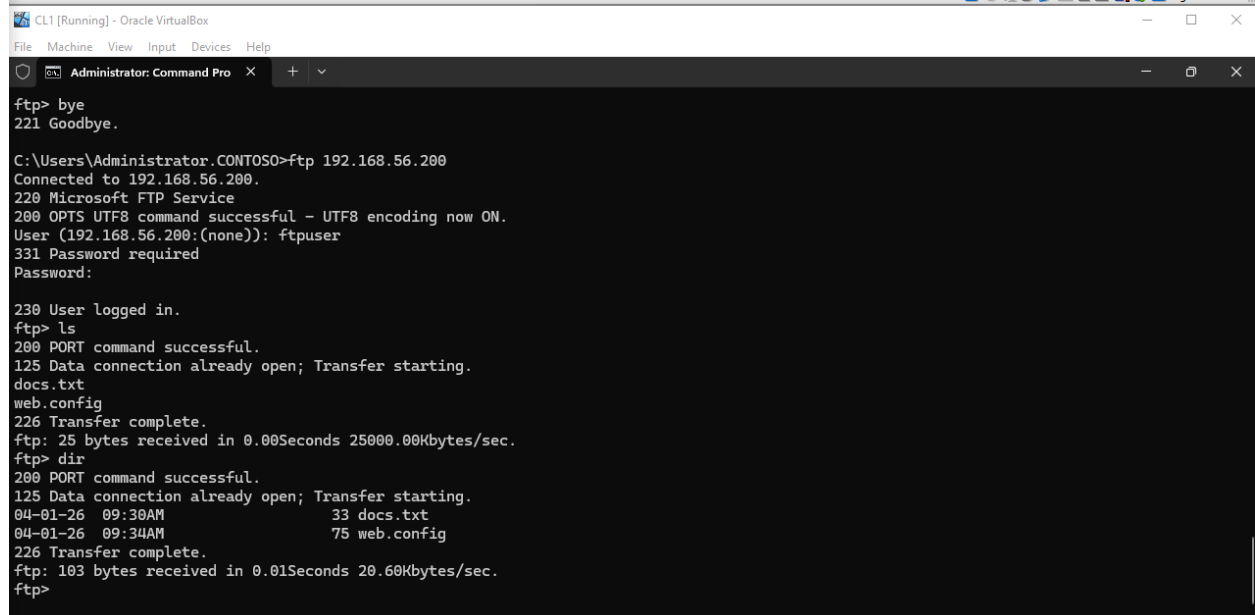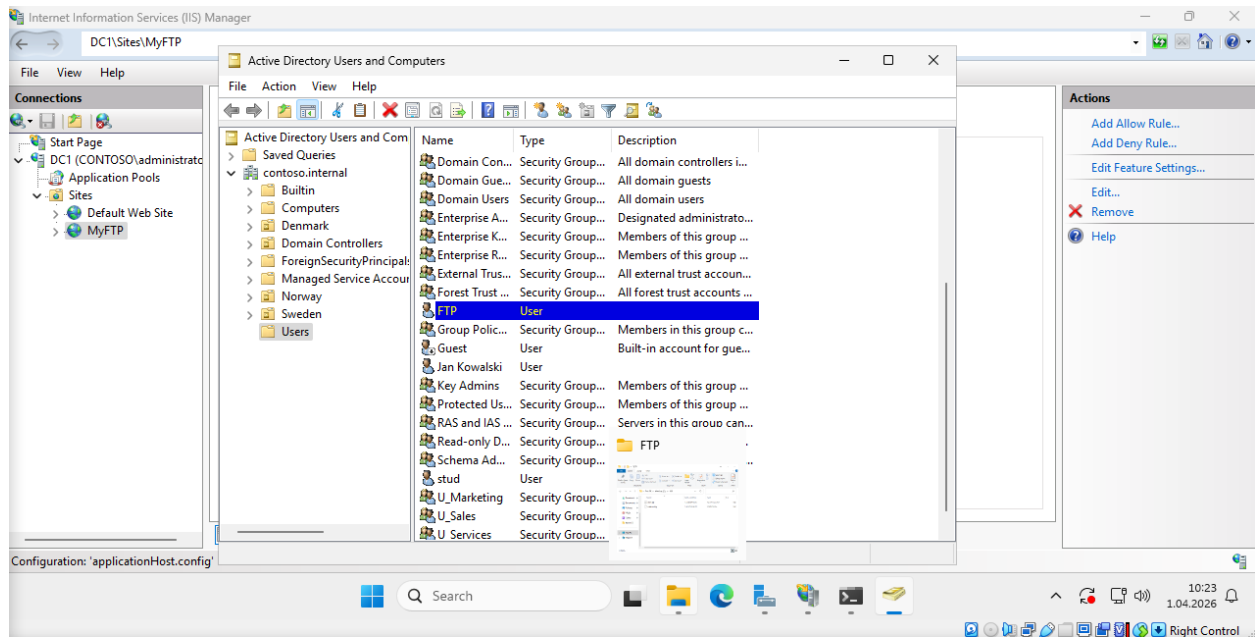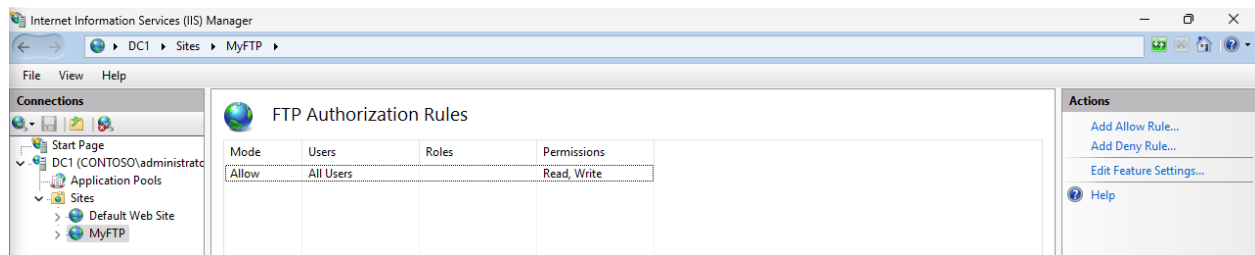

3: FTP - By NETWORK CARD

Check the internet address after the initial configuration of the internet ip:

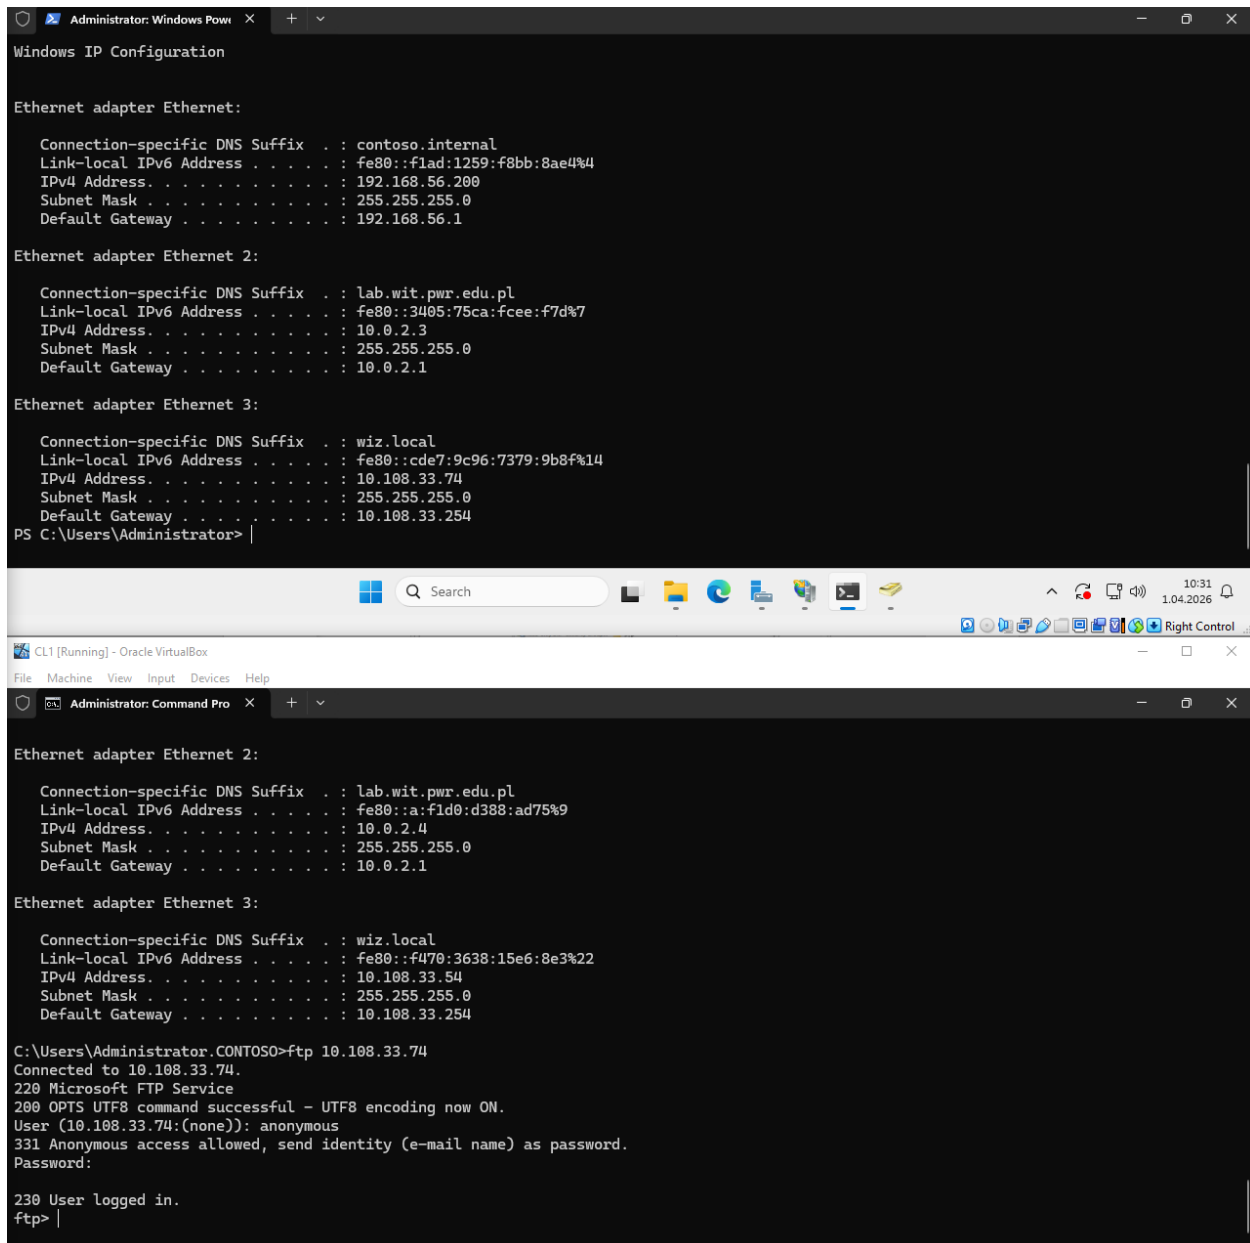

The screenshot displays two windows from a Windows operating system. The top window, titled 'Administrator: Windows PowerShell', shows the 'Windows IP Configuration' output for three Ethernet adapters. The bottom window, titled 'Administrator: Command Prompt', shows the configuration for Ethernet adapter Ethernet 2 and the execution of an FTP command to connect to 10.108.33.74.

```
Administrator: Windows PowerShell
Windows IP Configuration

Ethernet adapter Ethernet:

    Connection-specific DNS Suffix  . : contoso.internal
    Link-local IPv6 Address . . . . . : fe80::f1ad:1259:f8bb:8ae4%4
    IPv4 Address. . . . . : 192.168.56.200
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 192.168.56.1

Ethernet adapter Ethernet 2:

    Connection-specific DNS Suffix  . : lab.wit.pwr.edu.pl
    Link-local IPv6 Address . . . . . : fe80::3405:75ca:fcee:f7d%7
    IPv4 Address. . . . . : 10.0.2.3
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 10.0.2.1

Ethernet adapter Ethernet 3:

    Connection-specific DNS Suffix  . : wiz.local
    Link-local IPv6 Address . . . . . : fe80::cde7:9c96:7379:9b8f%14
    IPv4 Address. . . . . : 10.108.33.74
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 10.108.33.254
PS C:\Users\Administrator>

Administrator: Command Prompt
Ethernet adapter Ethernet 2:

    Connection-specific DNS Suffix  . : lab.wit.pwr.edu.pl
    Link-local IPv6 Address . . . . . : fe80::a:fd0:d388:ad75%9
    IPv4 Address. . . . . : 10.0.2.4
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 10.0.2.1

Ethernet adapter Ethernet 3:

    Connection-specific DNS Suffix  . : wiz.local
    Link-local IPv6 Address . . . . . : fe80::f470:3638:15e6:8e3%22
    IPv4 Address. . . . . : 10.108.33.54
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : 10.108.33.254

C:\Users\Administrator>CONTOSO>ftp 10.108.33.74
Connected to 10.108.33.74.
220 Microsoft FTP Service
200 OPTS UTF8 command successful - UTF8 encoding now ON.
User (10.108.33.74:(none)): anonymous
331 Anonymous access allowed, send identity (e-mail name) as password.
Password:

230 User logged in.
ftp>
```