University of Information Technology – VNU-HCM

Faculty of Computer Engineering

CSBU102 – Computer System

LAB 02

Accessing Main Memory: Words, Arrays, Bytes and Strings

Full name	Phan Tran Tuan Anh	**Student ID**	26560002
Class	ATBC2026	**Practice date**	11/11/2026
Self-assessed score		**GitHub link**	https://github.com/petertuananh/CSBU102_26560002/blob/main/Lab02

1. LAB OVERVIEW

Purpose. In LAB 1 every value lived in one of the 32 registers. Real programs use far more data than that, such as a list of scores or a line of text, and keep it in main memory (RAM); a processor can calculate only on registers. In this session you will learn how a program finds data in memory, brings it into a register and writes a result back, for whole words (arrays) and for single bytes (characters). Every new idea is explained first and then practised.

> **Situation: a lecturer's score sheet**
>
> A lecturer keeps the scores of a class and the students' names in a small program. Even five scores and one name are too much to keep in registers, so the program stores them in main memory and moves one value at a time into a register to read, change or add it. All names and scores are fictitious.

After this session, you can:

- explain address, word and the alignment rule, and declare data with `.word`, `.byte` and `.asciiz`;
- read and write words with `lw` and `sw` (base register + offset) and compute the address of array element i as base + 4 × i, also when i is held in a register;
- read and write bytes with `lb`, `lbu` and `sb`, and explain sign extension and byte order from your own observations;
- change data in memory: swap two elements, update an element, edit characters of a string;
- predict, observe and explain what a short program does with memory, including what happens when it goes wrong.

Table 1. Structure of the session

Part	Content	Score
0	Getting started: the memory panes of MARS	–
1	Experiment 1 – Words and addresses	30
2	Experiment 2 – Arrays: reading and writing elements	30
3	Experiment 3 – Bytes, characters and strings	25
4	Wrap-up and submission	15
	Total	**100**
Ext	Extension – A 3 × 3 board in memory (optional)	+10

Working conventions

• A yellow cell is where you write an answer or a value (your text appears in red). A dashed frame is where you paste a screenshot. Listings are in grey frames; a line that starts with `# >>>` marks a place where you write code.

• Questions are labelled *Understand*, *Apply*, *Analyze* or *Evaluate*. Many activities follow PREDICT → OBSERVE → EXPLAIN: write down what you expect, run the program and record what happens, then explain any difference. A wrong prediction is never penalised; the explanation earns the marks.

• Save every program you submit as `Lab02_<StudentID>_<Part>.asm`, for example `Lab02_22520001_TN2.asm` (parts TN1 to TN3 and EXT), and start it with a comment block with your name, student ID and a one-line purpose.

PART 0. GETTING STARTED: THE MEMORY PANES OF MARS

You already know how to assemble, run and step through a program. This time you also use the Data Segment, the MARS pane that shows main memory (Table 2).

Table 2. Skills checklist

☐	Skill	Hint
☐	Check the settings	Settings: tick *Permit extended (pseudo) instructions* and *Initialize Program Counter to global 'main'*.
☐	Read the Data Segment	Each row starts with an address; the columns *Value (+0)*, *Value (+4)*, … show the words that follow. Tick *Hexadecimal Values* / *Addresses* or *ASCII* to change the display.
☐	Find the address of a label	Settings → *Show Labels Window (symbol table)*.
☐	Set a breakpoint	Tick the *Bkpt* box of an instruction in the Text Segment; Go stops just before it.

Step 0 – Quick check. Type Listing 0, assemble and run it (it prints one number read from memory). Then find the label `x` in the Labels window and the number 7 in the Data Segment.

Listing 0

```
# Listing 0 - quick check
.data
x:    .word 7
msg:  .asciiz "Value read from memory: "
nl:   .asciiz "\n"

.text
.globl main
main:
    li   $v0, 4
    la   $a0, msg
    syscall
    la   $t0, x
    lw   $a0, 0($t0)
    li   $v0, 1
    syscall
    li   $v0, 4
    la   $a0, nl
    syscall
    li   $v0, 10
    syscall
```

Text in the Run I/O pane:

```
Value read from memory: 7
```

EXPERIMENT 1. WORDS AND ADDRESSES (30 points)

Situation

Before the program can add two scores it must find them. A processor sees not a list of named scores but a very long row of numbered storage cells. This experiment shows how a program names a cell, brings its contents into a register and writes a result back.

Background: main memory, addresses and words

Main memory is a long row of **bytes** (8 bits). Every byte has its own number, its **address**. A MIPS register holds one **word** of 4 bytes, which occupies four consecutive addresses; the address of a word is the address of its first byte and must be a **multiple of 4** (the *alignment rule*). In MARS, declared data begins at `0x10010000` (Figure 1).

The processor calculates only with registers, so a program **loads** a value into a register and **stores** a result back: `lw $t0, 8($s0)` copies the word at address `$s0 + 8` into `$t0`, and `sw $t0, 8($s0)` copies `$t0` into that word. The constant 8 is the **offset** (in bytes), `$s0` is the **base register**, and base + offset is the *effective address*. A label names an address, and `la $s0, scores` copies the address of `scores` into `$s0`. Table 3 lists the directives that place data in memory.

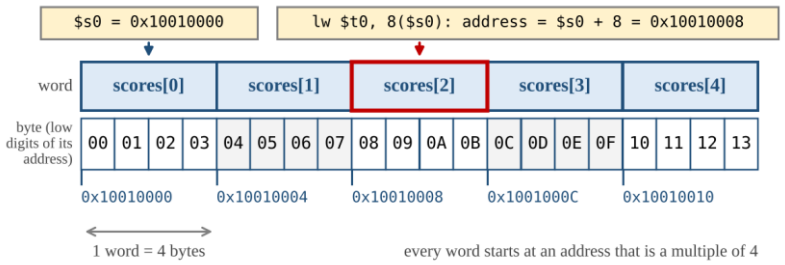


Figure 1. An array of five words in memory and the effective address of lw $t0, 8($s0)

Table 3. Data declarations

Directive	Example	What is placed in memory
`.word`	`a: .word 40, 55, 70`	Consecutive 32-bit words (an array); the label is the address of the first one.
`.byte`	`b: .byte 65`	One byte with the value 65.
`.asciiz`	`s: .asciiz "Hi"`	One byte per character, then one extra byte of value 0 that marks the end of the string.

Step 1.1 – Variables in memory (10 points)

In LAB 1, `a = b + c` was a single `add` on registers. Now the variables live in memory. Type Listing 1, assemble it, PREDICT the values in Table 4, then run it (decimal display) and OBSERVE. Also read the addresses in Table 5 (`pc` and `$sp` from the Registers pane right after assembling).

Listing 1

```
# Listing 1 - varA = varB + varC, with all three variables in memory
.data
varB: .word 25
varC: .word 17
varA: .word 0

.text
.globl main
main:
    la   $t0, varB         # $t0 = address of varB
    lw   $t1, 0($t0)       # $t1 = varB
    lw   $t2, 4($t0)       # $t2 = varC
    add  $t3, $t1, $t2     # $t3 = varB + varC
```

```
    sw   $t3, 8($t0)       # varA = $t3
    li   $v0, 10
    syscall
```

Table 4. Predict and observe Listing 1

Item	PREDICT (decimal)	OBSERVE (decimal)
`$t3`	42	42
Word at label `varA` in the Data Segment	42	42

Table 5. Addresses in the program

Item	Address (hex)
`pc` before the program runs	0x00400000
Label `varB` / `varC` / `varA`	0x10010000 / 0x10010004 / 0x10010008
`$sp` before the program runs	0x7fffeffc

Question 1.1 (Understand) Why do the addresses of `varB`, `varC` and `varA` differ by that number of bytes? The instructions, the declared data and the stack are kept in three different regions: which address belongs to which region, and which region has the highest addresses?

Why do the addresses of varB, varC and varA differ by that number of bytes? Because they are declared using the .word directive. In MIPS, a word is 32 bits long, which occupies exactly 4 consecutive bytes in memory. Therefore, their addresses differ by 4.
Which address belongs to which region?
Instructions (pc): Text Segment (0x00400000)
Declared data (varB, varC, varA): Data Segment (0x10010000)
Stack ($sp): Stack Segment (0x7fffeffc)
Which region has the highest addresses? The Stack region (pointed to by $sp) has the highest addresses.

Step 1.2 – Base plus offset (10 points)

Type Listing 2 (an array of five scores). For each instruction in Table 6, work out the effective address and PREDICT the value that ends up in the destination register; run the program and record the observed value. Row (4) is an `addi`: its result is an address (hexadecimal).

Listing 2

```
# Listing 2 - addresses and offsets
.data
scores: .word 40, 55, 70, 85, 100

.text
.globl main
main:
    la   $s0, scores      # $s0 = address of scores[0]
    lw   $t0, 0($s0)      # (1)
    lw   $t1, 4($s0)      # (2)
    lw   $t2, 16($s0)     # (3)
    addi $s1, $s0, 8      # (4) $s1 = $s0 + 8
    lw   $t3, 0($s1)      # (5)
    lw   $t4, -4($s1)     # (6)
    li   $v0, 10
    syscall
```

Table 6. Effective addresses and loaded values

#	Instruction	Effective address (hex)	PREDICT value	OBSERVE value
(1)	`lw $t0, 0($s0)`	0x10010000	40	40
(2)	`lw $t1, 4($s0)`	0x10010004	55	55
(3)	`lw $t2, 16($s0)`	0x10010010	100	100
(4)	`addi $s1, $s0, 8`	–	0x10010008	0x10010008
(5)	`lw $t3, 0($s1)`	0x10010008	70	70
(6)	`lw $t4, -4($s1)`	0x10010004	55	55

Question 1.2 (Apply) Write the formula for the address of element `i` of an array of words in terms of the address of element 0, and use it for `scores[3]`. Why does 4 appear in the formula, and not 1?

Write the formula for the address of element i of an array of words:Address(array[i]) = Address(array[0]) + (i * 4)
Use it for scores[3]:Address(scores[3]) = Address(scores[0]) + (3 * 4) = Address(scores[0]) + 12
Why does 4 appear in the formula, and not 1? Because MIPS uses byte-addressing, meaning each memory address points to a single byte. However, an array of .word consists of 32-bit integers, and each word occupies exactly 4 bytes in memory. To advance to the next word, you must skip 4 bytes, hence the multiplier of 4.

Step 1.3 – Break it on purpose (10 points)

For each change in Table 7, PREDICT what will happen, change instruction (2) of Listing 2 (one change at a time), run the program and OBSERVE. In (a), also note the message that MARS shows. Restore the program afterwards.

Table 7. Controlled experiments

Change	PREDICT	OBSERVE
(a) `lw $t1, 2($s0)`	The program will crash/report an error because the address is not a multiple of 4 (unaligned access).	MARS stops the program and reports an error: Runtime exception at 0x...: fetch address not aligned on word boundary 0x10010002
(b) `lw $t1, 20($s0)`	The program will run without errors but will load a zero or garbage value because it accesses memory outside the array bounds.	The program runs normally without errors. The register $t1 receives the value 0 (the empty memory space after the array).

Question 1.3 (Analyze) Explain (a) and (b). Which one does the processor detect, and which does it not? What does this say about who is responsible for keeping an access inside an array?

Explain (a) and (b):
(a): In MIPS architecture, reading or writing a word (which is 32 bits or 4 bytes) requires the memory address to be a multiple of 4 (this is called the alignment rule). Adding an offset of 2 to the base address (0x10010000 + 2 = 0x10010002) results in an unaligned and therefore invalid address for the lw instruction.
(b): The scores array only has 5 elements (offsets 0, 4, 8, 12, 16). An offset of 20 points to a memory location outside the array's boundaries. However, because this address (0x10010014) is still perfectly aligned (a multiple of 4), the hardware executes the memory read normally without knowing it is conceptually "out of bounds".
Which one does the processor detect, and which does it not? The processor (and the MARS simulator) detects the error in (a) — the unaligned memory access. It does not detect the error in (b) - the out-of-bounds array access.

What does this say about who is responsible for keeping an access inside an array? In Assembly language, there is no automatic bounds checking provided by the hardware or the language itself. The programmer is entirely responsible for calculating the correct offsets and ensuring that the program strictly accesses memory within the declared bounds of an array.

EXPERIMENT 2. ARRAYS: READING AND WRITING ELEMENTS (30 points)

Situation

The lecturer finds a mistake in the score sheet. Two scores must be exchanged, one score must be corrected, and the total of the five scores must be recalculated. All of this happens in memory, element by element.

Background: the address of element i

The elements of an array are words stored one after another, so element `i` is at **base + 4 × i** (Experiment 1). When the index is a constant, you write 4 × i yourself as the offset of `lw` or `sw`. When the index is held in a register, the program must compute the address: `sll $t1, $s1, 2` shifts `$s1` left by two bits, which multiplies it by 4, and `add $t1, $t1, $s0` adds the base address. Then `lw` or `sw` uses `0($t1)`.

Step 2.1 – Swap two scores (10 points)


Complete Listing 3 so that it exchanges `scores[0]` and `scores[4]` in memory, using only `lw` and `sw`. After the run, the Data Segment must show 100, 55, 70, 85, 40 (decimal).

Listing 3

```
# Listing 3 - swap two scores in memory
.data
scores: .word 40, 55, 70, 85, 100

.text
.globl main
main:
    la   $s0, scores      # $s0 = address of scores[0]
    # >>> load scores[0] into $t0
    # >>> load scores[4] into $t1
    # >>> store $t1 into scores[0]
    # >>> store $t0 into scores[4]
    li   $v0, 10
    syscall
```

Screenshot of the Data Segment after the run:

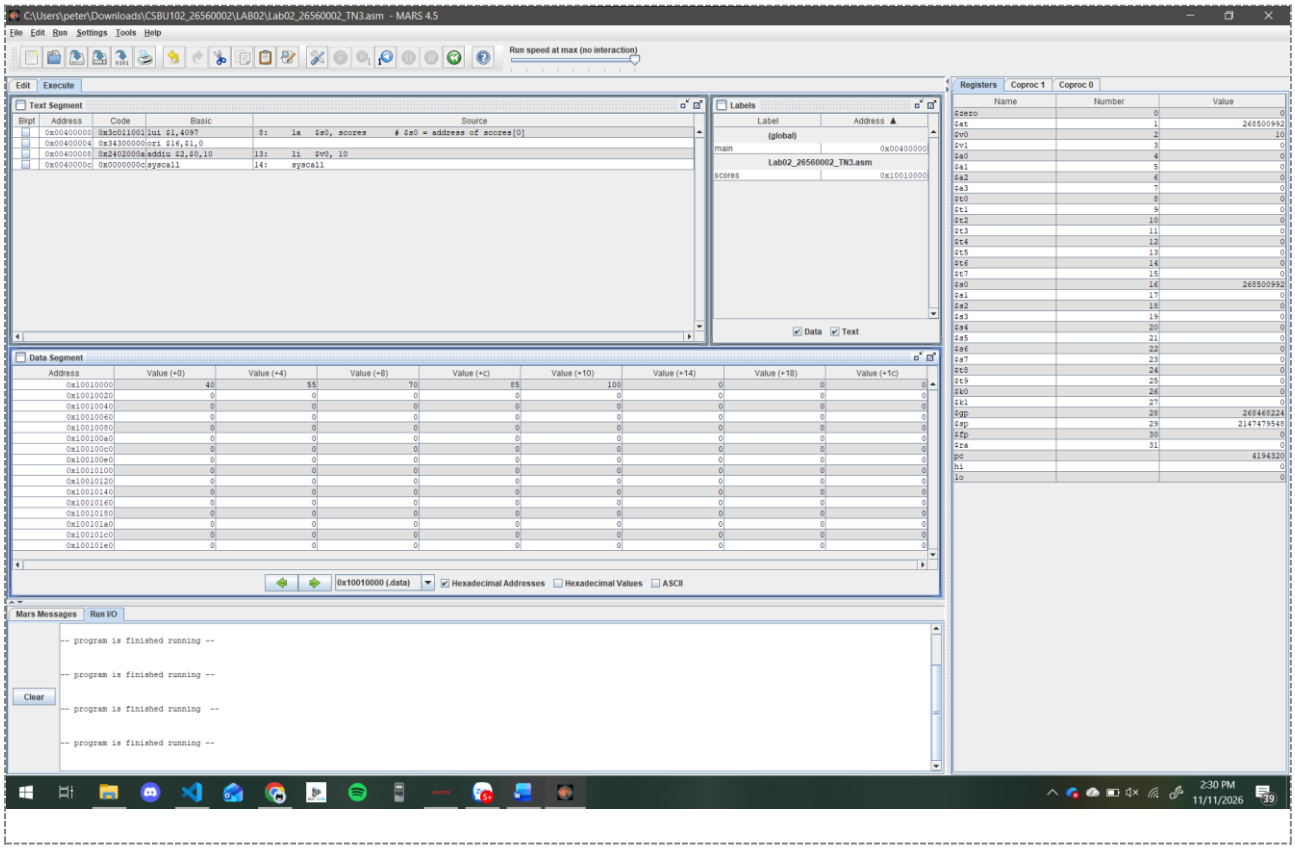

Question 2.1 (Analyze) Why did you need two registers? Could one temporary register be enough? Explain.

You need two registers because MIPS architecture does not support direct memory-to-memory data transfers. To swap two values, both values must be brought into the processor's registers. If you only used one temporary register (e.g., $t0), loading scores[0] into $t0 would mean you have no free register left to load scores[4]. If you then load scores[4] into $t0, you would overwrite and lose the original value of scores[0] before you had the chance to store it into scores[4]. Therefore, at least two temporary registers are required to hold both values simultaneously during the swap.

Step 2.2 – The index in a register (10 points)

Listing 4 computes the address of `scores[i]` from the index `i` in `$s1` and prints the element. Type it and run it with i = 3 to see how it works. Then, for each variant in Table 8, PREDICT the result (for (a) to (c): `$t1` in hexadecimal and `$t2`; for (d): what happens), change the program, run it and OBSERVE. Restore the original program after each variant.

Listing 4

```
# Listing 4 - the index of the element is held in a register
# Register plan:  $s0 = address of scores[0]   $s1 = i
.data
scores: .word 40, 55, 70, 85, 100
msg:    .asciiz "scores[i] = "
nl:     .asciiz "\n"

.text
.globl main
main:
    la   $s0, scores      # $s0 = address of scores[0]
    addi $s1, $zero, 3    # i = 3
    sll  $t1, $s1, 2      # $t1 = 4 * i
    add  $t1, $t1, $s0    # $t1 = address of scores[i]
    lw   $t2, 0($t1)      # $t2 = scores[i]
    li   $v0, 4
    la   $a0, msg
```

```
    syscall
    li   $v0, 1
    add  $a0, $t2, $zero
    syscall
    li   $v0, 4
    la   $a0, nl
    syscall
    li   $v0, 10
    syscall
```

Table 8. Variants of Listing 4

Variant	PREDICT	OBSERVE
(a) `i = 0`	$t1 = 0x10010000 $t2 = 40	$t1 = 0x10010000 $t2 = 40
(b) `i = 2`	$t1 = 0x10010008 $t2 = 70	$t1 = 0x10010008 $t2 = 70
(c) `i = 4`	$t1 = 0x10010010 $t2 = 100	$t1 = 0x10010010 $t2 = 100
(d) `i = 3` and `sll $t1, $s1, 1`	The program will crash/report an error because shifting by 1 multiplies by 2, resulting in an offset of 6 and an unaligned address (0x10010006).	MARS stops the program and reports a runtime exception: fetch address not aligned on word boundary 0x10010006.

Question 2.2 (Analyze) Why does the shift amount have to be 2? Explain what happened in (d) and which part of the computer detected the problem.

Why does the shift amount have to be 2? Shifting a binary number left by 2 bits is mathematically equivalent to multiplying it by 2^2 (which is 4). Because a .word in MIPS is 32 bits (4 bytes), each element in the array is 4 bytes apart. The array index must be multiplied by 4 to calculate the correct byte offset.
Explain what happened in (d): The instruction sll $t1, $s1, 1 shifted the index (3) left by 1, which multiplied it by 2 instead of 4, producing an offset of 6. Adding 6 to the base address resulted in the effective address 0x10010006. Since 6 is not a multiple of 4, it violated the MIPS alignment rule for word accesses.
Which part of the computer detected the problem? The processor hardware (simulated by MARS) detected the problem at runtime when it attempted to execute the lw instruction with an invalid, unaligned memory address.

Step 2.3 – Your own data (10 points)

Let D be the last digit of your student ID. In Table 9, find the index k and the new score V. Write a program, starting from Listing 4, that (1) puts k in `$s1` and V in a register and stores V into `scores[k]` with `sw`, using the address computation of Step 2.2; (2) adds up the five scores in `$s3`, loading each one with `lw` and a constant offset; (3) prints `Total:` followed by the total and a new line. First run it without step (1): the total of the original scores is 350. Then PREDICT the total for your own data by hand, run the program and complete Table 10.

Table 9. Personal data (D = last digit of the student ID)

D	k	V	D	k	V
0	0	15	5	0	62
1	1	28	6	1	77
2	2	33	7	2	84
3	3	46	8	3	91
4	4	59	9	4	98

Table 10. Results for your own data

My D	Result	Total	scores[k] in the Data Segment
2	**PREDICT**	313	33
2	**OBSERVE**	313	33

EXPERIMENT 3. BYTES, CHARACTERS AND STRINGS (25 points)

Situation

The score sheet also contains students' names. Text is stored one character per byte, so the program must read and write single bytes, not only whole words.

Background: characters, bytes and byte order

A character is stored as a small number, its **ASCII code** (Table 18): `A` is 65 (`0x41`), `a` is 97 (`0x61`), the digit `0` is 48. A string declared with `.asciiz` is a sequence of codes followed by a byte of value 0. Three instructions work on single bytes (Table 11); a byte address can be any number.

A word occupies four consecutive bytes, so a computer must decide which byte of the number goes to the lowest address. In **little-endian** order the least significant byte comes first; in **big-endian** order the most significant byte comes first. Both are used in real computers, and the lecture slides show both. Step 3.2 shows which one MARS uses.

Table 11. Instructions that move single bytes

Instruction	Example	Meaning
`lb`	`lb $t0, 1($s0)`	Load the byte at address `$s0 + 1`; the upper 24 bits are filled with copies of the byte's top bit (sign extension).
`lbu`	`lbu $t0, 1($s0)`	Load the byte at address `$s0 + 1`; the upper 24 bits are filled with zeros.
`sb`	`sb $t0, 1($s0)`	Store the lowest 8 bits of `$t0` in the byte at address `$s0 + 1`.

Step 3.1 – The bytes of a string (6 points)

Type Listing 5 and assemble it; tick *ASCII* in the Data Segment. Using Table 18, PREDICT the hexadecimal code of each byte of `"Hi!"`; then run and complete Table 12 and the answer below it.

Listing 5

```
# Listing 5 - the bytes of a string
.data
word1: .asciiz "Hi!"

.text
.globl main
main:
    la   $s0, word1       # $s0 = address of the first byte
    lb   $t0, 0($s0)
    lb   $t1, 1($s0)
    lb   $t2, 2($s0)
    lb   $t3, 3($s0)
    li   $v0, 11          # service 11: print one character
    add  $a0, $t1, $zero  # the byte that was loaded into $t1
    syscall
    li   $v0, 10
    syscall
```

Table 12. The bytes of word1

Offset	Address (hex)	PREDICT byte (hex)	OBSERVE byte (hex)	Character
0	0x10010000	0x48	0x48	H
1	0x10010001	0x69	0x69	i
2	0x10010002	0x21	0x21	!
3	0x10010003	0x00	0x00	\0 (Null terminator)

PREDICT – character printed in the Run I/O pane:

i

Question 3.1 (Understand) How many bytes does `"Hi!"` occupy, and why one more than the number of visible characters? What is the address of the last byte?

How many bytes does "Hi!" occupy, and why one more than the number of visible characters? It occupies 4 bytes. It uses one more byte than the visible characters because it is declared with the .asciiz directive, which automatically appends a null byte (0x00 or \0) at the very end to mark the termination of the string. What is the address of the last byte? The address of the last byte (the null terminator) is 0x10010003.

Step 3.2 – Which byte comes first? (6 points)

Listing 6 stores the word `0x41424344` and reads its four bytes one by one. Decide which byte order you expect MARS to use and PREDICT the four bytes; then run it and complete Table 13.

Listing 6

```
# Listing 6 - one word, four bytes
.data
w: .word 0x41424344

.text
.globl main
main:
    la   $s0, w
    lb   $t0, 0($s0)      # byte at offset 0
    lb   $t1, 1($s0)      # byte at offset 1
    lb   $t2, 2($s0)      # byte at offset 2
    lb   $t3, 3($s0)      # byte at offset 3
    lw   $t4, 0($s0)      # the whole word
    li   $v0, 10
    syscall
```

Table 13. Reading the bytes of one word

Item	PREDICT (hex)	OBSERVE (hex)
Byte at offset 0 (`$t0`)	0x44	0x44
Byte at offset 1 (`$t1`)	0x43	0x43
Byte at offset 2 (`$t2`)	0x42	0x42
Byte at offset 3 (`$t3`)	0x41	0x41
Whole word (`$t4`)	0x41424344	0x41424344

Question 3.2 (Analyze) Which byte of `0x41424344` is at the lowest address in MARS, and which byte order is that? Does it match your prediction? Why does `$t4` still hold `0x41424344`, and why does a program that uses only `lw` and `sw` never notice the byte order?

Which byte of 0x41424344 is at the lowest address in MARS, and which byte order is that? The byte 0x44 (the least significant byte) is at the lowest address. This is called little-endian byte order.
Does it match your prediction? Yes (assuming you predicted little-endian, which is standard for MARS running on modern x86 PCs).

Why does $t4 still hold 0x41424344, and why does a program that uses only lw and sw never notice the byte order?$t4 holds the correct value 0x41424344 because the lw instruction knows the system's byte order. It reads all four bytes and automatically reconstructs them in the correct sequence inside the register. A program using only lw (load word) and sw (store word) never notices the byte order because the hardware handles this translation seamlessly. As long as a 32-bit word is written with sw and read back with lw on the same machine, the exact numerical value is preserved, hiding the underlying memory layout from the programmer.

Step 3.3 – Signed and unsigned bytes (6 points)

Listing 7 stores one byte of value `0xF0` and loads it twice. PREDICT `$t0` and `$t1` in hexadecimal and decimal, run it, and complete Table 14.

Listing 7

```
# Listing 7 - lb and lbu
.data
b1: .byte 0xF0

.text
.globl main
main:
    la   $s0, b1
    lb   $t0, 0($s0)
    lbu  $t1, 0($s0)
    li   $v0, 10
    syscall
```

Table 14. lb and lbu compared

Instruction	PREDICT (hex)	PREDICT (dec)	OBSERVE (hex)	OBSERVE (dec)
`lb $t0, 0($s0)`	0xFFFFFFF0	-16	0xFFFFFFF0	-16
`lbu $t1, 0($s0)`	0x000000F0	240	0x000000F0	240

Question 3.3 (Analyze) Explain the difference in terms of sign extension (compare LAB 1, Question 2.4). Which instruction would you use to read the brightness of a pixel stored as a number from 0 to 255, and why?

Explain the difference in terms of sign extension: The lb (load byte) instruction performs sign extension. It checks the most significant bit (bit 7) of the byte 0xF0 (which is 1111 0000 in binary). Since this bit is 1, it fills the upper 24 bits of the 32-bit register with 1s, preserving the two's complement negative value (-16). The lbu (load byte unsigned) instruction performs zero extension. It simply fills the upper 24 bits of the register with 0s, treating the byte as a positive integer and preserving its absolute magnitude (240). Which instruction would you use to read the brightness of a pixel stored as a number from 0 to 255, and why? You must use lbu (load byte unsigned). Pixel brightness is an absolute, unsigned quantity ranging from 0 to 255. Values from 128 to 255 have a 1 in the most significant bit. If you used lb, any pixel with a brightness of 128 or higher would be incorrectly evaluated by the processor as a negative number. Using lbu ensures all brightness levels remain positive values from 0 to 255.

Step 3.4 – Capital letters by hand (7 points)

A capital letter has a code 32 below the matching lower-case letter (Table 18). Complete Listing 8 so that it changes the letters at offsets 0, 7 and 11 of `str1` into capital letters: for each one, load the byte with `lb`, subtract 32 and store it back with `sb`. The program must print `Nguyen Van An`. Then change `.asciiz` to `.ascii` in the declaration of `str1`, PREDICT the output, run it and OBSERVE (Table 15). Restore `.asciiz` afterwards.

Listing 8

```
# Listing 8 - capital letters at chosen positions of a string
# Register plan:  $s0 = address of the first byte of str1
.data
str1: .asciiz "nguyen van an"
```

```
tag:  .asciiz " [end]"
nl:   .asciiz "\n"

.text
.globl main
main:
    la   $s0, str1         # $s0 = address of str1
    # >>> make the byte at offset 0 a capital letter
    # >>> make the byte at offset 7 a capital letter
    # >>> make the byte at offset 11 a capital letter
    li   $v0, 4            # service 4: print the string that starts at $a0
    add  $a0, $s0, $zero
    syscall
    li   $v0, 4
    la   $a0, nl
    syscall
    li   $v0, 10
    syscall
```

Screenshot of the Run I/O pane (with `.asciiz`):

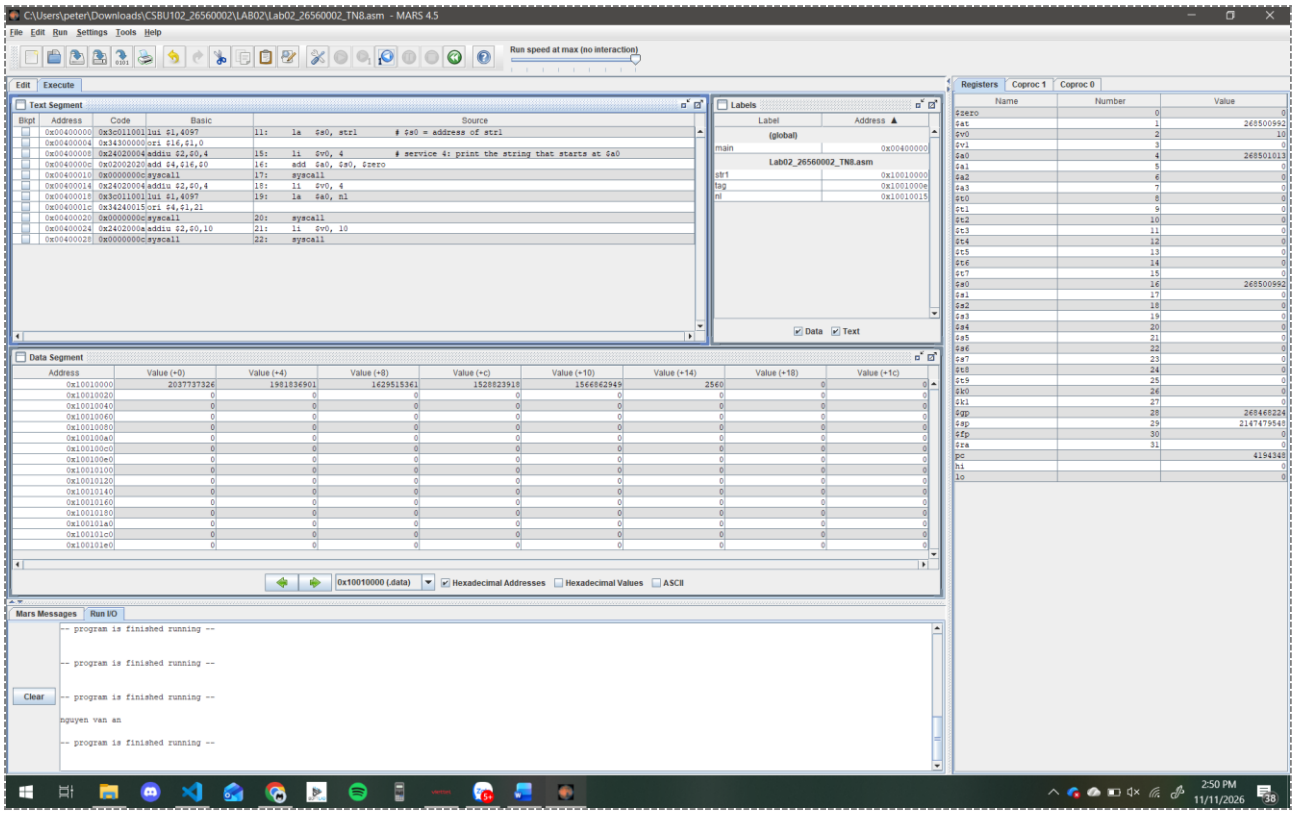


Table 15. A string without the terminating zero

Change	PREDICT	OBSERVE
`.ascii` instead of `.asciiz`	The program will print the string followed by random/garbage characters or other data from memory because it doesn't know where the string ends.	The program prints the string followed by extra unexpected characters (whatever data happens to be in the adjacent memory) until it eventually hits a 0x00 byte.

Question 3.4 (Analyze) Explain the output you observed with `.ascii`. Where did the extra text come from, and how does the print service know where a string ends?

Explain the output you observed with .ascii: Using .ascii stores only the specific characters of the string without automatically appending the null terminator (\0 or 0x00) at the end.
Where did the extra text come from? The extra text came from the contents of the memory addresses immediately following the string in the Data Segment. The processor interpreted whatever raw binary data was stored there as ASCII characters and printed them.

How does the print service know where a string ends? The MIPS print string service (syscall 4) relies exclusively on the null terminator (0x00) to know when to stop printing. It starts reading from the base address and prints character by character until it encounters a byte with the exact value of 0. Since .ascii omits this stopping condition, the service just keeps reading forward in memory indefinitely until it accidentally encounters a 0 byte.

EXTENSION. A 3 × 3 BOARD IN MEMORY (optional – up to 10 bonus points)

A game board with 3 rows and 3 columns is stored in memory as nine words, row by row: `board: .word 0, 0, 0, 0, 0, 0, 0, 0, 0`. The cell in row `r` and column `c` (both counted from 0) is word number 3 × r + c, so its address is `board` + 4 × (3 × r + c). Write a program that keeps `r` in `$s1` and `c` in `$s2`, computes this address with `sll` and `add` (3 × r is r + 2 × r), and stores the value 1 (mark X) into the cell (1, 2) and the value 2 (mark O) into the cell (2, 0). After the run, the Data Segment must show 1 and 2 in two of the nine words and 0 in all the others.

Question E.1 (Analyze) Which two words of `board` changed, at which addresses, and why does the formula give these words?

Which two words of board changed, at which addresses:
- The 6th word (index 5) changed to 1. Assuming the base address is 0x10010000, it changed at address 0x10010014 (offset 20).
- The 7th word (index 6) changed to 2. Assuming the base address is 0x10010000, it changed at address 0x10010018 (offset 24).

Why does the formula give these words? A 2D array is stored linearly (flattened) in a 1D memory layout in row-major order. Because there are 3 columns in each row, multiplying the row index r by 3 skips the preceding full rows. Adding the column index c pinpoints the exact element within that specific row. Finally, multiplying by 4 converts that element index into a byte offset, because each .word requires 4 bytes.

PART 4. WRAP-UP AND SUBMISSION (15 points)

Question 4.1 (Understand) Explain why `varA = varB + varC` needs two loads and one store in addition to the `add` when the variables are in memory. Use the terms *register*, *main memory*, *load* and *store*. (5 points)

Explain why varA = varB + varC needs two loads and one store in addition to the add: In the MIPS architecture, the processor can only perform arithmetic operations (like add) on data that is currently inside its internal **registers**. It cannot calculate directly on data sitting in **main memory**. Therefore, the program must first use two **load** instructions to copy the values of varB and varC from main memory into registers, perform the addition inside the processor, and finally use a **store** instruction to write the result from the register back out to varA in main memory.

Question 4.2 (Apply) Write the MIPS instructions for `scores[3] = scores[1] + scores[2]`. Assume `$s0` holds the address of `scores[0]` and use only `$t` registers. (5 points)

Write the MIPS instructions for scores[3] = scores[1] + scores[2]. Assume $s0 holds the address of scores[0]:

```
lw  $t1, 4($s0)     # Load scores[1] into $t1 (offset 1 * 4 = 4)
lw  $t2, 8($s0)     # Load scores[2] into $t2 (offset 2 * 4 = 8)
add $t3, $t1, $t2   # Add the two scores
sw  $t3, 12($s0)    # Store result into scores[3] (offset 3 * 4 = 12)
```

Question 4.3 (Evaluate) `lw` and `sw` need an address that is a multiple of 4, but `lb` and `sb` accept any address. Explain why, and name one task from this LAB where a byte instruction is the right choice and one where a word instruction is. (5 points)

Why lw and sw need multiples of 4, but lb and sb accept any address:lw and sw handle 32-bit words (4 bytes of data at once). MIPS architecture enforces an alignment rule that requires 4-byte accesses to

start on memory addresses that are evenly divisible by 4. On the other hand, lb and sb handle a single 8-bit byte at a time. Since memory is byte-addressed (every single byte has its own address), a single byte fits perfectly into any location without violating alignment boundaries.
One task where a byte instruction is the right choice: Reading or writing individual text characters in a string (e.g., printing the letters of "Hi!").
One task where a word instruction is the right choice: Storing and calculating integer variables, such as swapping 32-bit test scores in an array.

Table 16. Submission checklist

☐	Item
☐	The files `Lab02_<StudentID>_TN1.asm` to `_TN3.asm` (and `_EXT.asm` if you did the extension) are saved with the correct names, begin with a comment block and assemble without errors.
☐	Every `# >>>` marker is replaced by your own code and the register plan is documented in comments.
☐	This document is complete: all yellow cells are filled and every dashed frame contains a screenshot.
☐	The `.asm` files are pushed to your GitHub repository, the link is written on the first page, and everything is submitted as announced by your instructor.

APPENDIX. REFERENCE

Table 17. Instructions and system calls used in this LAB

Instruction	Example	Meaning
`lw / sw`	`lw $t0, 8($s0)`	`$t0` = word at address `$s0 + 8` / word at that address = `$t0` (address a multiple of 4)
`lb / lbu`	`lb $t0, 1($s0)`	`$t0` = byte at address `$s0 + 1`, sign-extended / filled with zeros
`sb`	`sb $t0, 1($s0)`	byte at address `$s0 + 1` = lowest 8 bits of `$t0`
`la, li`	`la $s0, label`	pseudo-instructions: `$s0` = address of `label`; `li $t0, 7`: `$t0` = 7
`add, addi`	`addi $t0, $t1, 20`	`$t0` = `$t1` + 20 (`add` uses two registers)
`sll`	`sll $t1, $s1, 2`	`$t1` = `$s1` shifted left by 2 bits (4 × `$s1`)
`syscall`	`$v0 = 1, 4, 10`	print integer (`$a0`); print string (`$a0` = address); exit

Table 18. ASCII codes used in this LAB

Character	Decimal	Hexadecimal	Remark
end of string	0	`0x00`	terminator of `.asciiz`
space; `!`	32; 33	`0x20; 0x21`	
digits `0` to `9`	48 – 57	`0x30 - 0x39`	consecutive
capital letters `A` to `Z`	65 – 90	`0x41 - 0x5A`	consecutive
lower-case letters `a` to `z`	97 – 122	`0x61 - 0x7A`	consecutive